


**SIEMENS**



Motors



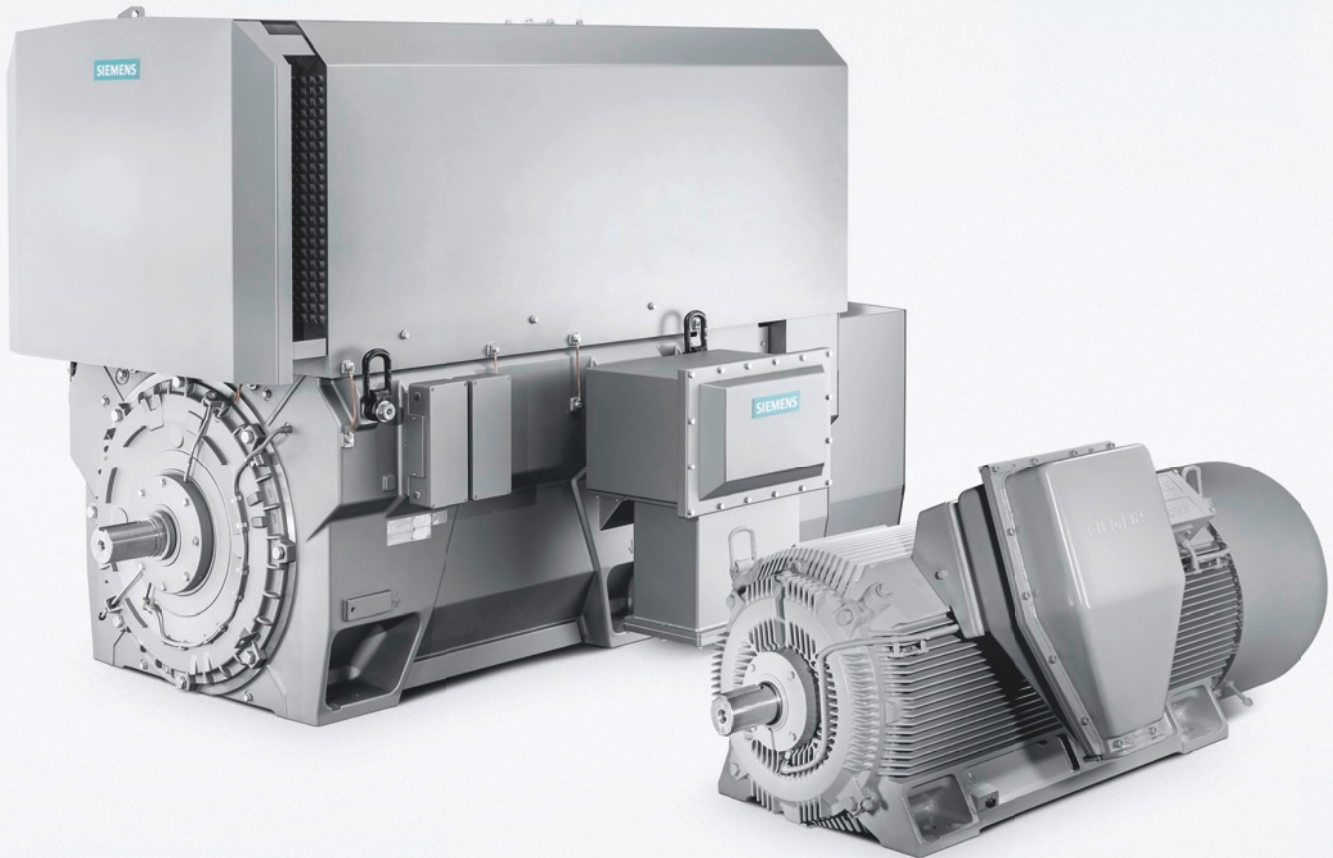


Three-Phase Induction Motors  
SIMOTICS HV, SIMOTICS TN  
Series H-compact, Series H-compact PLUS  
SIMOTICS HV M (Modular)

Catalog  
D 84.1

Edition  
July 2017

[www.siemens.com/motors](http://www.siemens.com/motors)

## Related catalogs

|  |   |
|--|---|
| <p><b>SIMOTICS GP, SD, XP, DP</b> D 81.1<br/> <b>Low-Voltage Motors</b><br/>           Type series 1FP1, 1LE1, 1MB1 and 1PC1<br/>           Frame sizes 71 to 315<br/>           Power range 0.09 to 200 kW<br/>           E86060-K5581-A111-A9-7600</p> |    |
| <p><b>High Voltage Three-phase Induction Motors</b> D 84.9<br/>           SIMOTICS HV Series A-compact PLUS<br/> <br/>           E86060-K5584-A191-A1-7600</p>   |    |
| <p><b>Three-Phase Induction Motors</b> D 86.1<br/>           SIMOTICS HV Series H-compact Standardline<br/> <br/>           E86060-K5586-A111-A3-7600</p>  |    |
| <p><b>SINAMICS G130</b> D 11<br/>           Drive Converter Chassis Units<br/> <b>SINAMICS G150</b><br/>           Drive Converter Cabinet Units<br/> <br/>           E86060-K5511-A101-A6-7600</p>  |    |
| <p><b>SINAMICS GM150/SINAMICS SM150</b> D 12<br/>           Medium-Voltage Converters<br/> <br/>           E86060-K5512-A101-A3-7600</p>   |   |
| <p><b>SINAMICS S120</b> D 21.3<br/>           Chassis Format Converter Units and Cabinet Modules<br/> <b>SINAMICS S150</b><br/>           Converter Cabinet Units<br/>           PDF (E86060-K5521-A131-A5-7600)</p>                                     |  |
| <p><b>SINAMICS PERFECT HARMONY GH180</b> D 15.1<br/>           Medium-Voltage Air-Cooled Drives<br/> <br/>           E86060-K5515-A111-A3-7600</p>   |  |
| <p><b>Industry Mall</b><br/>           Information and Ordering Platform on the Internet:<br/> <br/> <a href="http://www.siemens.com/industrymall">www.siemens.com/industrymall</a></p>  |  |

# Three-Phase Induction Motors

## SIMOTICS HV, SIMOTICS TN

Motors



Catalog D 84.1 · July 2017

Supersedes:  
Catalog D 84.1 · 2017

© Siemens AG 2017

### Introduction

1

### Motors for line operation

Overview  
Air-cooled motors  
Water-cooled motors  
Options and tests

2

### Motors for converter operation

General  
Converter with non-sinusoidal output  
Air-cooled motors  
Water-cooled motors  
Options and tests

3

### Explosion-protected motors

Overview  
Type of protection Ex ec/Ex tc  
Type of protection Ex pxb  
Type of protection Ex eb  
Options and tests

4

### Options for marine and offshore applications

Orientation  
Ordering examples  
Options

5

### Service & Support

Industry Services

6

### Appendix

Partner at Siemens  
Online Services  
Indexes  
Conditions of sale and delivery

7



The products and systems described in this catalog are manufactured/distributed under application of a certified quality management system in accordance with DIN EN ISO 9001 (Certified Registration No. 002241 QM UM). The certificate is recognized by all IQNet countries.

# Integrated Drive Systems

Faster on the market and in the black with Integrated Drive Systems

The motors in this catalog are an important element of a Siemens Integrated Drive System, contributing significantly to increased efficiency, productivity, and availability in industrial production processes.


Integrated Drive Systems are Siemens' trendsetting answer to the high degree of complexity that characterizes drive and automation technology today. The world's only true one-stop solution for entire drive systems is characterized in particular by its threefold integration: Horizontal, vertical,

and lifecycle integration ensure that every drive system component fits seamlessly into the whole system, into any automation environment, and even into the entire lifecycle of a plant.

The outcome is an optimal workflow – from engineering all the way to service that entails more productivity, increased efficiency, and better availability. That's how Integrated Drive Systems reduce time to market and time to profit.

## Horizontal integration

**Integrated drive portfolio:** The core elements of a fully integrated drive portfolio are frequency converters, motors, couplings, and gear units. At Siemens, they're all available from a single source. Perfectly integrated, perfectly interacting. For all power and performance classes. As standard solutions or fully customized. No other player in the market can offer a comparable portfolio. Moreover, all Siemens drive components are perfectly matched, so they are optimally interacting.

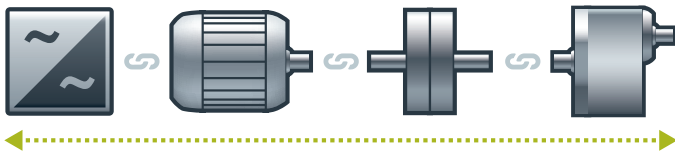


You can boost the availability of your application or plant to up to

**99%\***

\*e.g., conveyor application

## Vertical integration

Thanks to **vertical integration**, the complete drive train is seamlessly integrated in the entire automation environment – an important prerequisite for production with maximum value added. Integrated Drive Systems are part of Totally Integrated Automation (TIA), which means that they are perfectly embedded into the system architecture of the entire industrial production process. This enables optimal processes through maximum communication and control.

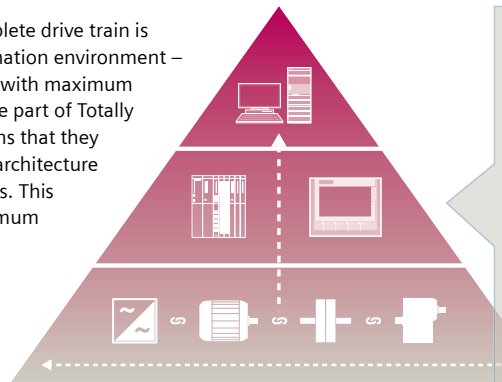


With TIA Portal you can cut your engineering time by up to

**30%**

## Lifecycle integration

**Lifecycle integration** adds the factor of time: Software and service are available for the entire lifecycle of an Integrated Drive System. That way, important optimization potential for maximum productivity, increased efficiency, and highest availability can be leveraged throughout the system's lifecycle – from planning, design, and engineering to operation, maintenance, and all the way even to modernization.

With Integrated Drive Systems, assets become important success factors. They ensure shorter time to market, maximum productivity and efficiency in operation, and shorter time to profit.

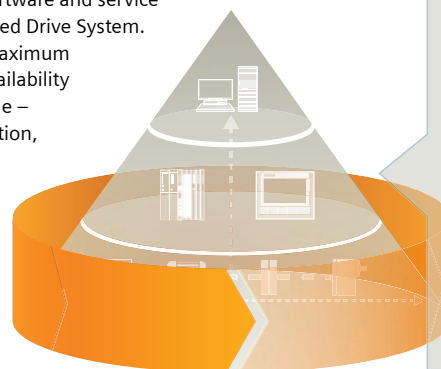

With Integrated Drive Systems you can reduce your maintenance costs by up to

**15%**

## Introduction



|             |   |
|-------------|---|
| <b>1/2</b>  | <b>Overview</b>   |
| <b>1/3</b>  | <b>SIMOTICS HV/TN Series H-compact</b>  |
| 1/3         | Article number code   |
| 1/4         | Performance features  |
| 1/5         | Cooling concepts  |
| <b>1/6</b>  | <b>SIMOTICS HV/TN Series H-compact PLUS, SIMOTICS HV M (Modular)</b>            |
| 1/6         | Article number code   |
| 1/10        | Performance features  |
| 1/12        | Cooling concepts  |
| <b>1/14</b> | <b>General technical versions</b>   |
| 1/14        | Overview  |
|             | Motor protection  |
|             | Electrical design   |
|             | Motor connection and terminal box   |
|             | Protection for line-operated high voltage motors against switching overvoltages |
| 1/15        | Motor terminal boxes  |
| 1/20        | Mechanical design   |
|             | Bearing version   |
|             | Bearing insulation  |
|             | Vibration response  |
|             | Balancing quality   |
|             | Direction of rotation, fan  |
|             | Paint finish  |
|             | Standards and regulations   |
| 1/24        | Guideline for coupling selection  |
| <b>1/25</b> | <b>LOHER VARIO and LOHER VARIO PLUS</b>   |
| 1/25        | Overview  |

## Introduction

### Overview

1

#### Overview

In this catalog, the SIMOTICS HV/TN motor series in the high-voltage and low-voltage version are described.

In addition to the general technical data, this catalog includes detailed descriptions of the standard versions and the options that can be supplied by specifying order codes. It should be noted that certain order codes and combinations of order codes are not possible for all motor types. Customized solutions can be offered on request.

#### **Article number code**

The Article No. comprises a combination of digits and letters.

For options, the Article No. is supplemented by an additional hyphen and the letter **Z**. In addition, the order codes for the corresponding options must be specified.

Example:

**1LA4 354-4AN60-Z H05 + K16 + L20**

Ordering data:

- Complete Article No. and order code(s).
- If a quotation is available, in addition to the Article No., the quotation number should also be specified.
- When ordering a complete motor as a spare part, please specify the factory serial No. of the previously supplied motor as well as the Article No.

## Overview

The following overview explains the meaning of the individual positions of the Article No. The selection tables in Chapters 2 to 4 include the motors available as standard from this range.

| Structure of the Article No.:                          | Position:  | 1                                 | 2                          | 3                          | 4           | 5                               | 6                               | 7                | - | 8                          | 9                     | 10                    | 11 | 12               | -             | Z |   |               |               |   |   |               |                |   |   |               |                |   |   |               |               |   |   |               |               |   |   |              |   |   |   |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|--|--|-----------------------------------|----------------------------|----------------------------|-------------|---------------------------------|---------------------------------|------------------|---|----------------------------|-----------------------|-----------------------|----|------------------|---------------|---|---|---------------|---------------|---|---|---------------|----------------|---|---|---------------|----------------|---|---|---------------|---------------|---|---|---------------|---------------|---|---|--------------|---|---|---|--|--|--|---|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| <u>1st to 4th positions:</u><br>Motor design           | <ul style="list-style-type: none"> <li>Standard version               <ul style="list-style-type: none"> <li>Self-ventilated</li> <li>Force ventilated</li> <li>Water-jacket-cooled</li> </ul> </li> <li>Explosion-protected version               <ul style="list-style-type: none"> <li>Ex eb</li> <li>Ex pxb</li> <li>Ex ec</li> </ul> </li> </ul>  | 1<br>1<br>1                       | L<br>P<br>L                | A<br>Q<br>H                | 4<br>4<br>4 |                                 |                                 |                  |   |                            |                       |                       |    |                  |               |   |   |               |               |   |   |               |                |   |   |               |                |   |   |               |               |   |   |               |               |   |   |              |   |   |   |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| <u>5th to 6th positions:</u><br>Shaft height           | <ul style="list-style-type: none"> <li>315 mm</li> <li>355 mm</li> <li>400 mm</li> <li>450 mm</li> <li>500 mm</li> <li>560 mm</li> <li>630 mm</li> </ul>   |                                   |                            |                            |             | 3<br>3<br>4<br>4<br>5<br>5<br>6 | 1<br>5<br>0<br>5<br>0<br>6<br>3 |                  |   |                            |                       |                       |    |                  |               |   |   |               |               |   |   |               |                |   |   |               |                |   |   |               |               |   |   |               |               |   |   |              |   |   |   |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| <u>7th position:</u><br>Laminated core length          | <ul style="list-style-type: none"> <li>Short</li> <li>Medium</li> <li>Long</li> <li>Extra long</li> </ul>  |                                   |                            |                            |             |                                 |                                 | 0<br>2<br>4<br>6 |   |                            |                       |                       |    |                  |               |   |   |               |               |   |   |               |                |   |   |               |                |   |   |               |               |   |   |               |               |   |   |              |   |   |   |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| <u>8th position:</u><br>Pole number                    | <ul style="list-style-type: none"> <li>2-pole</li> <li>4-pole</li> <li>6-pole</li> <li>8-pole</li> <li>10-pole</li> <li>12-pole</li> </ul>   |                                   |                            |                            |             |                                 |                                 |                  |   | 2<br>4<br>6<br>8<br>3<br>5 |                       |                       |    |                  |               |   |   |               |               |   |   |               |                |   |   |               |                |   |   |               |               |   |   |               |               |   |   |              |   |   |   |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| <u>9th position:</u><br>Rotor version                  | <ul style="list-style-type: none"> <li>Standard aluminum rotor</li> <li>Special aluminum rotor</li> <li>Standard copper rotor</li> <li>Special copper rotor</li> <li>Special version (CuSi,...)</li> </ul>   |                                   |                            |                            |             |                                 |                                 |                  |   |                            | A<br>B<br>C<br>D<br>E |                       |    |                  |               |   |   |               |               |   |   |               |                |   |   |               |                |   |   |               |               |   |   |               |               |   |   |              |   |   |   |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| <u>10th position:</u><br>Character for operation with: | <ul style="list-style-type: none"> <li>Line supply, low voltage</li> <li>Line supply, high voltage</li> <li>LV drive converter</li> <li>MV drive converter</li> <li>Converters, others (e.g. SINAMICS PERFECT HARMONY)</li> </ul>  |                                   |                            |                            |             |                                 |                                 |                  |   |                            |                       | A<br>N<br>M<br>V<br>W |    |                  |               |   |   |               |               |   |   |               |                |   |   |               |                |   |   |               |               |   |   |               |               |   |   |              |   |   |   |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| <u>11th position:</u><br>voltage code                  | <table border="0"> <tr> <td><b>Line supply, high voltage:</b></td> <td><b>MV drive converter:</b></td> <td><b>LV drive converter:</b></td> <td></td> </tr> <tr> <td>3.3 kV, 50 Hz</td> <td>2.3 kV, 50 Hz</td> <td>690 V, 50 Hz</td> <td>0</td> </tr> <tr> <td>6.6 kV, 60 Hz</td> <td>2.3 kV, 60 Hz</td> <td>–</td> <td>1</td> </tr> <tr> <td>–</td> <td>3.3 kV, 50 Hz</td> <td>–</td> <td>2</td> </tr> <tr> <td>3.0 kV, 50 Hz</td> <td>3.3 kV, 60 Hz</td> <td>–</td> <td>3</td> </tr> <tr> <td>4.0 kV, 60 Hz</td> <td>4.16 kV, 50 Hz</td> <td>–</td> <td>4</td> </tr> <tr> <td>5.0 kV, 50 Hz</td> <td>4.16 kV, 60 Hz</td> <td>–</td> <td>5</td> </tr> <tr> <td>6.0 kV, 50 Hz</td> <td>6.0 kV, 50 Hz</td> <td>–</td> <td>6</td> </tr> <tr> <td>6.6 kV, 50 Hz</td> <td>6.6 kV, 50 Hz</td> <td>–</td> <td>7</td> </tr> <tr> <td>10 kV, 50 Hz</td> <td>–</td> <td>–</td> <td>8</td> </tr> <tr> <td colspan="3">Other voltage/frequency (additional text data)</td> <td>9</td> </tr> </table> | <b>Line supply, high voltage:</b> | <b>MV drive converter:</b> | <b>LV drive converter:</b> |             | 3.3 kV, 50 Hz                   | 2.3 kV, 50 Hz                   | 690 V, 50 Hz     | 0 | 6.6 kV, 60 Hz              | 2.3 kV, 60 Hz         | –                     | 1  | –                | 3.3 kV, 50 Hz | – | 2 | 3.0 kV, 50 Hz | 3.3 kV, 60 Hz | – | 3 | 4.0 kV, 60 Hz | 4.16 kV, 50 Hz | – | 4 | 5.0 kV, 50 Hz | 4.16 kV, 60 Hz | – | 5 | 6.0 kV, 50 Hz | 6.0 kV, 50 Hz | – | 6 | 6.6 kV, 50 Hz | 6.6 kV, 50 Hz | – | 7 | 10 kV, 50 Hz | – | – | 8 | Other voltage/frequency (additional text data) |  |  | 9 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| <b>Line supply, high voltage:</b>                      | <b>MV drive converter:</b>   | <b>LV drive converter:</b>        |                            |                            |             |                                 |                                 |                  |   |                            |                       |                       |    |                  |               |   |   |               |               |   |   |               |                |   |   |               |                |   |   |               |               |   |   |               |               |   |   |              |   |   |   |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 3.3 kV, 50 Hz  | 2.3 kV, 50 Hz  | 690 V, 50 Hz                      | 0                          |                            |             |                                 |                                 |                  |   |                            |                       |                       |    |                  |               |   |   |               |               |   |   |               |                |   |   |               |                |   |   |               |               |   |   |               |               |   |   |              |   |   |   |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 6.6 kV, 60 Hz  | 2.3 kV, 60 Hz  | –                                 | 1                          |                            |             |                                 |                                 |                  |   |                            |                       |                       |    |                  |               |   |   |               |               |   |   |               |                |   |   |               |                |   |   |               |               |   |   |               |               |   |   |              |   |   |   |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| –  | 3.3 kV, 50 Hz  | –                                 | 2                          |                            |             |                                 |                                 |                  |   |                            |                       |                       |    |                  |               |   |   |               |               |   |   |               |                |   |   |               |                |   |   |               |               |   |   |               |               |   |   |              |   |   |   |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 3.0 kV, 50 Hz  | 3.3 kV, 60 Hz  | –                                 | 3                          |                            |             |                                 |                                 |                  |   |                            |                       |                       |    |                  |               |   |   |               |               |   |   |               |                |   |   |               |                |   |   |               |               |   |   |               |               |   |   |              |   |   |   |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 4.0 kV, 60 Hz  | 4.16 kV, 50 Hz   | –                                 | 4                          |                            |             |                                 |                                 |                  |   |                            |                       |                       |    |                  |               |   |   |               |               |   |   |               |                |   |   |               |                |   |   |               |               |   |   |               |               |   |   |              |   |   |   |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 5.0 kV, 50 Hz  | 4.16 kV, 60 Hz   | –                                 | 5                          |                            |             |                                 |                                 |                  |   |                            |                       |                       |    |                  |               |   |   |               |               |   |   |               |                |   |   |               |                |   |   |               |               |   |   |               |               |   |   |              |   |   |   |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 6.0 kV, 50 Hz  | 6.0 kV, 50 Hz  | –                                 | 6                          |                            |             |                                 |                                 |                  |   |                            |                       |                       |    |                  |               |   |   |               |               |   |   |               |                |   |   |               |                |   |   |               |               |   |   |               |               |   |   |              |   |   |   |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 6.6 kV, 50 Hz  | 6.6 kV, 50 Hz  | –                                 | 7                          |                            |             |                                 |                                 |                  |   |                            |                       |                       |    |                  |               |   |   |               |               |   |   |               |                |   |   |               |                |   |   |               |               |   |   |               |               |   |   |              |   |   |   |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 10 kV, 50 Hz   | –  | –                                 | 8                          |                            |             |                                 |                                 |                  |   |                            |                       |                       |    |                  |               |   |   |               |               |   |   |               |                |   |   |               |                |   |   |               |               |   |   |               |               |   |   |              |   |   |   |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Other voltage/frequency (additional text data)         |  |                                   | 9                          |                            |             |                                 |                                 |                  |   |                            |                       |                       |    |                  |               |   |   |               |               |   |   |               |                |   |   |               |                |   |   |               |               |   |   |               |               |   |   |              |   |   |   |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| <u>12th position:</u><br>Type of construction          | <ul style="list-style-type: none"> <li>IM B3</li> <li>IM V1 with canopy</li> <li>IM V1 without canopy</li> <li>IM B35</li> </ul>   |                                   |                            |                            |             |                                 |                                 |                  |   |                            |                       |                       |    | 0<br>4<br>8<br>6 |               |   |   |               |               |   |   |               |                |   |   |               |                |   |   |               |               |   |   |               |               |   |   |              |   |   |   |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Options: Additional order codes required.              |  |                                   |                            |                            |             |                                 |                                 |                  |   |                            |                       |                       |    |                  |               |   |   |               |               |   |   |               |                |   |   |               |                |   |   |               |               |   |   |               |               |   |   |              |   |   |   |  |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |

## Introduction

### SIMOTICS HV/TN Series H-compact

#### Performance features

#### Overview

##### Performance features of the H-compact series

The H-compact series of motors is characterized by:

- Extremely compact design
- Longest lifetime and highest reliability
- Globally proven Siemens MICALASTIC insulation system

- Proven over many years of use in the widest range of sectors
- Wide range of options, that allow the motor to be optimally adapted to customer requirements
- Various cooling concepts for every environment

##### Overview table of the H-compact series

| Series            | Version | Voltages              | Powers                         | Degree of protection | Cooling method | Type of protection | Type of construction       |
|-------------------|---------|-----------------------|--------------------------------|----------------------|----------------|--------------------|----------------------------|
| 1LA4              | IEC     | 690 V                 | 1150 ... 1650 kW <sup>1)</sup> | IP55                 | IC411          | –                  | IM B3,<br>IM B35,<br>IM V1 |
|                   |         | 2.3 ... 11 kV         | 200 ... 3000 kW <sup>2)</sup>  |                      |                | –                  |                            |
| 1LA4 Standardline |         | 3.0; 3.3; 6.0; 6.6 kV | 200 ... 800 kW <sup>3)</sup>   |                      |                | –                  | IM B3                      |
| 1MS4              |         | 2.3 ... 11 kV         | 200 ... 3000 kW <sup>2)</sup>  |                      |                | Ex ec              | IM B3,<br>IM B35,<br>IM V1 |
| 1MG4              |         | 2.3 ... 11 kV         | 200 ... 3000 kW <sup>2)</sup>  |                      |                | Ex pxb             |                            |
| 1MA4              |         | 3.4 ... 6.6 kV        | 170 ... 630 kW <sup>3)</sup>   |                      |                | Ex eb              |                            |
| 1PQ4              |         | 690 V                 | 1150 ... 1700 kW <sup>1)</sup> |                      | IC416          | –                  |                            |
|                   |         | 2.3 ... 6.6 kV        | 1180 ... 2950 kW <sup>4)</sup> |                      |                | –                  |                            |
| 1LH4              |         | 690 V                 | 1380 ... 1750 kW <sup>1)</sup> |                      | IC71W          | –                  |                            |
|                   |         | 2.3 ... 6.6 kV        | 1224 ... 1488 kW <sup>3)</sup> |                      |                | –                  |                            |

##### Cooling method

|       |                              |
|-------|------------------------------|
| IC411 | Rib-cooled, self-ventilated  |
| IC416 | Rib-cooled, force-ventilated |
| IC71W | Water-jacket-cooled          |

##### Type of protection

|        |   |
|--------|---|
| Ex ec  | Increased safety of the motor, Zone 2                                     |
| Ex pxb | Pressurized motor enclosure, increased safety of the terminal box, Zone 1 |
| Ex eb  | Increased safety of the motor, Zone 1                                     |

##### Degree of protection

|      |  |
|------|--|
| IP55 | Enclosed, protected against dust and jet-water |
|------|--|

##### Type of construction

|        |                                       |
|--------|---------------------------------------|
| IM B3  | Horizontal, with feet, without flange |
| IM B35 | Horizontal, with feet, with flange    |
| IM V1  | Vertical, without feet, with flange   |

#### 1LA4 Standardline version

The 1LA4 Standardline motors are self-ventilated, enclosed rib-cooled motors belonging to the H-compact series with a restricted range of options. Due to the fact that there are a restricted number of selectable options, they have significantly shorter delivery times as a result of the simplified order administration and the standardized production process. The compact and rugged design guarantees a high degree of reliability and availability for small frame sizes.

With Standardline, a defined range of motors (pole number, power rating) are available for line operation. See Catalog D 86.1.

<sup>1)</sup> Only for converter operation. Values apply for 50 Hz, 4-pole version, insulation system, thermal class 155 (F), utilized to 155 (F).

<sup>2)</sup> Values apply for 2.3 to 6.6 kV, 50 Hz, 4-pole version, insulation system, thermal class 155 (F), utilized to 130 (B).

<sup>3)</sup> Values apply for 50 Hz, 4-pole version, insulation system, thermal class 155 (F), utilized to 130 (B).


<sup>4)</sup> Values apply for 6 to 6.6 kV, 50 Hz, 4-pole version, insulation system, thermal class 155 (F), utilized to 155 (F).



**Mode of operation****Self-ventilated, IC411 cooling type, 1LA4, 1MA4, 1MS4, 1MG4 series**


Self-ventilated, rib-cooled motors have a technically sophisticated cooling concept that corresponds to cooling type IC411 according to DIN EN 60034-6/VDE 0530-6 (IEC 60034-6) with an additional, inner cooling air circuit with fan. As can be seen in the diagram, a fan is located at the non-drive end, which draws in the air from outside and blows it axially over the outer cooling ribs of the housing. Heat is exchanged with the inner cooling circuit at this location, which guarantees a uniform temperature distribution in the active motor and bearing areas.

The fan impellers for the inner and outer cooling air flow are mounted on the motor shaft and play a role in achieving the significantly reduced noise level thanks to their optimized aerodynamic design.

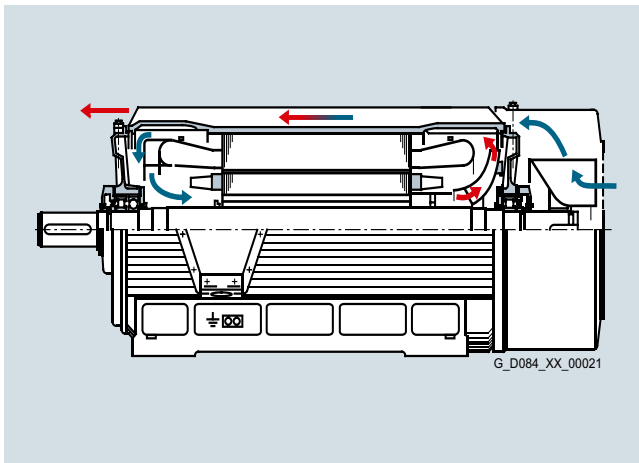
**Force-ventilated, IC416 cooling type, 1PQ4 series**

For the force-ventilated motors, a fan unit is located at the non-drive end, which draws in the air from outside and blows it axially over the outer cooling ribs of the housing. Heat is exchanged with the inner cooling circuit at this location, which guarantees a uniform temperature distribution in the active motor and bearing areas.

The fan impeller for the inner cooling circuit is mounted on the motor shaft and is bidirectional. Further, the outer cooling air flow is generated from a separately-driven fan that guarantees a constant cooling power in every operating state. This means that the motor can always be operated over its complete speed control range and in both directions of rotation.

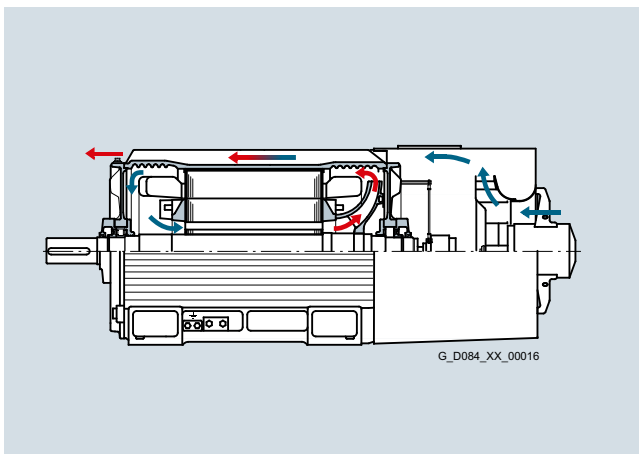**Water-jacket-cooled, IC71W cooling type, 1LH4 series**

The water-jacket-cooled motors have a double wall frame jacket with a spiral cooling water duct and, in addition, an inner cooling air circuit. The cooling water inlet is at the drive end, the outlet is at the non-drive end. Intensive heat exchange takes place through the cooling water. The inner air cooling circuit guarantees a uniform temperature distribution in the active motor and bearing areas.

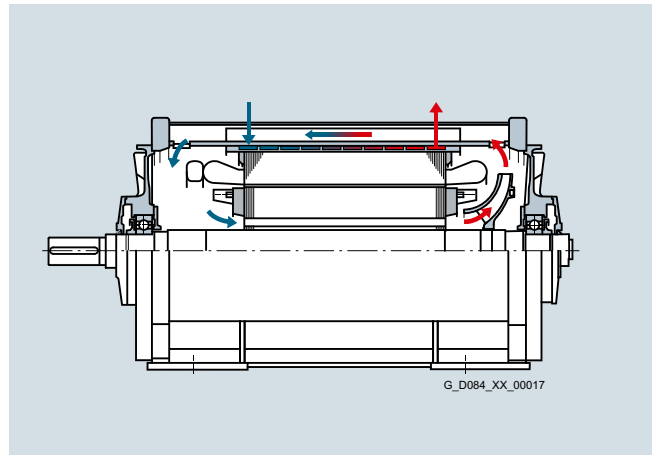

## Introduction

### SIMOTICS HV/TN Series H-compact PLUS, SIMOTICS HV M (Modular)

#### Article number code · SIMOTICS HV/TN Series H-compact PLUS

1

#### Overview

The following overview explains the meaning of the individual positions of the Article No. The selection tables in Parts 2 to 4 include the motors available as standard from this range.

| Structure of the Article No., shaft heights 450 mm to 630 mm |  | Position:                           | 1     | 2 | 3 | 4 | 5 | 6 | 7 | - | 8 | 9 | 10 | 11 | 12 | - | Z |   |
|--|--|-------------------------------------|-------|---|---|---|---|---|---|---|---|---|----|----|----|---|---|---|
| 1st to 4th position:<br>Motor version                        | <b>Standard version</b>  |                                     |       |   |   |   |   |   |   |   |   |   |    |    |    |   |   |   |
|  |  | <b>Degree of protection/cooling</b> |       |   |   |   |   |   |   |   |   |   |    |    |    |   |   |   |
|  |  | <b>IEC</b>                          |       |   |   |   |   |   |   |   |   |   |    |    |    |   |   |   |
|  |  | <b>NEMA</b>                         |       |   |   |   |   |   |   |   |   |   |    |    |    |   |   |   |
|  | Open-circuit ventilated  | IP23/IC01                           | -     | 1 | R | A | 4 |   |   |   |   |   |    |    |    |   |   |   |
|  | Air/air cooling  | IP55/IC611 or IC616                 | -     | 1 | R | Q | 4 |   |   |   |   |   |    |    |    |   |   |   |
|  | Air/water cooling  | IP55/IC81W or IC86W                 | -     | 1 | R | N | 4 |   |   |   |   |   |    |    |    |   |   |   |
|  | Open-circuit ventilated  | IP23/IC01                           | -     | 1 | R | A | 6 |   |   |   |   |   |    |    |    |   |   |   |
|  | Open-circuit ventilated  | IP24W/IC01                          | WP11  | 1 | R | P | 6 |   |   |   |   |   |    |    |    |   |   |   |
|  | Air/air cooling  | IP55/IC611 or IC616                 | TEAAC | 1 | R | Q | 6 |   |   |   |   |   |    |    |    |   |   |   |
|  | Air/water cooling  | IP55/IC81W or IC86W                 | TEWAC | 1 | R | N | 6 |   |   |   |   |   |    |    |    |   |   |   |
|  | <b>Ex eb version</b>   |                                     |       |   |   |   |   |   |   |   |   |   |    |    |    |   |   |   |
|  | Air/air cooling  | IP55/IC611 or IC616                 | -     | 1 | S | J | 4 |   |   |   |   |   |    |    |    |   |   |   |
|  | Air/water cooling  | IP55/IC81W or IC86W                 | -     | 1 | S | N | 4 |   |   |   |   |   |    |    |    |   |   |   |
|  | Air/air cooling  | IP55/IC611 or IC616                 | -     | 1 | S | J | 6 |   |   |   |   |   |    |    |    |   |   |   |
|  | Air/water cooling  | IP55/IC81W or IC86W                 | -     | 1 | S | N | 6 |   |   |   |   |   |    |    |    |   |   |   |
|  | <b>Ex ec version</b>   |                                     |       |   |   |   |   |   |   |   |   |   |    |    |    |   |   |   |
|  | Air/air cooling  | IP55/IC611 or IC616                 | -     | 1 | S | G | 4 |   |   |   |   |   |    |    |    |   |   |   |
|  | Air/water cooling  | IP55/IC81W or IC86W                 | -     | 1 | S | L | 4 |   |   |   |   |   |    |    |    |   |   |   |
|  | Air/air cooling  | IP55/IC611 or IC616                 | -     | 1 | S | G | 6 |   |   |   |   |   |    |    |    |   |   |   |
|  | Air/water cooling  | IP55/IC81W or IC86W                 | -     | 1 | S | L | 6 |   |   |   |   |   |    |    |    |   |   |   |
|  | <b>Ex pxb version</b>  |                                     |       |   |   |   |   |   |   |   |   |   |    |    |    |   |   |   |
|  | Air/air cooling  | IP55/IC611 or IC616                 | -     | 1 | S | B | 4 |   |   |   |   |   |    |    |    |   |   |   |
|  | Air/water cooling  | IP55/IC81W or IC86W                 | -     | 1 | S | Q | 4 |   |   |   |   |   |    |    |    |   |   |   |
|  | Air/air cooling  | IP55/IC611 or IC616                 | -     | 1 | S | B | 6 |   |   |   |   |   |    |    |    |   |   |   |
|  | Air/water cooling  | IP55/IC81W or IC86W                 | -     | 1 | S | Q | 6 |   |   |   |   |   |    |    |    |   |   |   |
| 5th to 6th position:<br>Shaft height                         | • 450 mm   |                                     |       |   |   |   | 4 | 5 |   |   |   |   |    |    |    |   |   |   |
|  | • 500 mm   |                                     |       |   |   |   | 5 | 0 |   |   |   |   |    |    |    |   |   |   |
|  | • 560 mm   |                                     |       |   |   |   | 5 | 6 |   |   |   |   |    |    |    |   |   |   |
|  | • 630 mm   |                                     |       |   |   |   | 6 | 3 |   |   |   |   |    |    |    |   |   |   |
| 7th position:<br>Laminated core length                       | The laminated core length is coded in digits 0 to 9 (without fixed assignment) |                                     |       |   |   |   |   |   |   |   |   |   |    |    |    |   |   |   |
|  |  |                                     |       |   |   |   |   |   |   |   |   |   |    |    |    |   |   |   |
| 8th position:<br>Pole number                                 | • 2-pole   |                                     |       |   |   |   |   |   |   |   |   |   |    |    |    |   |   | 2 |
|  | • 4-pole   |                                     |       |   |   |   |   |   |   |   |   |   |    |    |    |   |   | 4 |
|  | • 6-pole   |                                     |       |   |   |   |   |   |   |   |   |   |    |    |    |   |   | 6 |
|  | • 8-pole   |                                     |       |   |   |   |   |   |   |   |   |   |    |    |    |   |   | 8 |
|  | • 10-pole  |                                     |       |   |   |   |   |   |   |   |   |   |    |    |    |   |   | 3 |
|  | • 12-pole  |                                     |       |   |   |   |   |   |   |   |   |   |    |    |    |   |   | 5 |
|  | • 14-pole  |                                     |       |   |   |   |   |   |   |   |   |   |    |    |    |   |   | 7 |
|  | • 16-pole  |                                     |       |   |   |   |   |   |   |   |   |   |    |    |    |   |   | 9 |
|  |  |                                     |       |   |   |   |   |   |   |   |   |   |    |    |    |   |   |   |

## Overview (continued)

| Structure of the Article No.:                           | Position:  | 1   | 2  | 3   | 4                                | 5 | 6 | 7 | - | 8 | 9 | 10 | 11 | 12 | - | Z        |  |
|---|--|---|--|---|----------------------------------|---|---|---|---|---|---|----|----|----|---|----------|--|
| 9th position:<br>Cooling method for:                    | <b>IEC version:</b>  | <b>Cooling method:</b>                          |  |   |                                  |   |   |   |   |   |   |    |    |    |   |          |  |
|   | <ul style="list-style-type: none"> <li>With shaft-mounted fan (basic version) or shaft-mounted fan for the inner and separately-driven fan for the outer cooling circuit</li> <li>With shaft-mounted fan for the inner and outer cooling circuits</li> <li>With separately-driven fan for the inner or for the inner and outer cooling circuits</li> </ul> | IC01/IC81W                                      |  |   |                                  |   |   |   |   |   |   | H  |    |    |   |          |  |
|   |  | IC616   |  |   |                                  |   |   |   |   |   | H |    |    |    |   |          |  |
|   |  | IC611   |  |   |                                  |   |   |   |   |   | J |    |    |    |   |          |  |
|   |  | IC86W/IC666                                     |  |   |                                  |   |   |   |   |   | F |    |    |    |   |          |  |
|   | <b>NEMA version (only available for 1R.6 motors with shaft height 710; other shaft heights on request)</b>   | <b>Cooling method:</b>                          |  |   |                                  |   |   |   |   |   |   |    |    |    |   |          |  |
|   | <ul style="list-style-type: none"> <li>With separately-driven fan for the inner and outer cooling circuits</li> <li>With shaft-mounted fan</li> <li>With shaft-mounted fan for the inner and separately-drive fan for the outer cooling circuit</li> <li>With shaft-mounted fan for the inner and outer cooling circuits</li> </ul>                        | TEAAC   |  |   |                                  |   |   |   |   |   |   | A  |    |    |   |          |  |
|   |  | WP11 or TEWAC                                   |  |   |                                  |   |   |   |   |   |   | B  |    |    |   |          |  |
|   |  | TEAAC   |  |   |                                  |   |   |   |   |   |   | B  |    |    |   |          |  |
|   |  | TEAAC   |  |   |                                  |   |   |   |   |   |   | C  |    |    |   |          |  |
| 10th position:<br>Rotor version or drive converter type | <b>Line operation</b>  | <b>Letter</b>                                   | <b>Converter operation</b>                     | <b>Letter</b>   |                                  |   |   |   |   |   |   |    |    |    |   |          |  |
|   | 1R.4: Standard rotor with E-Cu   | <b>E</b>  | 1R.4: MV drive converter                       | <b>V</b>  |                                  |   |   |   |   |   |   |    |    |    |   |          |  |
|   | 1R.4: Standard rotor with CuSi   | <b>S</b>  | 1R.4: LV drive converter                       | <b>M</b>  |                                  |   |   |   |   |   |   |    |    |    |   |          |  |
|   | 1R.6: Standard rotor with E-Cu   | <b>JKL</b><br>(power-dependent)                 | 1R.6: LV drive converter; copper rotor         | <b>P</b><br>(SINAMICS G/<br>SINAMCIS S)<br><b>Q</b><br>(other converters)   |                                  |   |   |   |   |   |   |    |    |    |   |          |  |
|   | 1R.6: Standard rotor with CuSi   | <b>MN</b><br>(power-dependent)                  | 1R.6: MV drive converter; copper rotor         | <b>S</b><br>(SINAMICS GM/<br>SINAMICS SM)<br><b>T</b><br>(SINAMICS PERFECT HARMONY)<br><b>U</b><br>(other converters) |                                  |   |   |   |   |   |   |    |    |    |   |          |  |
|   | 1R.4 and 1R.6: Special rotor with E-Cu   | <b>X</b>  |  |   |                                  |   |   |   |   |   |   |    |    |    |   |          |  |
| 1R.4 and 1R.6: Special rotor with CuSi                  | <b>Y</b>   |   |  |   |                                  |   |   |   |   |   |   |    |    |    |   |          |  |
| 11th position:<br>Voltage code                          | <b>1R.4: Line operation:</b>   | <b>1R.4: Operation with MV drive converter:</b> | <b>1R.4: Operation with LV drive converter</b> | <b>1R.6: Line operation</b>   | <b>1R.6: Converter operation</b> |   |   |   |   |   |   |    |    |    |   |          |  |
|   | 3.3 kV, 50 Hz  | 2.3 kV, 50 Hz                                   | 690 V, 50 Hz, on request                       | 3.3 kV, 50 Hz   | 690 V, 50 Hz                     |   |   |   |   |   |   |    |    |    |   | <b>0</b> |  |
|   | 6.6 kV, 60 Hz  | 2.3 kV, 60 Hz                                   | –  | 6.6 kV, 60 Hz   | 690 V, 60 Hz                     |   |   |   |   |   |   |    |    |    |   | <b>1</b> |  |
|   | –  | 3.3 kV, 50 Hz                                   | –  | 13.2 kV, 60 Hz  | 2,3 kV, 50 Hz                    |   |   |   |   |   |   |    |    |    |   | <b>2</b> |  |
|   | 3.0 kV, 50 Hz  | 3.3 kV, 60 Hz                                   | –  | 4.16 kV, 60 Hz  | 4,16 kV, 60 Hz                   |   |   |   |   |   |   |    |    |    |   | <b>3</b> |  |
|   | 4.0 kV, 60 Hz  | 4.16 kV, 50 Hz                                  | –  | 4.0 kV, 60 Hz   | 4,16 kV, 50 Hz                   |   |   |   |   |   |   |    |    |    |   | <b>4</b> |  |
|   | 5.0 kV, 50 Hz  | 4.16 kV, 60 Hz                                  | –  | 2.3 kV, 60 Hz   | 3,3 kV, 50 Hz                    |   |   |   |   |   |   |    |    |    |   | <b>5</b> |  |
|   | 6.0 kV, 50 Hz  | 6.0 kV, 50 Hz                                   | –  | 6.0 kV, 50 Hz   | 6,0 kV, 50 Hz                    |   |   |   |   |   |   |    |    |    |   | <b>6</b> |  |
|   | 6.6 kV, 50 Hz  | 6.6 kV, 50 Hz                                   | –  | 6.6 kV, 50 Hz   | 6,6 k V, 50 Hz                   |   |   |   |   |   |   |    |    |    |   | <b>7</b> |  |
|   | 10 kV, 50 Hz   | –   | –  | 10 kV, 50 Hz  | 6,6 kV, 60 Hz                    |   |   |   |   |   |   |    |    |    |   | <b>8</b> |  |
| Other voltage/frequency (additional text data)          |  |   |  |   |                                  |   |   |   |   |   |   |    |    |    |   | <b>9</b> |  |
| 12th position:<br>Type of construction                  | <ul style="list-style-type: none"> <li>IM B3</li> <li>IM V1 with canopy (for shaft height 630 mm, only in type of construction IM V10)</li> <li>IM V1 without canopy (for shaft height 630 mm, only in type of construction IM V10)</li> </ul>   |   |  |   |                                  |   |   |   |   |   |   |    |    |    |   | <b>0</b> |  |
|   | Options: Additional order code required. Refer to section Options and tests in Chapter 2, Chapter 3 and Chapter 4.   |   |  |   |                                  |   |   |   |   |   |   |    |    |    |   | <b>4</b> |  |
|   |  |   |  |   |                                  |   |   |   |   |   |   |    |    |    |   | <b>8</b> |  |

## Introduction

### SIMOTICS HV/TN Series H-compact PLUS, SIMOTICS HV M (Modular)

#### Article number code · SIMOTICS HV M (Modular)

1

#### Overview

The following overview explains the meaning of the individual positions of the Article No. The selection tables in Parts 2 to 4 include the motors available as standard from this range.

| Structure of the Article No.,<br>shaft heights 710 mm to 800 mm | Position:  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | - | 8 | 9 | 10 | 11 | 12 | - | 13 | 14 | 15 | 16 | Z |                                |
|---|--|---|---|---|---|---|---|---|---|---|---|----|----|----|---|----|----|----|----|---|--------------------------------|
| <b>1st to 3th position:</b><br>Motor version, Ex-protection     | Ex-protection  |   |   |   |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   |                                |
|   | Air/air cooling non Ex   | 1 | R | Q |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   |                                |
|   | Air/air cooling Ex ec  | 1 | S | G |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   |                                |
|   | Air/air cooling Ex pxb   | 1 | S | B |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   |                                |
|   | Air/air cooling Ex eb  | 1 | S | J |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   |                                |
|   | Basic design, open-circuit ventilated non Ex                                   | 1 | R | A |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   |                                |
|   | Weather protected design, open-circuit ventilated non ex                       | 1 | R | P |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   |                                |
|   | Air/water cooling non Ex   | 1 | R | N |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   |                                |
|   | Air/water cooling Ex ec  | 1 | S | L |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   |                                |
|   | Air/water cooling Ex pxb   | 1 | S | Q |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   |                                |
|   | Air/water cooling Ex eb  | 1 | S | N |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   |                                |
| <b>4th position:</b><br>Motor series                            | SIMOTIC HV M (modular)   |   |   |   | 7 |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   |                                |
| <b>5th to 6th position:</b><br>Shaft height                     | • 710 mm   |   |   |   |   | 7 | 1 |   |   |   |   |    |    |    |   |    |    |    |    |   |                                |
|   | • 800 mm   |   |   |   |   | 8 | 0 |   |   |   |   |    |    |    |   |    |    |    |    |   |                                |
| <b>7th position:</b><br>Laminated core length                   | The laminated core length is coded in digits 0 to 9 (without fixed assignment) |   |   |   |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   |                                |
| <b>8th position:</b><br>Pole number                             | • 2-pole   |   |   |   |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   | 2                              |
|   | • 4-pole   |   |   |   |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   | 4                              |
|   | • 6-pole   |   |   |   |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   | 6                              |
|   | • 8-pole   |   |   |   |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   | 8                              |
|   | • 10-pole  |   |   |   |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   | 3                              |
|   | • 12-pole  |   |   |   |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   | 5                              |
|   | • 14-pole  |   |   |   |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   | 7                              |
|   | • 16-pole  |   |   |   |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   | 0                              |
|   | • 18-pole  |   |   |   |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   | 1                              |
|   | • Other pole numbers   |   |   |   |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   | 9                              |
|   |  |   |   |   |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   | Additional order code required |
| <b>9th position:</b><br>Cooling method for:                     | <b>Cooling method:</b>   |   |   |   |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   |                                |
|   | • Open inner cooling air circuit   |   |   |   |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   | F                              |
|   | • Weather-protected design, open circuit                                       |   |   |   |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   | H                              |
|   | • Air/air cooling  |   |   |   |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   | J                              |
|   | • Air/air cooling with forced ventilation for outer air circuit                |   |   |   |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   | K                              |
|   | • Air/air cooling with forced ventilation for inner air circuit                |   |   |   |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   | L                              |
|   | • Air/air cooling with forced ventilation for inner and outer air circuit      |   |   |   |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   | M                              |
|   | • Air/water cooling  |   |   |   |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   | N                              |
|   | • Air/water cooling with forced ventilation                                    |   |   |   |   |   |   |   |   |   |   |    |    |    |   |    |    |    |    |   | P                              |

## Overview (continued)

| Structure of the Article No.:  | Position:  | 1  | 2 | 3 | 4 | 5 | 6 | 7 | - | 8 | 9 | 10                              | 11 | 12 | - | 13 | 14 | 15 | 16 | Z |  |   |
|--|--|--|---|---|---|---|---|---|---|---|---|---------------------------------|----|----|---|----|----|----|----|---|--|---|
| <u>10th position:</u><br>Motor for line operation or for converter operation | <b>For line operation with</b>   |  |   |   |   |   |   |   |   |   |   |                                 | A  |    |   |    |    |    |    |   |  |   |
|  | • High voltage motor   |  |   |   |   |   |   |   |   |   |   |                                 | B  |    |   |    |    |    |    |   |  |   |
|  | • Low voltage motor  |  |   |   |   |   |   |   |   |   |   |                                 |    |    |   |    |    |    |    |   |  |   |
|  | <b>For converter operation with</b>  |  |   |   |   |   |   |   |   |   |   |                                 | C  |    |   |    |    |    |    |   |  |   |
|  | • SINAMICS G150  |  |   |   |   |   |   |   |   |   |   |                                 | D  |    |   |    |    |    |    |   |  |   |
|  | • SINAMICS S120  |  |   |   |   |   |   |   |   |   |   |                                 | E  |    |   |    |    |    |    |   |  |   |
|  | • SINAMICS S150  |  |   |   |   |   |   |   |   |   |   |                                 | F  |    |   |    |    |    |    |   |  |   |
|  | • SINAMICS G180  |  |   |   |   |   |   |   |   |   |   |                                 | R  |    |   |    |    |    |    |   |  |   |
|  | • SINAMICS GM150   |  |   |   |   |   |   |   |   |   |   |                                 | S  |    |   |    |    |    |    |   |  |   |
|  | • SINAMICS SM150   |  |   |   |   |   |   |   |   |   |   |                                 | T  |    |   |    |    |    |    |   |  |   |
|  | • SINAMICS GH180   |  |   |   |   |   |   |   |   |   |   |                                 | U  |    |   |    |    |    |    |   |  |   |
|  | • SINAMICS GH150   |  |   |   |   |   |   |   |   |   |   |                                 | Z  |    |   |    |    |    |    |   |  |   |
|  | • Other converters (additional text data)  |  |   |   |   |   |   |   |   |   |   |                                 |    |    |   |    |    |    |    |   |  |   |
| <u>11th position:</u><br>Voltage code  | <b>Line operation</b>  | <b>Operation with MV drive converter</b> |   |   |   |   |   |   |   |   |   | <b>Line/converter operation</b> |    |    |   |    |    |    |    |   |  |   |
|  | 3.3 kV, 50 Hz  | 7.2 kV, 50 Hz                            |   |   |   |   |   |   |   |   |   | 690 V, 60 Hz                    |    |    |   |    |    |    |    |   |  | 0 |
|  | 6.6 kV, 60 Hz  | 11 kV, 50 Hz                             |   |   |   |   |   |   |   |   |   | 690 V, 50 Hz                    |    |    |   |    |    |    |    |   |  | 1 |
|  | 13.2 kV, 60 Hz   | 2.3 kV, 50 Hz                            |   |   |   |   |   |   |   |   |   | –                               |    |    |   |    |    |    |    |   |  | 2 |
|  | 4.16 kV, 60 Hz   | 4.16 kV, 60 Hz                           |   |   |   |   |   |   |   |   |   | –                               |    |    |   |    |    |    |    |   |  | 3 |
|  | 4 kV, 60 Hz  | 4.16 kV, 50 Hz                           |   |   |   |   |   |   |   |   |   | 400 V                           |    |    |   |    |    |    |    |   |  | 4 |
|  | 2.3 kV, 60 Hz  | 3.3 kV, 50 Hz                            |   |   |   |   |   |   |   |   |   | 500V                            |    |    |   |    |    |    |    |   |  | 5 |
|  | 6.0 kV, 50 Hz  | 6 kV, 50 Hz                              |   |   |   |   |   |   |   |   |   | –                               |    |    |   |    |    |    |    |   |  | 6 |
|  | 6.6 kV, 50 Hz  | 6.6 kV, 50 Hz                            |   |   |   |   |   |   |   |   |   | 660 V                           |    |    |   |    |    |    |    |   |  | 7 |
|  | 10 kV, 50 Hz   | 6.6 kV, 60 Hz                            |   |   |   |   |   |   |   |   |   | –                               |    |    |   |    |    |    |    |   |  | 8 |
|  | Other voltages/frequency (additional text data)  |  |   |   |   |   |   |   |   |   |   |                                 |    |    |   |    |    |    |    |   |  | 9 |
| <u>12th position:</u><br>Type of construction                                | • IM B3 (IM 1001)  |  |   |   |   |   |   |   |   |   |   |                                 | 0  |    |   |    |    |    |    |   |  |   |
|  | • IM V1, without protective hood (IM 3011)   |  |   |   |   |   |   |   |   |   |   |                                 | 8  |    |   |    |    |    |    |   |  |   |
|  | • Other mounting types (additional text data)  |  |   |   |   |   |   |   |   |   |   |                                 | 9  |    |   |    |    |    |    |   |  |   |
| <u>13th position:</u><br>Temperature class (for explosion protection)        | • Without temperature class  |  |   |   |   |   |   |   |   |   |   |                                 | 0  |    |   |    |    |    |    |   |  |   |
|  | • Temperature class T2   |  |   |   |   |   |   |   |   |   |   |                                 | 2  |    |   |    |    |    |    |   |  |   |
|  | • Temperature class T3   |  |   |   |   |   |   |   |   |   |   |                                 | 3  |    |   |    |    |    |    |   |  |   |
|  | • Temperature class T4   |  |   |   |   |   |   |   |   |   |   |                                 | 4  |    |   |    |    |    |    |   |  |   |
| <u>14th position:</u><br>Rotor version                                       | • Standard rotor – E-Cu  |  |   |   |   |   |   |   |   |   |   |                                 |    |    |   |    | C  |    |    |   |  |   |
|  | • Special rotor – E-Cu   |  |   |   |   |   |   |   |   |   |   |                                 |    |    |   |    | D  |    |    |   |  |   |
|  | • Standard rotor – CuSi  |  |   |   |   |   |   |   |   |   |   |                                 |    |    |   |    | E  |    |    |   |  |   |
|  | • Special rotor – CuSi   |  |   |   |   |   |   |   |   |   |   |                                 |    |    |   |    | F  |    |    |   |  |   |
|  | • Special rotor – with other material type   |  |   |   |   |   |   |   |   |   |   |                                 |    |    |   |    | G  |    |    |   |  |   |
| <u>15th position:</u><br>Housing and bearing version                         | • Steel fabricated housing / anti-friction bearings  |  |   |   |   |   |   |   |   |   |   |                                 |    |    |   |    |    |    | G  |   |  |   |
|  | • Steel fabricated housing / sleeve bearing  |  |   |   |   |   |   |   |   |   |   |                                 |    |    |   |    |    |    | J  |   |  |   |
| <u>16th position:</u><br>Category  | • Standard series  |  |   |   |   |   |   |   |   |   |   |                                 |    |    |   |    |    |    |    | 0 |  |   |
| <u>Z position:</u>   | Options: Additional order code required. Refer to section Options and tests in Chapter 2, Chapter 3 and Chapter 4. |  |   |   |   |   |   |   |   |   |   |                                 |    |    |   |    |    |    |    | Z |  |   |

## Introduction

### SIMOTICS HV/TN Series H-compact PLUS, SIMOTICS HV M (Modular)

#### Performance features

#### Overview

##### Performance features of the H-compact PLUS and SIMOTICS HV M series

The H-compact PLUS and SIMOTICS HV M motors have a modular design (main motor housing with different possible cooling top enclosures).

This means that the following cooling methods can be implemented:

- Air/water cooling
- Air/air cooling
- Open-circuit cooling

The new 1R.6/1S.6 and 1R.7/1S.7 series are the second generation of the H-compact PLUS motors. They offer higher power ratings (for two-pole motors), permit a higher external moment of inertia, sport an innovative design as well as an extended range of options.

##### Overview table of the H-compact PLUS series

| Series     | Version | Voltages                    | Powers                           | Degree of protection | Cooling method    | Type of protection | Type of construction                            |
|------------|---------|-----------------------------|----------------------------------|----------------------|-------------------|--------------------|---|
| 1RA4       | IEC     | 690 V                       | 1370 ... 2800 kW <sup>2)</sup>   | IP23                 | IC01              | No                 | IM B3, IM V1,<br>(shaft height 630<br>only V10) |
| 1RA6       |         | 3.3 ... 11 kV <sup>1)</sup> | 1370 ... 11700 kW <sup>3)</sup>  |                      |                   |                    |   |
| 1RN4       | IEC     | 690 V                       | 1370 ... 2800 kW <sup>2)</sup>   | IP55                 | IC81W             | No                 |   |
| 1RN6       |         | 3.3 ... 11 kV <sup>1)</sup> | 1370 ... 11700 kW <sup>3)</sup>  |                      |                   |                    |   |
| 1RQ4       | IEC     | 690 V                       | 1090 ... 2400 kW <sup>2)</sup>   | IP55                 | IC611/IC616/IC666 | No                 |   |
| 1RQ6       |         | 3.3 ... 11 kV <sup>1)</sup> | 1090 ... 8700 kW <sup>3)</sup>   |                      |                   |                    |   |
| 1SG4       | IEC     | 690 V                       | 1090 ... 2400 kW <sup>2)</sup>   | IP55                 | IC611/IC616/IC666 | Ex ec, Ex tc       |   |
| 1SG6       |         | 3.3 ... 11 kV <sup>1)</sup> | 1090 ... 8700 kW <sup>3)</sup>   |                      |                   |                    |   |
| 1SL4       | IEC     | 690 V                       | 1370 ... 2800 kW <sup>2)</sup>   | IP55                 | IC81W             | Ex ec, Ex tc       |   |
| 1SL6       |         | 3.3 ... 11 kV <sup>1)</sup> | 1370 ... 11700 kW <sup>3)</sup>  |                      |                   |                    |   |
| 1SB4       | IEC     | 690 V                       | 1090 ... 2400 kW <sup>2)</sup>   | IP55                 | IC611/IC616/IC666 | Ex pxb             |   |
| 1SB6       |         | 3.3 ... 11 kV <sup>1)</sup> | 1090 ... 8700 kW <sup>3)</sup>   |                      |                   |                    |   |
| 1SQ4       | IEC     | 690 V                       | 1370 ... 2800 kW <sup>2)</sup>   | IP55                 | IC81W             | Ex pxb             |   |
| 1SQ6       |         | 3.3 ... 11 kV <sup>1)</sup> | 1370 ... 11700 kW <sup>3)</sup>  |                      |                   |                    |   |
| 1SJ4, 1SJ6 | IEC     | On request                  | On request                       | IP55                 | IC611/IC616/IC666 | Ex eb              |   |
| 1SN4, 1SN6 |         |                             |                                  |                      | IC81W             |                    |   |
| 1RP6       | IEC     | 690 V                       | 1370 ... 2800 kW <sup>2)</sup>   | IP24W                | IC01              | No                 | IM B3, IM V1                                    |
|            |         | 3.3 ... 11 kV               | 1370 ... 11700 kW <sup>3)</sup>  |                      |                   |                    |   |
| 1RN6       | NEMA    | 3.3 ... 13.8 kV             | 11000 ... 18000 hp <sup>4)</sup> | WP11                 | Open              | No                 |   |
|            |         | 3.3 ... 13.8 kV             | 11000 ... 18000 hp <sup>4)</sup> |                      |                   |                    |   |
| 1RQ6       | NEMA    | 3.3 ... 13.8 kV             | 11000 ... 18000 hp <sup>4)</sup> | TEAAC                | Air/air           | No                 |   |
| 1SG6       | NEMA    | 3.3 ... 13.8 kV             | 11000 ... 18000 hp <sup>4)</sup> | TEAAC                | Air/air           | Class 1, Div 2     |   |
| 1SL6       | NEMA    | 3.3 ... 13.8 kV             | 11000 ... 18000 hp <sup>4)</sup> | TEWAC                | Air/water         | Class 1, Div 2     |   |

##### Overview table of the SIMOTICS HV M series, shaft heights 710 and 800 mm

| Series           | Version | Voltages                    | Powers                          | Degree of protection | Cooling method    | Type of protection | Type of construction |
|------------------|---------|-----------------------------|---------------------------------|----------------------|-------------------|--------------------|----------------------|
| 1RN7, 1RA7, 1RP7 | IEC     | 3.3 ... 11 kV <sup>1)</sup> | 9000 ... 12500 kW <sup>3)</sup> | IP55/IP24W           | IC81W/IC86W/IC01  | No                 | IM B3, IM V1         |
| 1RQ7             | IEC     | 3.3 ... 11 kV <sup>1)</sup> | 7000 ... 9500 kW <sup>3)</sup>  | IP55                 | IC611/IC616/IC666 | No                 |                      |
| 1SG7             | IEC     | 3.3 ... 11 kV <sup>1)</sup> | 7000 ... 9500 kW <sup>3)</sup>  | IP55                 | IC611/IC616/IC666 | Ex ec, Ex tc       |                      |
| 1SL7             | IEC     | 3.3 ... 11 kV <sup>1)</sup> | 9000 ... 12500 kW <sup>3)</sup> | IP55                 | IC81W/IC86W       | Ex ec, Ex tc       |                      |

Note: Detailed data for shaft height 800 mm on request.

<sup>1)</sup> 13.8 kV on request.

<sup>2)</sup> Power rating values apply for 690 V, 50 Hz, 4-pole version, insulation system thermal class 155 (F), utilized to 155 (F).

<sup>3)</sup> Power rating values apply for 6 kV, 50 Hz, 4-pole version, insulation system thermal class 155 (F), utilized to 130 (B).

<sup>4)</sup> Power rating values apply for 6.6 kV, 60 Hz, 4-pole version, insulation system thermal class 155 (F), utilized to 130 (B).

## Overview (continued)

| Cooling method     |  |
|--------------------|--|
| IC01               | Air-cooled, self-ventilated  |
| IC81W              | Air/water cooler, inner cooling circuit self-ventilated  |
| IC86W              | Air/water cooler, inner cooling circuit force-ventilated                                       |
| IC611              | Air/air cooler, inner cooling circuit self-ventilated, outer cooling circuit self-ventilated   |
| IC616              | Air/air cooler, inner cooling circuit self-ventilated, outer cooling circuit force-ventilated  |
| IC666              | Air/air cooler, inner cooling circuit force-ventilated, outer cooling circuit force-ventilated |
| TEWAC              | Closed motor with air/water cooler   |
| TEAAC              | Closed motor with air/air cooler   |
| Type of protection |  |
| Ex ec              | Increased safety of the motor, Zone 2  |
| Ex pxb             | Pressurized motor, increased safety of the terminal box, Zone 1                                |
| Class1, Div 2      | Non-sparking motor   |

| Degree of protection |  |
|----------------------|--|
| IP23                 | Protected against the ingress of solid foreign bodies with a diameter greater than 12 mm and water spray                             |
| IP24W                | Protected against the ingress of solid foreign bodies with a diameter greater than 12 mm and splashwater. Weather-protected version. |
| IP55                 | Protected against dust and jet-water   |
| WP11                 | Weather-protected motor with air intake baffles  |
| TEWAC                | Closed motor with air/water cooler   |
| TEAAC                | Closed motor with air/air cooler   |
| Type of construction |  |
| IM B3                | Horizontal, with feet, without flange  |
| IM V1                | Vertical, without feet, with flanged bearing shield  |
| IM V10               | Vertical, without feet, with flange at the enclosure   |

## Introduction

SIMOTICS HV/TN Series H-compact PLUS, SIMOTICS HV M (Modular)


### Cooling concepts

#### Mode of operation

The following diagrams show the general mode of operation of the cooling. They do not include any design details.


##### **Air/air heat exchanger (IC611)**

1RQ. series with one-sided ventilation

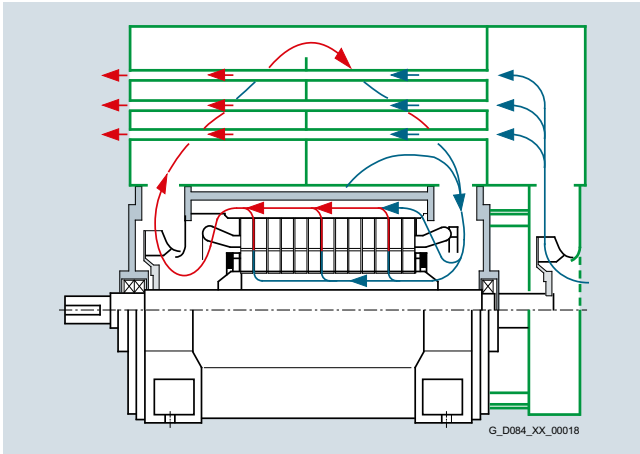


##### **Air/water heat exchanger (IC81W)**


1RN. series with one-sided ventilation

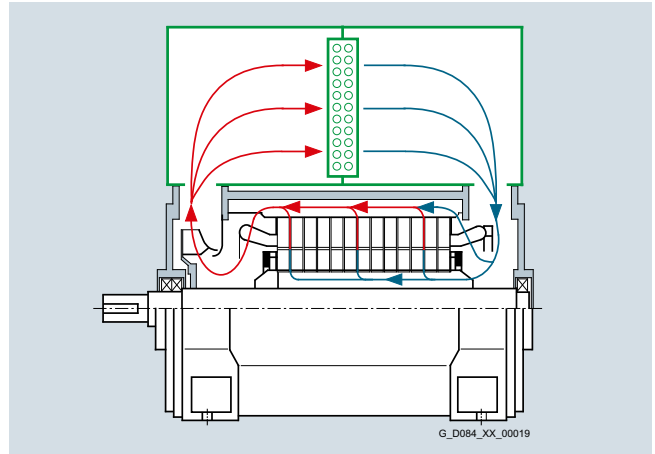





1RQ. series with two-sided ventilation

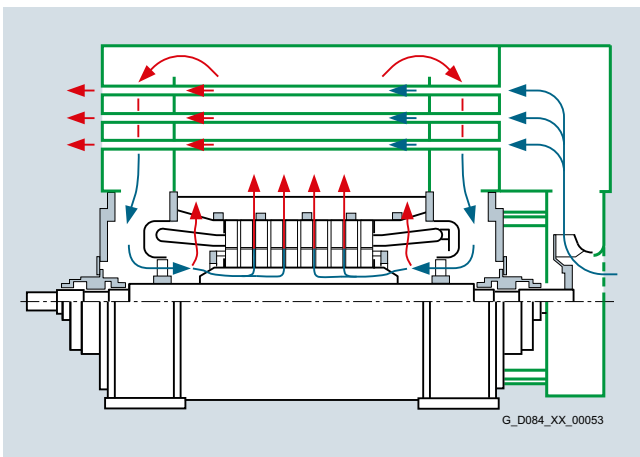

1RN. series with one-sided or two-sided ventilation

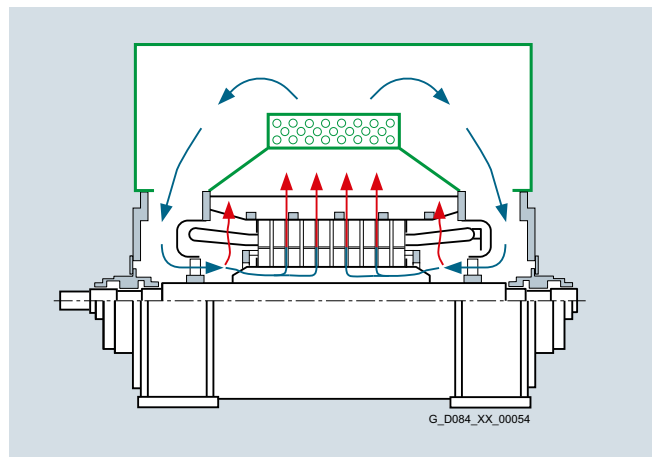

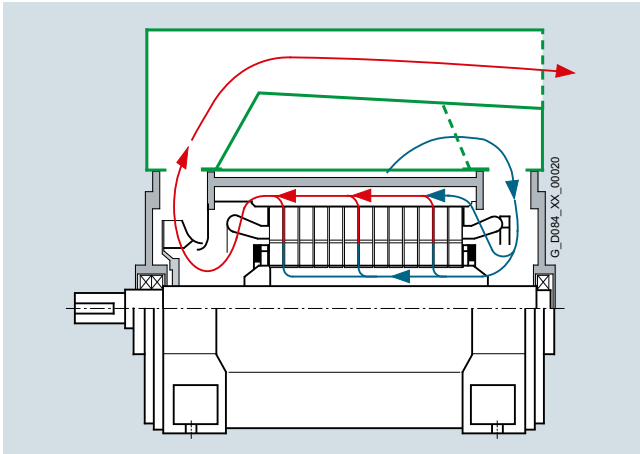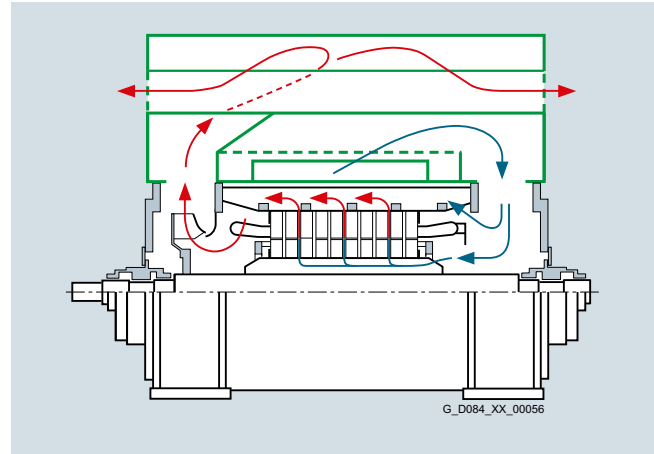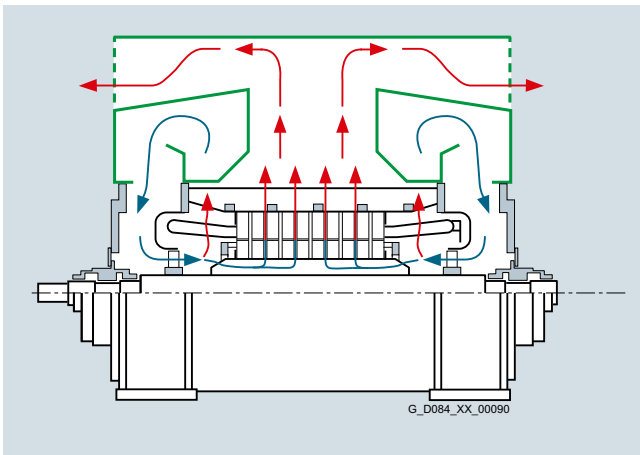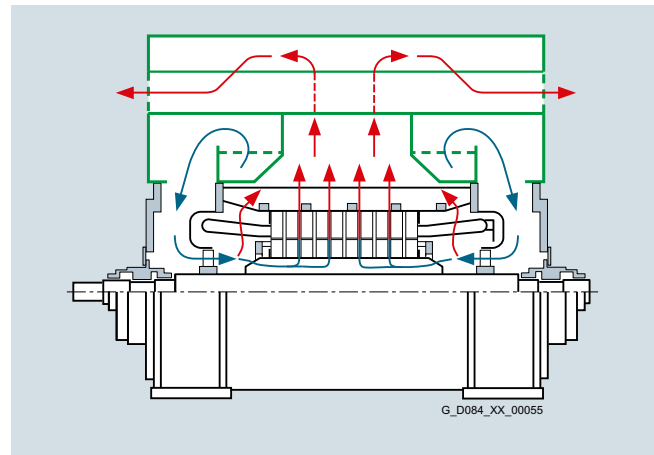

**Mode of operation** (continued)**Open-circuit ventilation (IC01)**1RA. series with one-sided ventilation1RP. series with one-sided ventilation1RA. series with two-sided ventilation1RP. series with two-sided ventilation

## Introduction

### General technical versions

#### Overview

#### Overview

##### Motor protection

A series of standard and optional monitoring and protective devices are available for motor protection.

| Protective device                                 | Description  |
|---|--|
| Stator winding monitoring                         | 6 PT100 resistance thermometers for temperature monitoring as standard.  |
| Anti-friction bearing monitoring                  | Measuring nipple for shock pulse measurement as standard. Optional PT100 resistance thermometer for temperature monitoring.  |
| Sleeve bearing monitoring                         | Optional PT100 resistance thermometer for temperature monitoring. Optional for circulating oil cooling: Throttle valves, manometer and flowmeter in the oil intake line. Optional holes in the oil discharge line to mount a thermometer or a sight glass to monitor the oil flow. |
| Shaft vibration monitoring                        | Optional for motors with sleeve bearings.  |
| Air temperature monitoring in the cooling circuit | Optional using a thermometer in the cooler assembly on the air intake and air discharge side for H-compact PLUS motors.  |
| Leakage water monitoring                          | Optional using sensors in the cooler housing for water-cooled H-compact PLUS and SIMOTICS HV M motors.   |
| Starting and speed monitoring                     | Optional rotary pulse encoder for motors for converter operation.  |
| Anti-condensation heating                         | Standard for H-compact PLUS and SIMOTICS HV M motors. Optional for H-compact motors.   |

##### Electrical design

High voltage motors have the Siemens MICALASTIC insulation system according to thermal class 155 (F).

The rotor windings of H-compact motors are manufactured out of die cast aluminum or copper:

| Shaft height<br>mm | Rotor design with number of poles |       |    |    |    |    |
|--------------------|-----------------------------------|-------|----|----|----|----|
|                    | 2                                 | 4     | 6  | 8  | 10 | 12 |
| 315                | Al                                | Al    | Al | –  | –  | –  |
| 355                | Al                                | Al    | Al | Al | –  | –  |
| 400                | Al                                | Al    | Al | Al | –  | –  |
| 450                | Al                                | Al/Cu | Al | Al | Al | Cu |
| 500                | Cu                                | Al    | Cu | Cu | Cu | Cu |
| 560                | Cu                                | Cu    | Cu | Cu | Cu | Cu |
| 630                | Cu                                | Cu    | Cu | Cu | Cu | Cu |

H-compact PLUS and SIMOTICS HV M motors always have copper rotors.

##### Motor connection and terminal boxes for high voltage motors

The motor terminal boxes are generously dimensioned. This design allows cables, which are generally used worldwide, to be simply and quickly connected up as well as to accommodate all of the generally used cable entry fittings.

Arrangement of the motor terminal box (standard version):

When viewing the drive side, the motor terminal box is mounted at the righthand side of the stator frame with cable entry from the bottom. When requested, it can be mounted on the lefthand side. However, it must be specified when ordering. When requested, the terminal box can be mounted, rotated through 90° or through 180° if the spatial situation at the machine permits this (except for terminal boxes with cast cable entry glands).

Terminal arrangement according to DIN 42962.

Degree of protection of the motor terminal box: IP55, IP56, IP66 – depending on the terminal box type (refer to the table).

The motor terminal boxes comprise a lower section or housing, bolted to the stator frame, and a removable cover. The 1XA8711, 1XB8911 and 1XB8751 terminal boxes that are normally used have bushings manufactured out of casting resin. All of the other terminal boxes have cast-resin post insulators with bolted bus-bars (exception: cable connector connection).

All motor terminal boxes are short-circuit proof. If a short-circuit occurs in the motor, all of the forces generated by the short-circuit current are reliably handled by the components in the terminal box (e.g. cast-resin post insulators).

Further, all motor terminal boxes are short-circuit proof. If arcs occur in the motor terminal box, the pressure generated is immediately dissipated using a pressure relief mechanism.

Short-circuit strength and short-circuit proof of the motor terminal boxes used as standard:

- 400 MVA at 6 kV; 0.2 s
- 700 MVA at 10 kV; 0.2 s

These values correspond to a rated peak withstand current of approx. 100 kA.

Motor connecting cable and cable entry fittings are not supplied with the motor.

##### Protection for line-operated high voltage motors against switching overvoltages

The motor windings are dimensioned according to the requirements of IEC 60034-15. If higher overvoltages can occur, over-voltage protection is required at the supply side or can be offered as a motor option.

## Overview

**Overview of the generally used motor terminal boxes**

| Terminal box        | Rated voltage<br>kV | Current<br>A                  | Cable entries<br>Number | Cable entry diameter, max.<br>mm |
|---------------------|---------------------|-------------------------------|-------------------------|----------------------------------|
| <b>1XB1 631</b>     | 1                   | 1230                          | 4                       | 75                               |
| <b>1XA8 711</b>     | 6.6                 | 315                           | 1                       | 75                               |
| <b>1XB8 751</b>     | 6.6                 | 630 (for parallel connection) | 2                       | 75                               |
| <b>1XB8 911</b>     | 11                  | 315                           | 1                       | 75                               |
| <b>1XD1 543-3AA</b> | 11                  | 1200                          | –                       | –                                |
| <b>1XD1 566-3AA</b> | 11                  | 2750                          | –                       | –                                |
| <b>1XD1 643-3AA</b> | 13.2                | 800                           | –                       | –                                |

Cable connector connection on request.

**Connection options**

| Terminal box        | Terminal element   | Number of<br>cables       | Cable cross-section (Cu or Al),<br>max. that can be introduced<br>mm <sup>2</sup> | Weight<br>kg | Degree of protection to<br>DIN EN 60529 |
|---------------------|--|---------------------------|---|--------------|---|
| <b>1XB1 631</b>     | Cable lug  | 4 cables,<br>3-conductor  | 240   | 83           | IP55                                    |
| <b>1XA8 711</b>     | Connecting terminal on<br>M16 studs<br>Connection with cable lug and<br>two hexagon nuts | 1 cable,<br>3-conductor   | 1 x 3 x 240   | 42           | IP55 <sup>1)</sup>                      |
| <b>1XB8 751</b>     | Connecting terminal on<br>M16 studs<br>Connection with cable lug and<br>two hexagon nuts | 2 cables,<br>3-conductor  | 2 x 3 x 240   | 131          | IP56                                    |
| <b>1XB8 911</b>     | Connecting terminal on<br>M16 studs<br>Connection with cable lug and<br>two hexagon nuts | 1 cable,<br>3-conductor   | 1 x 3 x 240   | 93           | IP56                                    |
| <b>1XD1 543-3AA</b> | Cable lug on busbar  | 6 cables,<br>1-conductor  | 300   | 230          | IP55                                    |
| <b>1XD1 566-3AA</b> | Cable lug on busbar  | 10 cables,<br>1-conductor | 300   | 170          | IP55 <sup>1)</sup>                      |
| <b>1XD1 643-3AA</b> | Cable lug on busbar  | 4 cables,<br>1-conductor  | 300   | 500          | IP55                                    |

<sup>1)</sup> IP66 on request.


## Introduction

General technical versions


### Motor terminal boxes

#### Dimension drawings

##### Terminal box type 1XA8 711 (up to 6.6 kV, 3 terminals)

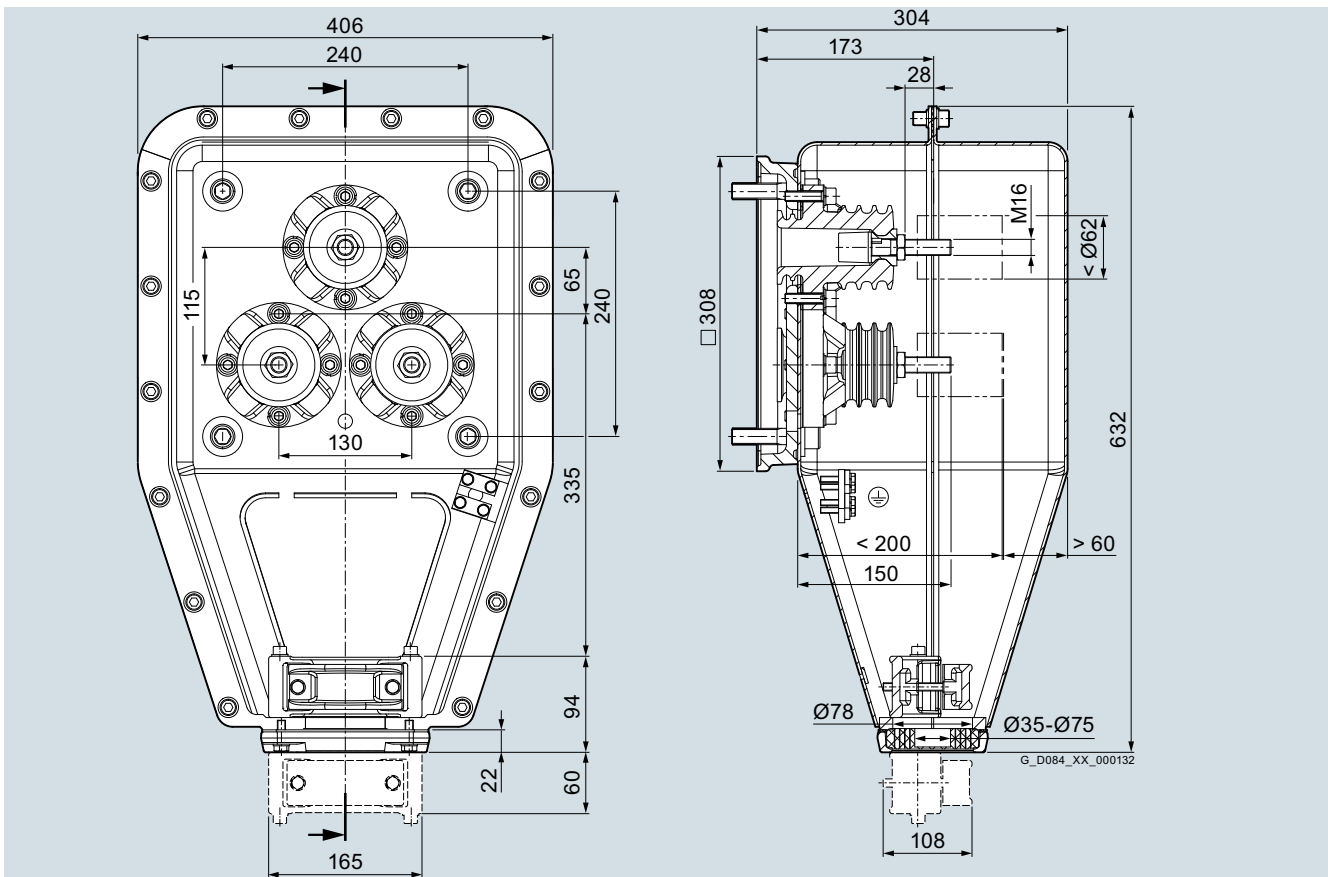


##### Terminal box type 1XB8 911 (up to 11 kV)

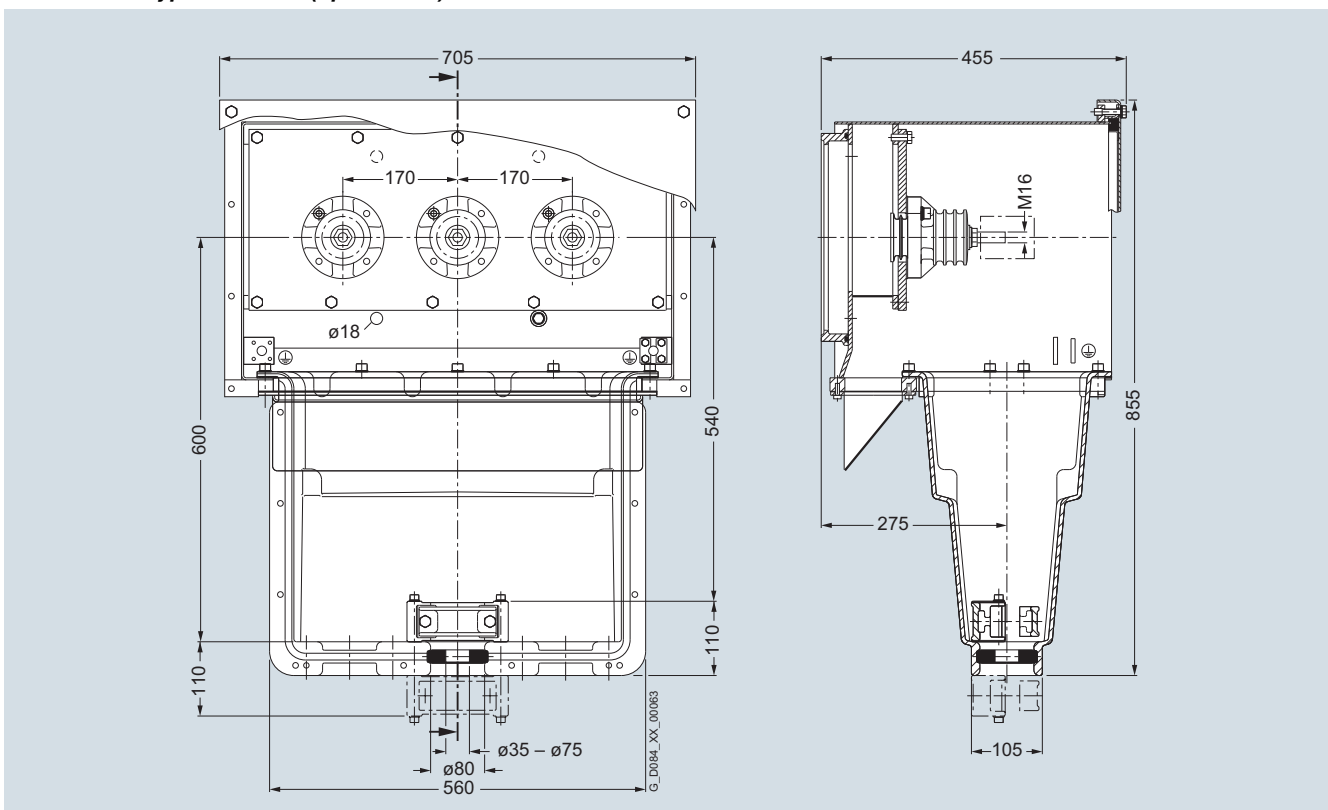


## Dimension drawings (continued)

## Terminal box type 1XB8 751 (up to 6.6 kV, 6 terminals)

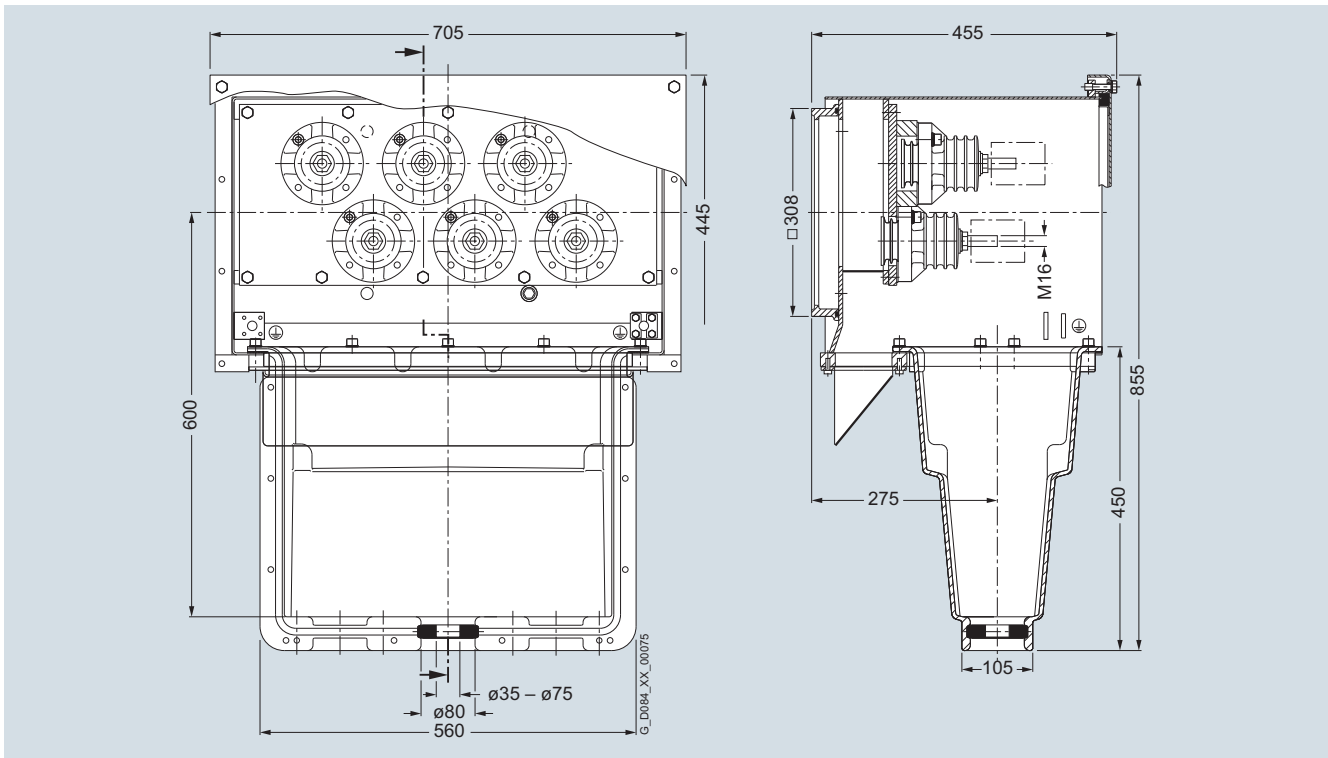

## Terminal box type 1XD1 543-3AA up to 11 kV IEC and 6.6 kV NEMA

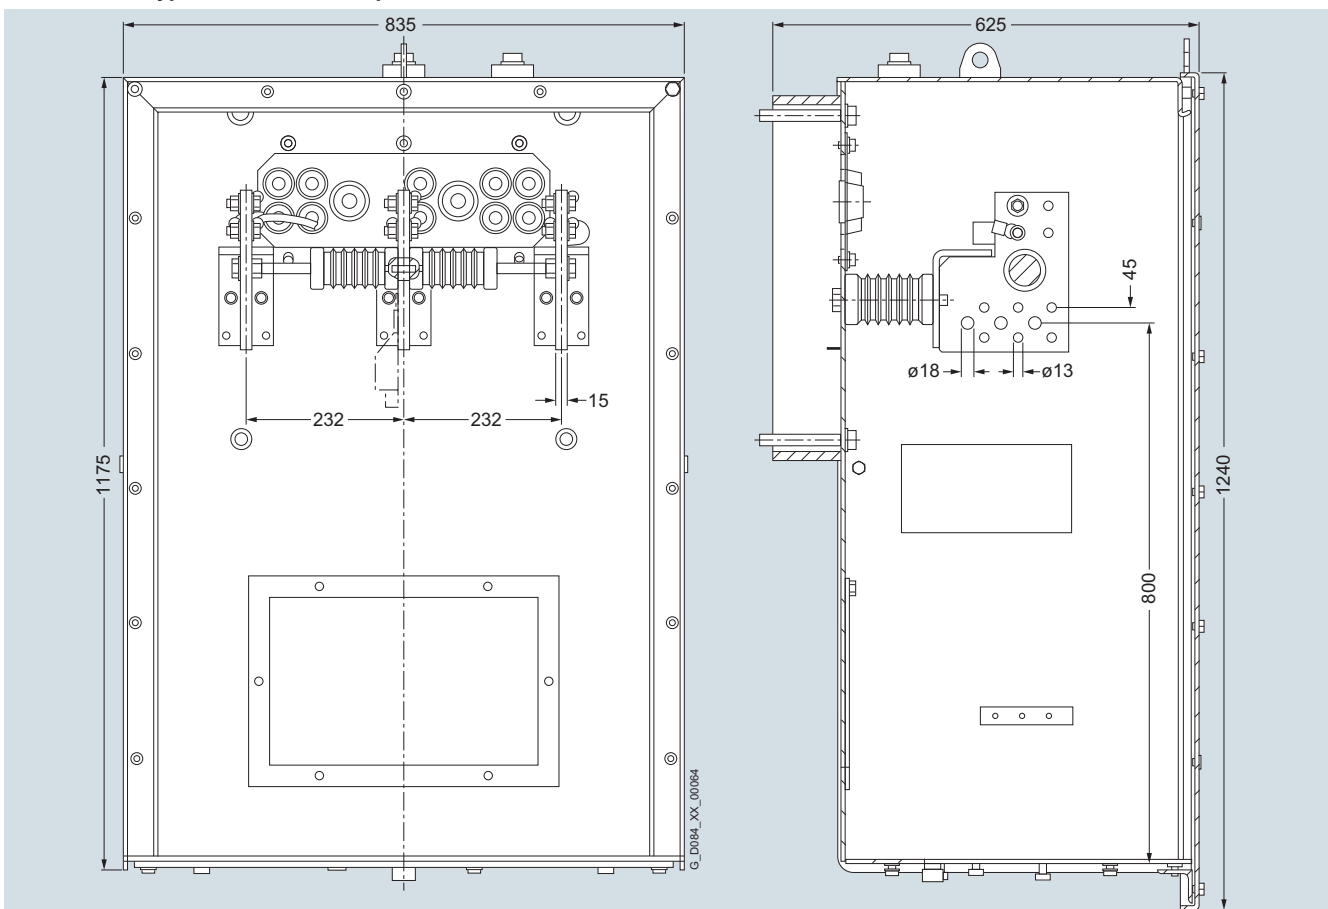

## Introduction


General technical versions

### Motor terminal boxes


1

#### Dimension drawings (continued)

##### Terminal box type 1XD1 566-3AA (up to 11 kV, 10 terminals)

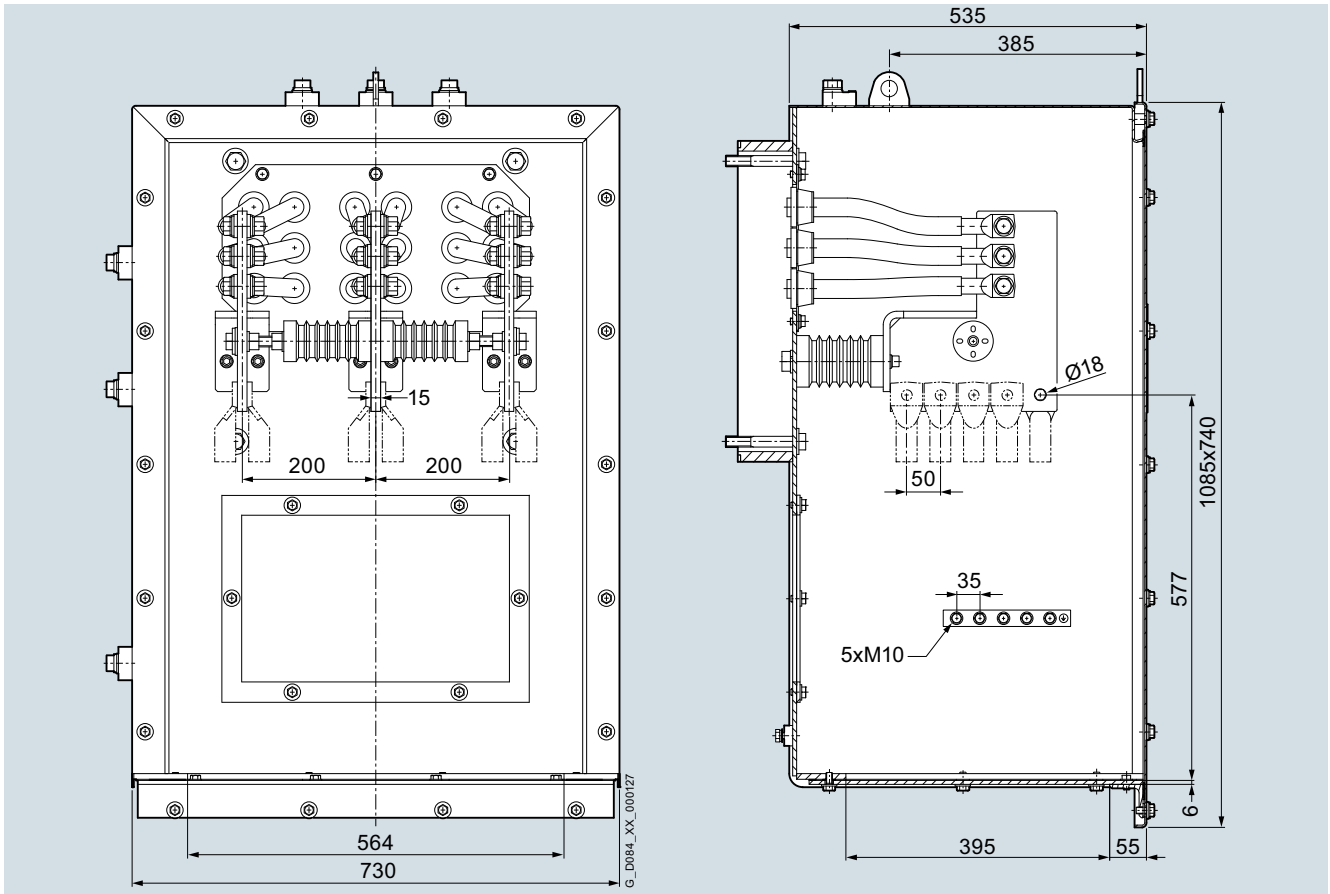

##### Terminal box type 1XB1 631 (up to 1 kV, 12 terminals)

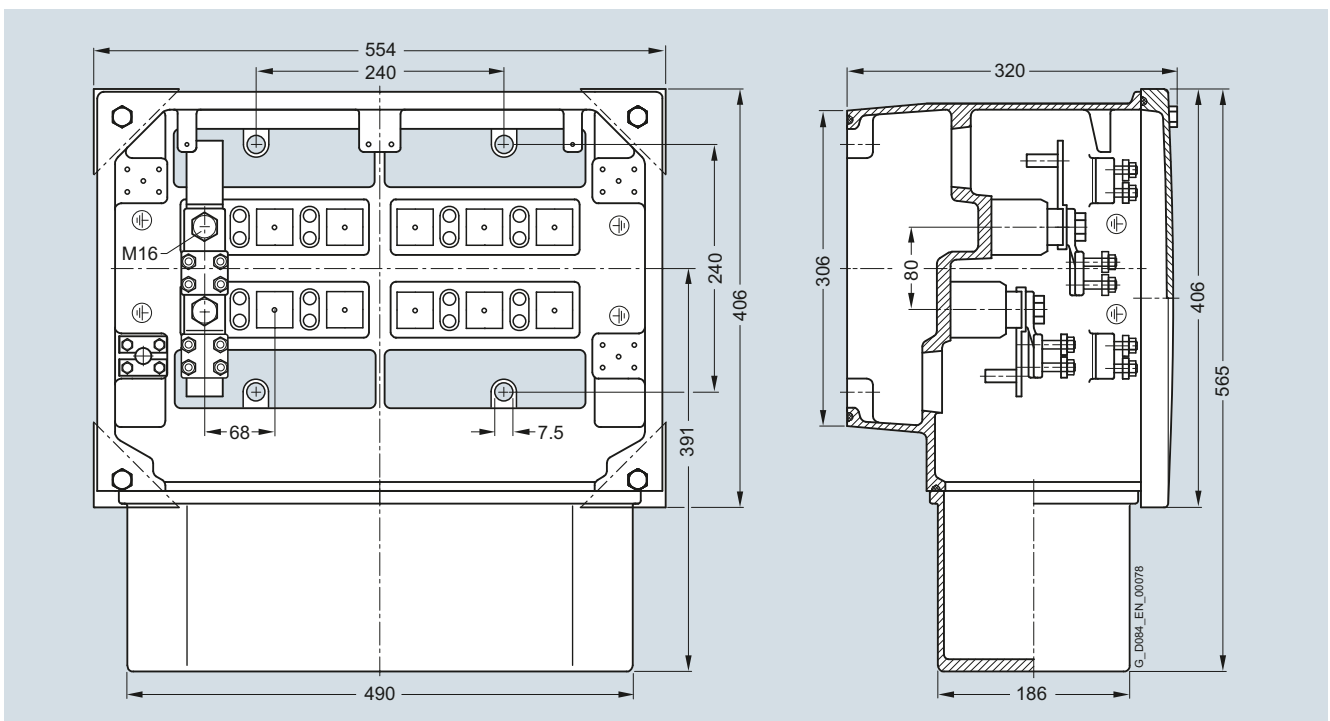


#### Dimension drawings (continued)

##### **Neutral point terminal box**

The motor terminal box is also used to form the neutral point of winding ends.

##### **Auxiliary terminal box to connect monitoring elements, anti-condensation heating**

The standard version 1XB9 014 comprises an aluminum enclosure. Max. cable cross-section that can be connected, 4 mm<sup>2</sup>.

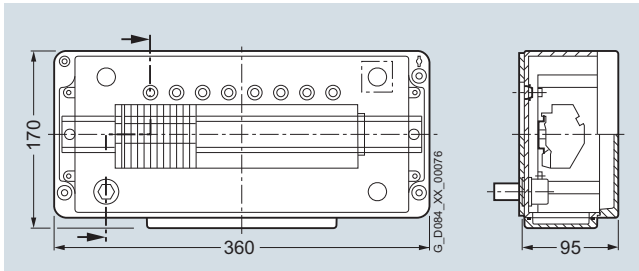

Terminal boxes manufactured out of cast iron (1XB9 016) and stainless steel (1XB9 015) can be optionally ordered.

## Introduction

### General technical versions

#### Mechanical design

#### Overview

##### Bearing version

Motors for connection to the line supply have anti-friction bearings or sleeve bearings as standard according to the following overview.

The bearing concepts for motors for converter operation depend on the speed control range.

##### Overview, bearing versions

| Motor type    | Bearing version<br>IM B3, IM B35 <sup>1)</sup>    |   | Number of poles 4                                 |   | Number of poles ≥ 6                                    |  | IM V1 <sup>2)</sup>                                    |                |
|---------------|---|---|---|---|--|--|--|----------------|
|               | 50 Hz   | 60 Hz   | 50 Hz   | 60 Hz   | 50 Hz  | 60 Hz  |  |                |
| 1LA4/1M.4 31. | Anti-friction bearings (sleeve bearings optional) | Anti-friction bearings (sleeve bearings optional) | Anti-friction bearings (sleeve bearings optional) | Anti-friction bearings (sleeve bearings optional) | Anti-friction bearings (sleeve bearings not available) | Anti-friction bearings (sleeve bearings not available) | Anti-friction bearings (sleeve bearings not available) |                |
| 1LA4/1M.4 35. |   |   |   |   |  |  |  |                |
| 1LA4/1M.4 40. |   |   |   |   |  |  |  |                |
| 1LA4/1M.4 45. |   |   |   |   |  |  |  | Sleeve bearing |
| 1LA4/1M.4 50. |   |   |   |   |  |  |  | Sleeve bearing |
| 1LA4/1M.4 56. |   |   |   |   |  |  |  |                |
| 1LA4 63.      | Not available                                     | Not available                                     |   | Sleeve bearing                                    |  |  |  |                |
| 1R.6/1S.6 45. | Anti-friction bearings (sleeve bearings optional) | Sleeve bearing                                    | Anti-friction bearings (sleeve bearings optional) | Anti-friction bearings (sleeve bearings optional) | Anti-friction bearings (sleeve bearings optional)      | Anti-friction bearings (sleeve bearings optional)      | Anti-friction bearings (sleeve bearings not available) |                |
| 1R.6/1S.6 50. |   |   |   |   |  |  |  |                |
| 1R.6/1S.6 56. |   |   |   |   |  |  |  | Sleeve bearing |
| 1R.4/1S.4 63. |   |   |   |   |  |  |  | Sleeve bearing |
| 1R.6/1S.6 71. |   |   |   |   |  |  |  |                |
| 1R.7/1S.7 71. |   |   |   | Anti-friction bearings (sleeve bearings optional) |  |  |  |                |

##### Anti-friction bearings

| Motor series | Type of construction | Shaft height<br>mm   | Drive end  | Non-drive end   |
|--------------|----------------------|--|--|---|
| 1LA4/1M.4    | IM B3                | 315 ... 450  | Deep-groove ball bearings (locating bearing)   | Deep-groove ball bearings (floating bearing)  |
|              |                      | 500 (converter version)<br>560, 4-pole (converter version)       | Deep-groove ball bearings (locating bearing)   | Deep-groove ball bearings (floating bearing)  |
|              |                      | 500 ... 560 (line version)<br>560, 6-/8-pole (converter version) | Twin bearings:<br>Deep-groove ball bearing and cylindrical-roller bearing (locating bearing)     | Cylindrical-roller bearings (floating bearing)  |
|              |                      | 630  | Twin bearings:<br>Deep-groove ball bearing and cylindrical-roller bearing (locating bearing)     | Cylindrical-roller bearings (floating bearing)  |
|              | IM V1                | 315 ... 560  | Double bearings:<br>Deep-groove ball bearings and angular-contact ball bearings (thrust bearing) | Deep-groove ball bearings (floating bearing)  |
| 630          |                      | Deep-groove ball bearings (floating bearing)                     | Pair of angular-contact ball bearings (thrust bearing)   |   |
| 1R./1S.      | IM B3                | 450  | Deep-groove ball bearings (locating bearing)   | Deep-groove ball bearings (floating bearing)  |
|              |                      | 500 ... 710  | Double bearings:<br>Deep-groove ball bearings and cylindrical-roller bearings (locating bearing) | Cylindrical-roller bearings (floating bearing)  |
|              | IM V1                | 450  | Deep-groove ball bearings (floating bearing)   | Double-row ball bearings:<br>Deep-groove ball bearings and angular-contact ball bearings (thrust bearing) |
|              |                      | 500 ... 560  | Deep-groove ball bearings (floating bearing)   | Angular-contact ball bearings (thrust bearing)  |
|              |                      | 710  | Deep-groove ball bearings (floating bearing)   | Pair of angular-contact ball bearings (thrust bearing)  |
|              | IM V10               | 630  | Deep-groove ball bearings (floating bearing)   | Pair of angular-contact ball bearings (thrust bearing)  |

<sup>1)</sup> IM B35 only for motor types 1L. and 1M.; not available with sleeve bearings.

<sup>2)</sup> Motor type 1R.4 / 1S.4 63. only in type of construction IM V10.



**Overview** (continued)**Sleeve bearings**

For motors with sleeve bearings, lateral flange or (for shaft heights 450, 500 and 710 mm), center flange sleeve bearings are used. Generally, these motors are equipped with two floating bearings. This means that the rotor must be axially guided by the bearings of the driven machine through a coupling with limited axial play. An appropriate sleeve bearing can be installed at the drive end if the motor rotor is to be axially guided.

**H-compact**

Assignment of oil-ring lubrication or circulating-oil lubrication to the shaft heights:

The bearing at the NDE is not insulated. EF side flange bearings are used as standard. With shaft height 45 as a mains-operated motor, side flange bearings are used in the two-pole design. Exception: With shaft height 45 (2-pole) in converter operation, mid flange bearings are also used.

| SH      | No. of Poles | Oil ISO VG | CT [K]  | 50 Hz       |        |   |   | 60 Hz       |        |   |   |  |
|---------|--------------|------------|---------|-------------|--------|---|---|-------------|--------|---|---|--|
|         |              |            |         | Core Length |        |   |   | Core Length |        |   |   |  |
|         |              |            |         | 0           | 2      | 4 | 6 | 0           | 2      | 4 | 6 |  |
| 31.     | 2            | 22/32      | 40...55 | Ring        |        |   |   | Ring        |        |   |   |  |
|         | 4            | 46         | 40...55 | Ring        |        |   |   | Ring        |        |   |   |  |
| 35.     | 2            | 22/32      | 40...55 | Ring        |        |   |   | Ring        |        |   |   |  |
|         | 4            | 46         | 40...55 | Ring        |        |   |   | Ring        |        |   |   |  |
| 40.     | 2            | 22/32      | 40...55 | Ring        |        |   |   | Ring        |        |   |   |  |
|         | 4            | 46         | 40...55 | Ring        |        |   |   | Ring        |        |   |   |  |
|         | 6            | 46         | 40...55 | Ring        |        |   |   | Ring        |        |   |   |  |
| 45.     | 2            | 22         | 40      | Ring        |        |   |   | Ring        |        |   |   |  |
|         |              |            | 45      |             |        |   |   | Ring        |        |   |   |  |
|         |              |            | 50      |             |        |   |   | Forced      |        |   |   |  |
|         |              |            | 55      | Ring        |        |   |   | Forced      |        |   |   |  |
|         | 2            | 32         | 40      | Ring        |        |   |   | Ring        |        |   |   |  |
|         |              |            | 45      |             |        |   |   | Forced      |        |   |   |  |
|         |              |            | 50      | Ring        |        |   |   | Forced      |        |   |   |  |
|         |              |            | 55      | Forced      |        |   |   |             |        |   |   |  |
|         | 4            | 46         | 40...45 | Ring        |        |   |   | Ring        |        |   |   |  |
|         |              |            | 50...55 |             |        |   |   | Forced      |        |   |   |  |
|         | ≥ 6...       | 46         | 40...55 | Ring        |        |   |   | Ring        |        |   |   |  |
|         | 50.          | 2          | 22      | 40          | Ring   |   |   |             | Forced |   |   |  |
| 45...55 |              |            |         | Forced      |        |   |   |             |        |   |   |  |
| 2       |              | 32         | 40...55 | Forced      |        |   |   | Forced      |        |   |   |  |
| 4       |              | 32         | 40...50 | Ring        |        |   |   | Ring        |        |   |   |  |
|         |              |            | 55      |             |        |   |   | Ring        |        |   |   |  |
| 4       |              | 46         | 40      | Ring        |        |   |   | Ring        |        |   |   |  |
|         |              |            | 45      |             |        |   |   | Ring        |        |   |   |  |
|         |              |            | 50...55 |             |        |   |   | Forced      |        |   |   |  |
| ≥ 6...  |              | 46         | 40...55 | Ring        |        |   |   | Ring        |        |   |   |  |
| 56.     |              | 2          | 22/32   | 40...55     | Forced |   |   |             | Forced |   |   |  |
|         |              | 4          | 32      | 40          | Ring   |   |   |             | Ring   |   |   |  |
|         |              |            |         | 45          |        |   |   |             | Ring   |   |   |  |
|         | 50           |            |         |             |        |   |   | Forced      |        |   |   |  |
|         | 55           |            |         | Ring        |        |   |   | Forced      |        |   |   |  |
|         | 4            | 46         | 40      | Ring        |        |   |   | Ring        |        |   |   |  |
|         |              |            | 45      |             |        |   |   | Forced      |        |   |   |  |
|         |              |            | 50      | Ring        |        |   |   | Forced      |        |   |   |  |
|         |              |            | 55      | Forced      |        |   |   |             |        |   |   |  |
|         | ≥ 6...       | 46         | 40...45 | Ring        |        |   |   | Ring        |        |   |   |  |
|         |              |            | 50      |             |        |   |   | Ring        |        |   |   |  |
|         |              |            | 55      |             |        |   |   | Forced      |        |   |   |  |

When electrically insulating the sleeve bearings at the NDE, SH 50. and SH 56. must be recalculated.

## Introduction

### General technical versions

#### Mechanical design

#### Overview (continued)

##### H-compact PLUS, SIMOTICS HV M

Assignment of oil-ring lubrication or circulating-oil lubrication to the shaft heights:

The DE bearing is not insulated, the NDE bearing is insulated. Type EM center flange bearings and also type EF lateral flange bearings are used. 2-pole motors of the shaft heights 450, 500 and motors of the shaft heights 710, 2 and 4-pole are equipped with center flange bearings. All other motors have a lateral flange bearings. When using four lobe bore sleeve bearings (e.g. SH710, 2-pole) it is mandatory that a redundant oil supply is used.

| SH          | No. of Poles | Oil ISO VG | CT [K]  | 50 Hz       |   |        |   | 60 Hz       |        |        |   |
|-------------|--------------|------------|---------|-------------|---|--------|---|-------------|--------|--------|---|
|             |              |            |         | Core Length |   |        |   | Core Length |        |        |   |
|             |              |            |         | 0           | 2 | 4      | 6 | 0           | 2      | 4      | 6 |
| <b>1R.6</b> |              |            |         |             |   |        |   |             |        |        |   |
| 45.         | 2            | 22         | 40...55 | Ring        |   |        |   |             |        | Ring   |   |
|             | 4            | 32         | 40...55 | Ring        |   |        |   |             |        | Ring   |   |
|             | ≥ 6...       | 46         | 40...55 | Ring        |   |        |   |             |        | Ring   |   |
| 50.         | 2            | 22         | 40...50 | Ring        |   |        |   |             |        | Ring   |   |
|             |              |            | 55      | Ring        |   |        |   |             | Ring   | Forced |   |
|             | 4            | 32         | 40...55 | Ring        |   |        |   |             |        | Ring   |   |
| 56.         | 2            | 22         | 40...45 | Ring        |   |        |   |             |        | Forced |   |
|             |              |            | 50      | Ring        |   | Forced |   |             |        |        |   |
|             | 55           | Forced     |         |             |   |        |   |             |        |        |   |
| 63.         | 2            | 32         | 40...55 | Forced      |   |        |   |             |        | Forced |   |
|             |              |            | 50      | Ring        |   |        |   |             | Ring   | Forced |   |
|             | 55           | Forced     |         |             |   |        |   |             |        |        |   |
| 71.         | 2            | 32         | 40...55 | Forced      |   |        |   |             |        | Forced |   |
|             |              |            | 50      | Ring        |   |        |   |             | Ring   | Forced |   |
|             | 55           | Forced     |         |             |   |        |   |             |        |        |   |
| 71.         | 4            | 32         | 40...55 | Forced      |   |        |   |             |        | Forced |   |
|             |              |            | 50      | Ring        |   |        |   |             | Ring   | Forced |   |
|             | 55           | Forced     |         |             |   |        |   |             |        |        |   |
| 71.         | 6            | 46         | 40      | Ring        |   |        |   |             |        | Ring   |   |
|             |              |            | 45...50 | Ring        |   |        |   |             | Ring   | Forced |   |
|             | 55           | Ring       |         | Forced      |   |        |   | Ring        | Forced |        |   |
| ≥ 8...      | 68           | 40...55    | Ring    |             |   |        |   |             | Ring   |        |   |
| <b>1R.7</b> |              |            |         |             |   |        |   |             |        |        |   |
| 71.         | 2            | 22         | 40...55 | Forced      |   |        |   |             |        | Forced |   |
|             |              |            | 50      | Forced      |   |        |   |             |        | Forced |   |
|             | 55           | Forced     |         |             |   |        |   |             |        |        |   |
| 71.         | 4            | 32         | 40...45 | Ring        |   |        |   |             |        | Forced |   |
|             |              |            | 50...55 | Forced      |   |        |   |             |        | Forced |   |
|             | 55           | Forced     |         |             |   |        |   |             |        |        |   |
| 71.         | 6            | 46         | 40      | Ring        |   |        |   |             |        | Ring   |   |
|             |              |            | 40...55 | Ring        |   |        |   |             | Ring   | Forced |   |
|             | 55           | Ring       |         | Forced      |   |        |   | Ring        | Forced |        |   |
| ≥ 8...      | 46           | 40...45    | Ring    |             |   |        |   |             | Ring   |        |   |

<sup>1)</sup> Only 6-pole, with higher number of poles available with oil-ring lubrication.

**Overview** (continued)**Bearing insulation**NDE bearing insulation

The following motor types are equipped with insulated NDE bearing as a standard feature.

**Line operation (DOL):**

- **H-compact** motor types with insulated NDE bearing

| Number of poles     | 2        | 4        | 6        | ≥ 8      |
|---------------------|----------|----------|----------|----------|
| <b>Shaft height</b> |          |          |          |          |
| <b>315</b>          | L27      | L27      | L27      | L27      |
| <b>355</b>          | L27      | L27      | L27      | Standard |
| <b>400</b>          | L27      | L27      | L27      | Standard |
| <b>450</b>          | L27      | Standard | Standard | Standard |
| <b>500</b>          | L27      | Standard | Standard | Standard |
| <b>560</b>          | Standard | Standard | Standard | Standard |
| <b>630</b>          | n/a      | Standard | Standard | Standard |

- **H-compact PLUS and SIMOTICS HV M:**

For all direct online motors, NDE bearing is insulated.

**Converter operation (VSD):**

For operation with SINAMICS LV, SINAMICS PERFECT HARMONY and SINAMICS GM150/SM150 with sine-wave filter, NDE bearing is insulated.

DE and NDE bearing insulation

For all other than the above mentioned motor types or applications (e.g. operation with GM150/SM150 without sine-wave filter), both bearings are insulated as a standard and an earthing device is necessary.

When specified by the customer, insulated bearings can be provided at the DE and NDE for any motor type.

If both bearings are insulated, an additional detachable link is provided for this bearing insulation.

**Vibration response**

Horizontal motors up to 3600 rpm fulfill, as standard, vibration severity level A according to IEC 60034-14. Vibration severity level B is optionally possible; but not for 2-pole H-compact PLUS motors with anti-friction bearings. Values for vertical motors on request.

**Balancing quality**

The motor rotors are balanced dynamically with half feather key (but without mounted coupling halves). The balancing quality according to ISO 1940 is, up to and including 1500 rpm, G 1.5 and beyond this, G 1.

**Direction of rotation, fan**

The direction of rotation must be specified in every order.

2-pole H-compact motors have an external unidirectional fan. For higher-pole motors, for shaft heights 315 to 450 mm, external bidirectional fans are used and for shaft heights 500 to 630 mm, unidirectional external fans.

H-compact PLUS and SIMOTICS HV M motors have unidirectional inner and outer fans. In particular, this means that for motors with two-sided ventilation bidirectional fan design is not possible.

For H-compact PLUS and SIMOTICS HV M motors with single side ventilation, bidirectional fan design is available on request. (Bidirectional fan design may result in reduced power rating and efficiency as well as a higher noise level.)

**Paint finish**

Unless otherwise specified in the order, the motors are supplied in the standard paint finish color RAL 7030 (stone gray). Other colors are available on request at an additional cost. Motors can be optionally supplied with a special paint finish.

The standard paint finish is classified in the "Moderate" climate group according to IEC 721-2-1. It is suitable for:

- Installed indoors or outdoors under a roof, where the motors are not exposed to any direct effects of the weather.
- Temperatures, continuously up to +100 °C, briefly up to +120 °C
- Relative air humidity up to 85 % at +25 °C continuously; briefly up to +100 % at +30 °C

The **special paint finish** is classified in the "Worldwide" climate group acc. to IEC 721-2-1. It is suitable for:

- Installed outdoors, where motors are directly exposed to the effects of the weather, e.g. direct solar radiation
- Additional temperature and humidity ranges
- Temperatures, continuously up to +120 °C, briefly up to +140 °C

Typical installation locations are industrial environments and coastal areas. For outdoor applications in salt laden atmospheres, one of the options E81, E82 or E83 should be selected.

**Standards and regulations**

The motors comply with the appropriate standards and regulations, especially those listed in the table below.

| Title  | IEC           | DIN/EN/ISO       |
|--|---------------|------------------|
| General specifications for rotating electrical machinery   | IEC 60034-1   | DIN EN 60034-1   |
| Degrees of protection for rotating electrical machinery (IP code)  | IEC 60034-5   | DIN EN 60034-5   |
| Cooling methods for rotating electrical machinery (IC code)  | IEC 60034-6   | DIN EN 60034-6   |
| Types of construction, mounting types and terminal box positions for rotating electrical machinery (IM code) | IEC 60034-7   | DIN EN 60034-7   |
| Terminal designations and direction of rotation for rotating electrical machinery                            | IEC 60034-8   | DIN EN 60034-8   |
| Mechanical vibration of rotating electrical machinery  | IEC 60034-14  | DIN EN 60034-14  |
| Rated impulse voltages for rotating electrical machinery   | IEC 60034-15  | DIN EN 60034-15  |
| Electrical insulation – thermal classification   | IEC 60085     | DIN EN 60085     |
| Mechanical vibration – requirements on the balancing quality of rotors                                       | –             | DIN ISO 1940-1   |
| Determining the losses and efficiency from tests   | IEC 60034-2-1 | DIN EN 60034-2-1 |

## Introduction

### General technical versions

#### Guideline for coupling selection

1

#### Overview

The motors in this catalog are designed for operation with a flexible coupling. The maximum half coupling weights are shown in the table below.

#### **Maximum allowable coupling weight**

| <b>Shaft end diameter</b> | <b>Max. weight of half coupling for 2-pole motors</b> | <b>Max. weight of half coupling for 4-pole and motors with higher pole numbers</b> |
|---------------------------|---|--|
| mm                        | kg  | kg   |
| 50                        | 10  | 10   |
| 55                        | 10  | 20   |
| 60                        | 10  | 20   |
| 65                        | 10  | 20   |
| 70                        | 20  | 30   |
| 75                        | 20  | 30   |
| 80                        | 20  | 40   |
| 85                        | 30  | 50   |
| 90                        | 30  | 50   |
| 95                        | 30  | 60   |
| 100                       | 40  | 70   |
| 105                       | 40  | 80   |
| 110                       | 50  | 90   |
| 115                       | 50  | 100  |
| 120                       | 60  | 110  |
| 125                       | 70  | 130  |
| 130                       | 70  | 140  |
| 135                       | 80  | 160  |
| 140                       | 90  | 170  |
| 145                       | 100   | 190  |
| 150                       | 110   | 210  |
| 155                       | 120   | 230  |
| 160                       | 130   | 250  |
| 165                       | 140   | 270  |
| 170                       | 150   | 300  |
| 175                       | 160   | 320  |
| 180                       | 180   | 350  |
| 185                       | 190   | 380  |
| 190                       | 210   | 410  |
| 195                       | 220   | 440  |
| 200                       | 240   | 470  |
| 205                       | 250   | 500  |
| 210                       | 270   | 540  |

#### Note:

Motor and driven machine have to be aligned according to manual.

If the coupling weight exceeds the maximum value, feasibility has to be checked.

### Overview




Motor of the LOHER VARIO series

#### LOHER VARIO

For applications with rib or water-jacket cooled motors and an extended range of options or special requirements on project management, the LOHER VARIO series of motors is available on request.

They have the following performance features:

- High degree of variability as a result of the welded steel enclosure (dimensions can be adapted, instrumentation, bearing concepts)
- Flexible production processes and customized documentation
- High-pole machines up to 16-pole, higher pole numbers are available on request
- Anti-corrosion protection using special paint finishes according to the manufacturers standard or customer specifications
- Water-jacket cooling IC71W in the extended power range with up to 60 % higher power density; compact and quiet, admirably suited for converter operation with constant load torque and wide field-weakening range
- Optimized starting and operating parameters, coordinated and harmonized to meet customer applications
- Complies with almost all application requirements and specifications
- High degree of sector-specific adaptation options
- For safe area applications and types of protection Ex n, Ex p and Ex d in rib and water-jacket cooled versions
- Low-voltage and high-voltage versions up to 11 kV

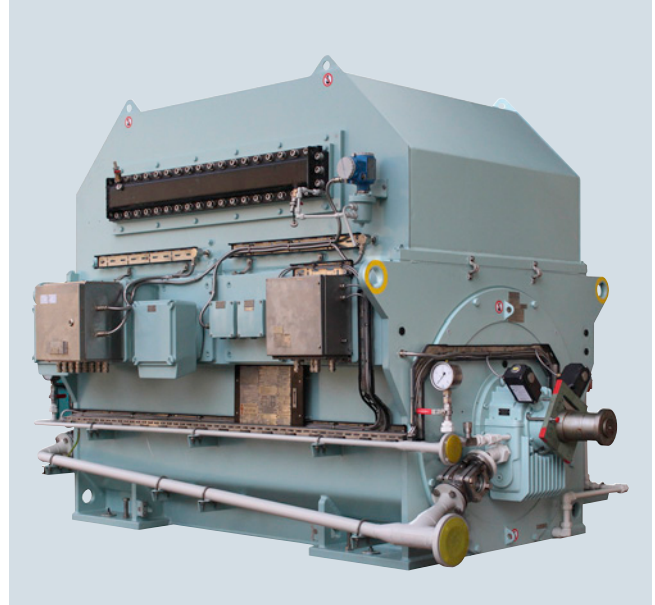

LOHER VARIO PLUS motor in a water-cooled version (cooling type IC81W)

#### LOHER VARIO PLUS

For applications with modular-cooled motors and an extended range of options or special requirements on project management, the LOHER VARIO PLUS series of motors is available on request.

They have the following performance features:

- High degree of variability as a result of the platform-based enclosure (dimensions can be adapted, mounted components)
- Customized machines, also for special installation locations and applications
- Flexible production processes and customized documentation
- High-pole machines up to 16-pole, higher pole numbers are available on request
- Anti-corrosion protection using special paint finishes according to the manufacturers standard or customer specifications
- Widest range of connection systems fulfill special requirements (e.g. requirements relating to short-circuit strength, cable cross-sections, phase-segregated version)
- Optimized starting and operating parameters, coordinated and harmonized to meet customer applications
- Complies with almost all application requirements and specifications
- High degree of sector-specific adaptation options
- For safe area applications and types of protection Ex n and Ex p in special versions
- Low-voltage and high-voltage versions up to 11 kV

## Introduction

Notes

1

## Motors for line operation



|            |   |              |   |
|------------|---|--------------|---|
| <b>2/2</b> | <b>Overview</b>   | <b>2/122</b> | IM B3 type of construction, anti-friction bearings (1RP6, NEMA) |
| <b>2/3</b> | <b>Air-cooled motors</b>  | <b>2/125</b> | IM B3 type of construction, sleeve bearings (1RP6, NEMA)        |
| 2/3        | <u>H-compact 1LA4</u>   | <b>2/128</b> | IM V1 type of construction, anti-friction bearings (1RP6, NEMA) |
| 2/5        | Selection and ordering data                                     | <b>2/130</b> | IM B3 type of construction, anti-friction bearings (1RA7)       |
| 2/8        | 2 to 6.6 kV, 50 Hz  | <b>2/132</b> | IM B3 type of construction, sleeve bearings (1RA7)              |
| 2/10       | 9 to 11 kV, 50 Hz   | <b>2/134</b> | IM V1 type of construction, anti-friction bearings (1RA7)       |
| 2/13       | 2 to 6.6 kV, 60 Hz  |              |   |
| 2/19       | Dimension drawings  | <b>2/136</b> | <b>Water-cooled motors</b>                                      |
| 2/24       | IM B3 type of construction, anti-friction bearings              | <b>2/136</b> | <u>H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7</u>         |
| 2/29       | IM B3 type of construction, sleeve bearings                     |              | Selection and ordering data                                     |
| 2/30       | IM V1 type of construction, anti-friction bearings              | <b>2/138</b> | 3.3 to 6.6 kV, 50 Hz  |
| 2/30       | <u>H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7</u>         | <b>2/142</b> | 9 to 11 kV, 50 Hz   |
| 2/32       | Selection and ordering data                                     | <b>2/146</b> | 4 to 6.6 kV, 60 Hz  |
| 2/32       | 3.3 to 6.6 kV, 50 Hz  | <b>2/150</b> | 4 to 6.6 kV, 60 Hz NEMA version                                 |
| 2/36       | 9 to 11 kV, 50 Hz   | <b>2/151</b> | 12.5 to 13.8 kV, 60 Hz NEMA version                             |
| 2/40       | 4 to 6.6 kV, 60 Hz  |              | Dimension drawings  |
| 2/44       | 4 to 6.6 kV, 60 Hz NEMA version                                 | <b>2/152</b> | IM B3 type of construction, anti-friction bearings (1RN4, 1RN6) |
| 2/45       | 12.5 to 13.8 kV, 60 Hz NEMA version                             | <b>2/159</b> | IM B3 type of construction, sleeve bearings (1RN4, 1RN6)        |
| 2/46       | Dimension drawings  | <b>2/166</b> | IM V1 type of construction, anti-friction bearings (1RN4, 1RN6) |
| 2/46       | IM B3 type of construction, anti-friction bearings (1RQ4, 1RQ6) | <b>2/173</b> | IM B3 type of construction, anti-friction bearings (1RN6, NEMA) |
| 2/53       | IM B3 type of construction, sleeve bearings (1RQ4, 1RQ6)        | <b>2/176</b> | IM B3 type of construction, sleeve bearings (1RN6, NEMA)        |
| 2/61       | IM V1 type of construction, anti-friction bearings (1RQ4, 1RQ6) | <b>2/179</b> | IM V1 type of construction, anti-friction bearings (1RN6, NEMA) |
| 2/69       | IM B3 type of construction, anti-friction bearings (1RQ6, NEMA) | <b>2/181</b> | IM B3 type of construction, anti-friction bearings (1RN7)       |
| 2/71       | IM B3 type of construction, sleeve bearings (1RQ6, NEMA)        | <b>2/184</b> | IM B3 type of construction, sleeve bearings (1RN7)              |
| 2/74       | IM V1 type of construction, anti-friction bearings (1RQ6, NEMA) | <b>2/187</b> | IM V1 type of construction, anti-friction bearings (1RN7)       |
| 2/76       | IM B3 type of construction, anti-friction bearings (1RQ7)       |              |   |
| 2/79       | IM B3 type of construction, sleeve bearings (1RQ7)              | <b>2/189</b> | <b>Options and tests</b>  |
| 2/82       | IM V1 type of construction, anti-friction bearings (1RQ7)       | <b>2/189</b> | <u>Description of options</u>                                   |
| 2/84       | <u>H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7</u>   |              |   |
| 2/86       | Selection and ordering data                                     |              |   |
| 2/90       | 3.3 to 6.6 kV, 50 Hz  |              |   |
| 2/94       | 9 to 11 kV, 50 Hz   |              |   |
| 2/98       | 4 to 6.6 kV, 60 Hz  |              |   |
| 2/99       | 4 to 6.6 kV, 60 Hz NEMA version                                 |              |   |
| 2/100      | 12.5 to 13.8 kV, 60 Hz NEMA version                             |              |   |
| 2/107      | Dimension drawings  |              |   |
| 2/115      | IM B3 type of construction, anti-friction bearings (1RA4, 1RA6) |              |   |
|            | IM B3 type of construction, sleeve bearings (1RA4, 1RA6)        |              |   |
|            | IM V1 type of construction, anti-friction bearings (1RA4, 1RA6) |              |   |

## Motors for line operation

### Overview

#### Overview

##### Normal conditions

Selection and ordering data included in this chapter are valid for standard operating and installation conditions:

- Installation altitude of the motor  $\leq 1000$  m above sea level
- Ambient temperature (= coolant temperature for air-cooled motors) = 40 °C
- Coolant temperature for water-cooled motors = 25 °C
- Thermal class 155 (F) utilized to 130 (B)
- Continuous duty S1
- Permissible tolerances in compliance with IEC/EN 60034-1:
  - Rated voltage  $V_{rated} \pm 5\%$
  - Rated frequency  $f_{rated} \pm 2\%$

The SIMOTICS HV/TN series is designed to be directly switched-on when certain starting conditions are maintained.

Motor starting does not have to be separately checked if the following criteria are maintained:

- The voltage when starting does not drop below  $0.9 \times V_{rated}$ .
- The load torque increases approximately with the square of the speed ( $T \sim n^2$ ).
- The maximum load torque does not exceed the corresponding value in the following table:


| Shaft height   | 315 |      | 350 |      | 400 |      | 450  |      | 500 |      | 560 |      | 630 |      | 710 |      |
|--|-----|------|-----|------|-----|------|------|------|-----|------|-----|------|-----|------|-----|------|
| Number of poles  | 2   | 4... | 2   | 4... | 2   | 4... | 2    | 4... | 2   | 4... | 2   | 4... | 2   | 4... | 2   | 4... |
| <b>H-compact</b><br>max. load torque = $T_{rated} \times$      | 0.9 | 0.9  | 0.9 | 0.9  | 0.9 | 0.9  | 0.9  | 0.9  | 0.9 | 0.9  | 0.9 | 0.9  | 0.9 | 0.9  | -   | -    |
| <b>H-compact PLUS</b><br>max. load torque = $T_{rated} \times$ | -   | -    | -   | -    | -   | -    | 0.75 | 0.9  | 0.7 | 0.9  | 0.6 | 0.9  | 0.6 | 0.9  | 0.5 | 0.9  |
| <b>SIMOTICS HV M</b><br>max. load torque = $T_{rated} \times$  | -   | -    | -   | -    | -   | -    | -    | -    | -   | -    | -   | -    | -   | -    | 0.5 | 0.9  |

Start-up with max. permissible inertia according to "selection and ordering data" is possible either for three times from cold or two times from warm motor condition (natural coast down between consecutive starts assumed).

If limits of load characteristic and/or inertia are exceeded, the motor start-up calculation has to be checked. In this case, please contact your Siemens sales representative.



## Overview

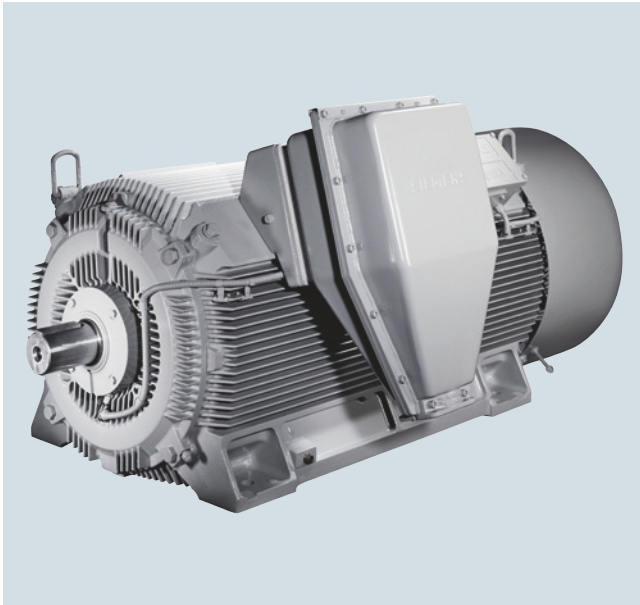

## Technical data

## Overview of technical data

| H-compact 1LA4            |   |
|---------------------------|---|
| Rated voltage             | 2.0 ... 11 kV   |
| Rated frequency           | 50/60 Hz  |
| Motor type                | Induction motor with squirrel-cage rotor  |
| Type of construction      | IM B3, IM V1  |
| Degree of protection      | IP55  |
| Cooling method            | IC411   |
| Stator winding insulation | Thermal class 155 (F), utilized to 130 (B)                                      |
| Shaft height              | 315 ... 630 mm  |
| Bearings                  | Anti-friction bearings, sleeve bearings   |
| Cage material             | Die-cast aluminum or copper (dependent on the shaft height and number of poles) |
| Standards                 | IEC, EN   |
| Frame design              | Cast iron with cooling ribs   |


## Power range for IEC motors for line operation

## 1LA4, 1MS4 (Ex ec), 1MG4 (Ex pxb) series

Insulation system, thermal class 155 (F), utilized to 130 (B).

Ambient temperature up to 40 °C, installation altitude up to 1000 m.

2.0 to 3.3 kV; 50 and 60 Hz

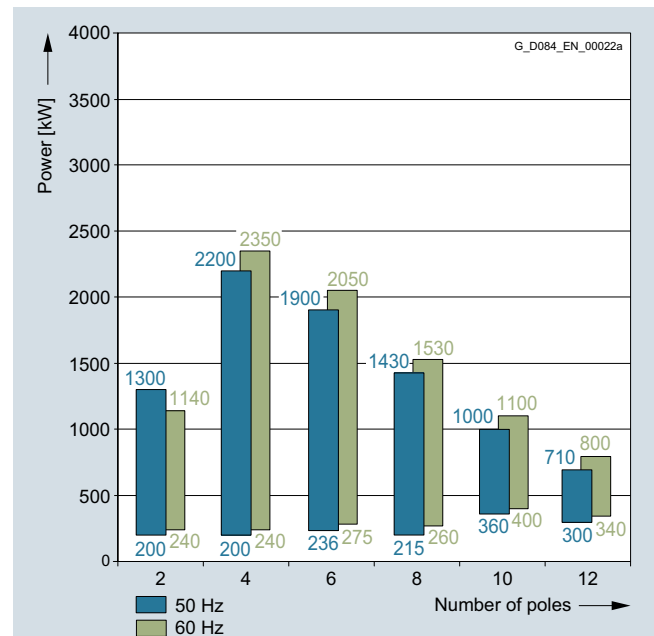

## Motors for line operation

Air-cooled motors



### H-compact 1LA4

Technical data (continued)

#### Power range for IEC motors for line operation (continued)

3.4 to 6.6 kV; 50 and 60 Hz

9 to 11 kV; 50 Hz

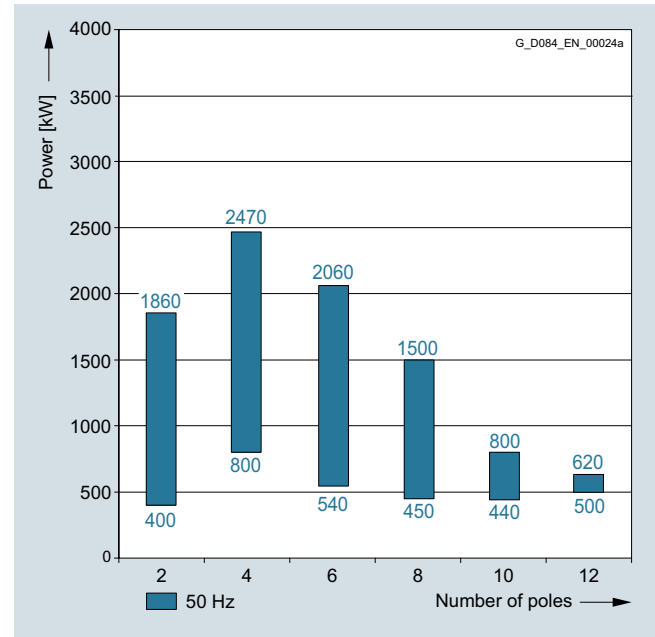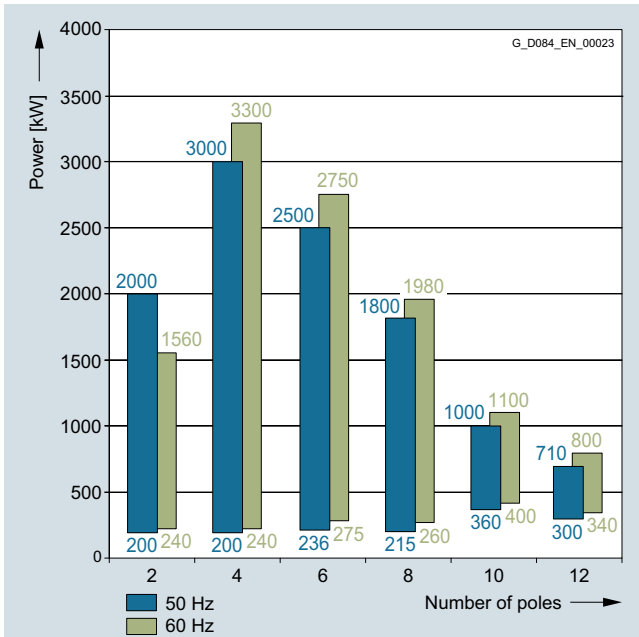

## Selection and ordering data

The 1LA4 data also apply to explosion-protected 1MG4 (Ex pxb) and 1MS4 (Ex ec) motors.

| Rated power<br>IEC<br>kW     | High voltage motor<br>H-compact<br>Article No. | Speed<br>rpm | Rated<br>current<br>$I_{rated}$<br>at<br>6 kV<br>A | Efficiency       |                  | Power factor                 |                              | Torque<br>Nm | Break-<br>down<br>torque<br>$T_B/$<br>$T_{rated}$<br>[-] | Locked-<br>rotor<br>torque<br>$T_{LR}/$<br>$T_{rated}$<br>[-] | Locked-<br>rotor<br>current<br>$I_{LR}/$<br>$I_{rated}$<br>[-] | Moment of<br>inertia      |  |
|------------------------------|--|--------------|--|------------------|------------------|------------------------------|------------------------------|--------------|--|---|--|---------------------------|--|
|                              |  |              |  | 4/4<br>load<br>% | 3/4<br>load<br>% | 4/4<br>load<br>cos $\varphi$ | 3/4<br>load<br>cos $\varphi$ |              |  |   |  | Motor<br>kgm <sup>2</sup> | Exter-<br>nal,<br>max. <sup>1)</sup><br>kgm <sup>2</sup> |
| <b>2.0 ... 6.6 kV, 50 Hz</b> |  |              |  |                  |                  |                              |                              |              |  |   |  |                           |  |
| 2-pole                       |  |              |  |                  |                  |                              |                              |              |  |   |  |                           |  |
| 200                          | <b>1LA4 310-2AN</b>                            | 2970         | 23.5   | 94.7             | 94.9             | 0.87                         | 0.86                         | 643          | 2.30   | 0.90  | 5.0  | 2.2                       | 28   |
| 236                          | <b>1LA4 312-2AN</b>                            | 2967         | 27.5   | 94.5             | 94.8             | 0.87                         | 0.85                         | 760          | 2.30   | 0.90  | 5.0  | 2.2                       | 26   |
| 300                          | <b>1LA4 314-2AN</b>                            | 2972         | 34.5   | 95.2             | 95.4             | 0.88                         | 0.86                         | 964          | 2.40   | 1.05  | 5.2  | 2.7                       | 30   |
| 355                          | <b>1LA4 316-2AN</b>                            | 2974         | 40.5   | 95.7             | 95.8             | 0.88                         | 0.87                         | 1140         | 2.50   | 1.10  | 5.3  | 3.1                       | 35   |
| 400                          | <b>1LA4 350-2AN</b>                            | 2978         | 45.5   | 95.6             | 95.8             | 0.88                         | 0.86                         | 1283         | 2.30   | 1.05  | 5.2  | 4.3                       | 38   |
| 450                          | <b>1LA4 352-2AN</b>                            | 2978         | 51.0   | 95.9             | 96.0             | 0.88                         | 0.87                         | 1443         | 2.50   | 1.20  | 5.5  | 4.8                       | 43   |
| 500                          | <b>1LA4 354-2AN</b>                            | 2980         | 57.0   | 96.1             | 96.3             | 0.88                         | 0.87                         | 1602         | 2.50   | 1.20  | 5.5  | 5.2                       | 46   |
| 560                          | <b>1LA4 400-2AN</b>                            | 2984         | 64.0   | 96.0             | 96.0             | 0.88                         | 0.86                         | 1792         | 2.50   | 0.85  | 5.4  | 7.8                       | 26   |
| 650                          | <b>1LA4 402-2AN</b>                            | 2985         | 74.0   | 96.3             | 96.3             | 0.88                         | 0.87                         | 2079         | 2.60   | 0.90  | 5.6  | 8.7                       | 27   |
| 750                          | <b>1LA4 404-2AN</b>                            | 2985         | 84.0   | 96.5             | 96.5             | 0.89                         | 0.88                         | 2399         | 2.60   | 0.95  | 5.6  | 9.9                       | 30   |
| 820                          | <b>1LA4 450-2AN</b>                            | 2981         | 92   | 96.2             | 96.2             | 0.88                         | 0.87                         | 2625         | 2.40   | 0.95  | 6.0  | 13.5                      | 68   |
| 940                          | <b>1LA4 452-2AN</b>                            | 2982         | 106  | 96.5             | 96.4             | 0.89                         | 0.87                         | 3008         | 2.50   | 0.95  | 6.2  | 15.4                      | 73   |
| 1030                         | <b>1LA4 454-2AN</b>                            | 2982         | 114  | 96.6             | 96.6             | 0.90                         | 0.89                         | 3296         | 2.40   | 0.95  | 6.2  | 17.3                      | 79   |
| 1200                         | <b>1LA4 500-2CN</b> 0                          | 2985         | 132  | 96.7             | 96.6             | 0.90                         | 0.89                         | 3839         | 2.30   | 0.65  | 5.3  | 29.0                      | 93   |
| 1300                         | <b>1LA4 502-2CN</b> 0                          | 2986         | 144  | 96.8             | 96.7             | 0.90                         | 0.89                         | 4157         | 2.30   | 0.65  | 5.3  | 32.0                      | 98   |
| 1420 <sup>2)</sup>           | <b>1LA4 504-2CN</b> 0                          | 2986         | 154  | 96.9             | 96.9             | 0.91                         | 0.90                         | 4541         | 2.40   | 0.70  | 5.5  | 35.0                      | 125  |
| 1680 <sup>2)</sup>           | <b>1LA4 560-2CN</b> 0                          | 2990         | 184  | 96.9             | 96.7             | 0.91                         | 0.90                         | 5365         | 2.50   | 0.45  | 5.4  | 53.0                      | 104  |
| 1900 <sup>2)</sup>           | <b>1LA4 562-2CN</b> 0                          | 2991         | 205  | 97.0             | 96.9             | 0.91                         | 0.90                         | 6066         | 2.60   | 0.50  | 5.7  | 58.0                      | 131  |
| 2000 <sup>2)</sup>           | <b>1LA4 564-2CN</b> 0                          | 2990         | 220  | 97.2             | 97.1             | 0.91                         | 0.90                         | 6387         | 2.50   | 0.45  | 5  | 64.0                      | 136  |
| 4-pole                       |  |              |  |                  |                  |                              |                              |              |  |   |  |                           |  |
| 200                          | <b>1LA4 310-4AN</b>                            | 1480         | 25.5   | 93.8             | 94.0             | 0.81                         | 0.77                         | 1290         | 2.30   | 1.15  | 5.2  | 2.8                       | 159  |
| 250                          | <b>1LA4 312-4AN</b>                            | 1480         | 30.5   | 94.5             | 94.8             | 0.84                         | 0.81                         | 1613         | 2.30   | 1.15  | 5.3  | 3.5                       | 201  |
| 300                          | <b>1LA4 314-4AN</b>                            | 1480         | 36.0   | 94.7             | 95.0             | 0.85                         | 0.82                         | 1936         | 2.40   | 1.25  | 5.5  | 4.0                       | 222  |
| 365                          | <b>1LA4 316-4AN</b>                            | 1481         | 43.5   | 95.2             | 95.5             | 0.85                         | 0.82                         | 2353         | 2.40   | 1.25  | 5.5  | 4.8                       | 297  |
| 400                          | <b>1LA4 350-4AN</b>                            | 1485         | 48.0   | 95.2             | 95.4             | 0.84                         | 0.81                         | 2572         | 2.50   | 1.25  | 5.5  | 6.0                       | 224  |
| 470                          | <b>1LA4 352-4AN</b>                            | 1484         | 56.0   | 95.4             | 95.6             | 0.85                         | 0.82                         | 3024         | 2.35   | 1.20  | 5.3  | 6.9                       | 247  |
| 560                          | <b>1LA4 354-4AN</b>                            | 1485         | 65.0   | 95.7             | 95.9             | 0.86                         | 0.84                         | 3601         | 2.40   | 1.30  | 5.5  | 8.1                       | 296  |
| 600                          | <b>1LA4 400-4AN</b>                            | 1489         | 71.0   | 95.4             | 95.4             | 0.85                         | 0.81                         | 3848         | 2.60   | 1.25  | 5.70   | 11.6                      | 288  |
| 680                          | <b>1LA4 402-4AN</b>                            | 1489         | 80.0   | 95.7             | 95.6             | 0.85                         | 0.82                         | 4361         | 2.60   | 1.25  | 5.70   | 12.9                      | 330  |
| 750                          | <b>1LA4 404-4AN</b>                            | 1489         | 88.0   | 95.8             | 95.7             | 0.86                         | 0.83                         | 4810         | 2.65   | 1.30  | 5.80   | 14.5                      | 381  |
| 900                          | <b>1LA4 450-4AN</b>                            | 1489         | 108  | 96.0             | 96.0             | 0.84                         | 0.82                         | 5772         | 2.25   | 0.95  | 5.20   | 22.0                      | 438  |
| 950                          | <b>1LA4 452-4AN</b>                            | 1489         | 112  | 96.0             | 96.1             | 0.85                         | 0.83                         | 6093         | 2.25   | 0.95  | 5.20   | 24.0                      | 556  |

## Voltage code:

3 kV, 50 Hz  
3.3 kV, 50 Hz  
5 kV, 50 Hz  
6 kV, 50 Hz  
6.6 kV, 50 Hz  
Other voltage

3  
0  
5  
6  
7  
9

## Type of construction:

IM B3  
IM V1 (with canopy)  
IM V1 (without canopy)

0  
4  
8

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

<sup>2)</sup> Not available for  $\leq 3.3$  kV.

## Motors for line operation

## Air-cooled motors

## H-compact 1LA4

## Selection and ordering data (continued)

| Rated power<br>IEC<br>kW     | High voltage motor<br>H-compact<br>Article No. | Speed<br>rpm | Rated current<br>$I_{rated}$<br>at<br>6 kV<br>A | Efficiency       |                  | Power factor                  |                               | Torque<br>Nm | Break-<br>down<br>torque<br>$T_B/$<br>$T_{rated}$<br>[-] | Locked-<br>rotor<br>torque<br>$T_{LR}/$<br>$T_{rated}$<br>[-] | Locked-<br>rotor<br>current<br>$I_{LR}/$<br>$I_{rated}$<br>[-] | Moment of inertia         |   |
|------------------------------|--|--------------|---|------------------|------------------|-------------------------------|-------------------------------|--------------|--|---|--|---------------------------|---|
|                              |  |              |   | 4/4<br>load<br>% | 3/4<br>load<br>% | 4/4<br>load<br>$\cos \varphi$ | 3/4<br>load<br>$\cos \varphi$ |              |  |   |  | Motor<br>kgm <sup>2</sup> | External,<br>max. <sup>1)</sup><br>kgm <sup>2</sup> |
| <b>2.0 ... 6.6 kV, 50 Hz</b> |  |              |   |                  |                  |                               |                               |              |  |   |  |                           |   |
| 4-pole (continued)           |  |              |   |                  |                  |                               |                               |              |  |   |  |                           |   |
| 1050                         | 1LA4 454-4AN                                   | 1489         | 124   | 96.2             | 96.3             | 0.85                          | 0.83                          | 6734         | 2.30   | 0.95  | 5.25   | 27.0                      | 653   |
| 1200                         | 1LA4 500-4AN                                   | 1492         | 140   | 96.5             | 96.3             | 0.85                          | 0.83                          | 7680         | 2.4  | 0.90  | 5.5  | 33.0                      | 447   |
| 1300                         | 1LA4 502-4AN                                   | 1492         | 150   | 96.6             | 96.4             | 0.86                          | 0.84                          | 8320         | 2.4  | 0.90  | 5.5  | 37.0                      | 538   |
| 1450                         | 1LA4 504-4AN                                   | 1492         | 166   | 96.7             | 96.7             | 0.87                          | 0.86                          | 9280         | 2.4  | 0.90  | 5.5  | 42.0                      | 628   |
| 1700                         | 1LA4 560-4CN                                   | 1494         | 196   | 96.7             | 96.6             | 0.86                          | 0.83                          | 10866        | 2.5  | 0.60  | 5.5  | 79.0                      | 551   |
| 1900                         | 1LA4 562-4CN                                   | 1494         | 215   | 96.9             | 96.8             | 0.88                          | 0.85                          | 12144        | 2.5  | 0.60  | 5.5  | 92.0                      | 698   |
| 2200                         | 1LA4 564-4CN                                   | 1494         | 250   | 97.2             | 97.1             | 0.88                          | 0.86                          | 14061        | 2.5  | 0.60  | 5.5  | 104.0                     | 761   |
| 2400 <sup>2)</sup>           | 1LA4 632-4CN                                   | 1494         | 265   | 97.3             | 97.2             | 0.89                          | 0.87                          | 15341        | 2.3  | 0.55  | 5.5  | 157.0                     | 845   |
| 2700 <sup>2)</sup>           | 1LA4 634-4CN                                   | 1495         | 300   | 97.4             | 97.3             | 0.89                          | 0.87                          | 17184        | 2.3  | 0.55  | 5.5  | 171.0                     | 940   |
| 3000 <sup>2)</sup>           | 1LA4 636-4CN                                   | 1495         | 335   | 97.5             | 97.4             | 0.89                          | 0.87                          | 19164        | 2.3  | 0.55  | 5.5  | 186.2                     | 1020  |
| 6-pole                       |  |              |   |                  |                  |                               |                               |              |  |   |  |                           |   |
| 236                          | 1LA4 314-6AN                                   | 986          | 29.5  | 94.1             | 94.5             | 0.82                          | 0.78                          | 2286         | 2.50   | 1.25  | 5.3  | 5.3                       | 375   |
| 270                          | 1LA4 316-6AN                                   | 985          | 33.5  | 94.3             | 94.8             | 0.82                          | 0.80                          | 2617         | 2.40   | 1.25  | 5.5  | 6.4                       | 431   |
| 315                          | 1LA4 350-6AN                                   | 989          | 39.0  | 94.8             | 95.1             | 0.82                          | 0.79                          | 3041         | 2.30   | 1.10  | 5.3  | 10.8                      | 541   |
| 365                          | 1LA4 352-6AN                                   | 989          | 44.5  | 95.1             | 95.4             | 0.83                          | 0.80                          | 3524         | 2.20   | 1.10  | 5.3  | 12.7                      | 667   |
| 425                          | 1LA4 354-6AN                                   | 990          | 52.0  | 95.3             | 95.5             | 0.82                          | 0.79                          | 4099         | 2.40   | 1.25  | 5.5  | 15.0                      | 841   |
| 490                          | 1LA4 400-6AN                                   | 991          | 59.0  | 95.4             | 95.6             | 0.84                          | 0.81                          | 4722         | 2.30   | 1.05  | 5.5  | 21.2                      | 740   |
| 570                          | 1LA4 402-6AN                                   | 992          | 68.0  | 95.7             | 95.9             | 0.84                          | 0.81                          | 5487         | 2.30   | 1.10  | 5.5  | 24.2                      | 1193  |
| 630                          | 1LA4 404-6AN                                   | 991          | 77.0  | 95.8             | 95.9             | 0.82                          | 0.80                          | 6071         | 2.40   | 1.20  | 5.5  | 27.3                      | 1233  |
| 700                          | 1LA4 450-6AN                                   | 992          | 84.0  | 95.8             | 95.9             | 0.84                          | 0.81                          | 6738         | 2.30   | 1.10  | 5.4  | 33.0                      | 1417  |
| 750                          | 1LA4 452-6AN                                   | 993          | 90.0  | 96.4             | 96.4             | 0.84                          | 0.81                          | 7212         | 2.30   | 1.10  | 5.4  | 37.0                      | 1813  |
| 800                          | 1LA4 454-6AN                                   | 993          | 94.0  | 96.0             | 96.1             | 0.85                          | 0.82                          | 7693         | 2.30   | 1.10  | 5.4  | 41.0                      | 1789  |
| 1040                         | 1LA4 500-6CN                                   | 994          | 120   | 96.5             | 96.6             | 0.87                          | 0.85                          | 9992         | 2.10   | 0.75  | 5.30   | 82.0                      | 1668  |
| 1160                         | 1LA4 502-6CN                                   | 994          | 132   | 96.6             | 96.7             | 0.88                          | 0.86                          | 11145        | 2.10   | 0.75  | 5.30   | 92.0                      | 1858  |
| 1270                         | 1LA4 504-6CN                                   | 994          | 144   | 96.8             | 96.9             | 0.88                          | 0.86                          | 12202        | 2.15   | 0.75  | 5.40   | 102.0                     | 2048  |
| 1470                         | 1LA4 560-6CN                                   | 995          | 168   | 96.9             | 96.9             | 0.87                          | 0.85                          | 14109        | 2.25   | 0.65  | 5.25   | 138.0                     | 2105  |
| 1720                         | 1LA4 562-6CN                                   | 995          | 196   | 97.0             | 97.1             | 0.87                          | 0.85                          | 16509        | 2.25   | 0.65  | 5.30   | 158.0                     | 2470  |
| 1900                         | 1LA4 564-6CN                                   | 995          | 215   | 97.1             | 97.2             | 0.88                          | 0.86                          | 18236        | 2.30   | 0.65  | 5.35   | 183.0                     | 2890  |
| 2050 <sup>2)</sup>           | 1LA4 632-6CN                                   | 995          | 230   | 97.0             | 96.8             | 0.89                          | 0.87                          | 19676        | 2.3  | 0.50  | 5.5  | 269.1                     | 2230  |
| 2300 <sup>2)</sup>           | 1LA4 634-6CN                                   | 995          | 255   | 97.1             | 97.0             | 0.90                          | 0.88                          | 22075        | 2.3  | 0.50  | 5.5  | 297.4                     | 2450  |
| 2500 <sup>2)</sup>           | 1LA4 636-6CN                                   | 995          | 275   | 97.2             | 97.1             | 0.90                          | 0.88                          | 23995        | 2.3  | 0.50  | 5.5  | 323.0                     | 2680  |
| 8-pole                       |  |              |   |                  |                  |                               |                               |              |  |   |  |                           |   |
| 215                          | 1LA4 350-8AN                                   | 738          | 27.0  | 93.8             | 94.2             | 0.81                          | 0.78                          | 2782         | 2.30   | 1.00  | 5.1  | 10.6                      | 826   |
| 250                          | 1LA4 352-8AN                                   | 739          | 31.5  | 94.0             | 94.4             | 0.81                          | 0.78                          | 3230         | 2.40   | 1.00  | 5.3  | 12.5                      | 986   |
| 300                          | 1LA4 354-8AN                                   | 739          | 38.0  | 94.2             | 94.7             | 0.81                          | 0.78                          | 3876         | 2.40   | 1.10  | 5.3  | 14.8                      | 1107  |
| 370                          | 1LA4 400-8AN                                   | 741          | 45.5  | 95.0             | 95.3             | 0.82                          | 0.79                          | 4768         | 2.40   | 1.05  | 5.1  | 21.3                      | 1110  |

## Voltage code:

3 kV, 50 Hz  
3.3 kV, 50 Hz  
5 kV, 50 Hz  
6 kV, 50 Hz  
6.6 kV, 50 Hz  
Other voltage

3  
0  
5  
6  
7  
9

## Type of construction:

IM B3  
IM V1 (with canopy)  
IM V1 (without canopy)

0  
4  
8

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

<sup>2)</sup> Not available for  $\leq 3.3$  kV.

## Selection and ordering data (continued)

| Rated power<br>IEC<br>kW     | High voltage motor<br>H-compact<br>Article No. | Speed<br>rpm | Rated current<br>$I_{rated}$<br>at<br>6 kV<br>A | Efficiency       |                  | Power factor                 |                              | Torque<br>Nm | Break-<br>down<br>torque<br>$T_B/$<br>$T_{rated}$<br>[-] | Locked-<br>rotor<br>torque<br>$T_{LR}/$<br>$T_{rated}$<br>[-] | Locked-<br>rotor<br>current<br>$I_{LR}/$<br>$I_{rated}$<br>[-] | Moment of inertia         |   |
|------------------------------|--|--------------|---|------------------|------------------|------------------------------|------------------------------|--------------|--|---|--|---------------------------|---|
|                              |  |              |   | 4/4<br>load<br>% | 3/4<br>load<br>% | 4/4<br>load<br>cos $\varphi$ | 3/4<br>load<br>cos $\varphi$ |              |  |   |  | Motor<br>kgm <sup>2</sup> | External,<br>max. <sup>1)</sup><br>kgm <sup>2</sup> |
| <b>2.0 ... 6.6 kV, 50 Hz</b> |  |              |   |                  |                  |                              |                              |              |  |   |  |                           |   |
| 8-pole (continued)           |  |              |   |                  |                  |                              |                              |              |  |   |  |                           |   |
| 420                          | 1LA4 402-8AN                                   | 741          | 52.0  | 95.2             | 95.5             | 0.82                         | 0.79                         | 5412         | 2.40   | 1.10  | 5.4  | 24.4                      | 1402  |
| 465                          | 1LA4 404-8AN                                   | 741          | 57.0  | 95.2             | 95.5             | 0.82                         | 0.79                         | 5992         | 2.40   | 1.00  | 5.4  | 27.4                      | 1589  |
| 530                          | 1LA4 450-8AN                                   | 742          | 67.0  | 95.4             | 95.6             | 0.80                         | 0.77                         | 6821         | 2.50   | 1.00  | 5.4  | 34.0                      | 2016  |
| 600                          | 1LA4 452-8AN                                   | 742          | 75.0  | 95.6             | 95.7             | 0.81                         | 0.76                         | 7722         | 2.50   | 1.00  | 5.4  | 37.0                      | 2563  |
| 670                          | 1LA4 454-8AN                                   | 742          | 83.0  | 95.7             | 95.9             | 0.81                         | 0.78                         | 8622         | 2.50   | 1.00  | 5.4  | 42.0                      | 2778  |
| 800                          | 1LA4 500-8CN                                   | 746          | 98  | 96.1             | 96.1             | 0.82                         | 0.78                         | 10241        | 2.15   | 0.75  | 5.10   | 82.0                      | 2820  |
| 850                          | 1LA4 502-8CN                                   | 746          | 106   | 96.1             | 96.1             | 0.81                         | 0.78                         | 10881        | 2.20   | 0.80  | 5.25   | 92.0                      | 2470  |
| 980                          | 1LA4 504-8CN                                   | 746          | 122   | 96.2             | 96.2             | 0.81                         | 0.78                         | 12546        | 2.20   | 0.75  | 5.20   | 102.0                     | 3582  |
| 1100                         | 1LA4 560-8CN                                   | 746          | 132   | 96.4             | 96.4             | 0.83                         | 0.80                         | 14082        | 2.30   | 0.70  | 5.10   | 138.0                     | 3672  |
| 1260                         | 1LA4 562-8CN                                   | 746          | 152   | 96.6             | 96.6             | 0.83                         | 0.81                         | 16130        | 2.30   | 0.70  | 5.05   | 158.0                     | 4692  |
| 1430                         | 1LA4 564-8CN                                   | 746          | 172   | 96.7             | 96.7             | 0.83                         | 0.80                         | 18306        | 2.35   | 0.70  | 5.20   | 183.0                     | 4582  |
| 1630 <sup>2)</sup>           | 1LA4 634-8CN                                   | 746          | 192   | 96.7             | 96.5             | 0.84                         | 0.81                         | 20867        | 2.4  | 0.50  | 5.5  | 294.0                     | 4100  |
| 1800 <sup>2)</sup>           | 1LA4 636-8CN                                   | 746          | 210   | 96.8             | 96.6             | 0.84                         | 0.81                         | 23043        | 2.4  | 0.50  | 5.5  | 320.1                     | 4440  |
| 10-pole                      |  |              |   |                  |                  |                              |                              |              |  |   |  |                           |   |
| 360                          | 1LA4 450-3AN                                   | 591          | 48.5  | 94.3             | 94.6             | 0.76                         | 0.71                         | 5817         | 2.30   | 1.00  | 4.5  | 34.0                      | 3266  |
| 400                          | 1LA4 452-3AN                                   | 591          | 54.0  | 94.6             | 94.9             | 0.76                         | 0.71                         | 6463         | 2.30   | 1.00  | 4.5  | 37.0                      | 4063  |
| 450                          | 1LA4 454-3AN                                   | 592          | 60.0  | 94.8             | 95.0             | 0.76                         | 0.71                         | 7259         | 2.30   | 1.00  | 4.5  | 42.0                      | 4458  |
| 530                          | 1LA4 500-3CN                                   | 593          | 68.0  | 95.2             | 95.4             | 0.79                         | 0.75                         | 8535         | 2.30   | 0.95  | 4.8  | 82.0                      | 5280  |
| 590                          | 1LA4 502-3CN                                   | 593          | 75.0  | 95.4             | 95.6             | 0.79                         | 0.74                         | 9501         | 2.30   | 0.95  | 4.8  | 92.0                      | 6200  |
| 650                          | 1LA4 504-3CN                                   | 593          | 83.0  | 95.5             | 95.6             | 0.79                         | 0.74                         | 10467        | 2.30   | 0.95  | 4.8  | 102.0                     | 6770  |
| 770                          | 1LA4 560-3CN                                   | 595          | 98.0  | 95.8             | 95.9             | 0.79                         | 0.75                         | 12358        | 2.20   | 0.75  | 5.0  | 138.0                     | 3902  |
| 850                          | 1LA4 562-3CN                                   | 596          | 108   | 95.9             | 96.0             | 0.79                         | 0.75                         | 13619        | 2.20   | 0.75  | 5.0  | 158.0                     | 4102  |
| 1000                         | 1LA4 564-3CN                                   | 595          | 126   | 96.1             | 96.2             | 0.80                         | 0.75                         | 16049        | 2.20   | 0.75  | 5.0  | 183.0                     | 5717  |
| 12-pole                      |  |              |   |                  |                  |                              |                              |              |  |   |  |                           |   |
| 300                          | 1LA4 450-5CN                                   | 492          | 43.0  | 93.6             | 93.7             | 0.72                         | 0.66                         | 5823         | 2.10   | 0.75  | 4.2  | 34.0                      | 3166  |
| 325                          | 1LA4 452-5CN                                   | 492          | 47.0  | 93.7             | 93.7             | 0.71                         | 0.64                         | 6308         | 2.10   | 0.75  | 4.2  | 37.0                      | 3063  |
| 350                          | 1LA4 454-5CN                                   | 493          | 45.0  | 93.8             | 93.8             | 0.72                         | 0.65                         | 6779         | 2.10   | 0.75  | 4.2  | 42.0                      | 3158  |
| 420                          | 1LA4 500-5CN                                   | 494          | 59.0  | 94.6             | 94.6             | 0.72                         | 0.67                         | 8119         | 2.00   | 0.65  | 4.2  | 82.0                      | 4500  |
| 460                          | 1LA4 502-5CN                                   | 494          | 64.0  | 94.7             | 94.7             | 0.73                         | 0.68                         | 8892         | 2.00   | 0.65  | 4.2  | 92.0                      | 5360  |
| 500                          | 1LA4 504-5CN                                   | 494          | 71.0  | 94.7             | 94.7             | 0.72                         | 0.67                         | 9665         | 2.00   | 0.65  | 4.2  | 102.0                     | 4640  |
| 580                          | 1LA4 560-5CN                                   | 495          | 81.0  | 95.1             | 95.0             | 0.72                         | 0.65                         | 11189        | 2.00   | 0.65  | 4.4  | 138.0                     | 7284  |
| 640                          | 1LA4 562-5CN                                   | 495          | 90.0  | 95.3             | 95.1             | 0.72                         | 0.65                         | 12346        | 2.00   | 0.65  | 4.4  | 158.0                     | 8862  |
| 710                          | 1LA4 564-5CN                                   | 495          | 99.0  | 95.4             | 95.2             | 0.72                         | 0.65                         | 13697        | 2.00   | 0.65  | 4.4  | 183.0                     | 10478   |

## Voltage code:

3 kV, 50 Hz  
3.3 kV, 50 Hz  
5 kV, 50 Hz  
6 kV, 50 Hz  
6.6 kV, 50 Hz  
Other voltage

3  
0  
5  
6  
7  
9

## Type of construction:

IM B3  
IM V1 (with canopy)  
IM V1 (without canopy)

0  
4  
8

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
Higher pole numbers are available on request.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

<sup>2)</sup> Not available for  $\leq 3.3$  kV.

## Motors for line operation

## Air-cooled motors

## H-compact 1LA4

## Selection and ordering data

| Rated power<br>IEC        | High voltage motor<br>H-compact<br>Article No. | Speed<br>rpm | Rated current             |               | Efficiency    |                            | Power factor               |                           | Torque<br>Nm | Break-down torque<br>$T_B/T_{rated}$ | Locked-rotor torque<br>$T_{LR}/T_{rated}$ | Locked-rotor current<br>$I_{LR}/I_{rated}$ | Moment of inertia                                |  |
|---------------------------|--|--------------|---------------------------|---------------|---------------|----------------------------|----------------------------|---------------------------|--------------|--------------------------------------|---|--|--|--|
|                           |  |              | $I_{rated}$ at 10 kV<br>A | 4/4 load<br>% | 3/4 load<br>% | 4/4 load<br>$\cos \varphi$ | 3/4 load<br>$\cos \varphi$ | Motor<br>kgm <sup>2</sup> |              |                                      |   |  | External, max. <sup>1)</sup><br>kgm <sup>2</sup> |  |
| <b>9 ... 11 kV, 50 Hz</b> |  |              |                           |               |               |                            |                            |                           |              |                                      |   |  |  |  |
| 2-pole                    |  |              |                           |               |               |                            |                            |                           |              |                                      |   |  |  |  |
| 400                       | 1LA4 400-2AN                                   | 2986         | 28.0                      | 95.4          | 95.5          | 0.86                       | 0.85                       | 1279                      | 2.45         | 0.95                                 | 5.80                                      | 7.8  | 13   |  |
| 450                       | 1LA4 401-2AN                                   | 2985         | 31.5                      | 95.6          | 95.7          | 0.86                       | 0.86                       | 1440                      | 2.30         | 0.90                                 | 5.45                                      | 8.5  | 14   |  |
| 500                       | 1LA4 403-2AN                                   | 2986         | 34.5                      | 95.8          | 96.0          | 0.87                       | 0.86                       | 1599                      | 2.45         | 1.00                                 | 5.90                                      | 9.3  | 18   |  |
| 720                       | 1LA4 450-2AN                                   | 2982         | 48.5                      | 95.9          | 95.9          | 0.89                       | 0.88                       | 2305                      | 2.30         | 0.95                                 | 6.0                                       | 13.5                                       | 73   |  |
| 820                       | 1LA4 452-2AN                                   | 2983         | 55                        | 96.2          | 96.1          | 0.90                       | 0.88                       | 2624                      | 2.40         | 0.95                                 | 6.2                                       | 15.4                                       | 81   |  |
| 900                       | 1LA4 454-2AN                                   | 2983         | 60                        | 96.3          | 96.3          | 0.90                       | 0.89                       | 2880                      | 2.40         | 0.95                                 | 6.2                                       | 17.3                                       | 94   |  |
| 1120                      | 1LA4 500-2CN 0                                 | 2986         | 75.0                      | 96.4          | 96.4          | 0.90                       | 0.89                       | 3582                      | 2.50         | 0.70                                 | 5.6                                       | 29.0                                       | 102  |  |
| 1170                      | 1LA4 502-2CN 0                                 | 2987         | 78.0                      | 96.5          | 96.5          | 0.90                       | 0.89                       | 3740                      | 2.50         | 0.70                                 | 5.9                                       | 32.0                                       | 123  |  |
| 1290                      | 1LA4 504-2CN 0                                 | 2988         | 85.0                      | 96.7          | 96.6          | 0.91                       | 0.90                       | 4123                      | 2.60         | 0.75                                 | 6.0                                       | 35.0                                       | 147  |  |
| 1550                      | 1LA4 560-2CN 0                                 | 2991         | 102                       | 96.7          | 96.6          | 0.91                       | 0.90                       | 4948                      | 2.50         | 0.50                                 | 5.5                                       | 53.0                                       | 118  |  |
| 1700                      | 1LA4 562-2CN 0                                 | 2991         | 112                       | 96.9          | 96.8          | 0.91                       | 0.90                       | 5427                      | 2.50         | 0.50                                 | 5.5                                       | 58.0                                       | 138  |  |
| 1860                      | 1LA4 564-2CN 0                                 | 2991         | 122                       | 97.0          | 96.9          | 0.91                       | 0.90                       | 5938                      | 2.50         | 0.50                                 | 5.5                                       | 64.0                                       | 147  |  |
| 4-pole                    |  |              |                           |               |               |                            |                            |                           |              |                                      |   |  |  |  |
| 800                       | 1LA4 450-4AN                                   | 1489         | 57                        | 95.6          | 95.6          | 0.85                       | 0.83                       | 5131                      | 2.25         | 0.95                                 | 5.15                                      | 22.0                                       | 528  |  |
| 850                       | 1LA4 452-4AN                                   | 1489         | 60                        | 95.8          | 95.8          | 0.86                       | 0.85                       | 5452                      | 2.25         | 0.95                                 | 5.15                                      | 24.0                                       | 626  |  |
| 900                       | 1LA4 454-4AN                                   | 1489         | 63                        | 95.9          | 96.0          | 0.86                       | 0.84                       | 5772                      | 2.25         | 0.95                                 | 5.20                                      | 27.0                                       | 803  |  |
| 1060                      | 1LA4 500-4AN                                   | 1492         | 74                        | 96.2          | 96.1          | 0.86                       | 0.84                       | 6784                      | 2.4          | 0.90                                 | 5.5                                       | 33.0                                       | 477  |  |
| 1180                      | 1LA4 502-4AN                                   | 1492         | 82                        | 96.3          | 96.4          | 0.86                       | 0.85                       | 7552                      | 2.4          | 0.90                                 | 5.5                                       | 37.0                                       | 568  |  |
| 1320                      | 1LA4 504-4AN                                   | 1492         | 91                        | 96.5          | 96.5          | 0.87                       | 0.86                       | 8448                      | 2.4          | 0.90                                 | 5.5                                       | 42.0                                       | 703  |  |
| 1500                      | 1LA4 560-4CN                                   | 1494         | 104                       | 96.6          | 96.4          | 0.86                       | 0.83                       | 9587                      | 2.6          | 0.60                                 | 5.5                                       | 79.0                                       | 600  |  |
| 1700                      | 1LA4 562-4CN                                   | 1494         | 116                       | 96.8          | 96.7          | 0.88                       | 0.85                       | 10866                     | 2.5          | 0.60                                 | 5.4                                       | 92.0                                       | 713  |  |
| 2000                      | 1LA4 564-4CN                                   | 1494         | 136                       | 97.0          | 96.9          | 0.88                       | 0.85                       | 12783                     | 2.6          | 0.60                                 | 5.5                                       | 104.0                                      | 841  |  |
| 2210                      | 1LA4 634-4CN                                   | 1495         | 148                       | 97.2          | 97.0          | 0.89                       | 0.87                       | 14117                     | 2.3          | 0.5                                  | 5.5                                       | 171.0                                      | 1030   |  |
| 2470                      | 1LA4 636-4CN                                   | 1495         | 164                       | 97.3          | 97.2          | 0.89                       | 0.87                       | 15778                     | 2.3          | 0.5                                  | 5.5                                       | 186.2                                      | 1120   |  |
| 6-pole                    |  |              |                           |               |               |                            |                            |                           |              |                                      |   |  |  |  |
| 540                       | 1LA4 450-6AN                                   | 993          | 38.5                      | 95.3          | 95.4          | 0.85                       | 0.82                       | 5193                      | 2.30         | 1.10                                 | 5.4                                       | 33.0                                       | 947  |  |
| 590                       | 1LA4 452-6AN                                   | 993          | 42.0                      | 95.4          | 95.5          | 0.85                       | 0.82                       | 5674                      | 2.40         | 1.20                                 | 5.5                                       | 37.0                                       | 843  |  |
| 630                       | 1LA4 454-6AN                                   | 993          | 45.0                      | 95.5          | 95.6          | 0.85                       | 0.83                       | 6058                      | 2.40         | 1.20                                 | 5.5                                       | 41.0                                       | 1039   |  |
| 950                       | 1LA4 500-6CN                                   | 995          | 66                        | 96.3          | 96.5          | 0.86                       | 0.85                       | 9118                      | 2.10         | 0.65                                 | 5.10                                      | 82.0                                       | 1018   |  |
| 1050                      | 1LA4 502-6CN                                   | 995          | 72                        | 96.4          | 96.7          | 0.87                       | 0.85                       | 10078                     | 2.10         | 0.65                                 | 5.15                                      | 92.0                                       | 1158   |  |
| 1170                      | 1LA4 504-6CN                                   | 995          | 80                        | 96.6          | 96.8          | 0.87                       | 0.85                       | 11230                     | 2.20         | 0.75                                 | 5.25                                      | 102.0                                      | 1298   |  |
| 1250                      | 1LA4 560-6CN                                   | 996          | 86.0                      | 96.7          | 96.8          | 0.87                       | 0.85                       | 11984                     | 2.45         | 0.65                                 | 5.6                                       | 138.0                                      | 1680   |  |
| 1450                      | 1LA4 562-6CN                                   | 996          | 99.0                      | 96.8          | 96.9          | 0.87                       | 0.85                       | 13902                     | 2.45         | 0.65                                 | 5.6                                       | 158.0                                      | 2025   |  |
| 1650                      | 1LA4 564-6CN                                   | 996          | 112                       | 96.9          | 97.0          | 0.87                       | 0.85                       | 15819                     | 2.45         | 0.65                                 | 5.6                                       | 183.0                                      | 2035   |  |
| 1860                      | 1LA4 634-6CN                                   | 995          | 124                       | 96.5          | 96.4          | 0.90                       | 0.88                       | 17852                     | 2.3          | 0.5                                  | 5.5                                       | 297.4                                      | 1800   |  |
| 2060                      | 1LA4 636-6CN                                   | 995          | 136                       | 96.7          | 96.6          | 0.90                       | 0.88                       | 19772                     | 2.3          | 0.5                                  | 5.5                                       | 323.0                                      | 2090   |  |

## Voltage code:

10 kV, 50 Hz  
Other voltage8  
9

## Type of construction:

IM B3  
IM V1 (with canopy)  
IM V1 (without canopy)0  
4  
8

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.

1) Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

## Selection and ordering data (continued)

| Rated power<br>IEC           | High voltage motor<br>H-compact | Speed | Rated current                     |             | Efficiency  |             | Power factor |                                       | Torque | Break-down torque | Locked-rotor torque | Locked-rotor current | Moment of inertia                      |  |
|------------------------------|---------------------------------|-------|-----------------------------------|-------------|-------------|-------------|--------------|---------------------------------------|--------|-------------------|---------------------|----------------------|--|--|
|                              |                                 |       | $I_{\text{rated}}$<br>at<br>10 kV | 4/4<br>load | 3/4<br>load | 4/4<br>load | 3/4<br>load  | $T_{\text{B}}/$<br>$T_{\text{rated}}$ |        |                   |                     |                      | $T_{\text{LR}}/$<br>$T_{\text{rated}}$ | $I_{\text{LR}}/$<br>$I_{\text{rated}}$ |
| kW                           | Article No.                     | rpm   | A                                 | %           | %           | cos φ       | cos φ        | Nm                                    | [-]    | [-]               | [-]                 | kgm <sup>2</sup>     | kgm <sup>2</sup>                       |  |
| <b>9 ... 11 kV, 50 Hz</b>    |                                 |       |                                   |             |             |             |              |                                       |        |                   |                     |                      |  |  |
| 8-pole                       |                                 |       |                                   |             |             |             |              |                                       |        |                   |                     |                      |  |  |
| 450                          | <b>1LA4 450-8AN</b>             | 743   | 34.0                              | 94.8        | 95.0        | 0.80        | 0.76         | 5783                                  | 2.60   | 1.00              | 5.5                 | 34.0                 | 1286                                   |  |
| 480                          | <b>1LA4 452-8AN</b>             | 743   | 36.0                              | 95.0        | 95.2        | 0.81        | 0.77         | 6169                                  | 2.60   | 1.00              | 5.5                 | 37.0                 | 1383                                   |  |
| 560                          | <b>1LA4 454-8AN</b>             | 743   | 42.0                              | 95.3        | 95.4        | 0.81        | 0.77         | 7197                                  | 2.60   | 1.00              | 5.5                 | 42.0                 | 1788                                   |  |
| 700                          | <b>1LA4 500-8CN</b>             | 746   | 52.0                              | 95.8        | 95.8        | 0.81        | 0.77         | 8960                                  | 2.20   | 0.75              | 5.5                 | 82.0                 | 1740                                   |  |
| 750                          | <b>1LA4 502-8CN</b>             | 746   | 55.0                              | 95.9        | 95.9        | 0.82        | 0.78         | 9600                                  | 2.20   | 0.75              | 5.5                 | 92.0                 | 2020                                   |  |
| 800                          | <b>1LA4 504-8CN</b>             | 746   | 59.0                              | 96.0        | 96.0        | 0.82        | 0.78         | 10240                                 | 2.20   | 0.75              | 5.5                 | 102.0                | 2240                                   |  |
| 950                          | <b>1LA4 560-8CN</b>             | 746   | 70.0                              | 96.2        | 96.1        | 0.81        | 0.77         | 12160                                 | 2.40   | 0.65              | 5.3                 | 138.0                | 2562                                   |  |
| 1050                         | <b>1LA4 562-8CN</b>             | 746   | 77.0                              | 96.2        | 96.2        | 0.82        | 0.78         | 13440                                 | 2.40   | 0.65              | 5.3                 | 158.0                | 2282                                   |  |
| 1250                         | <b>1LA4 564-8CN</b>             | 746   | 92.0                              | 96.5        | 96.3        | 0.81        | 0.77         | 16000                                 | 2.50   | 0.70              | 5.5                 | 183.0                | 3217                                   |  |
| 1350                         | <b>1LA4 634-8CN</b>             | 746   | 96                                | 96.2        | 96.0        | 0.84        | 0.81         | 17282                                 | 2.4    | 0.50              | 5.5                 | 294.0                | O. R. <sup>2)</sup>                    |  |
| 1500                         | <b>1LA4 636-8CN</b>             | 746   | 106                               | 96.3        | 96.1        | 0.84        | 0.81         | 19202                                 | 2.4    | 0.50              | 5.5                 | 320.1                | O. R. <sup>2)</sup>                    |  |
| 10-pole                      |                                 |       |                                   |             |             |             |              |                                       |        |                   |                     |                      |  |  |
| 440                          | <b>1LA4 500-3CN</b>             | 593   | 33.5                              | 94.7        | 95.0        | 0.80        | 0.76         | 7085                                  | 2.20   | 0.85              | 4.7                 | 82.0                 | 3080                                   |  |
| 500                          | <b>1LA4 502-3CN</b>             | 593   | 38.0                              | 95.0        | 95.2        | 0.80        | 0.75         | 8051                                  | 2.20   | 0.90              | 4.7                 | 92.0                 | 3770                                   |  |
| 530                          | <b>1LA4 504-3CN</b>             | 593   | 40.0                              | 95.1        | 95.3        | 0.80        | 0.75         | 8535                                  | 2.20   | 0.90              | 4.7                 | 102.0                | 4070                                   |  |
| 630                          | <b>1LA4 560-3CN</b>             | 595   | 47.5                              | 95.4        | 95.6        | 0.80        | 0.75         | 10111                                 | 2.20   | 0.75              | 5.0                 | 138.0                | 2382                                   |  |
| 690                          | <b>1LA4 562-3CN</b>             | 596   | 52.0                              | 95.4        | 95.6        | 0.80        | 0.75         | 11055                                 | 2.20   | 0.80              | 5.1                 | 158.0                | 2317                                   |  |
| 800                          | <b>1LA4 564-3CN</b>             | 596   | 61.0                              | 95.6        | 95.7        | 0.79        | 0.75         | 12817                                 | 2.25   | 0.80              | 5.2                 | 183.0                | 2807                                   |  |
| 12-pole                      |                                 |       |                                   |             |             |             |              |                                       |        |                   |                     |                      |  |  |
| 500                          | <b>1LA4 560-5CN</b>             | 496   | 43.0                              | 94.8        | 94.6        | 0.71        | 0.65         | 9626                                  | 2.00   | 0.65              | 4.4                 | 138.0                | 4655                                   |  |
| 560                          | <b>1LA4 562-5CN</b>             | 496   | 48.0                              | 95.0        | 94.8        | 0.71        | 0.64         | 10781                                 | 2.00   | 0.65              | 4.4                 | 158.0                | 5533                                   |  |
| 620                          | <b>1LA4 564-5CN</b>             | 496   | 52.0                              | 95.1        | 94.9        | 0.72        | 0.65         | 11936                                 | 2.00   | 0.65              | 4.4                 | 183.0                | 5774                                   |  |
| <b>Voltage code:</b>         |                                 |       |                                   |             |             |             |              |                                       |        |                   |                     |                      |  |  |
| 10 kV, 50 Hz                 |                                 | 8     |                                   |             |             |             |              |                                       |        |                   |                     |                      |  |  |
| Other voltage                |                                 | 9     |                                   |             |             |             |              |                                       |        |                   |                     |                      |  |  |
| <b>Type of construction:</b> |                                 |       |                                   |             |             |             |              |                                       |        |                   |                     |                      |  |  |
| IM B3                        |                                 | 0     |                                   |             |             |             |              |                                       |        |                   |                     |                      |  |  |
| IM V1 (with canopy)          |                                 | 4     |                                   |             |             |             |              |                                       |        |                   |                     |                      |  |  |
| IM V1 (without canopy)       |                                 | 8     |                                   |             |             |             |              |                                       |        |                   |                     |                      |  |  |

Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.

Higher pole numbers are available on request.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

<sup>2)</sup> On request.

## Motors for line operation

## Air-cooled motors

## H-compact 1LA4

## Selection and ordering data

The 1LA4 data also apply to explosion-protected 1MG4 (Ex pxb) and 1MS4 (Ex ec) motors.

| Rated power<br>IEC<br>kW     | High voltage motor<br>H-compact<br>Article No. | Speed<br>rpm | Rated<br>current<br>$I_{rated}$<br>at<br>4.16 kV<br>A | Efficiency       |                  | Power factor                 |                              | Torque<br>Nm | Break-<br>down<br>torque<br>$T_B/$<br>$T_{rated}$<br>[-] | Locked-<br>rotor<br>torque<br>$T_{LR}/$<br>$T_{rated}$<br>[-] | Locked-<br>rotor<br>current<br>$I_{LR}/$<br>$I_{rated}$<br>[-] | Moment of<br>inertia      |   |
|------------------------------|--|--------------|---|------------------|------------------|------------------------------|------------------------------|--------------|--|---|--|---------------------------|---|
|                              |  |              |   | 4/4<br>load<br>% | 3/4<br>load<br>% | 4/4<br>load<br>cos $\varphi$ | 3/4<br>load<br>cos $\varphi$ |              |  |   |  | Motor<br>kgm <sup>2</sup> | External,<br>max. <sup>1)</sup><br>kgm <sup>2</sup> |
| <b>2.0 ... 6.6 kV, 60 Hz</b> |  |              |   |                  |                  |                              |                              |              |  |   |  |                           |   |
| 2-pole                       |  |              |   |                  |                  |                              |                              |              |  |   |  |                           |   |
| 240                          | <b>1LA4 310-2AN</b>                            | 3572         | 40.5  | 94.7             | 94.7             | 0.87                         | 0.86                         | 642          | 2.3  | 0.95  | 5.0  | 2.2                       | 18  |
| 285                          | <b>1LA4 312-2AN</b>                            | 3569         | 48.0  | 94.7             | 94.7             | 0.87                         | 0.85                         | 763          | 2.2  | 0.85  | 5.0  | 2.2                       | 16  |
| 350                          | <b>1LA4 314-2AN</b>                            | 3572         | 59.0  | 95.2             | 95.2             | 0.87                         | 0.86                         | 936          | 2.4  | 1.00  | 5.3  | 2.7                       | 18  |
| 410                          | <b>1LA4 316-2AN</b>                            | 3574         | 68.0  | 95.6             | 95.6             | 0.88                         | 0.87                         | 1095         | 2.5  | 1.10  | 5.4  | 3.1                       | 26  |
| 460                          | <b>1LA4 350-2AN</b>                            | 3578         | 76.0  | 95.6             | 95.6             | 0.88                         | 0.86                         | 1228         | 2.5  | 1.05  | 5.4  | 4.3                       | 25  |
| 510                          | <b>1LA4 352-2AN</b>                            | 3580         | 84.0  | 95.9             | 95.8             | 0.88                         | 0.87                         | 1360         | 2.6  | 1.20  | 5.6  | 4.8                       | 29  |
| 560                          | <b>1LA4 354-2AN</b>                            | 3579         | 91.0  | 96.0             | 96.0             | 0.89                         | 0.88                         | 1494         | 2.5  | 1.25  | 5.6  | 5.2                       | 31  |
| 630                          | <b>1LA4 400-2AN</b>                            | 3583         | 104   | 95.9             | 95.6             | 0.88                         | 0.87                         | 1679         | 2.3  | 0.80  | 5.3  | 7.8                       | 14  |
| 730                          | <b>1LA4 402-2AN</b>                            | 3585         | 120   | 96.1             | 95.9             | 0.88                         | 0.87                         | 1944         | 2.5  | 0.85  | 5.5  | 8.7                       | 16  |
| 830                          | <b>1LA4 404-2AN</b>                            | 3585         | 134   | 96.3             | 96.1             | 0.89                         | 0.88                         | 2211         | 2.6  | 0.90  | 5.5  | 9.9                       | 19  |
| 920                          | <b>1LA4 450-2CN</b>                            | 3583         | 150   | 96.1             | 95.8             | 0.89                         | 0.88                         | 2452         | 2.40   | 0.70  | 5.5  | 17.0                      | 43  |
| 1000                         | <b>1LA4 452-2CN</b>                            | 3584         | 160   | 96.2             | 95.8             | 0.90                         | 0.88                         | 2664         | 2.45   | 0.70  | 5.7  | 19.0                      | 46  |
| 1140                         | <b>1LA4 454-2CN</b>                            | 3585         | 182   | 96.6             | 96.4             | 0.90                         | 0.88                         | 3037         | 2.55   | 0.75  | 5.9  | 21.0                      | 54  |
| 1330 <sup>2)</sup>           | <b>1LA4 500-2CN</b> 0                          | 3586         | 215   | 96.3             | 95.9             | 0.90                         | 0.89                         | 3542         | 2.4  | 0.65  | 5.5  | 29.0                      | 52  |
| 1380 <sup>2)</sup>           | <b>1LA4 502-2CN</b> 0                          | 3586         | 220   | 96.3             | 96.0             | 0.91                         | 0.90                         | 3675         | 2.4  | 0.65  | 5.5  | 32.0                      | 58  |
| 1560 <sup>2)</sup>           | <b>1LA4 504-2CN</b> 0                          | 3586         | 245   | 96.7             | 96.3             | 0.91                         | 0.90                         | 4154         | 2.5  | 0.70  | 5.6  | 35.0                      | 72  |
| 4-pole                       |  |              |   |                  |                  |                              |                              |              |  |   |  |                           |   |
| 240                          | <b>1LA4 310-4AN</b>                            | 1780         | 44.5  | 93.8             | 93.7             | 0.80                         | 0.76                         | 1288         | 2.40   | 1.15  | 5.3  | 2.8                       | 104   |
| 300                          | <b>1LA4 312-4AN</b>                            | 1780         | 52.0  | 94.6             | 94.6             | 0.84                         | 0.81                         | 1609         | 2.30   | 1.20  | 5.2  | 3.5                       | 133   |
| 360                          | <b>1LA4 314-4AN</b>                            | 1780         | 62.0  | 94.9             | 95.0             | 0.85                         | 0.82                         | 1931         | 2.30   | 1.25  | 5.3  | 4.0                       | 145   |
| 440                          | <b>1LA4 316-4AN</b>                            | 1780         | 75.0  | 95.3             | 95.4             | 0.85                         | 0.82                         | 2360         | 2.40   | 1.30  | 5.5  | 4.8                       | 200   |
| 470                          | <b>1LA4 350-4AN</b>                            | 1783         | 81.0  | 95.2             | 95.2             | 0.85                         | 0.83                         | 2517         | 2.30   | 1.15  | 5.2  | 6.0                       | 144   |
| 550                          | <b>1LA4 352-4AN</b>                            | 1783         | 93.0  | 95.5             | 95.5             | 0.86                         | 0.84                         | 2946         | 2.20   | 1.15  | 5.2  | 6.9                       | 159   |
| 640                          | <b>1LA4 354-4AN</b>                            | 1784         | 106   | 95.6             | 95.6             | 0.87                         | 0.85                         | 3426         | 2.30   | 1.20  | 5.5  | 8.1                       | 195   |
| 680                          | <b>1LA4 400-4AN</b>                            | 1788         | 116   | 95.1             | 94.8             | 0.86                         | 0.83                         | 3632         | 2.55   | 1.20  | 5.80   | 11.6                      | 174   |
| 750                          | <b>1LA4 402-4AN</b>                            | 1788         | 126   | 95.4             | 95.2             | 0.87                         | 0.84                         | 4006         | 2.55   | 1.25  | 5.80   | 12.9                      | 206   |
| 830                          | <b>1LA4 404-4AN</b>                            | 1789         | 138   | 96.6             | 95.3             | 0.87                         | 0.85                         | 4431         | 2.55   | 1.20  | 5.90   | 14.5                      | 243   |
| 1000                         | <b>1LA4 450-4AN</b>                            | 1789         | 172   | 95.6             | 95.1             | 0.84                         | 0.82                         | 5338         | 2.40   | 0.95  | 5.25   | 22.0                      | 298   |

## Voltage code:

4 kV, 60 Hz  
6.6 kV, 60 Hz  
Other voltage

4  
1  
9

## Type of construction:

IM B3  
IM V1 (with canopy)  
IM V1 (without canopy)

0  
4  
8

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on [Page 2/2](#).

<sup>2)</sup> Not available for  $\leq 3.3$  kV.



## Selection and ordering data (continued)

| Rated power<br>IEC<br>kW     | High voltage motor<br>H-compact<br>Article No. | Speed<br>rpm | Rated current<br>$I_{rated}$<br>at<br>4.16 kV<br>A | Efficiency    |               | Power factor               |                            | Torque<br>Nm | Break-down torque<br>$T_B/T_{rated}$<br>[-] | Locked-rotor torque<br>$T_{LR}/T_{rated}$<br>[-] | Locked-rotor current<br>$I_{LR}/I_{rated}$<br>[-] | Moment of inertia         |  |
|------------------------------|--|--------------|--|---------------|---------------|----------------------------|----------------------------|--------------|---|--|---|---------------------------|--|
|                              |  |              |  | 4/4 load<br>% | 3/4 load<br>% | 4/4 load<br>$\cos \varphi$ | 3/4 load<br>$\cos \varphi$ |              |   |  |   | Motor<br>kgm <sup>2</sup> | External, max. <sup>1)</sup><br>kgm <sup>2</sup> |
| <b>2.0 ... 6.6 kV, 60 Hz</b> |  |              |  |               |               |                            |                            |              |   |  |   |                           |  |
| 4-pole (continued)           |  |              |  |               |               |                            |                            |              |   |  |   |                           |  |
| 1050                         | 1LA4 452-4AN                                   | 1789         | 178  | 95.7          | 95.4          | 0.86                       | 0.84                       | 5605         | 2.30  | 0.95   | 5.20  | 24.0                      | 366  |
| 1150                         | 1LA4 454-4AN                                   | 1789         | 194  | 95.9          | 95.6          | 0.86                       | 0.84                       | 6139         | 2.30  | 0.95   | 5.25  | 27.0                      | 443  |
| 1350                         | 1LA4 500-4AN                                   | 1792         | 230  | 96.1          | 95.8          | 0.85                       | 0.83                       | 7194         | 2.40  | 0.90   | 5.5   | 33.0                      | 277  |
| 1450                         | 1LA4 502-4AN                                   | 1792         | 245  | 96.2          | 95.9          | 0.86                       | 0.84                       | 7727         | 2.40  | 0.90   | 5.5   | 37.0                      | 348  |
| 1600                         | 1LA4 504-4AN                                   | 1792         | 260  | 96.3          | 96.2          | 0.88                       | 0.86                       | 8526         | 2.40  | 0.90   | 5.5   | 42.0                      | 413  |
| 1870                         | 1LA4 560-4CN                                   | 1794         | 315  | 96.4          | 96.0          | 0.86                       | 0.84                       | 9954         | 2.50  | 0.55   | 5.5   | 79.0                      | 356  |
| 2090                         | 1LA4 562-4CN                                   | 1794         | 345  | 96.6          | 96.3          | 0.87                       | 0.84                       | 11125        | 2.60  | 0.60   | 5.6   | 92.0                      | 458  |
| 2350                         | 1LA4 564-4CN                                   | 1794         | 385  | 96.8          | 96.6          | 0.88                       | 0.85                       | 12508        | 2.60  | 0.60   | 5.6   | 104.0                     | 540  |
| 2640 <sup>2)</sup>           | 1LA4 632-4CN                                   | 1793         | 425  | 96.9          | 96.7          | 0.89                       | 0.87                       | 14068        | 2.3   | 0.55   | 5.5   | 157.0                     | O. R. <sup>3)</sup>                              |
| 2970 <sup>2)</sup>           | 1LA4 634-4CN                                   | 1794         | 475  | 97.1          | 96.9          | 0.89                       | 0.87                       | 15758        | 2.3   | 0.55   | 5.5   | 171.0                     | O. R. <sup>3)</sup>                              |
| 3300 <sup>2)</sup>           | 1LA4 636-4CN                                   | 1794         | 530  | 97.3          | 97.1          | 0.89                       | 0.87                       | 17573        | 2.3   | 0.55   | 5.5   | 186.2                     | O. R. <sup>3)</sup>                              |
| 6-pole                       |  |              |  |               |               |                            |                            |              |   |  |   |                           |  |
| 275                          | 1LA4 314-6AN                                   | 1184         | 49.0   | 94.3          | 94.5          | 0.83                       | 0.80                       | 2218         | 2.40  | 1.20   | 5.2   | 5.3                       | 247  |
| 325                          | 1LA4 316-6AN                                   | 1185         | 58.0   | 94.7          | 95.0          | 0.82                       | 0.80                       | 2619         | 2.40  | 1.20   | 5.5   | 6.4                       | 360  |
| 380                          | 1LA4 350-6AN                                   | 1190         | 68.0   | 95.1          | 95.1          | 0.82                       | 0.79                       | 3049         | 2.40  | 1.15   | 5.3   | 10.8                      | 498  |
| 430                          | 1LA4 352-6AN                                   | 1190         | 75.0   | 95.3          | 95.4          | 0.83                       | 0.80                       | 3450         | 2.20  | 1.10   | 5.5   | 12.7                      | 615  |
| 510                          | 1LA4 354-6AN                                   | 1189         | 90.0   | 95.5          | 95.6          | 0.82                       | 0.80                       | 4096         | 2.30  | 1.15   | 5.5   | 15.0                      | 689  |
| 560                          | 1LA4 400-6AN                                   | 1192         | 98.0   | 95.6          | 95.5          | 0.83                       | 0.80                       | 4486         | 2.50  | 1.10   | 5.5   | 21.2                      | 740  |
| 670                          | 1LA4 402-6AN                                   | 1192         | 116  | 95.8          | 95.8          | 0.83                       | 0.81                       | 5367         | 2.40  | 1.10   | 5.5   | 24.2                      | 780  |
| 690                          | 1LA4 404-6AN                                   | 1191         | 120  | 95.8          | 95.8          | 0.83                       | 0.82                       | 5532         | 2.30  | 1.10   | 5.5   | 27.3                      | 925  |
| 800                          | 1LA4 450-6AN                                   | 1192         | 138  | 95.8          | 95.7          | 0.84                       | 0.81                       | 6409         | 2.30  | 1.10   | 5.4   | 33.0                      | 947  |
| 850                          | 1LA4 452-6AN                                   | 1192         | 144  | 95.9          | 95.9          | 0.85                       | 0.83                       | 6809         | 2.30  | 1.10   | 5.4   | 37.0                      | 1083   |
| 900                          | 1LA4 454-6AN                                   | 1192         | 154  | 96.0          | 96.0          | 0.85                       | 0.83                       | 7210         | 2.30  | 1.10   | 5.4   | 41.0                      | 1489   |
| 1160                         | 1LA4 500-6CN                                   | 1195         | 192  | 96.5          | 96.6          | 0.87                       | 0.86                       | 9270         | 2.10  | 0.75   | 5.30  | 82.0                      | 1168   |
| 1290                         | 1LA4 502-6CN                                   | 1195         | 210  | 96.7          | 96.7          | 0.88                       | 0.86                       | 10309        | 2.15  | 0.75   | 5.35  | 92.0                      | 1308   |
| 1380                         | 1LA4 504-6CN                                   | 1195         | 225  | 96.8          | 96.8          | 0.88                       | 0.86                       | 11028        | 2.15  | 0.75   | 5.40  | 102.0                     | 1598   |
| 1570                         | 1LA4 560-6CN                                   | 1195         | 260  | 96.7          | 96.7          | 0.87                       | 0.86                       | 12547        | 2.20  | 0.60   | 5.15  | 138.0                     | 1425   |
| 1870                         | 1LA4 562-6CN                                   | 1195         | 310  | 97.0          | 96.9          | 0.87                       | 0.85                       | 14944        | 2.25  | 0.65   | 5.30  | 158.0                     | 1640   |
| 2050                         | 1LA4 564-6CN                                   | 1195         | 335  | 97.1          | 97.1          | 0.88                       | 0.86                       | 16383        | 2.25  | 0.60   | 5.25  | 183.0                     | 1980   |
| 2255 <sup>2)</sup>           | 1LA4 632-6CN                                   | 1194         | 360  | 96.8          | 96.6          | 0.89                       | 0.87                       | 18043        | 2.3   | 0.50   | 5.5   | 269.1                     | O. R. <sup>3)</sup>                              |
| 2530 <sup>2)</sup>           | 1LA4 634-6CN                                   | 1194         | 400  | 96.9          | 96.7          | 0.90                       | 0.88                       | 20243        | 2.3   | 0.50   | 5.5   | 297.4                     | O. R. <sup>3)</sup>                              |
| 2750 <sup>2)</sup>           | 1LA4 636-6CN                                   | 1194         | 435  | 97.0          | 96.9          | 0.90                       | 0.88                       | 22003        | 2.3   | 0.50   | 5.5   | 323.0                     | O. R. <sup>3)</sup>                              |

## Voltage code:

4 kV, 60 Hz  
6.6 kV, 60 Hz  
Other voltage

4  
1  
9

## Type of construction:

IM B3  
IM V1 (with canopy)  
IM V1 (without canopy)

0  
4  
8

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

<sup>2)</sup> Not available for  $\leq 3.3$  kV.

<sup>3)</sup> On request.

## Motors for line operation

## Air-cooled motors

## H-compact 1LA4

## Selection and ordering data (continued)

| Rated power<br>IEC           | High voltage motor<br>H-compact<br>Article No. | Speed<br>rpm | Rated current<br>$I_{rated}$<br>at<br>4.16 kV<br>A | Efficiency       |                  | Power factor                  |                               | Torque<br>Nm | Break-<br>down<br>torque<br>$T_B/T_{rated}$<br>[-] | Locked-<br>rotor<br>torque<br>$T_{LR}/T_{rated}$<br>[-] | Locked-<br>rotor<br>current<br>$I_{LR}/I_{rated}$<br>[-] | Moment of inertia         |   |
|------------------------------|--|--------------|--|------------------|------------------|-------------------------------|-------------------------------|--------------|--|---|--|---------------------------|---|
|                              |  |              |  | 4/4<br>load<br>% | 3/4<br>load<br>% | 4/4<br>load<br>$\cos \varphi$ | 3/4<br>load<br>$\cos \varphi$ |              |  |   |  | Motor<br>kgm <sup>2</sup> | External,<br>max. <sup>1)</sup><br>kgm <sup>2</sup> |
| <b>2.0 ... 6.6 kV, 60 Hz</b> |  |              |  |                  |                  |                               |                               |              |  |   |  |                           |   |
| <b>8-pole</b>                |  |              |  |                  |                  |                               |                               |              |  |   |  |                           |   |
| 260                          | <b>1LA4 350-8AN</b>                            | 889          | 47.5   | 94.2             | 94.4             | 0.81                          | 0.78                          | 2793         | 2.30   | 0.95  | 5.1  | 10.6                      | 683   |
| 300                          | <b>1LA4 352-8AN</b>                            | 889          | 54.0   | 94.5             | 94.6             | 0.81                          | 0.78                          | 3222         | 2.40   | 1.00  | 5.2  | 12.5                      | 824   |
| 360                          | <b>1LA4 354-8AN</b>                            | 890          | 65.0   | 94.7             | 94.9             | 0.81                          | 0.78                          | 3863         | 2.50   | 1.05  | 5.4  | 14.8                      | 879   |
| 445                          | <b>1LA4 400-8AN</b>                            | 892          | 80.0   | 95.3             | 95.3             | 0.81                          | 0.79                          | 4764         | 2.40   | 1.05  | 5.3  | 21.3                      | 1044  |
| 490                          | <b>1LA4 402-8AN</b>                            | 891          | 86.0   | 95.3             | 95.3             | 0.83                          | 0.80                          | 5251         | 2.30   | 1.00  | 5.2  | 24.4                      | 1069  |
| 540                          | <b>1LA4 404-8AN</b>                            | 892          | 96.0   | 95.6             | 95.6             | 0.82                          | 0.80                          | 5781         | 2.40   | 1.05  | 5.4  | 27.4                      | 1446  |
| 600                          | <b>1LA4 450-8AN</b>                            | 891          | 108  | 95.4             | 95.5             | 0.81                          | 0.78                          | 6430         | 2.50   | 1.00  | 5.4  | 34.0                      | 1466  |
| 670                          | <b>1LA4 452-8AN</b>                            | 892          | 120  | 95.6             | 95.7             | 0.81                          | 0.76                          | 7172         | 2.60   | 1.00  | 5.5  | 37.0                      | 1843  |
| 770                          | <b>1LA4 454-8AN</b>                            | 892          | 138  | 95.8             | 95.9             | 0.81                          | 0.78                          | 8243         | 2.60   | 1.00  | 5.5  | 42.0                      | 1958  |
| 900                          | <b>1LA4 500-8CN</b>                            | 896          | 160  | 96.1             | 95.9             | 0.81                          | 0.77                          | 9593         | 2.35   | 0.75  | 5.25   | 82.0                      | 2290  |
| 950                          | <b>1LA4 502-8CN</b>                            | 896          | 170  | 96.1             | 96.0             | 0.81                          | 0.78                          | 10126        | 2.20   | 0.70  | 5.25   | 92.0                      | 2050  |
| 1040                         | <b>1LA4 504-8CN</b>                            | 896          | 182  | 96.2             | 96.2             | 0.82                          | 0.81                          | 11085        | 2.10   | 0.70  | 5.10   | 102.0                     | 2290  |
| 1250                         | <b>1LA4 560-8CN</b>                            | 896          | 220  | 96.4             | 96.2             | 0.82                          | 0.78                          | 13323        | 2.50   | 0.70  | 5.30   | 138.0                     | 2487  |
| 1400                         | <b>1LA4 562-8CN</b>                            | 896          | 240  | 96.6             | 96.5             | 0.83                          | 0.81                          | 14922        | 2.30   | 0.65  | 5.10   | 158.0                     | 3012  |
| 1530                         | <b>1LA4 564-8CN</b>                            | 896          | 265  | 96.7             | 96.5             | 0.83                          | 0.79                          | 16307        | 2.55   | 0.70  | 5.40   | 183.0                     | 3687  |
| 1793 <sup>2)</sup>           | <b>1LA4 634-8CN</b>                            | 895          | 305  | 96.5             | 96.1             | 0.84                          | 0.81                          | 19135        | 2.4  | 0.50  | 5.5  | 294.0                     | O. R. <sup>3)</sup>                                 |
| 1980 <sup>2)</sup>           | <b>1LA4 636-8CN</b>                            | 895          | 340  | 96.7             | 96.2             | 0.84                          | 0.81                          | 21130        | 2.4  | 0.50  | 5.5  | 320.1                     | O. R. <sup>3)</sup>                                 |
| <b>10-pole</b>               |  |              |  |                  |                  |                               |                               |              |  |   |  |                           |   |
| 400                          | <b>1LA4 450-3AN</b>                            | 711          | 77.0   | 94.5             | 94.7             | 0.76                          | 0.73                          | 5372         | 2.20   | 1.00  | 4.8  | 34.0                      | 2416  |
| 450                          | <b>1LA4 452-3AN</b>                            | 711          | 87.0   | 94.7             | 94.8             | 0.76                          | 0.72                          | 6044         | 2.30   | 1.00  | 4.8  | 37.0                      | 2513  |
| 500                          | <b>1LA4 454-3AN</b>                            | 711          | 96.0   | 94.8             | 95.0             | 0.76                          | 0.73                          | 6715         | 2.30   | 1.00  | 4.8  | 42.0                      | 2488  |
| 610                          | <b>1LA4 500-3CN</b>                            | 713          | 112  | 95.4             | 95.5             | 0.79                          | 0.75                          | 8170         | 2.20   | 0.90  | 4.8  | 82.0                      | 3700  |
| 670                          | <b>1LA4 502-3CN</b>                            | 713          | 124  | 95.4             | 95.6             | 0.79                          | 0.75                          | 8973         | 2.20   | 0.90  | 4.8  | 92.0                      | 4170  |
| 710                          | <b>1LA4 504-3CN</b>                            | 714          | 132  | 95.6             | 95.5             | 0.78                          | 0.74                          | 9496         | 2.40   | 0.95  | 5.1  | 102.0                     | 4840  |
| 870                          | <b>1LA4 560-3CN</b>                            | 715          | 160  | 95.9             | 95.9             | 0.79                          | 0.74                          | 11619        | 2.30   | 0.75  | 5.1  | 138.0                     | 2862  |
| 950                          | <b>1LA4 562-3CN</b>                            | 716          | 176  | 96.0             | 95.9             | 0.78                          | 0.73                          | 12670        | 2.50   | 0.80  | 5.5  | 158.0                     | 3377  |
| 1100                         | <b>1LA4 564-3CN</b>                            | 716          | 200  | 96.1             | 96.1             | 0.79                          | 0.75                          | 14670        | 2.30   | 0.75  | 5.3  | 183.0                     | 3517  |
| <b>12-pole</b>               |  |              |  |                  |                  |                               |                               |              |  |   |  |                           |   |
| 340                          | <b>1LA4 450-5CN</b>                            | 593          | 71.0   | 94.0             | 93.8             | 0.71                          | 0.64                          | 5475         | 2.00   | 0.70  | 4.3  | 34.0                      | 2286  |
| 375                          | <b>1LA4 452-5CN</b>                            | 592          | 78.0   | 94.2             | 94.1             | 0.71                          | 0.66                          | 6049         | 2.00   | 0.70  | 4.3  | 37.0                      | 2723  |
| 410                          | <b>1LA4 454-5CN</b>                            | 592          | 84.0   | 94.2             | 94.1             | 0.72                          | 0.66                          | 6613         | 2.00   | 0.70  | 4.3  | 42.0                      | 2428  |
| 460                          | <b>1LA4 500-5CN</b>                            | 595          | 95.0   | 94.6             | 94.4             | 0.71                          | 0.65                          | 7382         | 2.00   | 0.65  | 4.2  | 82.0                      | 3200  |
| 500                          | <b>1LA4 502-5CN</b>                            | 594          | 102  | 94.8             | 94.7             | 0.72                          | 0.67                          | 8038         | 2.00   | 0.65  | 4.2  | 92.0                      | 3880  |
| 540                          | <b>1LA4 504-5CN</b>                            | 594          | 110  | 94.9             | 94.8             | 0.72                          | 0.67                          | 8681         | 2.00   | 0.65  | 4.2  | 102.0                     | 3850  |
| 650                          | <b>1LA4 560-5CN</b>                            | 595          | 134  | 95.2             | 94.9             | 0.71                          | 0.64                          | 10432        | 2.00   | 0.65  | 4.4  | 138.0                     | 5636  |
| 710                          | <b>1LA4 562-5CN</b>                            | 596          | 144  | 95.3             | 95.0             | 0.72                          | 0.65                          | 11375        | 2.00   | 0.65  | 4.4  | 158.0                     | 6123  |
| 800                          | <b>1LA4 564-5CN</b>                            | 596          | 164  | 95.4             | 95.1             | 0.71                          | 0.65                          | 12817        | 2.00   | 0.65  | 4.4  | 183.0                     | 7377  |

## Voltage code:

4 kV, 60 Hz  
6.6 kV, 60 Hz  
Other voltage

4  
1  
9

## Type of construction:

IM B3  
IM V1 (with canopy)  
IM V1 (without canopy)

0  
4  
8

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.


Higher pole numbers are available on request.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

<sup>2)</sup> Not available for  $\leq 3.3$  kV.

<sup>3)</sup> On request.

## Dimension drawings

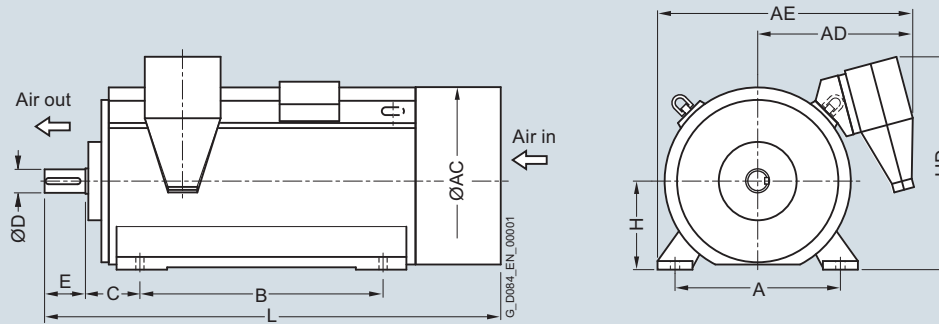

| Motor type   | Weight<br>kg | Dimensions |          |                        |                        |         |         |         |         |         |                        |         |
|--|--------------|------------|----------|------------------------|------------------------|---------|---------|---------|---------|---------|------------------------|---------|
|  |              | A<br>mm    | AC<br>mm | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>2)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, anti-friction bearings<sup>3)</sup></b> |              |            |          |                        |                        |         |         |         |         |         |                        |         |
| <b>2-pole</b>  |              |            |          |                        |                        |         |         |         |         |         |                        |         |
| 1LA4 310-2AN.0   | 1550         | 610        | 700      | 710                    | 1075                   | 710     | 200     | 70      | 105     | 315     | 860                    | 1590    |
| 1LA4 312-2AN.0   | 1550         | 610        | 700      | 710                    | 1075                   | 710     | 200     | 70      | 105     | 315     | 860                    | 1590    |
| 1LA4 314-2AN.0   | 1850         | 610        | 700      | 710                    | 1075                   | 900     | 200     | 70      | 105     | 315     | 860                    | 1790    |
| 1LA4 316-2AN.0   | 2000         | 610        | 700      | 710                    | 1075                   | 900     | 200     | 70      | 105     | 315     | 860                    | 1790    |
| 1LA4 350-2AN.0   | 2300         | 686        | 780      | 740                    | 1155                   | 1000    | 224     | 75      | 105     | 355     | 930                    | 1930    |
| 1LA4 352-2AN.0   | 2400         | 686        | 780      | 740                    | 1155                   | 1000    | 224     | 75      | 105     | 355     | 930                    | 1930    |
| 1LA4 354-2AN.0   | 2550         | 686        | 780      | 740                    | 1155                   | 1000    | 224     | 75      | 105     | 355     | 930                    | 1930    |
| 1LA4 400-2AN.0   | 3150         | 750        | 870      | 775                    | 1225                   | 1120    | 254     | 85      | 130     | 400     | 1010                   | 2095    |
| 1LA4 402-2AN.0   | 3300         | 750        | 870      | 775                    | 1225                   | 1120    | 254     | 85      | 130     | 400     | 1010                   | 2095    |
| 1LA4 404-2AN.0   | 3550         | 750        | 870      | 775                    | 1225                   | 1120    | 254     | 85      | 130     | 400     | 1010                   | 2095    |
| 1LA4 450-2AN.0 <sup>4)</sup>   | 4600         | 850        | 960      | 825                    | 1340                   | 1250    | 280     | 95      | 130     | 450     | 1100                   | 2320    |
| 1LA4 452-2AN.0 <sup>4)</sup>   | 4900         | 850        | 960      | 825                    | 1340                   | 1250    | 280     | 95      | 130     | 450     | 1100                   | 2320    |
| 1LA4 454-2AN.0 <sup>4)</sup>   | 5200         | 850        | 960      | 825                    | 1340                   | 1250    | 280     | 95      | 130     | 450     | 1100                   | 2320    |
| <b>4-pole</b>  |              |            |          |                        |                        |         |         |         |         |         |                        |         |
| 1LA4 310-4AN.0   | 1500         | 610        | 700      | 710                    | 1075                   | 710     | 200     | 90      | 130     | 315     | 860                    | 1610    |
| 1LA4 312-4AN.0   | 1650         | 610        | 700      | 710                    | 1075                   | 710     | 200     | 90      | 130     | 315     | 860                    | 1610    |
| 1LA4 314-4AN.0   | 1900         | 610        | 700      | 710                    | 1075                   | 900     | 200     | 90      | 130     | 315     | 860                    | 1810    |
| 1LA4 316-4AN.0   | 2050         | 610        | 700      | 710                    | 1075                   | 900     | 200     | 90      | 130     | 315     | 860                    | 1810    |
| 1LA4 350-4AN.0   | 2350         | 686        | 780      | 740                    | 1155                   | 1000    | 224     | 100     | 165     | 355     | 930                    | 1985    |
| 1LA4 352-4AN.0   | 2550         | 686        | 780      | 740                    | 1155                   | 1000    | 224     | 100     | 165     | 355     | 930                    | 1985    |
| 1LA4 354-4AN.0   | 2750         | 686        | 780      | 740                    | 1155                   | 1000    | 224     | 100     | 165     | 355     | 930                    | 1985    |
| 1LA4 400-4AN.0   | 3400         | 750        | 870      | 775                    | 1225                   | 1120    | 254     | 120     | 165     | 400     | 1010                   | 2125    |
| 1LA4 402-4AN.0   | 3600         | 750        | 870      | 775                    | 1225                   | 1120    | 254     | 120     | 165     | 400     | 1010                   | 2125    |
| 1LA4 404-4AN.0   | 3800         | 750        | 870      | 775                    | 1225                   | 1120    | 254     | 120     | 165     | 400     | 1010                   | 2125    |
| 1LA4 450-4AN.0   | 4700         | 850        | 960      | 825                    | 1340                   | 1250    | 280     | 130     | 200     | 450     | 1100                   | 2390    |
| 1LA4 452-4AN.0   | 5000         | 850        | 960      | 825                    | 1340                   | 1250    | 280     | 130     | 200     | 450     | 1100                   | 2390    |
| 1LA4 454-4AN.0   | 5300         | 850        | 960      | 825                    | 1340                   | 1250    | 280     | 130     | 200     | 450     | 1100                   | 2390    |
| 1LA4 500-4AN.0   | 5900         | 950        | 1070     | 875                    | 1440                   | 1320    | 315     | 140     | 200     | 500     | 1200                   | 2525    |
| 1LA4 502-4AN.0   | 6300         | 950        | 1070     | 875                    | 1440                   | 1320    | 315     | 140     | 200     | 500     | 1200                   | 2525    |

<sup>1)</sup> For currents  $I_{rated} > 315$  A, the dimension changes by + 140 mm (for H = 500), by + 145 mm (for H = 560) or by + 155 mm (for H = 630).

<sup>2)</sup> For currents  $I_{rated} > 315$  A, the dimension changes by + 70 mm.

<sup>3)</sup> The dimensions also apply for the 1MA4 and 1MS4 series.


<sup>4)</sup> Anti-friction bearings only for 50 Hz operation.

## Motors for line operation

### Air-cooled motors

#### H-compact 1LA4

#### Dimension drawings (continued)

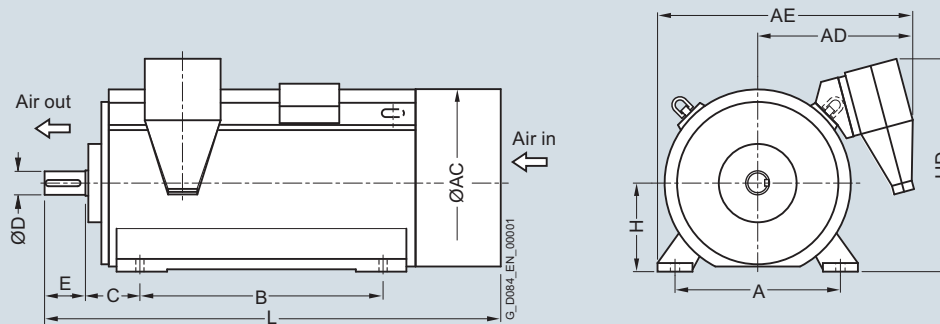

| Motor type   | Weight<br>kg | Dimensions |          |                        |                        |         |         |         |         |         |                        |         |
|--|--------------|------------|----------|------------------------|------------------------|---------|---------|---------|---------|---------|------------------------|---------|
|  |              | A<br>mm    | AC<br>mm | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>2)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, anti-friction bearings<sup>3)</sup></b> |              |            |          |                        |                        |         |         |         |         |         |                        |         |
| <b>4-pole</b>  |              |            |          |                        |                        |         |         |         |         |         |                        |         |
| 1LA4 504-4AN.0   | 6800         | 950        | 1070     | 875                    | 1440                   | 1320    | 315     | 140     | 200     | 500     | 1200                   | 2525    |
| 1LA4 560-4CN.0   | 8200         | 1060       | 1210     | 925                    | 1560                   | 1400    | 335     | 160     | 240     | 560     | 1310                   | 2775    |
| 1LA4 562-4CN.0   | 8900         | 1060       | 1210     | 925                    | 1560                   | 1400    | 335     | 160     | 240     | 560     | 1310                   | 2775    |
| 1LA4 564-4CN.0   | 9700         | 1060       | 1210     | 925                    | 1560                   | 1400    | 335     | 160     | 240     | 560     | 1310                   | 2775    |
| 1LA4 632-4CN.0 <sup>4)</sup>   | 12200        | 1120       | 1350     | 945                    | 1560                   | 1600    | 335     | 170     | 240     | 630     | 1410                   | 3015    |
| 1LA4 634-4CN.0 <sup>4)</sup>   | 12800        | 1120       | 1350     | 945                    | 1560                   | 1600    | 335     | 170     | 240     | 630     | 1410                   | 3015    |
| 1LA4 636-4CN.0 <sup>4)</sup>   | 13600        | 1120       | 1350     | 945                    | 1560                   | 1600    | 335     | 170     | 240     | 630     | 1410                   | 3015    |
| <b>6-pole</b>  |              |            |          |                        |                        |         |         |         |         |         |                        |         |
| 1LA4 314-6AN.0   | 1950         | 610        | 700      | 710                    | 1075                   | 900     | 200     | 90      | 130     | 315     | 860                    | 1810    |
| 1LA4 316-6AN.0   | 2150         | 610        | 700      | 710                    | 1075                   | 900     | 200     | 90      | 130     | 315     | 860                    | 1810    |
| 1LA4 350-6AN.0   | 2400         | 686        | 780      | 740                    | 1155                   | 1000    | 224     | 100     | 165     | 355     | 930                    | 1985    |
| 1LA4 352-6AN.0   | 2600         | 686        | 780      | 740                    | 1155                   | 1000    | 224     | 100     | 165     | 355     | 930                    | 1985    |
| 1LA4 354-6AN.0   | 2850         | 686        | 780      | 740                    | 1155                   | 1000    | 224     | 100     | 165     | 355     | 930                    | 1985    |
| 1LA4 400-6AN.0   | 3500         | 750        | 870      | 775                    | 1225                   | 1120    | 254     | 120     | 165     | 400     | 1010                   | 2125    |
| 1LA4 402-6AN.0   | 3750         | 750        | 870      | 775                    | 1225                   | 1120    | 254     | 120     | 165     | 400     | 1010                   | 2125    |
| 1LA4 404-6AN.0   | 4000         | 750        | 870      | 775                    | 1225                   | 1120    | 254     | 120     | 165     | 400     | 1010                   | 2125    |
| 1LA4 450-6AN.0   | 4600         | 850        | 960      | 825                    | 1340                   | 1250    | 280     | 130     | 200     | 450     | 1100                   | 2390    |
| 1LA4 452-6AN.0   | 4900         | 850        | 960      | 825                    | 1340                   | 1250    | 280     | 130     | 200     | 450     | 1100                   | 2390    |
| 1LA4 454-6AN.0   | 5200         | 850        | 960      | 825                    | 1340                   | 1250    | 280     | 130     | 200     | 450     | 1100                   | 2390    |
| 1LA4 500-6CN.0   | 6400         | 950        | 1070     | 875                    | 1440                   | 1320    | 315     | 140     | 200     | 500     | 1200                   | 2525    |
| 1LA4 502-6CN.0   | 6800         | 950        | 1070     | 875                    | 1440                   | 1320    | 315     | 140     | 200     | 500     | 1200                   | 2525    |
| 1LA4 504-6CN.0   | 7300         | 950        | 1070     | 875                    | 1440                   | 1320    | 315     | 140     | 200     | 500     | 1200                   | 2525    |
| 1LA4 560-6CN.0   | 8500         | 1060       | 1210     | 925                    | 1560                   | 1400    | 335     | 160     | 240     | 560     | 1310                   | 2775    |
| 1LA4 562-6CN.0   | 9300         | 1060       | 1210     | 925                    | 1560                   | 1400    | 335     | 160     | 240     | 560     | 1310                   | 2775    |
| 1LA4 564-6CN.0   | 10100        | 1060       | 1210     | 925                    | 1560                   | 1400    | 335     | 160     | 240     | 560     | 1310                   | 2775    |
| 1LA4 632-6CN.0   | 12700        | 1120       | 1350     | 945                    | 1560                   | 1600    | 335     | 180     | 240     | 630     | 1410                   | 3015    |
| 1LA4 634-6CN.0   | 13400        | 1120       | 1350     | 945                    | 1560                   | 1600    | 335     | 180     | 240     | 630     | 1410                   | 3015    |
| 1LA4 636-6CN.0   | 14100        | 1120       | 1350     | 945                    | 1560                   | 1600    | 335     | 180     | 240     | 630     | 1410                   | 3015    |


<sup>1)</sup> For currents  $I_{rated} > 315$  A, the dimension changes by + 140 mm (for H = 500), by + 145 mm (for H = 560) or by + 155 mm (for H = 630).

<sup>2)</sup> For currents  $I_{rated} > 315$  A, the dimension changes by + 70 mm.

<sup>3)</sup> The dimensions also apply for the 1MA4 and 1MS4 series.

<sup>4)</sup> Anti-friction bearings only for 50 Hz operation.

## Dimension drawings (continued)

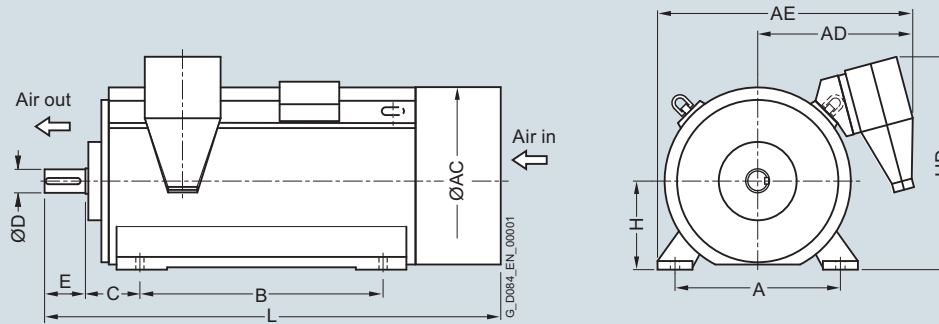

| Motor type   | Weight<br>kg | Dimensions |          |                        |                        |         |         |         |         |         |                        |         |
|--|--------------|------------|----------|------------------------|------------------------|---------|---------|---------|---------|---------|------------------------|---------|
|  |              | A<br>mm    | AC<br>mm | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>2)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, anti-friction bearings<sup>3)</sup></b> |              |            |          |                        |                        |         |         |         |         |         |                        |         |
| <b>8-pole</b>  |              |            |          |                        |                        |         |         |         |         |         |                        |         |
| 1LA4 350-8AN.0   | 2400         | 686        | 780      | 740                    | 1155                   | 1000    | 224     | 100     | 165     | 355     | 930                    | 1985    |
| 1LA4 352-8AN.0   | 2600         | 686        | 780      | 740                    | 1155                   | 1000    | 224     | 100     | 165     | 355     | 930                    | 1985    |
| 1LA4 354-8AN.0   | 2800         | 686        | 780      | 740                    | 1155                   | 1000    | 224     | 100     | 165     | 355     | 930                    | 1985    |
| 1LA4 400-8AN.0   | 3450         | 750        | 870      | 775                    | 1225                   | 1120    | 254     | 120     | 165     | 400     | 1010                   | 2125    |
| 1LA4 402-8AN.0   | 3700         | 750        | 870      | 775                    | 1225                   | 1120    | 254     | 120     | 165     | 400     | 1010                   | 2125    |
| 1LA4 404-8AN.0   | 3950         | 750        | 870      | 775                    | 1225                   | 1120    | 254     | 120     | 165     | 400     | 1010                   | 2125    |
| 1LA4 450-8AN.0   | 4600         | 850        | 960      | 825                    | 1340                   | 1250    | 280     | 130     | 200     | 450     | 1100                   | 2390    |
| 1LA4 452-8AN.0   | 4900         | 850        | 960      | 825                    | 1340                   | 1250    | 280     | 130     | 200     | 450     | 1100                   | 2390    |
| 1LA4 454-8AN.0   | 5200         | 850        | 960      | 825                    | 1340                   | 1250    | 280     | 130     | 200     | 450     | 1100                   | 2390    |
| 1LA4 500-8CN.0   | 6400         | 950        | 1070     | 875                    | 1440                   | 1320    | 315     | 140     | 200     | 500     | 1200                   | 2525    |
| 1LA4 502-8CN.0   | 6700         | 950        | 1070     | 875                    | 1440                   | 1320    | 315     | 140     | 200     | 500     | 1200                   | 2525    |
| 1LA4 504-8CN.0   | 7200         | 950        | 1070     | 875                    | 1440                   | 1320    | 315     | 140     | 200     | 500     | 1200                   | 2525    |
| 1LA4 560-8CN.0   | 8500         | 1060       | 1210     | 925                    | 1560                   | 1400    | 335     | 160     | 240     | 560     | 1310                   | 2775    |
| 1LA4 562-8CN.0   | 9200         | 1060       | 1210     | 925                    | 1560                   | 1400    | 335     | 160     | 240     | 560     | 1310                   | 2775    |
| 1LA4 564-8CN.0   | 10000        | 1060       | 1210     | 925                    | 1560                   | 1400    | 335     | 160     | 240     | 560     | 1310                   | 2775    |
| 1LA4 634-8CN.0   | 13300        | 1120       | 1350     | 945                    | 1560                   | 1600    | 335     | 180     | 240     | 630     | 1410                   | 3015    |
| 1LA4 636-8CN.0   | 14000        | 1120       | 1350     | 945                    | 1560                   | 1600    | 335     | 180     | 240     | 630     | 1410                   | 3015    |
| <b>10-pole</b>   |              |            |          |                        |                        |         |         |         |         |         |                        |         |
| 1LA4 450-3AN.0   | 4600         | 850        | 960      | 825                    | 1340                   | 1250    | 280     | 130     | 200     | 450     | 1100                   | 2390    |
| 1LA4 452-3AN.0   | 4900         | 850        | 960      | 825                    | 1340                   | 1250    | 280     | 130     | 200     | 450     | 1100                   | 2390    |
| 1LA4 454-3AN.0   | 5200         | 850        | 960      | 825                    | 1340                   | 1250    | 280     | 130     | 200     | 450     | 1100                   | 2390    |
| 1LA4 500-3CN.0   | 6400         | 950        | 1070     | 875                    | 1440                   | 1320    | 315     | 140     | 200     | 500     | 1200                   | 2525    |
| 1LA4 502-3CN.0   | 6700         | 950        | 1070     | 875                    | 1440                   | 1320    | 315     | 140     | 200     | 500     | 1200                   | 2525    |
| 1LA4 504-3CN.0   | 7200         | 950        | 1070     | 875                    | 1440                   | 1320    | 315     | 140     | 200     | 500     | 1200                   | 2525    |
| 1LA4 560-3CN.0   | 8500         | 1060       | 1210     | 925                    | 1560                   | 1400    | 335     | 160     | 240     | 560     | 1310                   | 2775    |
| 1LA4 562-3CN.0   | 9200         | 1060       | 1210     | 925                    | 1560                   | 1400    | 335     | 160     | 240     | 560     | 1310                   | 2775    |
| 1LA4 564-3CN.0   | 10000        | 1060       | 1210     | 925                    | 1560                   | 1400    | 335     | 160     | 240     | 560     | 1310                   | 2775    |

<sup>1)</sup> For currents  $I_{rated} > 315$  A, the dimension changes by + 140 mm (for H = 500), by + 145 mm (for H = 560) or by + 155 mm (for H = 630).

<sup>2)</sup> For currents  $I_{rated} > 315$  A, the dimension changes by + 70 mm.


<sup>3)</sup> The dimensions also apply for the 1MA4 and 1MS4 series.

## Motors for line operation

### Air-cooled motors

#### H-compact 1LA4

#### Dimension drawings (continued)

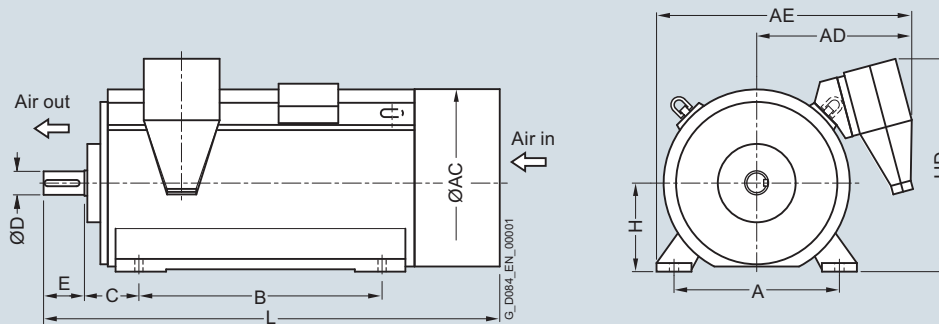

| Motor type   | Weight<br>kg | Dimensions |          |                        |                        |         |         |         |         |         |                        |         |
|--|--------------|------------|----------|------------------------|------------------------|---------|---------|---------|---------|---------|------------------------|---------|
|  |              | A<br>mm    | AC<br>mm | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>2)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, anti-friction bearings<sup>3)</sup></b> |              |            |          |                        |                        |         |         |         |         |         |                        |         |
| 12-pole  |              |            |          |                        |                        |         |         |         |         |         |                        |         |
| 1LA4 450-5CN.0   | 4600         | 850        | 960      | 825                    | 1340                   | 1250    | 280     | 130     | 200     | 450     | 1100                   | 2390    |
| 1LA4 452-5CN.0   | 4900         | 850        | 960      | 825                    | 1340                   | 1250    | 280     | 130     | 200     | 450     | 1100                   | 2390    |
| 1LA4 454-5CN.0   | 5200         | 850        | 960      | 825                    | 1340                   | 1250    | 280     | 130     | 200     | 450     | 1100                   | 2390    |
| 1LA4 500-5CN.0   | 6400         | 950        | 1070     | 875                    | 1440                   | 1320    | 315     | 140     | 200     | 500     | 1200                   | 2525    |
| 1LA4 502-5CN.0   | 6700         | 950        | 1070     | 875                    | 1440                   | 1320    | 315     | 140     | 200     | 500     | 1200                   | 2525    |
| 1LA4 504-5CN.0   | 7200         | 950        | 1070     | 875                    | 1440                   | 1320    | 315     | 140     | 200     | 500     | 1200                   | 2525    |
| 1LA4 560-5CN.0   | 8500         | 1060       | 1210     | 925                    | 1560                   | 1400    | 335     | 160     | 240     | 560     | 1310                   | 2775    |
| 1LA4 562-5CN.0   | 9200         | 1060       | 1210     | 925                    | 1560                   | 1400    | 335     | 160     | 240     | 560     | 1310                   | 2775    |
| 1LA4 564-5CN.0   | 10000        | 1060       | 1210     | 925                    | 1560                   | 1400    | 335     | 160     | 240     | 560     | 1310                   | 2775    |

#### Note:


Higher pole numbers are available on request.

<sup>1)</sup> For currents  $I_{rated} > 315$  A, the dimension changes by + 140 mm (for H = 500), by + 145 mm (for H = 560) or by + 155 mm (for H = 630).

<sup>2)</sup> For currents  $I_{rated} > 315$  A, the dimension changes by + 70 mm.

<sup>3)</sup> The dimensions also apply for the 1MA4 and 1MS4 series.

## Dimension drawings

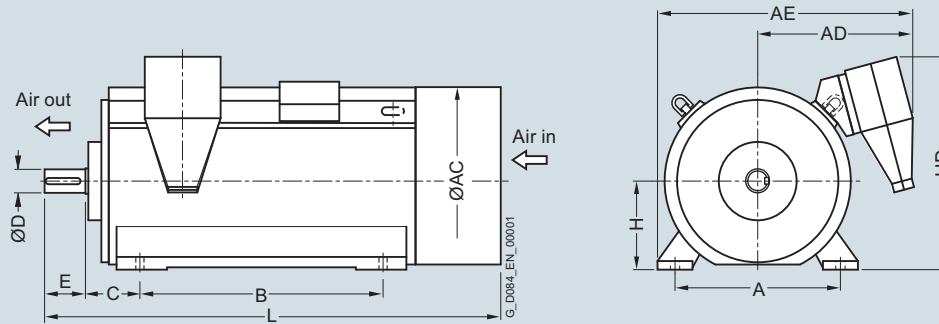

| Motor type  | Weight<br>kg | Dimensions |          |          |          |         |         |         |         |         |          |         |
|---|--------------|------------|----------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|   |              | A<br>mm    | AC<br>mm | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>9 ... 11 kV, IM B3 type of construction, anti-friction bearings<sup>1)</sup></b> |              |            |          |          |          |         |         |         |         |         |          |         |
| <b>2-pole</b>   |              |            |          |          |          |         |         |         |         |         |          |         |
| 1LA4 400-2AN.0  | 3150         | 750        | 870      | 775      | 1225     | 1120    | 254     | 85      | 130     | 400     | 1010     | 2095    |
| 1LA4 401-2AN.0  | 3300         | 750        | 870      | 775      | 1225     | 1120    | 254     | 85      | 130     | 400     | 1010     | 2095    |
| 1LA4 403-2AN.0  | 3550         | 750        | 870      | 775      | 1225     | 1120    | 254     | 85      | 130     | 400     | 1010     | 2095    |
| 1LA4 450-2AN.0 <sup>2)</sup>  | 4600         | 850        | 960      | 970      | 1485     | 1250    | 280     | 95      | 130     | 450     | 1170     | 2320    |
| 1LA4 452-2AN.0 <sup>2)</sup>  | 4900         | 850        | 960      | 970      | 1485     | 1250    | 280     | 95      | 130     | 450     | 1170     | 2320    |
| 1LA4 454-2AN.0 <sup>2)</sup>  | 5200         | 850        | 960      | 970      | 1485     | 1250    | 280     | 95      | 130     | 450     | 1170     | 2320    |
| <b>4-pole</b>   |              |            |          |          |          |         |         |         |         |         |          |         |
| 1LA4 450-4AN.0  | 4600         | 850        | 960      | 970      | 1485     | 1250    | 280     | 130     | 200     | 450     | 1170     | 2390    |
| 1LA4 452-4AN.0  | 4900         | 850        | 960      | 970      | 1485     | 1250    | 280     | 130     | 200     | 450     | 1170     | 2390    |
| 1LA4 454-4AN.0  | 5200         | 850        | 960      | 970      | 1485     | 1250    | 280     | 130     | 200     | 450     | 1170     | 2390    |
| 1LA4 500-4AN.0  | 5900         | 950        | 1070     | 1015     | 1580     | 1320    | 315     | 140     | 200     | 500     | 1270     | 2525    |
| 1LA4 502-4AN.0  | 6200         | 950        | 1070     | 1015     | 1580     | 1320    | 315     | 140     | 200     | 500     | 1270     | 2525    |
| 1LA4 504-4AN.0  | 6700         | 950        | 1070     | 1015     | 1580     | 1320    | 315     | 140     | 200     | 500     | 1270     | 2525    |
| 1LA4 560-4CN.0  | 8100         | 1060       | 1210     | 1070     | 1705     | 1400    | 335     | 160     | 240     | 560     | 1380     | 2775    |
| 1LA4 562-4CN.0  | 8800         | 1060       | 1210     | 1070     | 1705     | 1400    | 335     | 160     | 240     | 560     | 1380     | 2775    |
| 1LA4 564-4CN.0  | 9600         | 1060       | 1210     | 1070     | 1705     | 1400    | 335     | 160     | 240     | 560     | 1380     | 2775    |
| 1LA4 634-4CN.0 <sup>2)</sup>  | 12800        | 1120       | 1350     | 1100     | 1675     | 1600    | 335     | 170     | 240     | 630     | 1480     | 3015    |
| 1LA4 636-4CN.0 <sup>2)</sup>  | 13600        | 1120       | 1350     | 1100     | 1675     | 1600    | 335     | 170     | 240     | 630     | 1480     | 3015    |
| <b>6-pole</b>   |              |            |          |          |          |         |         |         |         |         |          |         |
| 1LA4 450-6AN.0  | 4600         | 850        | 960      | 970      | 1485     | 1250    | 280     | 130     | 200     | 450     | 1170     | 2390    |
| 1LA4 452-6AN.0  | 4800         | 850        | 960      | 970      | 1485     | 1250    | 280     | 130     | 200     | 450     | 1170     | 2390    |
| 1LA4 454-6AN.0  | 5200         | 850        | 960      | 970      | 1485     | 1250    | 280     | 130     | 200     | 450     | 1170     | 2390    |
| 1LA4 500-6CN.0  | 6300         | 950        | 1070     | 1015     | 1580     | 1320    | 315     | 140     | 200     | 500     | 1270     | 2525    |
| 1LA4 502-6CN.0  | 6800         | 950        | 1070     | 1015     | 1580     | 1320    | 315     | 140     | 200     | 500     | 1270     | 2525    |
| 1LA4 504-6CN.0  | 7200         | 950        | 1070     | 1015     | 1580     | 1320    | 315     | 140     | 200     | 500     | 1270     | 2525    |
| 1LA4 560-6CN.0  | 8500         | 1060       | 1210     | 1070     | 1705     | 1400    | 335     | 160     | 240     | 560     | 1380     | 2775    |
| 1LA4 562-6CN.0  | 9100         | 1060       | 1210     | 1070     | 1705     | 1400    | 335     | 160     | 240     | 560     | 1380     | 2775    |
| 1LA4 564-6CN.0  | 10000        | 1060       | 1210     | 1070     | 1705     | 1400    | 335     | 160     | 240     | 560     | 1380     | 2775    |
| 1LA4 634-6CN.0  | 13400        | 1120       | 1350     | 1100     | 1675     | 1600    | 335     | 180     | 240     | 630     | 1480     | 3015    |
| 1LA4 636-6CN.0  | 14100        | 1120       | 1350     | 1100     | 1675     | 1600    | 335     | 180     | 240     | 630     | 1480     | 3015    |


<sup>1)</sup> The dimensions also apply for the 1MA4 and 1MS4 series.<sup>2)</sup> Anti-friction bearings only for 50 Hz operation.

## Motors for line operation

### Air-cooled motors

#### H-compact 1LA4

#### Dimension drawings (continued)

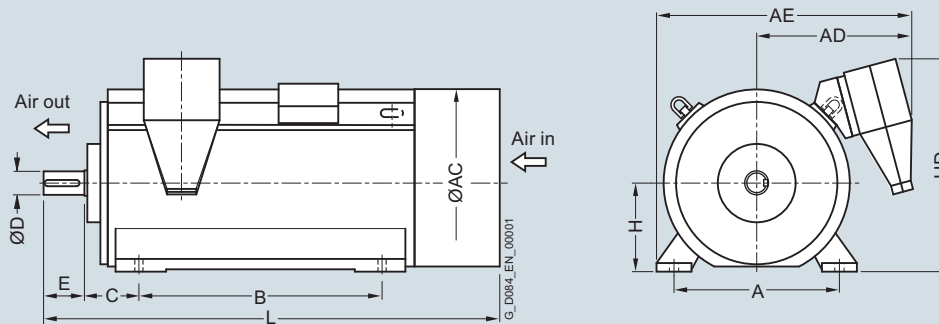

| Motor type  | Weight<br>kg | Dimensions |          |          |          |         |         |         |         |         |          |         |
|---|--------------|------------|----------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|   |              | A<br>mm    | AC<br>mm | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>9 ... 11 kV, IM B3 type of construction, anti-friction bearings<sup>1)</sup></b> |              |            |          |          |          |         |         |         |         |         |          |         |
| <b>8-pole</b>   |              |            |          |          |          |         |         |         |         |         |          |         |
| 1LA4 450-8AN.0  | 4600         | 850        | 960      | 970      | 1485     | 1250    | 280     | 130     | 200     | 450     | 1170     | 2390    |
| 1LA4 452-8AN.0  | 4800         | 850        | 960      | 970      | 1485     | 1250    | 280     | 130     | 200     | 450     | 1170     | 2390    |
| 1LA4 454-8AN.0  | 5200         | 850        | 960      | 970      | 1485     | 1250    | 280     | 130     | 200     | 450     | 1170     | 2390    |
| 1LA4 500-8CN.0  | 6300         | 950        | 1070     | 1015     | 1580     | 1320    | 315     | 140     | 200     | 500     | 1270     | 2525    |
| 1LA4 502-8CN.0  | 6700         | 950        | 1070     | 1015     | 1580     | 1320    | 315     | 140     | 200     | 500     | 1270     | 2525    |
| 1LA4 504-8CN.0  | 7100         | 950        | 1070     | 1015     | 1580     | 1320    | 315     | 140     | 200     | 500     | 1270     | 2525    |
| 1LA4 560-8CN.0  | 8400         | 1060       | 1210     | 1070     | 1705     | 1400    | 335     | 160     | 240     | 560     | 1380     | 2775    |
| 1LA4 562-8CN.0  | 9100         | 1060       | 1210     | 1070     | 1705     | 1400    | 335     | 160     | 240     | 560     | 1380     | 2775    |
| 1LA4 564-8CN.0  | 10000        | 1060       | 1210     | 1070     | 1705     | 1400    | 335     | 160     | 240     | 560     | 1380     | 2775    |
| 1LA4 634-8CN.0  | 13300        | 1120       | 1350     | 1100     | 1675     | 1600    | 335     | 180     | 240     | 630     | 1480     | 3015    |
| 1LA4 636-8CN.0  | 14000        | 1120       | 1350     | 1100     | 1675     | 1600    | 335     | 180     | 240     | 630     | 1480     | 3015    |
| <b>10-pole</b>  |              |            |          |          |          |         |         |         |         |         |          |         |
| 1LA4 500-3CN.0  | 6300         | 950        | 1070     | 1015     | 1580     | 1320    | 315     | 140     | 200     | 500     | 1270     | 2525    |
| 1LA4 502-3CN.0  | 6700         | 950        | 1070     | 1015     | 1580     | 1320    | 315     | 140     | 200     | 500     | 1270     | 2525    |
| 1LA4 504-3CN.0  | 7100         | 950        | 1070     | 1015     | 1580     | 1320    | 315     | 140     | 200     | 500     | 1270     | 2525    |
| 1LA4 560-3CN.0  | 8400         | 1060       | 1210     | 1070     | 1705     | 1400    | 335     | 160     | 240     | 560     | 1380     | 2775    |
| 1LA4 562-3CN.0  | 9100         | 1060       | 1210     | 1070     | 1705     | 1400    | 335     | 160     | 240     | 560     | 1380     | 2775    |
| 1LA4 564-3CN.0  | 10000        | 1060       | 1210     | 1070     | 1705     | 1400    | 335     | 160     | 240     | 560     | 1380     | 2775    |
| <b>12-pole</b>  |              |            |          |          |          |         |         |         |         |         |          |         |
| 1LA4 560-5CN.0  | 8400         | 1060       | 1210     | 1070     | 1705     | 1400    | 335     | 160     | 240     | 560     | 1380     | 2775    |
| 1LA4 562-5CN.0  | 9100         | 1060       | 1210     | 1070     | 1705     | 1400    | 335     | 160     | 240     | 560     | 1380     | 2775    |
| 1LA4 564-5CN.0  | 10000        | 1060       | 1210     | 1070     | 1705     | 1400    | 335     | 160     | 240     | 560     | 1380     | 2775    |


#### Note:

Higher pole numbers are available on request.

<sup>1)</sup> The dimensions also apply for the 1MA4 and 1MS4 series.



## Dimension drawings

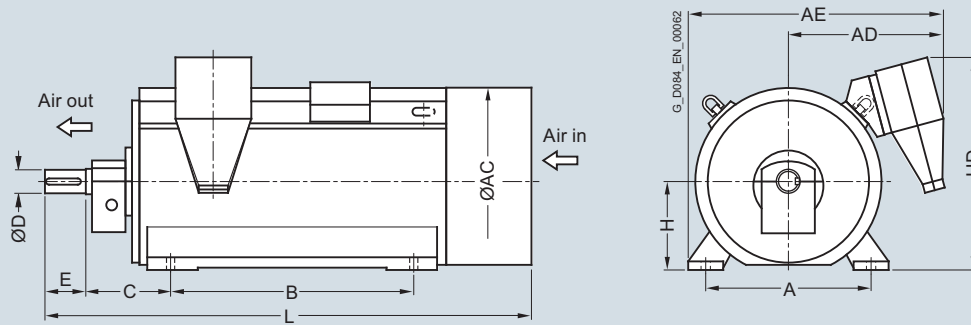

| Motor type  | Weight<br>kg | Dimensions |          |                        |                        |         |         |         |         |         |                        |         |
|---|--------------|------------|----------|------------------------|------------------------|---------|---------|---------|---------|---------|------------------------|---------|
|   |              | A<br>mm    | AC<br>mm | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>2)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, sleeve bearings<sup>3)</sup></b> |              |            |          |                        |                        |         |         |         |         |         |                        |         |
| <b>2-pole</b>   |              |            |          |                        |                        |         |         |         |         |         |                        |         |
| 1LA4 310-2AN.0-Z K96  | 1650         | 610        | 700      | 710                    | 1075                   | 710     | 375     | 70      | 105     | 315     | 860                    | 1980    |
| 1LA4 312-2AN.0-Z K96  | 1650         | 610        | 700      | 710                    | 1075                   | 710     | 375     | 70      | 105     | 315     | 860                    | 1980    |
| 1LA4 314-2AN.0-Z K96  | 1950         | 610        | 700      | 710                    | 1075                   | 900     | 375     | 70      | 105     | 315     | 860                    | 2180    |
| 1LA4 316-2AN.0-Z K96  | 2100         | 610        | 700      | 710                    | 1075                   | 900     | 375     | 70      | 105     | 315     | 860                    | 2180    |
| 1LA4 350-2AN.0-Z K96  | 2400         | 686        | 780      | 740                    | 1155                   | 1000    | 400     | 75      | 105     | 355     | 930                    | 2340    |
| 1LA4 352-2AN.0-Z K96  | 2500         | 686        | 780      | 740                    | 1155                   | 1000    | 400     | 75      | 105     | 355     | 930                    | 2340    |
| 1LA4 354-2AN.0-Z K96  | 2600         | 686        | 780      | 740                    | 1155                   | 1000    | 400     | 75      | 105     | 355     | 930                    | 2340    |
| 1LA4 400-2AN.0-Z K96  | 3200         | 750        | 870      | 775                    | 1225                   | 1120    | 425     | 85      | 130     | 400     | 1010                   | 2510    |
| 1LA4 402-2AN.0-Z K96  | 3350         | 750        | 870      | 775                    | 1225                   | 1120    | 425     | 85      | 130     | 400     | 1010                   | 2510    |
| 1LA4 404-2AN.0-Z K96  | 3600         | 750        | 870      | 775                    | 1225                   | 1120    | 425     | 85      | 130     | 400     | 1010                   | 2510    |
| 1LA4 450-2AN.0-Z K96 <sup>4)</sup>  | 4700         | 850        | 960      | 825                    | 1340                   | 1250    | 475     | 95      | 130     | 450     | 1100                   | 2515    |
| 1LA4 452-2AN.0-Z K96 <sup>4)</sup>  | 5000         | 850        | 960      | 825                    | 1340                   | 1250    | 475     | 95      | 130     | 450     | 1100                   | 2515    |
| 1LA4 454-2AN.0-Z K96 <sup>4)</sup>  | 5200         | 850        | 960      | 825                    | 1340                   | 1250    | 475     | 95      | 130     | 450     | 1100                   | 2515    |
| 1LA4 500-2CN.0  | 6100         | 950        | 1070     | 875                    | 1440                   | 1320    | 500     | 110     | 165     | 500     | 1200                   | 2675    |
| 1LA4 502-2CN.0  | 6300         | 950        | 1070     | 875                    | 1440                   | 1320    | 500     | 110     | 165     | 500     | 1200                   | 2675    |
| 1LA4 504-2CN.0  | 6700         | 950        | 1070     | 875                    | 1440                   | 1320    | 500     | 110     | 165     | 500     | 1200                   | 2675    |
| 1LA4 560-2CN.0  | 8200         | 1060       | 1210     | 925                    | 1560                   | 1400    | 500     | 120     | 165     | 560     | 1310                   | 2865    |
| 1LA4 562-2CN.0  | 8600         | 1060       | 1210     | 925                    | 1560                   | 1400    | 500     | 120     | 165     | 560     | 1310                   | 2865    |
| 1LA4 564-2CN.0  | 9100         | 1060       | 1210     | 925                    | 1560                   | 1400    | 500     | 120     | 165     | 560     | 1310                   | 2865    |
| <b>4-pole</b>   |              |            |          |                        |                        |         |         |         |         |         |                        |         |
| 1LA4 310-4AN.0-Z K96  | 1600         | 610        | 700      | 710                    | 1075                   | 710     | 375     | 90      | 130     | 315     | 860                    | 2010    |
| 1LA4 312-4AN.0-Z K96  | 1750         | 610        | 700      | 710                    | 1075                   | 710     | 375     | 90      | 130     | 315     | 860                    | 2010    |
| 1LA4 314-4AN.0-Z K96  | 2000         | 610        | 700      | 710                    | 1075                   | 900     | 375     | 90      | 130     | 315     | 860                    | 2210    |
| 1LA4 316-4AN.0-Z K96  | 2150         | 610        | 700      | 710                    | 1075                   | 900     | 375     | 90      | 130     | 315     | 860                    | 2210    |
| 1LA4 350-4AN.0-Z K96  | 2450         | 686        | 780      | 740                    | 1155                   | 1000    | 400     | 100     | 165     | 355     | 930                    | 2400    |
| 1LA4 352-4AN.0-Z K96  | 2600         | 686        | 780      | 740                    | 1155                   | 1000    | 400     | 100     | 165     | 355     | 930                    | 2400    |
| 1LA4 354-4AN.0-Z K96  | 2850         | 686        | 780      | 740                    | 1155                   | 1000    | 400     | 100     | 165     | 355     | 930                    | 2400    |
| 1LA4 400-4AN.0-Z K96  | 3450         | 750        | 870      | 775                    | 1225                   | 1120    | 450     | 120     | 165     | 400     | 1010                   | 2570    |
| 1LA4 402-4AN.0-Z K96  | 3650         | 750        | 870      | 775                    | 1225                   | 1120    | 450     | 120     | 165     | 400     | 1010                   | 2570    |

<sup>1)</sup> For currents  $I_{rated} > 315$  A, the dimension changes by + 140 mm (for H = 500), by + 145 mm (for H = 560) or by + 155 mm (for H = 630).

<sup>2)</sup> For currents  $I_{rated} > 315$  A, the dimension changes by + 70 mm.

<sup>3)</sup> The dimensions also apply for the 1MA4 and 1MS4 series.


<sup>4)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.

## Motors for line operation

## Air-cooled motors

## H-compact 1LA4

## Dimension drawings (continued)

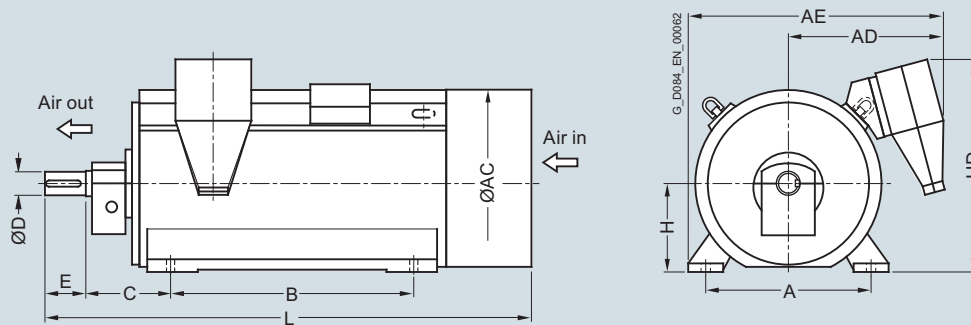

| Motor type  | Weight<br>kg | Dimensions |          |                        |                        |         |         |         |         |         |                        |         |
|---|--------------|------------|----------|------------------------|------------------------|---------|---------|---------|---------|---------|------------------------|---------|
|   |              | A<br>mm    | AC<br>mm | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>2)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, sleeve bearings<sup>3)</sup></b> |              |            |          |                        |                        |         |         |         |         |         |                        |         |
| <b>4-pole</b>   |              |            |          |                        |                        |         |         |         |         |         |                        |         |
| 1LA4 404-4AN.0-Z K96  | 3850         | 750        | 870      | 775                    | 1225                   | 1120    | 450     | 120     | 165     | 400     | 1010                   | 2570    |
| 1LA4 450-4AN.0-Z K96  | 4800         | 850        | 960      | 825                    | 1340                   | 1250    | 475     | 130     | 200     | 450     | 1100                   | 2745    |
| 1LA4 452-4AN.0-Z K96  | 5100         | 850        | 960      | 825                    | 1340                   | 1250    | 475     | 130     | 200     | 450     | 1100                   | 2745    |
| 1LA4 454-4AN.0-Z K96  | 5400         | 850        | 960      | 825                    | 1340                   | 1250    | 475     | 130     | 200     | 450     | 1100                   | 2745    |
| 1LA4 500-4AN.0-Z K96  | 6100         | 950        | 1070     | 875                    | 1440                   | 1320    | 500     | 140     | 200     | 500     | 1200                   | 2870    |
| 1LA4 502-4AN.0-Z K96  | 6500         | 950        | 1070     | 875                    | 1440                   | 1320    | 500     | 140     | 200     | 500     | 1200                   | 2870    |
| 1LA4 504-4AN.0-Z K96  | 7000         | 950        | 1070     | 875                    | 1440                   | 1320    | 500     | 140     | 200     | 500     | 1200                   | 2870    |
| 1LA4 560-4CN.0-Z K96  | 8500         | 1060       | 1210     | 925                    | 1560                   | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3170    |
| 1LA4 562-4CN.0-Z K96  | 9200         | 1060       | 1210     | 925                    | 1560                   | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3170    |
| 1LA4 564-4CN.0-Z K96  | 10000        | 1060       | 1210     | 925                    | 1560                   | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3170    |
| 1LA4 632-4CN.0-Z K96 <sup>4)</sup>  | 12500        | 1120       | 1350     | 945                    | 1560                   | 1600    | 560     | 170     | 240     | 630     | 1410                   | 3450    |
| 1LA4 634-4CN.0-Z K96 <sup>4)</sup>  | 13100        | 1120       | 1350     | 945                    | 1560                   | 1600    | 560     | 170     | 240     | 630     | 1410                   | 3450    |
| 1LA4 636-4CN.0-Z K96 <sup>4)</sup>  | 13900        | 1120       | 1350     | 945                    | 1560                   | 1600    | 560     | 170     | 240     | 630     | 1410                   | 3450    |
| <b>6-pole</b>   |              |            |          |                        |                        |         |         |         |         |         |                        |         |
| 1LA4 450-6AN.0-Z K96  | 4800         | 850        | 960      | 825                    | 1340                   | 1250    | 475     | 130     | 200     | 450     | 1100                   | 2745    |
| 1LA4 452-6AN.0-Z K96  | 5000         | 850        | 960      | 825                    | 1340                   | 1250    | 475     | 130     | 200     | 450     | 1100                   | 2745    |
| 1LA4 454-6AN.0-Z K96  | 5300         | 850        | 960      | 825                    | 1340                   | 1250    | 475     | 130     | 200     | 450     | 1100                   | 2745    |
| 1LA4 500-6CN.0-Z K96  | 6600         | 950        | 1070     | 875                    | 1440                   | 1320    | 530     | 140     | 200     | 500     | 1200                   | 2900    |
| 1LA4 502-6CN.0-Z K96  | 7000         | 950        | 1070     | 875                    | 1440                   | 1320    | 530     | 140     | 200     | 500     | 1200                   | 2900    |
| 1LA4 504-6CN.0-Z K96  | 7500         | 950        | 1070     | 875                    | 1440                   | 1320    | 530     | 140     | 200     | 500     | 1200                   | 2900    |
| 1LA4 560-6CN.0-Z K96  | 8800         | 1060       | 1210     | 925                    | 1560                   | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3170    |
| 1LA4 562-6CN.0-Z K96  | 9500         | 1060       | 1210     | 925                    | 1560                   | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3170    |
| 1LA4 564-6CN.0-Z K96  | 10400        | 1060       | 1210     | 925                    | 1560                   | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3170    |
| 1LA4 632-6CN.0-Z K96  | 13000        | 1120       | 1350     | 945                    | 1560                   | 1600    | 560     | 180     | 240     | 630     | 1410                   | 3450    |
| 1LA4 634-6CN.0-Z K96  | 13700        | 1120       | 1350     | 945                    | 1560                   | 1600    | 560     | 180     | 240     | 630     | 1410                   | 3450    |
| 1LA4 636-6CN.0-Z K96  | 14500        | 1120       | 1350     | 945                    | 1560                   | 1600    | 560     | 180     | 240     | 630     | 1410                   | 3450    |


<sup>1)</sup> For currents  $I_{rated} > 315$  A, the dimension changes by + 140 mm (for H = 500), by + 145 mm (for H = 560) or by + 155 mm (for H = 630).

<sup>2)</sup> For currents  $I_{rated} > 315$  A, the dimension changes by + 70 mm.

<sup>3)</sup> The dimensions also apply for the 1MA4 and 1MS4 series.

<sup>4)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.

## Dimension drawings (continued)

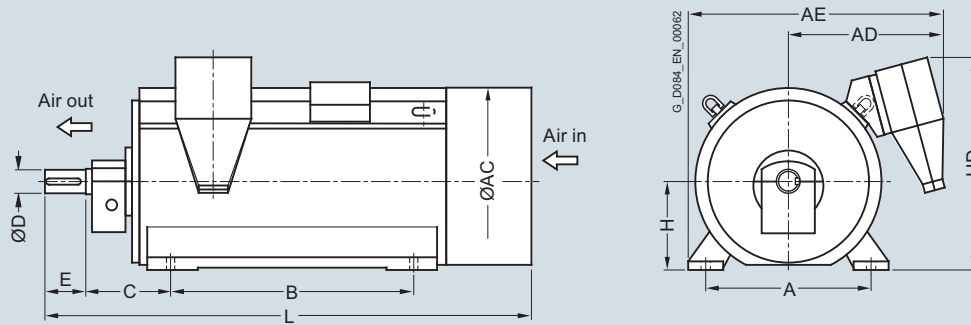

| Motor type  | Weight<br>kg | Dimensions |          |                        |                        |         |         |         |         |         |                        |         |
|---|--------------|------------|----------|------------------------|------------------------|---------|---------|---------|---------|---------|------------------------|---------|
|   |              | A<br>mm    | AC<br>mm | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>2)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, sleeve bearings<sup>3)</sup></b> |              |            |          |                        |                        |         |         |         |         |         |                        |         |
| 8-pole  |              |            |          |                        |                        |         |         |         |         |         |                        |         |
| 1LA4 450-8AN.0-Z K96  | 4700         | 850        | 960      | 825                    | 1340                   | 1250    | 475     | 130     | 200     | 450     | 1100                   | 2745    |
| 1LA4 452-8AN.0-Z K96  | 5000         | 850        | 960      | 825                    | 1340                   | 1250    | 475     | 130     | 200     | 450     | 1100                   | 2745    |
| 1LA4 454-8AN.0-Z K96  | 5300         | 850        | 960      | 825                    | 1340                   | 1250    | 475     | 130     | 200     | 450     | 1100                   | 2745    |
| 1LA4 500-8CN.0-Z K96  | 6600         | 950        | 1070     | 875                    | 1440                   | 1320    | 530     | 140     | 200     | 500     | 1200                   | 2900    |
| 1LA4 502-8CN.0-Z K96  | 6900         | 950        | 1070     | 875                    | 1440                   | 1320    | 530     | 140     | 200     | 500     | 1200                   | 2900    |
| 1LA4 504-8CN.0-Z K96  | 7400         | 950        | 1070     | 875                    | 1440                   | 1320    | 530     | 140     | 200     | 500     | 1200                   | 2900    |
| 1LA4 560-8CN.0-Z K96  | 8800         | 1060       | 1210     | 925                    | 1560                   | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3170    |
| 1LA4 562-8CN.0-Z K96  | 9500         | 1060       | 1210     | 925                    | 1560                   | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3170    |
| 1LA4 564-8CN.0-Z K96  | 10300        | 1060       | 1210     | 925                    | 1560                   | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3170    |
| 1LA4 634-8CN.0-Z K96  | 13600        | 1120       | 1350     | 945                    | 1560                   | 1600    | 560     | 180     | 240     | 630     | 1410                   | 3450    |
| 1LA4 636-8CN.0-Z K96  | 14400        | 1120       | 1350     | 945                    | 1560                   | 1600    | 560     | 180     | 240     | 630     | 1410                   | 3450    |
| 10-pole   |              |            |          |                        |                        |         |         |         |         |         |                        |         |
| 1LA4 450-3AN.0-Z K96  | 4700         | 850        | 960      | 825                    | 1340                   | 1250    | 475     | 130     | 200     | 450     | 1100                   | 2745    |
| 1LA4 452-3AN.0-Z K96  | 5000         | 850        | 960      | 825                    | 1340                   | 1250    | 475     | 130     | 200     | 450     | 1100                   | 2745    |
| 1LA4 454-3AN.0-Z K96  | 5300         | 850        | 960      | 825                    | 1340                   | 1250    | 475     | 130     | 200     | 450     | 1100                   | 2745    |
| 1LA4 500-3CN.0-Z K96  | 6600         | 950        | 1070     | 875                    | 1440                   | 1320    | 530     | 140     | 200     | 500     | 1200                   | 2900    |
| 1LA4 502-3CN.0-Z K96  | 6900         | 950        | 1070     | 875                    | 1440                   | 1320    | 530     | 140     | 200     | 500     | 1200                   | 2900    |
| 1LA4 504-3CN.0-Z K96  | 7400         | 950        | 1070     | 875                    | 1440                   | 1320    | 530     | 140     | 200     | 500     | 1200                   | 2900    |
| 1LA4 560-3CN.0-Z K96  | 8800         | 1060       | 1210     | 925                    | 1560                   | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3170    |
| 1LA4 562-3CN.0-Z K96  | 9500         | 1060       | 1210     | 925                    | 1560                   | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3170    |
| 1LA4 564-3CN.0-Z K96  | 10300        | 1060       | 1210     | 925                    | 1560                   | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3170    |
| 12-pole   |              |            |          |                        |                        |         |         |         |         |         |                        |         |
| 1LA4 450-5CN.0-Z K96  | 4700         | 850        | 960      | 825                    | 1340                   | 1250    | 475     | 130     | 200     | 450     | 1100                   | 2745    |
| 1LA4 452-5CN.0-Z K96  | 5000         | 850        | 960      | 825                    | 1340                   | 1250    | 475     | 130     | 200     | 450     | 1100                   | 2745    |
| 1LA4 454-5CN.0-Z K96  | 5300         | 850        | 960      | 825                    | 1340                   | 1250    | 475     | 130     | 200     | 450     | 1100                   | 2745    |
| 1LA4 500-5CN.0-Z K96  | 6600         | 950        | 1070     | 875                    | 1440                   | 1320    | 530     | 140     | 200     | 500     | 1200                   | 2900    |
| 1LA4 502-5CN.0-Z K96  | 6900         | 950        | 1070     | 875                    | 1440                   | 1320    | 530     | 140     | 200     | 500     | 1200                   | 2900    |
| 1LA4 504-5CN.0-Z K96  | 7400         | 950        | 1070     | 875                    | 1440                   | 1320    | 530     | 140     | 200     | 500     | 1200                   | 2900    |
| 1LA4 560-5CN.0-Z K96  | 8800         | 1060       | 1210     | 925                    | 1560                   | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3170    |
| 1LA4 562-5CN.0-Z K96  | 9500         | 1060       | 1210     | 925                    | 1560                   | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3170    |
| 1LA4 564-5CN.0-Z K96  | 10300        | 1060       | 1210     | 925                    | 1560                   | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3170    |

## Note:

Higher pole numbers are available on request.

<sup>1)</sup> For currents  $I_{rated} > 315$  A, the dimension changes by + 140 mm (for H = 500), by + 145 mm (for H = 560) or by + 155 mm (for H = 630).

<sup>2)</sup> For currents  $I_{rated} > 315$  A, the dimension changes by + 70 mm.


<sup>3)</sup> The dimensions also apply for the 1MA4 and 1MS4 series.

## Motors for line operation

### Air-cooled motors

#### H-compact 1LA4

#### Dimension drawings

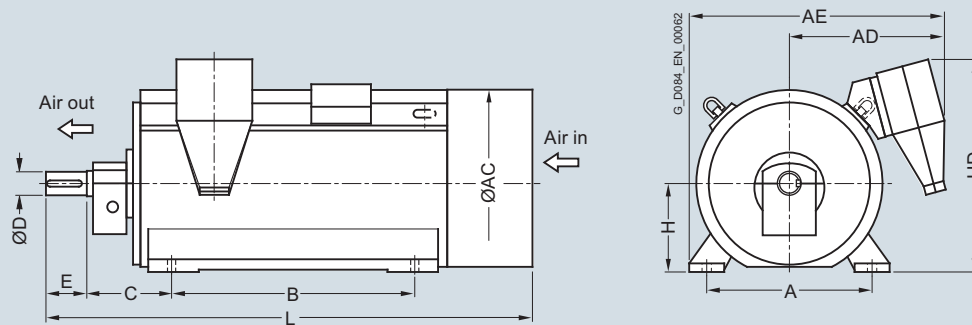


| Motor type   | Weight<br>kg | Dimensions |          |          |          |         |         |         |         |         |          |         |
|--|--------------|------------|----------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AC<br>mm | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>9 ... 11 kV, IM B3 type of construction, sleeve bearings<sup>1)</sup></b> |              |            |          |          |          |         |         |         |         |         |          |         |
| <b>2-pole</b>  |              |            |          |          |          |         |         |         |         |         |          |         |
| 1LA4 400-2AN.0   | 3150         | 750        | 870      | 775      | 1225     | 1120    | 254     | 85      | 130     | 400     | 1010     | 2095    |
| 1LA4 401-2AN.0   | 3300         | 750        | 870      | 775      | 1225     | 1120    | 254     | 85      | 130     | 400     | 1010     | 2095    |
| 1LA4 403-2AN.0   | 3550         | 750        | 870      | 775      | 1225     | 1120    | 254     | 85      | 130     | 400     | 1010     | 2095    |
| 1LA4 450-2AN.0-Z K96 <sup>2)</sup>   | 4600         | 850        | 960      | 970      | 1485     | 1250    | 475     | 95      | 130     | 450     | 1170     | 2515    |
| 1LA4 452-2AN.0-Z K96 <sup>2)</sup>   | 4900         | 850        | 960      | 970      | 1485     | 1250    | 475     | 95      | 130     | 450     | 1170     | 2515    |
| 1LA4 454-2AN.0-Z K96 <sup>2)</sup>   | 5200         | 850        | 960      | 970      | 1485     | 1250    | 475     | 95      | 130     | 450     | 1170     | 2515    |
| 1LA4 500-2CN.0   | 6000         | 950        | 1070     | 1015     | 1580     | 1320    | 500     | 110     | 165     | 500     | 1270     | 2675    |
| 1LA4 502-2CN.0   | 6300         | 950        | 1070     | 1015     | 1580     | 1320    | 500     | 110     | 165     | 500     | 1270     | 2675    |
| 1LA4 504-2CN.0   | 6700         | 950        | 1070     | 1015     | 1580     | 1320    | 500     | 110     | 165     | 500     | 1270     | 2675    |
| 1LA4 560-2CN.0   | 8100         | 1060       | 1210     | 1070     | 1705     | 1400    | 500     | 120     | 165     | 560     | 1380     | 2865    |
| 1LA4 562-2CN.0   | 8600         | 1060       | 1210     | 1070     | 1705     | 1400    | 500     | 120     | 165     | 560     | 1380     | 2865    |
| 1LA4 564-2CN.0   | 9100         | 1060       | 1210     | 1070     | 1705     | 1400    | 500     | 120     | 165     | 560     | 1380     | 2865    |
| <b>4-pole</b>  |              |            |          |          |          |         |         |         |         |         |          |         |
| 1LA4 450-4AN.0-Z K96   | 4700         | 850        | 960      | 970      | 1485     | 1250    | 475     | 130     | 200     | 450     | 1170     | 2745    |
| 1LA4 452-4AN.0-Z K96   | 5000         | 850        | 960      | 970      | 1485     | 1250    | 475     | 130     | 200     | 450     | 1170     | 2745    |
| 1LA4 454-4AN.0-Z K96   | 5300         | 850        | 960      | 970      | 1485     | 1250    | 475     | 130     | 200     | 450     | 1170     | 2745    |
| 1LA4 500-4AN.0-Z K96   | 6100         | 950        | 1070     | 1015     | 1580     | 1320    | 500     | 140     | 200     | 500     | 1270     | 2870    |
| 1LA4 502-4AN.0-Z K96   | 6400         | 950        | 1070     | 1015     | 1580     | 1320    | 500     | 140     | 200     | 500     | 1270     | 2870    |
| 1LA4 504-4AN.0-Z K96   | 6900         | 950        | 1070     | 1015     | 1580     | 1320    | 500     | 140     | 200     | 500     | 1270     | 2870    |
| 1LA4 560-4CN.0-Z K96   | 8400         | 1060       | 1210     | 1070     | 1705     | 1400    | 560     | 160     | 240     | 560     | 1380     | 3170    |
| 1LA4 562-4CN.0-Z K96   | 9100         | 1060       | 1210     | 1070     | 1705     | 1400    | 560     | 160     | 240     | 560     | 1380     | 3170    |
| 1LA4 564-4CN.0-Z K96   | 9800         | 1060       | 1210     | 1070     | 1705     | 1400    | 560     | 160     | 240     | 560     | 1380     | 3170    |
| 1LA4 634-4CN.0-Z K96 <sup>2)</sup>   | 13100        | 1120       | 1350     | 945      | 1560     | 1600    | 560     | 170     | 240     | 630     | 1410     | 3450    |
| 1LA4 636-4CN.0-Z K96 <sup>2)</sup>   | 13900        | 1120       | 1350     | 945      | 1560     | 1600    | 560     | 170     | 240     | 630     | 1410     | 3450    |

<sup>1)</sup> The dimensions also apply for the 1MA4 and 1MS4 series.

<sup>2)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.

## Dimension drawings (continued)

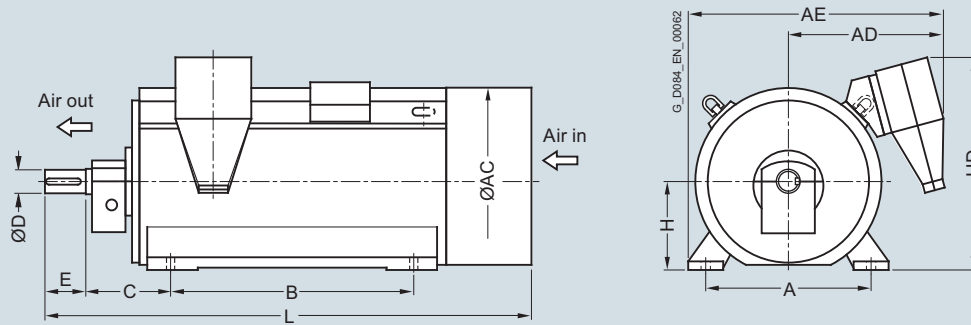

| Motor type   | Weight<br>kg | Dimensions |          |          |          |         |         |         |         |         |          |         |
|--|--------------|------------|----------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AC<br>mm | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>9 ... 11 kV, IM B3 type of construction, sleeve bearings<sup>1)</sup></b> |              |            |          |          |          |         |         |         |         |         |          |         |
| 6-pole   |              |            |          |          |          |         |         |         |         |         |          |         |
| 1LA4 450-6AN.0-Z K96   | 4700         | 850        | 960      | 970      | 1485     | 1250    | 475     | 130     | 200     | 450     | 1170     | 2745    |
| 1LA4 452-6AN.0-Z K96   | 5000         | 850        | 960      | 970      | 1485     | 1250    | 475     | 130     | 200     | 450     | 1170     | 2745    |
| 1LA4 454-6AN.0-Z K96   | 5300         | 850        | 960      | 970      | 1485     | 1250    | 475     | 130     | 200     | 450     | 1170     | 2745    |
| 1LA4 500-6CN.0-Z K96   | 6500         | 950        | 1070     | 1015     | 1580     | 1320    | 530     | 140     | 200     | 500     | 1270     | 2900    |
| 1LA4 502-6CN.0-Z K96   | 7000         | 950        | 1070     | 1015     | 1580     | 1320    | 530     | 140     | 200     | 500     | 1270     | 2900    |
| 1LA4 504-6CN.0-Z K96   | 7400         | 950        | 1070     | 1015     | 1580     | 1320    | 530     | 140     | 200     | 500     | 1270     | 2900    |
| 1LA4 560-6CN.0-Z K96   | 8800         | 1060       | 1210     | 1070     | 1705     | 1400    | 560     | 160     | 240     | 560     | 1380     | 3170    |
| 1LA4 562-6CN.0-Z K96   | 9400         | 1060       | 1210     | 1070     | 1705     | 1400    | 560     | 160     | 240     | 560     | 1380     | 3170    |
| 1LA4 564-6CN.0-Z K96   | 10300        | 1060       | 1210     | 1070     | 1705     | 1400    | 560     | 160     | 240     | 560     | 1380     | 3170    |
| 1LA4 634-6CN.0-Z K96   | 13700        | 1120       | 1350     | 945      | 1560     | 1600    | 560     | 180     | 240     | 630     | 1410     | 3450    |
| 1LA4 636-6CN.0-Z K96   | 14500        | 1120       | 1350     | 945      | 1560     | 1600    | 560     | 180     | 240     | 630     | 1410     | 3450    |
| 8-pole   |              |            |          |          |          |         |         |         |         |         |          |         |
| 1LA4 450-8AN.0-Z K96   | 4700         | 850        | 960      | 970      | 1485     | 1250    | 475     | 130     | 200     | 450     | 1170     | 2745    |
| 1LA4 452-8AN.0-Z K96   | 4900         | 850        | 960      | 970      | 1485     | 1250    | 475     | 130     | 200     | 450     | 1170     | 2745    |
| 1LA4 454-8AN.0-Z K96   | 5300         | 850        | 960      | 970      | 1485     | 1250    | 475     | 130     | 200     | 450     | 1170     | 2745    |
| 1LA4 500-8CN.0-Z K96   | 6500         | 950        | 1070     | 1015     | 1580     | 1320    | 530     | 140     | 200     | 500     | 1270     | 2900    |
| 1LA4 502-8CN.0-Z K96   | 6900         | 950        | 1070     | 1015     | 1580     | 1320    | 530     | 140     | 200     | 500     | 1270     | 2900    |
| 1LA4 504-8CN.0-Z K96   | 7400         | 950        | 1070     | 1015     | 1580     | 1320    | 530     | 140     | 200     | 500     | 1270     | 2900    |
| 1LA4 560-8CN.0-Z K96   | 8700         | 1060       | 1210     | 1070     | 1705     | 1400    | 560     | 160     | 240     | 560     | 1380     | 3170    |
| 1LA4 562-8CN.0-Z K96   | 9300         | 1060       | 1210     | 1070     | 1705     | 1400    | 560     | 160     | 240     | 560     | 1380     | 3170    |
| 1LA4 564-8CN.0-Z K96   | 10300        | 1060       | 1210     | 1070     | 1705     | 1400    | 560     | 160     | 240     | 560     | 1380     | 3170    |
| 1LA4 634-8CN.0-Z K96   | 13600        | 1120       | 1350     | 945      | 1560     | 1600    | 560     | 180     | 240     | 630     | 1410     | 3450    |
| 1LA4 636-8CN.0-Z K96   | 14400        | 1120       | 1350     | 945      | 1560     | 1600    | 560     | 180     | 240     | 630     | 1410     | 3450    |
| 10-pole  |              |            |          |          |          |         |         |         |         |         |          |         |
| 1LA4 500-3CN.0-Z K96   | 6500         | 950        | 1070     | 1015     | 1580     | 1320    | 530     | 140     | 200     | 500     | 1270     | 2900    |
| 1LA4 502-3CN.0-Z K96   | 6900         | 950        | 1070     | 1015     | 1580     | 1320    | 530     | 140     | 200     | 500     | 1270     | 2900    |
| 1LA4 504-3CN.0-Z K96   | 7400         | 950        | 1070     | 1015     | 1580     | 1320    | 530     | 140     | 200     | 500     | 1270     | 2900    |
| 1LA4 560-3CN.0-Z K96   | 8700         | 1060       | 1210     | 1070     | 1705     | 1400    | 560     | 160     | 240     | 560     | 1380     | 3170    |
| 1LA4 562-3CN.0-Z K96   | 9300         | 1060       | 1210     | 1070     | 1705     | 1400    | 560     | 160     | 240     | 560     | 1380     | 3170    |
| 1LA4 564-3CN.0-Z K96   | 10300        | 1060       | 1210     | 1070     | 1705     | 1400    | 560     | 160     | 240     | 560     | 1380     | 3170    |
| 12-pole  |              |            |          |          |          |         |         |         |         |         |          |         |
| 1LA4 560-5CN.0-Z K96   | 8700         | 1060       | 1210     | 1070     | 1705     | 1400    | 560     | 160     | 240     | 560     | 1380     | 3170    |
| 1LA4 562-5CN.0-Z K96   | 9300         | 1060       | 1210     | 1070     | 1705     | 1400    | 560     | 160     | 240     | 560     | 1380     | 3170    |
| 1LA4 564-5CN.0-Z K96   | 10300        | 1060       | 1210     | 1070     | 1705     | 1400    | 560     | 160     | 240     | 560     | 1380     | 3170    |

Note: Higher pole numbers are available on request.


<sup>1)</sup> The dimensions also apply for the 1MA4 and 1MS4 series.

## Motors for line operation

### Air-cooled motors

#### H-compact 1LA4

#### Dimension drawings

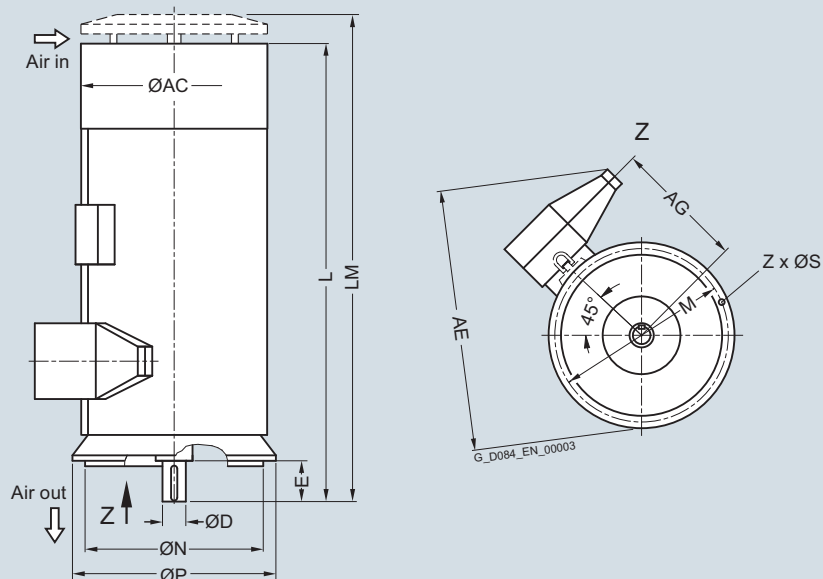

| Motor type | Weight<br>kg | Dimensions |                        |                        |         |         |         |          |         |         |         |         |               |
|------------|--------------|------------|------------------------|------------------------|---------|---------|---------|----------|---------|---------|---------|---------|---------------|
|            |              | AC<br>mm   | AG <sup>1)</sup><br>mm | AE <sup>2)</sup><br>mm | D<br>mm | E<br>mm | L<br>mm | LM<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |

#### Up to 6.6 kV, IM V1 type of construction, anti-friction bearings<sup>3)</sup>

##### 2-pole

|                              |      |     |     |      |    |     |      |      |      |     |     |    |   |
|------------------------------|------|-----|-----|------|----|-----|------|------|------|-----|-----|----|---|
| 1LA4 310-2AN..               | 1600 | 700 | 620 | 1225 | 70 | 105 | 1590 | 1720 | 800  | 680 | 740 | 22 | 8 |
| 1LA4 312-2AN..               | 1600 | 700 | 620 | 1225 | 70 | 105 | 1590 | 1720 | 800  | 680 | 740 | 22 | 8 |
| 1LA4 314-2AN..               | 1850 | 700 | 620 | 1225 | 70 | 105 | 1790 | 1920 | 800  | 680 | 740 | 22 | 8 |
| 1LA4 316-2AN..               | 2000 | 700 | 620 | 1225 | 70 | 105 | 1790 | 1920 | 800  | 680 | 740 | 22 | 8 |
| 1LA4 350-2AN.. <sup>4)</sup> | 2350 | 780 | 660 | 1310 | 75 | 105 | 1930 | 2070 | 900  | 780 | 840 | 22 | 8 |
| 1LA4 352-2AN.. <sup>4)</sup> | 2450 | 780 | 660 | 1310 | 75 | 105 | 1930 | 2070 | 900  | 780 | 840 | 22 | 8 |
| 1LA4 354-2AN.. <sup>4)</sup> | 2550 | 780 | 660 | 1310 | 75 | 105 | 1930 | 2070 | 900  | 780 | 840 | 22 | 8 |
| 1LA4 400-2AN.. <sup>4)</sup> | 3100 | 870 | 710 | 1400 | 85 | 130 | 2095 | 2245 | 1000 | 880 | 940 | 22 | 8 |
| 1LA4 402-2AN.. <sup>4)</sup> | 3300 | 870 | 710 | 1400 | 85 | 130 | 2095 | 2245 | 1000 | 880 | 940 | 22 | 8 |
| 1LA4 404-2AN.. <sup>4)</sup> | 3550 | 870 | 710 | 1400 | 85 | 130 | 2095 | 2245 | 1000 | 880 | 940 | 22 | 8 |

##### 4-pole

|                |      |     |     |      |     |     |      |      |      |      |      |    |   |
|----------------|------|-----|-----|------|-----|-----|------|------|------|------|------|----|---|
| 1LA4 310-4AN.. | 1500 | 700 | 620 | 1225 | 90  | 130 | 1610 | 1740 | 800  | 680  | 740  | 22 | 8 |
| 1LA4 312-4AN.. | 1650 | 700 | 620 | 1225 | 90  | 130 | 1610 | 1740 | 800  | 680  | 740  | 22 | 8 |
| 1LA4 314-4AN.. | 1900 | 700 | 620 | 1225 | 90  | 130 | 1810 | 1940 | 800  | 680  | 740  | 22 | 8 |
| 1LA4 316-4AN.. | 2050 | 700 | 620 | 1225 | 90  | 130 | 1810 | 1940 | 800  | 680  | 740  | 22 | 8 |
| 1LA4 350-4AN.. | 2400 | 780 | 660 | 1310 | 100 | 165 | 1985 | 2125 | 900  | 780  | 840  | 22 | 8 |
| 1LA4 352-4AN.. | 2600 | 780 | 660 | 1310 | 100 | 165 | 1985 | 2125 | 900  | 780  | 840  | 22 | 8 |
| 1LA4 354-4AN.. | 2800 | 780 | 660 | 1310 | 100 | 165 | 1985 | 2125 | 900  | 780  | 840  | 22 | 8 |
| 1LA4 400-4AN.. | 3400 | 870 | 710 | 1400 | 120 | 165 | 2125 | 2275 | 1000 | 880  | 940  | 22 | 8 |
| 1LA4 402-4AN.. | 3600 | 870 | 710 | 1400 | 120 | 165 | 2125 | 2275 | 1000 | 880  | 940  | 22 | 8 |
| 1LA4 404-4AN.. | 3800 | 870 | 710 | 1400 | 120 | 165 | 2125 | 2275 | 1000 | 880  | 940  | 22 | 8 |
| 1LA4 450-4AN.. | 4700 | 960 | 770 | 1550 | 130 | 200 | 2390 | 2550 | 1150 | 1000 | 1080 | 26 | 8 |


<sup>1)</sup> For currents  $I_{rated} > 315$  A, the dimension changes by + 45 mm.

<sup>2)</sup> For currents  $I_{rated} > 315$  A, the dimension changes by + 185 mm (for AC = 1070), by + 180 mm (for AC = 1210) or by + 130 mm (for AC = 1350).

<sup>3)</sup> The dimensions also apply for the 1MA4 and 1MS4 series.

<sup>4)</sup> Only in the 50 Hz version.

## Dimension drawings (continued)

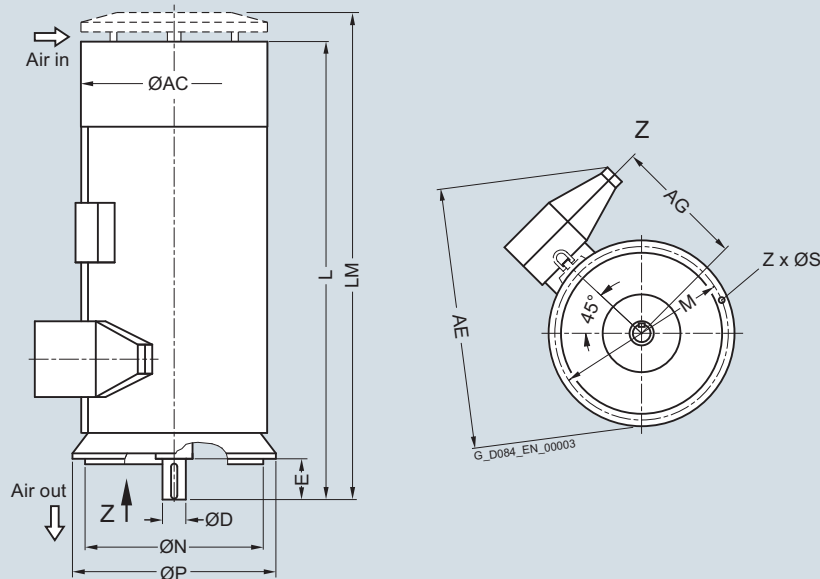

| Motor type | Weight<br>kg | Dimensions |                  |                  |   |   |   |    |   |   |   |   |   |
|------------|--------------|------------|------------------|------------------|---|---|---|----|---|---|---|---|---|
|            |              | AC         | AG <sup>1)</sup> | AE <sup>2)</sup> | D | E | L | LM | P | N | M | S | Z |

Up to 6.6 kV, IM V1 type of construction, anti-friction bearings<sup>3)</sup>

| 4-pole         |      |      |     |      |     |     |      |      |      |      |      |    |    |
|----------------|------|------|-----|------|-----|-----|------|------|------|------|------|----|----|
| 1LA4 452-4AN.. | 5000 | 960  | 770 | 1550 | 130 | 200 | 2390 | 2550 | 1150 | 1000 | 1080 | 26 | 8  |
| 1LA4 454-4AN.. | 5200 | 960  | 770 | 1550 | 130 | 200 | 2390 | 2550 | 1150 | 1000 | 1080 | 26 | 8  |
| 1LA4 500-4AN.. | 5900 | 1070 | 840 | 1660 | 140 | 200 | 2525 | 2695 | 1250 | 1120 | 1180 | 26 | 16 |
| 1LA4 502-4AN.. | 6300 | 1070 | 840 | 1660 | 140 | 200 | 2525 | 2695 | 1250 | 1120 | 1180 | 26 | 16 |
| 1LA4 504-4AN.. | 6800 | 1070 | 840 | 1660 | 140 | 200 | 2525 | 2695 | 1250 | 1120 | 1180 | 26 | 16 |
| 1LA4 560-4CN.. | 8300 | 1210 | 910 | 1800 | 160 | 240 | 2775 | 2955 | 1400 | 1250 | 1320 | 26 | 16 |
| 1LA4 562-4CN.. | 9000 | 1210 | 910 | 1800 | 160 | 240 | 2775 | 2955 | 1400 | 1250 | 1320 | 26 | 16 |
| 1LA4 564-4CN.. | 9700 | 1210 | 910 | 1800 | 160 | 240 | 2775 | 2955 | 1400 | 1250 | 1320 | 26 | 16 |
| 6-pole         |      |      |     |      |     |     |      |      |      |      |      |    |    |
| 1LA4 314-6AN.. | 1950 | 700  | 620 | 1225 | 90  | 130 | 1810 | 1940 | 800  | 680  | 740  | 22 | 8  |
| 1LA4 316-6AN.. | 2150 | 700  | 620 | 1225 | 90  | 130 | 1810 | 1940 | 800  | 680  | 740  | 22 | 8  |
| 1LA4 350-6AN.. | 2450 | 780  | 660 | 1310 | 100 | 165 | 1985 | 2125 | 900  | 780  | 840  | 22 | 8  |
| 1LA4 352-6AN.. | 2650 | 780  | 660 | 1310 | 100 | 165 | 1985 | 2125 | 900  | 780  | 840  | 22 | 8  |
| 1LA4 354-6AN.. | 2900 | 780  | 660 | 1310 | 100 | 165 | 1985 | 2125 | 900  | 780  | 840  | 22 | 8  |
| 1LA4 400-6AN.. | 3500 | 870  | 710 | 1400 | 120 | 165 | 2125 | 2275 | 1000 | 880  | 940  | 22 | 8  |
| 1LA4 402-6AN.. | 3750 | 870  | 710 | 1400 | 120 | 165 | 2125 | 2275 | 1000 | 880  | 940  | 22 | 8  |
| 1LA4 404-6AN.. | 4000 | 870  | 710 | 1400 | 120 | 165 | 2125 | 2275 | 1000 | 880  | 940  | 22 | 8  |
| 1LA4 450-6AN.. | 4600 | 960  | 770 | 1550 | 130 | 200 | 2390 | 2550 | 1150 | 1000 | 1080 | 26 | 8  |
| 1LA4 452-6AN.. | 4900 | 960  | 770 | 1550 | 130 | 200 | 2390 | 2550 | 1150 | 1000 | 1080 | 26 | 8  |
| 1LA4 454-6AN.. | 5200 | 960  | 770 | 1550 | 130 | 200 | 2390 | 2550 | 1150 | 1000 | 1080 | 26 | 8  |
| 1LA4 500-6CN.. | 6400 | 1070 | 840 | 1660 | 140 | 200 | 2525 | 2695 | 1250 | 1120 | 1180 | 26 | 16 |
| 1LA4 502-6CN.. | 6800 | 1070 | 840 | 1660 | 140 | 200 | 2525 | 2695 | 1250 | 1120 | 1180 | 26 | 16 |
| 1LA4 504-6CN.. | 7300 | 1070 | 840 | 1660 | 140 | 200 | 2525 | 2695 | 1250 | 1120 | 1180 | 26 | 16 |
| 1LA4 560-6CN.. | 8500 | 1210 | 910 | 1800 | 160 | 240 | 2775 | 2955 | 1400 | 1250 | 1320 | 26 | 16 |
| 1LA4 562-6CN.. | 9300 | 1210 | 910 | 1800 | 160 | 240 | 2775 | 2955 | 1400 | 1250 | 1320 | 26 | 16 |

<sup>1)</sup> For currents  $I_{rated} > 315$  A, the dimension changes by + 45 mm.

<sup>2)</sup> For currents  $I_{rated} > 315$  A, the dimension changes by + 185 mm (for AC = 1070), by + 180 mm (for AC = 1210) or by + 130 mm (for AC = 1350).


<sup>3)</sup> The dimensions also apply for the 1MA4 and 1MS4 series.

## Motors for line operation

### Air-cooled motors

#### H-compact 1LA4

#### Dimension drawings (continued)

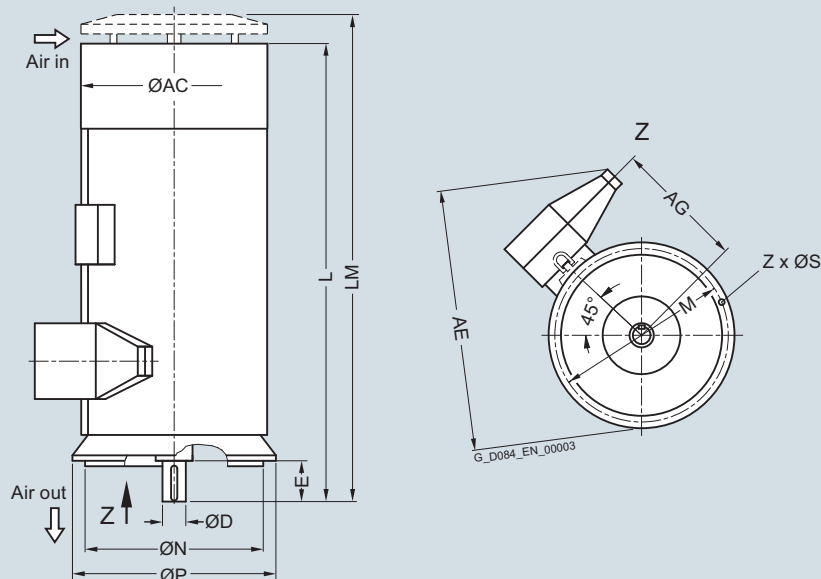

| Motor type | Weight<br>kg | Dimensions |                        |                        |         |         |         |          |         |         |         |         |               |
|------------|--------------|------------|------------------------|------------------------|---------|---------|---------|----------|---------|---------|---------|---------|---------------|
|            |              | AC<br>mm   | AG <sup>1)</sup><br>mm | AE <sup>2)</sup><br>mm | D<br>mm | E<br>mm | L<br>mm | LM<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |

#### Up to 6.6 kV, IM V1 type of construction, anti-friction bearings<sup>3)</sup>

##### 6-pole

|                |       |      |                     |      |     |     |      |      |      |      |      |    |    |
|----------------|-------|------|---------------------|------|-----|-----|------|------|------|------|------|----|----|
| 1LA4 564-6CN.. | 10100 | 1210 | 910                 | 1800 | 160 | 240 | 2775 | 2955 | 1400 | 1250 | 1320 | 26 | 16 |
| 1LA4 632-6CN.. | 12700 | 1350 | O. R. <sup>4)</sup> | 1820 | 180 | 240 | 3115 | 3305 | 1400 | 1250 | 1320 | 26 | 16 |
| 1LA4 634-6CN.. | 13400 | 1350 | O. R. <sup>4)</sup> | 1820 | 180 | 240 | 3115 | 3305 | 1400 | 1250 | 1320 | 26 | 16 |
| 1LA4 636-6CN.. | 14100 | 1350 | O. R. <sup>4)</sup> | 1820 | 180 | 240 | 3115 | 3305 | 1400 | 1250 | 1320 | 26 | 16 |

##### 8-pole

|                |       |      |                     |      |     |     |      |      |      |      |      |    |    |
|----------------|-------|------|---------------------|------|-----|-----|------|------|------|------|------|----|----|
| 1LA4 350-8AN.. | 2450  | 780  | 660                 | 1310 | 100 | 165 | 1985 | 2125 | 900  | 780  | 840  | 22 | 8  |
| 1LA4 352-8AN.. | 2650  | 780  | 660                 | 1310 | 100 | 165 | 1985 | 2125 | 900  | 780  | 840  | 22 | 8  |
| 1LA4 354-8AN.. | 2850  | 780  | 660                 | 1310 | 100 | 165 | 1985 | 2125 | 900  | 780  | 840  | 22 | 8  |
| 1LA4 400-8AN.. | 3450  | 870  | 710                 | 1400 | 120 | 165 | 2125 | 2275 | 1000 | 880  | 940  | 22 | 8  |
| 1LA4 402-8AN.. | 3700  | 870  | 710                 | 1400 | 120 | 165 | 2125 | 2275 | 1000 | 880  | 940  | 22 | 8  |
| 1LA4 404-8AN.. | 3950  | 870  | 710                 | 1400 | 120 | 165 | 2125 | 2275 | 1000 | 880  | 940  | 22 | 8  |
| 1LA4 450-8AN.. | 4600  | 960  | 770                 | 1550 | 130 | 200 | 2390 | 2550 | 1150 | 1000 | 1080 | 26 | 8  |
| 1LA4 452-8AN.. | 4900  | 960  | 770                 | 1550 | 130 | 200 | 2390 | 2550 | 1150 | 1000 | 1080 | 26 | 8  |
| 1LA4 454-8AN.. | 5200  | 960  | 770                 | 1550 | 130 | 200 | 2390 | 2550 | 1150 | 1000 | 1080 | 26 | 8  |
| 1LA4 500-8CN.. | 6400  | 1070 | 840                 | 1660 | 140 | 200 | 2525 | 2695 | 1250 | 1120 | 1180 | 26 | 16 |
| 1LA4 502-8CN.. | 6800  | 1070 | 840                 | 1660 | 140 | 200 | 2525 | 2695 | 1250 | 1120 | 1180 | 26 | 16 |
| 1LA4 504-8CN.. | 7200  | 1070 | 840                 | 1660 | 140 | 200 | 2525 | 2695 | 1250 | 1120 | 1180 | 26 | 16 |
| 1LA4 560-8CN.. | 8500  | 1210 | 910                 | 1800 | 160 | 240 | 2775 | 2955 | 1400 | 1250 | 1320 | 26 | 16 |
| 1LA4 562-8CN.. | 9200  | 1210 | 910                 | 1800 | 160 | 240 | 2775 | 2955 | 1400 | 1250 | 1320 | 26 | 16 |
| 1LA4 564-8CN.. | 10000 | 1210 | 910                 | 1800 | 160 | 240 | 2775 | 2955 | 1400 | 1250 | 1320 | 26 | 16 |
| 1LA4 632-8CN.. | 12500 | 1350 | O. R. <sup>4)</sup> | 1820 | 180 | 240 | 3115 | 3305 | 1400 | 1250 | 1320 | 26 | 16 |
| 1LA4 634-8CN.. | 13300 | 1350 | O. R. <sup>4)</sup> | 1820 | 180 | 240 | 3115 | 3305 | 1400 | 1250 | 1320 | 26 | 16 |
| 1LA4 636-8CN.. | 14000 | 1350 | O. R. <sup>4)</sup> | 1820 | 180 | 240 | 3115 | 3305 | 1400 | 1250 | 1320 | 26 | 16 |

<sup>1)</sup> For currents  $I_{rated} > 315$  A, the dimension changes by + 45 mm.


<sup>2)</sup> For currents  $I_{rated} > 315$  A, the dimension changes by + 185 mm (for AC = 1070), by + 180 mm (for AC = 1210) or by + 130 mm (for AC = 1350).

<sup>3)</sup> The dimensions also apply for the 1MA4 and 1MS4 series.

<sup>4)</sup> On request.



## Dimension drawings (continued)

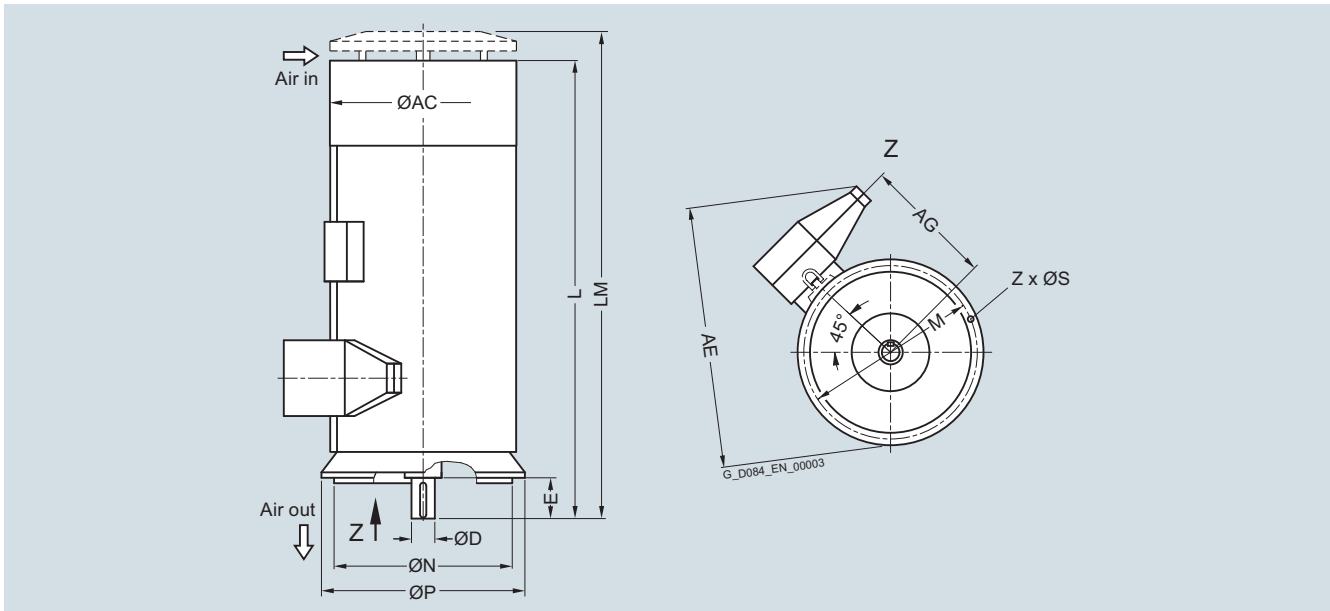

| Motor type   | Weight<br>kg | Dimensions |                        |                        |         |         |         |          |         |         |         |         |               |
|--|--------------|------------|------------------------|------------------------|---------|---------|---------|----------|---------|---------|---------|---------|---------------|
|  |              | AC<br>mm   | AG <sup>1)</sup><br>mm | AE <sup>2)</sup><br>mm | D<br>mm | E<br>mm | L<br>mm | LM<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |
| <b>Up to 6.6 kV, IM V1 type of construction, anti-friction bearings<sup>3)</sup></b> |              |            |                        |                        |         |         |         |          |         |         |         |         |               |
| <b>10-pole</b>   |              |            |                        |                        |         |         |         |          |         |         |         |         |               |
| 1LA4 450-3AN..   | 4600         | 960        | 770                    | 1550                   | 130     | 200     | 2390    | 2550     | 1150    | 1000    | 1080    | 26      | 8             |
| 1LA4 452-3AN..   | 4900         | 960        | 770                    | 1550                   | 130     | 200     | 2390    | 2550     | 1150    | 1000    | 1080    | 26      | 8             |
| 1LA4 454-3AN..   | 5200         | 960        | 770                    | 1550                   | 130     | 200     | 2390    | 2550     | 1150    | 1000    | 1080    | 26      | 8             |
| 1LA4 500-3CN..   | 6400         | 1070       | 840                    | 1660                   | 140     | 200     | 2525    | 2695     | 1250    | 1120    | 1180    | 26      | 16            |
| 1LA4 502-3CN..   | 6800         | 1070       | 840                    | 1660                   | 140     | 200     | 2525    | 2695     | 1250    | 1120    | 1180    | 26      | 16            |
| 1LA4 504-3CN..   | 7200         | 1070       | 840                    | 1660                   | 140     | 200     | 2525    | 2695     | 1250    | 1120    | 1180    | 26      | 16            |
| 1LA4 560-3CN..   | 8500         | 1210       | 910                    | 1800                   | 160     | 240     | 2775    | 2955     | 1400    | 1250    | 1320    | 26      | 16            |
| 1LA4 562-3CN..   | 9200         | 1210       | 910                    | 1800                   | 160     | 240     | 2775    | 2955     | 1400    | 1250    | 1320    | 26      | 16            |
| 1LA4 564-3CN..   | 10000        | 1210       | 910                    | 1800                   | 160     | 240     | 2775    | 2955     | 1400    | 1250    | 1320    | 26      | 16            |
| <b>12-pole</b>   |              |            |                        |                        |         |         |         |          |         |         |         |         |               |
| 1LA4 450-5CN..   | 4600         | 960        | 770                    | 1550                   | 130     | 200     | 2390    | 2550     | 1150    | 1000    | 1080    | 26      | 8             |
| 1LA4 452-5CN..   | 4900         | 960        | 770                    | 1550                   | 130     | 200     | 2390    | 2550     | 1150    | 1000    | 1080    | 26      | 8             |
| 1LA4 454-5CN..   | 5200         | 960        | 770                    | 1550                   | 130     | 200     | 2390    | 2550     | 1150    | 1000    | 1080    | 26      | 8             |
| 1LA4 500-5CN..   | 6400         | 1070       | 840                    | 1660                   | 140     | 200     | 2525    | 2695     | 1250    | 1120    | 1180    | 26      | 16            |
| 1LA4 502-5CN..   | 6800         | 1070       | 840                    | 1660                   | 140     | 200     | 2525    | 2695     | 1250    | 1120    | 1180    | 26      | 16            |
| 1LA4 504-5CN..   | 7200         | 1070       | 840                    | 1660                   | 140     | 200     | 2525    | 2695     | 1250    | 1120    | 1180    | 26      | 16            |
| 1LA4 560-5CN..   | 8500         | 1210       | 910                    | 1800                   | 160     | 240     | 2775    | 2955     | 1400    | 1250    | 1320    | 26      | 16            |
| 1LA4 562-5CN..   | 9200         | 1210       | 910                    | 1800                   | 160     | 240     | 2775    | 2955     | 1400    | 1250    | 1320    | 26      | 16            |
| 1LA4 564-5CN..   | 10000        | 1210       | 910                    | 1800                   | 160     | 240     | 2775    | 2955     | 1400    | 1250    | 1320    | 26      | 16            |

**Note:**

Higher pole numbers are available on request.

1) For currents  $I_{rated} > 315$  A, the dimension changes by + 45 mm.2) For currents  $I_{rated} > 315$  A, the dimension changes by + 185 mm (for AC = 1070), by + 180 mm (for AC = 1210) or by + 130 mm (for AC = 1350).


3) The dimensions also apply for the 1MA4 and 1MS4 series.

## Motors for line operation

### Air-cooled motors

#### H-compact 1LA4

#### Dimension drawings

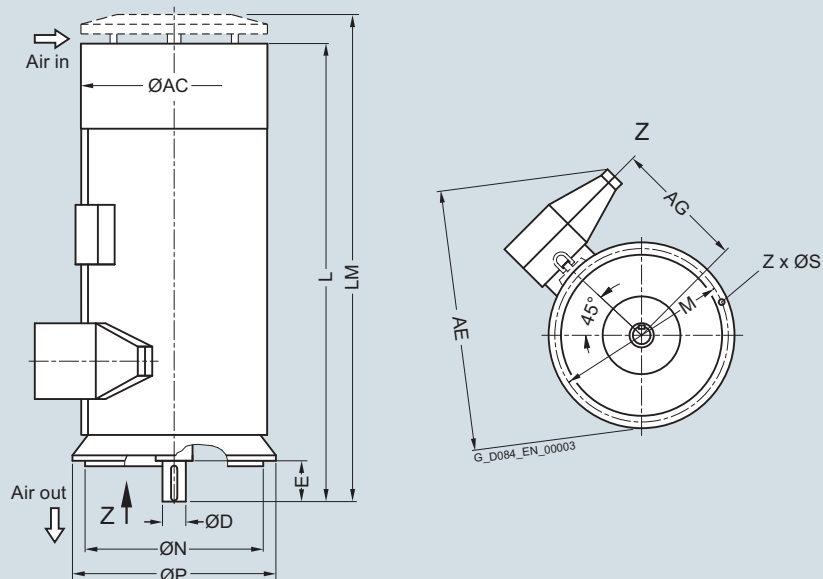


| Motor type  | Weight<br>kg | Dimensions |                     |          |         |         |         |          |         |         |         |         |               |
|---|--------------|------------|---------------------|----------|---------|---------|---------|----------|---------|---------|---------|---------|---------------|
|   |              | AC<br>mm   | AG<br>mm            | AE<br>mm | D<br>mm | E<br>mm | L<br>mm | LM<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |
| <b>9 ... 11 kV, IM V1 type of construction, anti-friction bearings<sup>1)</sup></b> |              |            |                     |          |         |         |         |          |         |         |         |         |               |
| <b>4-pole</b>   |              |            |                     |          |         |         |         |          |         |         |         |         |               |
| 1LA4 450-4AN..  | 4600         | 960        | 865                 | 1740     | 130     | 200     | 2390    | 2550     | 1150    | 1000    | 1080    | 26      | 8             |
| 1LA4 452-4AN..  | 4900         | 960        | 865                 | 1740     | 130     | 200     | 2390    | 2550     | 1150    | 1000    | 1080    | 26      | 8             |
| 1LA4 454-4AN..  | 5200         | 960        | 865                 | 1740     | 130     | 200     | 2390    | 2550     | 1150    | 1000    | 1080    | 26      | 8             |
| 1LA4 500-4AN..  | 5900         | 1070       | 940                 | 1845     | 140     | 200     | 2525    | 2695     | 1250    | 1120    | 1180    | 26      | 16            |
| 1LA4 502-4AN..  | 6300         | 1070       | 940                 | 1845     | 140     | 200     | 2525    | 2695     | 1250    | 1120    | 1180    | 26      | 16            |
| 1LA4 504-4AN..  | 6700         | 1070       | 940                 | 1845     | 140     | 200     | 2525    | 2695     | 1250    | 1120    | 1180    | 26      | 16            |
| 1LA4 560-4CN..  | 8100         | 1210       | 1010                | 1980     | 160     | 240     | 2775    | 2955     | 1400    | 1250    | 1320    | 26      | 16            |
| 1LA4 562-4CN..  | 8900         | 1210       | 1010                | 1980     | 160     | 240     | 2775    | 2955     | 1400    | 1250    | 1320    | 26      | 16            |
| 1LA4 564-4CN..  | 9600         | 1210       | 1010                | 1980     | 160     | 240     | 2775    | 2955     | 1400    | 1250    | 1320    | 26      | 16            |
| <b>6-pole</b>   |              |            |                     |          |         |         |         |          |         |         |         |         |               |
| 1LA4 450-6AN..  | 4600         | 960        | 865                 | 1740     | 130     | 200     | 2390    | 2550     | 1150    | 1000    | 1080    | 26      | 8             |
| 1LA4 452-6AN..  | 4800         | 960        | 865                 | 1740     | 130     | 200     | 2390    | 2550     | 1150    | 1000    | 1080    | 26      | 8             |
| 1LA4 454-6AN..  | 5100         | 960        | 865                 | 1740     | 130     | 200     | 2390    | 2550     | 1150    | 1000    | 1080    | 26      | 8             |
| 1LA4 500-6CN..  | 6400         | 1070       | 940                 | 1845     | 140     | 200     | 2525    | 2695     | 1250    | 1120    | 1180    | 26      | 16            |
| 1LA4 502-6CN..  | 6800         | 1070       | 940                 | 1845     | 140     | 200     | 2525    | 2695     | 1250    | 1120    | 1180    | 26      | 16            |
| 1LA4 504-6CN..  | 7200         | 1070       | 940                 | 1845     | 140     | 200     | 2525    | 2695     | 1250    | 1120    | 1180    | 26      | 16            |
| 1LA4 560-6CN..  | 8500         | 1210       | 1010                | 1980     | 160     | 240     | 2775    | 2955     | 1400    | 1250    | 1320    | 26      | 16            |
| 1LA4 562-6CN..  | 9200         | 1210       | 1010                | 1980     | 160     | 240     | 2775    | 2955     | 1400    | 1250    | 1320    | 26      | 16            |
| 1LA4 564-6CN..  | 10000        | 1210       | 1010                | 1980     | 160     | 240     | 2775    | 2955     | 1400    | 1250    | 1320    | 26      | 16            |
| 1LA4 634-6CN..  | 13400        | 1350       | O. R. <sup>2)</sup> | 1820     | 180     | 240     | 3115    | 3305     | 1400    | 1250    | 1320    | 26      | 16            |
| 1LA4 636-6CN..  | 14100        | 1350       | O. R. <sup>2)</sup> | 1820     | 180     | 240     | 3115    | 3305     | 1400    | 1250    | 1320    | 26      | 16            |
| <b>8-pole</b>   |              |            |                     |          |         |         |         |          |         |         |         |         |               |
| 1LA4 450-8AN..  | 4600         | 960        | 865                 | 1740     | 130     | 200     | 2390    | 2550     | 1150    | 1000    | 1080    | 26      | 8             |
| 1LA4 452-8AN..  | 4800         | 960        | 865                 | 1740     | 130     | 200     | 2390    | 2550     | 1150    | 1000    | 1080    | 26      | 8             |
| 1LA4 454-8AN..  | 5100         | 960        | 865                 | 1740     | 130     | 200     | 2390    | 2550     | 1150    | 1000    | 1080    | 26      | 8             |
| 1LA4 500-8CN..  | 6300         | 1070       | 940                 | 1845     | 140     | 200     | 2525    | 2695     | 1250    | 1120    | 1180    | 26      | 16            |

<sup>1)</sup> The dimensions also apply for the 1MA4 and 1MS4 series.

<sup>2)</sup> On request.

## Dimension drawings (continued)

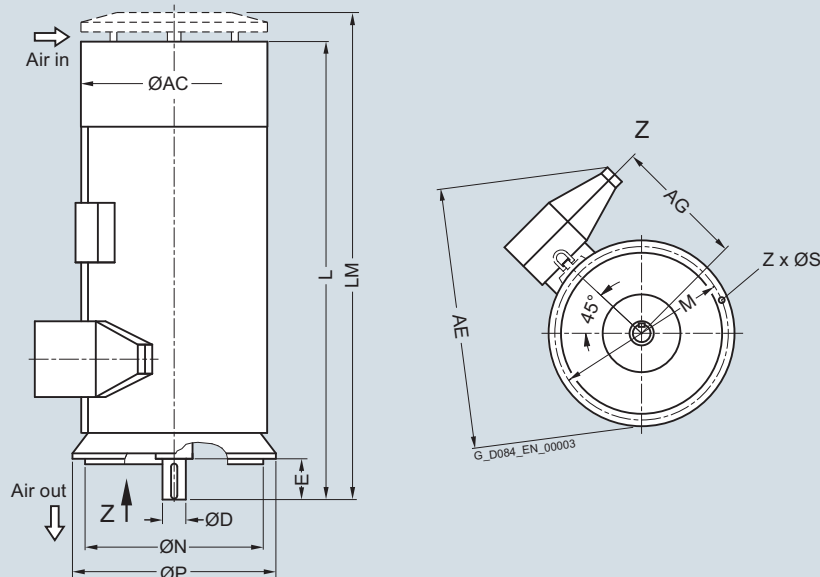

| Motor type  | Weight<br>kg | Dimensions |                     |          |         |         |         |          |         |         |         |         |               |
|---|--------------|------------|---------------------|----------|---------|---------|---------|----------|---------|---------|---------|---------|---------------|
|   |              | AC<br>mm   | AG<br>mm            | AE<br>mm | D<br>mm | E<br>mm | L<br>mm | LM<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |
| <b>9 ... 11 kV, IM V1 type of construction, anti-friction bearings<sup>1)</sup></b> |              |            |                     |          |         |         |         |          |         |         |         |         |               |
| <b>8-pole</b>   |              |            |                     |          |         |         |         |          |         |         |         |         |               |
| 1LA4 502-8CN..  | 6800         | 1070       | 940                 | 1845     | 140     | 200     | 2525    | 2695     | 1250    | 1120    | 1180    | 26      | 16            |
| 1LA4 504-8CN..  | 7200         | 1070       | 940                 | 1845     | 140     | 200     | 2525    | 2695     | 1250    | 1120    | 1180    | 26      | 16            |
| 1LA4 560-8CN..  | 8400         | 1210       | 1010                | 1980     | 160     | 240     | 2775    | 2955     | 1400    | 1250    | 1320    | 26      | 16            |
| 1LA4 562-8CN..  | 9100         | 1210       | 1010                | 1980     | 160     | 240     | 2775    | 2955     | 1400    | 1250    | 1320    | 26      | 16            |
| 1LA4 564-8CN..  | 10000        | 1210       | 1010                | 1980     | 160     | 240     | 2775    | 2955     | 1400    | 1250    | 1320    | 26      | 16            |
| 1LA4 634-8CN..  | 13300        | 1350       | O. R. <sup>2)</sup> | 1820     | 180     | 240     | 3115    | 3305     | 1400    | 1250    | 1320    | 26      | 16            |
| 1LA4 636-8CN..  | 14000        | 1350       | O. R. <sup>2)</sup> | 1820     | 180     | 240     | 3115    | 3305     | 1400    | 1250    | 1320    | 26      | 16            |
| <b>10-pole</b>  |              |            |                     |          |         |         |         |          |         |         |         |         |               |
| 1LA4 500-3CN..  | 6300         | 1070       | 940                 | 1845     | 140     | 200     | 2525    | 2695     | 1250    | 1120    | 1180    | 26      | 16            |
| 1LA4 502-3CN..  | 6800         | 1070       | 940                 | 1845     | 140     | 200     | 2525    | 2695     | 1250    | 1120    | 1180    | 26      | 16            |
| 1LA4 504-3CN..  | 7200         | 1070       | 940                 | 1845     | 140     | 200     | 2525    | 2695     | 1250    | 1120    | 1180    | 26      | 16            |
| 1LA4 560-3CN..  | 8400         | 1210       | 1010                | 1980     | 160     | 240     | 2775    | 2955     | 1400    | 1250    | 1320    | 26      | 16            |
| 1LA4 562-3CN..  | 9100         | 1210       | 1010                | 1980     | 160     | 240     | 2775    | 2955     | 1400    | 1250    | 1320    | 26      | 16            |
| 1LA4 564-3CN..  | 10000        | 1210       | 1010                | 1980     | 160     | 240     | 2775    | 2955     | 1400    | 1250    | 1320    | 26      | 16            |
| <b>12-pole</b>  |              |            |                     |          |         |         |         |          |         |         |         |         |               |
| 1LA4 560-5CN..  | 8400         | 1210       | 1010                | 1980     | 160     | 240     | 2775    | 2955     | 1400    | 1250    | 1320    | 26      | 16            |
| 1LA4 562-5CN..  | 9100         | 1210       | 1010                | 1980     | 160     | 240     | 2775    | 2955     | 1400    | 1250    | 1320    | 26      | 16            |
| 1LA4 564-5CN..  | 10000        | 1210       | 1010                | 1980     | 160     | 240     | 2775    | 2955     | 1400    | 1250    | 1320    | 26      | 16            |

**Note:**

Higher pole numbers are available on request.


<sup>1)</sup> The dimensions also apply for the 1MA4 and 1MS4 series.<sup>2)</sup> On request.

## Motors for line operation

Air-cooled motors

### H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Overview

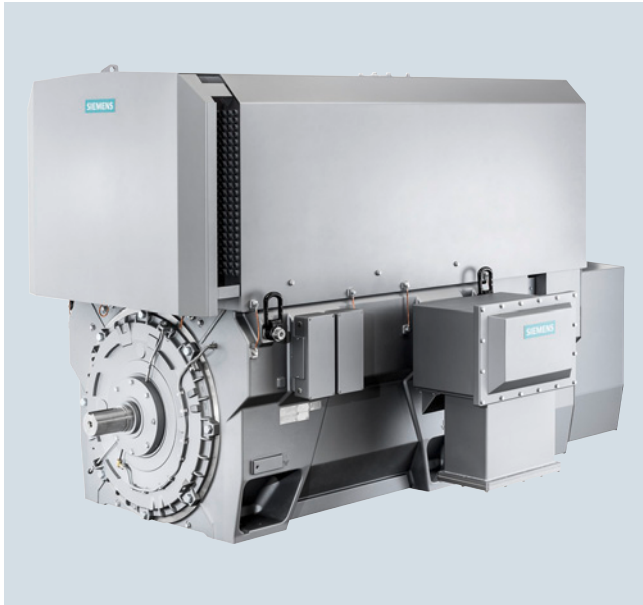

#### Technical data

##### Overview of technical data

##### H-compact PLUS 1RQ4/1RQ6, SIMOTICS HV M RQ7

|   |  |
|---|--|
| Rated voltage                                 | 3.3 ... 13.8 kV                                |
| Rated frequency                               | 50/60 Hz                                       |
| Motor type                                    | Induction motor with squirrel-cage rotor       |
| Type of construction                          | IM B3, IM V1                                   |
| Degree of protection                          | IP55   |
| Cooling method                                | IC611/IC616                                    |
| Stator winding insulation                     | Thermal class 155 (F), utilized to 130 (B)     |
| Shaft height                                  | 450 ... 710 mm                                 |
| Bearings                                      | Anti-friction bearings, sleeve bearings        |
| Cage material                                 | Copper   |
| Standards                                     | IEC, EN, NEMA                                  |
| Frame design for shaft heights 450 ... 560 mm | Housing: Cast iron<br>Cooling enclosure: Steel |
| Frame design for shaft heights 630 ... 710 mm | Housing: Steel<br>Cooling enclosure: Steel     |

#### Technical data (continued)

##### Power ranges for IEC motors for line operation

1RQ4, 1SG4 (Ex ec), 1SB4 (Ex pxb) series

1RQ6, 1SG6 (Ex ec), 1SB6 (Ex pxb) series


1RQ7, 1SG7 (Ex ec), 1SB7(Ex pxb) series

Insulationsystem, thermal class 155 (F), utilized to 130 (B).


Ambient temperature up to 40 °C, installation altitude up to 1000 m.

3.3 to 6.6 kV; 50 Hz

4.0 to 6.6 kV; 60 Hz

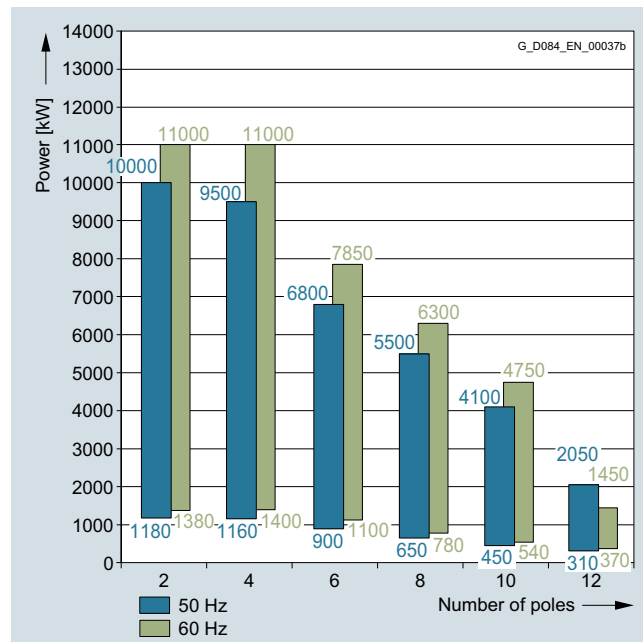

9 to 11 kV; 50 Hz

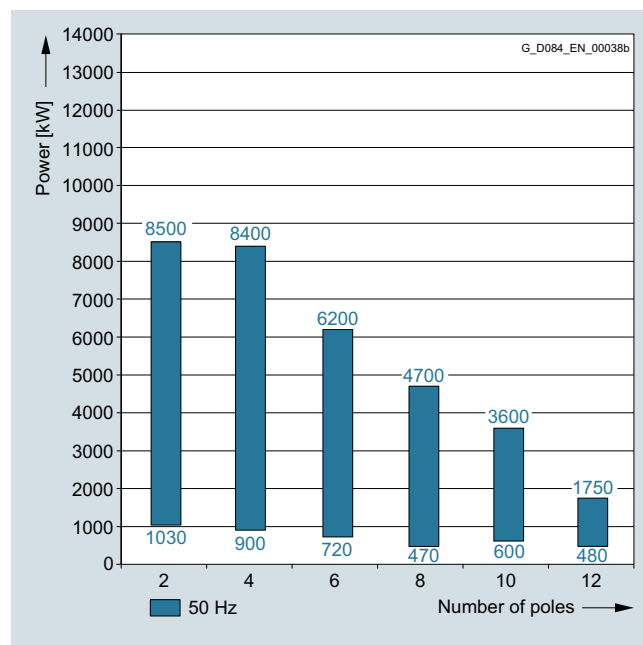


### Technical data (continued)


#### Power ranges for NEMA motors for line operation

Insulation system, thermal class 155 (F), utilized to 130 (B).

4 to 6.6 kV; 60 Hz

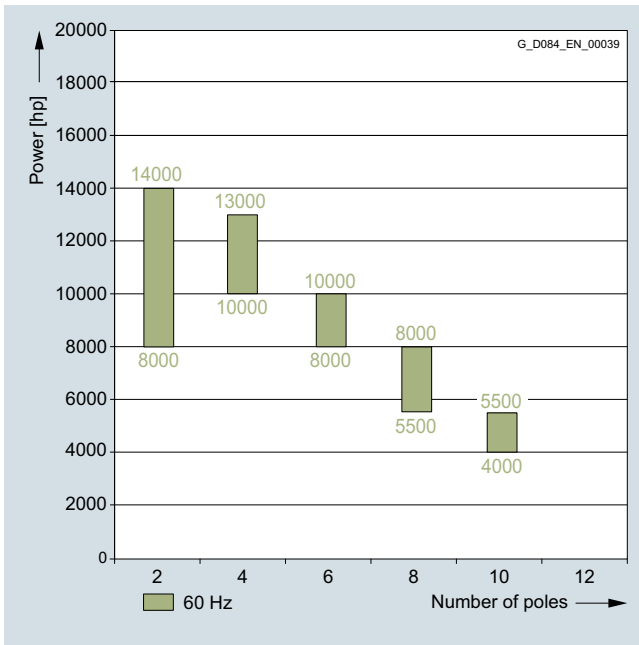

12.5 to 13.8 kV; 60 Hz

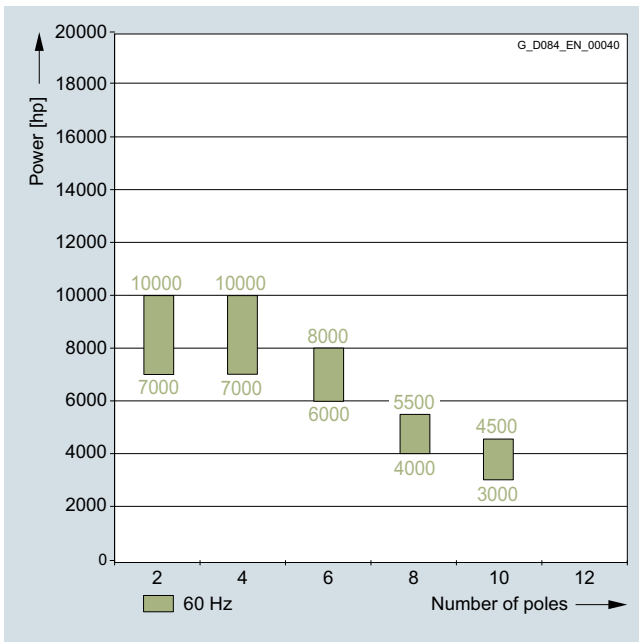

## Motors for line operation

## Air-cooled motors

## H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

## Selection and ordering data

The following data also apply to explosion-protected motors 1SB4/1SB6 (Ex pxb) and 1SG4/1SG6 (Ex ec).

| Rated power<br>IEC<br>kW     | High voltage motor<br>H-compact PLUS<br>Article No. | Speed<br>rpm | Rated current<br>$I_{\text{rated}}$<br>at<br>6 kV<br>A | Efficiency       |                  | Power factor                 |                              | Torque<br>Nm | Break-<br>down<br>torque<br>$T_B/T_{\text{rated}}$<br>[-] | Locked-<br>rotor<br>torque<br>$T_{LR}/T_{\text{rated}}$<br>[-] | Locked-<br>rotor<br>current<br>$I_{LR}/I_{\text{rated}}$<br>[-] | Moment of inertia         |   |
|------------------------------|---|--------------|--|------------------|------------------|------------------------------|------------------------------|--------------|---|--|---|---------------------------|---|
|                              |   |              |  | 4/4<br>load<br>% | 3/4<br>load<br>% | 4/4<br>load<br>cos $\varphi$ | 3/4<br>load<br>cos $\varphi$ |              |   |  |   | Motor<br>kgm <sup>2</sup> | External,<br>max. <sup>1)</sup><br>kgm <sup>2</sup> |
| <b>3.3 ... 6.6 kV, 50 Hz</b> |   |              |  |                  |                  |                              |                              |              |   |  |   |                           |   |
| <b>2-pole</b>                |   |              |  |                  |                  |                              |                              |              |   |  |   |                           |   |
| 1180                         | <b>1RQ6 450-2JJ</b>                                 | 2977         | 136  | 95.4             | 95.4             | 0.88                         | 0.87                         | 3785         | 2.45  | 0.75   | 5.40  | 12                        | 74  |
| 1320                         | <b>1RQ6 452-2JJ</b>                                 | 2978         | 150  | 95.7             | 95.8             | 0.89                         | 0.88                         | 4232         | 2.45  | 0.70   | 5.50  | 14                        | 76  |
| 1480                         | <b>1RQ6 454-2JJ</b>                                 | 2980         | 166  | 95.9             | 95.9             | 0.89                         | 0.87                         | 4742         | 2.50  | 0.65   | 5.50  | 15                        | 78  |
| 1620                         | <b>1RQ6 456-2JJ</b>                                 | 2980         | 180  | 96.2             | 96.2             | 0.90                         | 0.89                         | 5191         | 2.45  | 0.60   | 5.50  | 17                        | 81  |
| 1920                         | <b>1RQ6 500-2JJ</b>                                 | 2978         | 215  | 96.1             | 96.2             | 0.90                         | 0.89                         | 6156         | 2.25  | 0.65   | 5.25  | 19                        | 71  |
| 2180                         | <b>1RQ6 502-2JJ</b>                                 | 2975         | 240  | 96.3             | 96.6             | 0.90                         | 0.90                         | 6997         | 2.15  | 0.65   | 4.80  | 21                        | 79  |
| 2380                         | <b>1RQ6 504-2JJ</b>                                 | 2976         | 260  | 96.5             | 96.8             | 0.91                         | 0.91                         | 7636         | 2.20  | 0.60   | 5.20  | 25                        | 88  |
| 2620                         | <b>1RQ6 506-2JJ</b>                                 | 2977         | 285  | 96.6             | 96.9             | 0.91                         | 0.90                         | 8404         | 2.25  | 0.60   | 5.00  | 26                        | 98  |
| 3100                         | <b>1RQ6 560-2JJ</b>                                 | 2979         | 340  | 96.3             | 96.5             | 0.90                         | 0.90                         | 9937         | 2.10  | 0.55   | 4.60  | 39                        | 170   |
| 3450                         | <b>1RQ6 562-2JJ</b>                                 | 2981         | 380  | 96.5             | 96.5             | 0.90                         | 0.91                         | 11051        | 2.25  | 0.55   | 4.85  | 43                        | 190   |
| 3850                         | <b>1RQ6 564-2JJ</b>                                 | 2982         | 420  | 96.8             | 96.8             | 0.91                         | 0.91                         | 12328        | 2.35  | 0.60   | 5.15  | 49                        | 210   |
| 4170                         | <b>1RQ6 566-2JJ</b>                                 | 2982         | 460  | 96.9             | 96.9             | 0.91                         | 0.92                         | 13353        | 2.35  | 0.55   | 5.25  | 54                        | 230   |
| 4000                         | <b>1RQ4 630-2JE</b>                                 | 2984         | 450  | 96.6             | 96.5             | 0.89                         | 0.89                         | 12802        | 2.40  | 0.35   | 4.60  | 80                        | 150   |
| 4500                         | <b>1RQ4 632-2JE</b>                                 | 2986         | 495  | 96.9             | 96.8             | 0.90                         | 0.88                         | 14392        | 2.70  | 0.42   | 5.40  | 85                        | 200   |
| 5300                         | <b>1RQ4 634-2JE</b>                                 | 2986         | 580  | 97.3             | 97.2             | 0.90                         | 0.89                         | 16951        | 2.70  | 0.44   | 5.40  | 95                        | 280   |
| 6000                         | <b>1RQ4 636-2JE</b>                                 | 2987         | 660  | 97.5             | 97.4             | 0.90                         | 0.89                         | 19183        | 2.70  | 0.45   | 5.50  | 105                       | 320   |
| <b>4-pole</b>                |   |              |  |                  |                  |                              |                              |              |   |  |   |                           |   |
| 1160                         | <b>1RQ6 450-4JJ</b>                                 | 1486         | 134  | 95.6             | 95.8             | 0.87                         | 0.86                         | 7454         | 2.60  | 0.65   | 5.15  | 21                        | 315   |
| 1270                         | <b>1RQ6 452-4JJ</b>                                 | 1486         | 146  | 95.8             | 95.9             | 0.87                         | 0.85                         | 8161         | 2.65  | 0.60   | 5.20  | 23                        | 350   |
| 1350                         | <b>1RQ6 454-4JJ</b>                                 | 1486         | 152  | 95.9             | 96.1             | 0.89                         | 0.88                         | 8675         | 2.55  | 0.65   | 5.20  | 26                        | 390   |
| 1480                         | <b>1RQ6 456-4JJ</b>                                 | 1487         | 164  | 96.1             | 96.3             | 0.90                         | 0.89                         | 9504         | 2.75  | 0.75   | 5.50  | 30                        | 435   |
| 1880 <sup>2)</sup>           | <b>1RQ6 500-4JJ</b>                                 | 1485         | 215  | 95.6             | 96.1             | 0.89                         | 0.88                         | 12089        | 2.40  | 0.70   | 4.95  | 45                        | 400   |
| 2100 <sup>2)</sup>           | <b>1RQ6 502-4JJ</b>                                 | 1486         | 235  | 95.8             | 96.3             | 0.89                         | 0.89                         | 13494        | 2.45  | 0.70   | 5.00  | 48                        | 450   |
| 2320 <sup>2)</sup>           | <b>1RQ6 504-4JJ</b>                                 | 1486         | 260  | 96.0             | 96.5             | 0.89                         | 0.89                         | 14908        | 2.45  | 0.70   | 5.10  | 55                        | 500   |
| 2500 <sup>2)</sup>           | <b>1RQ6 506-4JJ</b>                                 | 1487         | 280  | 96.2             | 96.6             | 0.90                         | 0.89                         | 16054        | 2.55  | 0.70   | 5.35  | 59                        | 550   |
| 3150 <sup>2)</sup>           | <b>1RQ6 560-4JJ</b>                                 | 1490         | 350  | 96.7             | 96.9             | 0.90                         | 0.90                         | 20188        | 2.25  | 0.65   | 5.20  | 86                        | 790   |
| 3440 <sup>2)</sup>           | <b>1RQ6 562-4JJ</b>                                 | 1491         | 380  | 96.9             | 97.1             | 0.90                         | 0.90                         | 22031        | 2.15  | 0.55   | 5.20  | 96                        | 870   |
| 3900 <sup>2)</sup>           | <b>1RQ6 564-4JJ</b>                                 | 1491         | 430  | 97.0             | 97.2             | 0.91                         | 0.91                         | 24978        | 2.15  | 0.60   | 5.15  | 107                       | 960   |
| 4230 <sup>2)</sup>           | <b>1RQ6 566-4JJ</b>                                 | 1491         | 460  | 97.2             | 97.4             | 0.91                         | 0.91                         | 27091        | 2.20  | 0.60   | 5.20  | 117                       | 1060  |
| 4400                         | <b>1RQ4 630-4JE</b>                                 | 1490         | 490  | 96.8             | 96.9             | 0.89                         | 0.89                         | 28201        | 2.30  | 0.62   | 5.20  | 150                       | 920   |
| 4900                         | <b>1RQ4 632-4JE</b>                                 | 1491         | 550  | 97.0             | 97.1             | 0.89                         | 0.88                         | 31385        | 2.45  | 0.65   | 5.50  | 170                       | 1150  |
| 5300                         | <b>1RQ4 634-4JE</b>                                 | 1492         | 590  | 97.3             | 97.2             | 0.89                         | 0.88                         | 33924        | 2.40  | 0.62   | 5.50  | 185                       | 1350  |
| 5800                         | <b>1RQ4 636-4JE</b>                                 | 1492         | 650  | 97.3             | 97.3             | 0.88                         | 0.87                         | 37125        | 2.40  | 0.61   | 5.50  | 200                       | 1200  |

## Voltage code:

3.3 kV, 50 Hz  
6 kV, 50 Hz  
6.6 kV, 50 Hz  
Other voltage

0  
6  
7  
9

## Type of construction:

IM B3  
IM V1 (with canopy)

0  
4

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Electrical data is also valid for operation with SINAMICS PERFECT HARMONY drives.  
For ordering, please note the 10th and 11th position of the article number code.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

<sup>2)</sup> Data of vertical motors (IM V1) on request.

## Selection and ordering data (continued)

| Rated power<br>IEC<br>kW     | High voltage motor<br>H-compact PLUS<br>Article No. | Speed<br>rpm | Rated<br>current<br>A | Efficiency       |                  | Power factor                 |                              | Torque<br>Nm | Break-<br>down<br>torque<br>$\frac{T_B}{T_{rated}}$<br>[-] | Locked-<br>rotor<br>torque<br>$\frac{T_{LR}}{T_{rated}}$<br>[-] | Locked-<br>rotor<br>current<br>$\frac{I_{LR}}{I_{rated}}$<br>[-] | Moment of inertia         |   |
|------------------------------|---|--------------|-----------------------|------------------|------------------|------------------------------|------------------------------|--------------|--|---|--|---------------------------|---|
|                              |   |              |                       | 4/4<br>load<br>% | 3/4<br>load<br>% | 4/4<br>load<br>cos $\varphi$ | 3/4<br>load<br>cos $\varphi$ |              |  |   |  | Motor<br>kgm <sup>2</sup> | External,<br>max. <sup>1)</sup><br>kgm <sup>2</sup> |
| <b>3.3 ... 6.6 kV, 50 Hz</b> |   |              |                       |                  |                  |                              |                              |              |  |   |  |                           |   |
| <b>6-pole</b>                |   |              |                       |                  |                  |                              |                              |              |  |   |  |                           |   |
| 900                          | <b>1RQ6 450-6JJ</b>                                 | 988          | 106                   | 95.4             | 95.9             | 0.85                         | 0.84                         | 8698         | 2.30   | 0.90  | 4.70   | 28                        | 780   |
| 990                          | <b>1RQ6 452-6JJ</b>                                 | 989          | 118                   | 95.7             | 96.1             | 0.85                         | 0.84                         | 9558         | 2.45   | 0.95  | 5.10   | 32                        | 880   |
| 1120                         | <b>1RQ6 454-6JJ</b>                                 | 989          | 132                   | 95.9             | 96.2             | 0.85                         | 0.84                         | 10814        | 2.45   | 0.90  | 5.00   | 35                        | 990   |
| 1240                         | <b>1RQ6 456-6JJ</b>                                 | 991          | 148                   | 96.2             | 96.4             | 0.84                         | 0.82                         | 11948        | 2.55   | 0.80  | 5.10   | 40                        | 1160  |
| 1500                         | <b>1RQ6 500-6JJ</b>                                 | 989          | 176                   | 95.7             | 96.3             | 0.86                         | 0.85                         | 14483        | 2.15   | 0.70  | 4.75   | 56                        | 1280  |
| 1700                         | <b>1RQ6 502-6JJ</b>                                 | 990          | 198                   | 95.9             | 96.5             | 0.86                         | 0.84                         | 16397        | 2.25   | 0.70  | 4.95   | 61                        | 1420  |
| 1890                         | <b>1RQ6 504-6JJ</b>                                 | 990          | 220                   | 96.1             | 96.6             | 0.86                         | 0.85                         | 18230        | 2.25   | 0.70  | 4.80   | 68                        | 1580  |
| 2040                         | <b>1RQ6 506-6JJ</b>                                 | 990          | 235                   | 96.2             | 96.6             | 0.86                         | 0.84                         | 19677        | 2.20   | 0.65  | 4.90   | 76                        | 1780  |
| 2400                         | <b>1RQ6 560-6JJ</b>                                 | 991          | 270                   | 96.4             | 96.7             | 0.88                         | 0.87                         | 23126        | 2.10   | 0.70  | 4.85   | 107                       | 1920  |
| 2700                         | <b>1RQ6 562-6JJ</b>                                 | 992          | 310                   | 96.6             | 96.9             | 0.88                         | 0.87                         | 25991        | 2.15   | 0.70  | 4.85   | 118                       | 2100  |
| 3000                         | <b>1RQ6 564-6JJ</b>                                 | 992          | 340                   | 96.6             | 97.0             | 0.88                         | 0.88                         | 28878        | 2.15   | 0.70  | 4.75   | 131                       | 2350  |
| 3270                         | <b>1RQ6 566-6JJ</b>                                 | 992          | 370                   | 96.8             | 97.1             | 0.88                         | 0.88                         | 31478        | 2.20   | 0.70  | 4.95   | 145                       | 2600  |
| 3550                         | <b>1RQ4 630-6JE</b>                                 | 993          | 410                   | 96.8             | 96.7             | 0.86                         | 0.85                         | 34141        | 2.15   | 0.63  | 5.00   | 188                       | 2400  |
| 3850                         | <b>1RQ4 632-6JE</b>                                 | 993          | 440                   | 96.9             | 96.8             | 0.87                         | 0.85                         | 37027        | 2.20   | 0.66  | 5.20   | 207                       | 2800  |
| 4100                         | <b>1RQ4 634-6JE</b>                                 | 994          | 475                   | 96.9             | 96.9             | 0.86                         | 0.84                         | 39391        | 2.30   | 0.68  | 5.50   | 228                       | 2500  |
| 4400                         | <b>1RQ4 636-6JE</b>                                 | 994          | 510                   | 97.1             | 97.1             | 0.86                         | 0.84                         | 42274        | 2.40   | 0.68  | 5.50   | 251                       | 3200  |
| <b>8-pole</b>                |   |              |                       |                  |                  |                              |                              |              |  |   |  |                           |   |
| 650                          | <b>1RQ6 450-8JJ</b>                                 | 743          | 81                    | 95.3             | 95.7             | 0.81                         | 0.78                         | 8354         | 2.60   | 0.85  | 5.20   | 35                        | 960   |
| 710                          | <b>1RQ6 452-8JJ</b>                                 | 744          | 88                    | 95.6             | 95.9             | 0.81                         | 0.77                         | 9112         | 2.65   | 0.85  | 5.35   | 39                        | 1060  |
| 780                          | <b>1RQ6 454-8JJ</b>                                 | 742          | 94                    | 95.4             | 96.0             | 0.84                         | 0.82                         | 10038        | 2.25   | 0.75  | 4.65   | 44                        | 1160  |
| 870                          | <b>1RQ6 456-8JJ</b>                                 | 744          | 106                   | 95.7             | 96.0             | 0.82                         | 0.78                         | 11166        | 2.60   | 0.80  | 5.20   | 51                        | 1300  |
| 1120                         | <b>1RQ6 500-8JJ</b>                                 | 743          | 136                   | 95.5             | 96.0             | 0.83                         | 0.80                         | 14394        | 2.15   | 0.55  | 4.55   | 68                        | 1400  |
| 1250                         | <b>1RQ6 502-8JJ</b>                                 | 743          | 152                   | 95.6             | 96.1             | 0.83                         | 0.80                         | 16065        | 2.15   | 0.55  | 4.85   | 75                        | 1540  |
| 1380                         | <b>1RQ6 504-8JJ</b>                                 | 744          | 168                   | 95.8             | 96.2             | 0.83                         | 0.80                         | 17712        | 2.35   | 0.65  | 4.85   | 83                        | 1720  |
| 1500                         | <b>1RQ6 506-8JJ</b>                                 | 744          | 180                   | 95.9             | 96.3             | 0.84                         | 0.81                         | 19252        | 2.35   | 0.65  | 4.85   | 93                        | 1900  |
| 1750                         | <b>1RQ6 560-8JJ</b>                                 | 743          | 205                   | 96.1             | 96.7             | 0.85                         | 0.84                         | 22491        | 2.05   | 0.60  | 4.45   | 127                       | 2600  |
| 1950                         | <b>1RQ6 562-8JJ</b>                                 | 743          | 230                   | 96.2             | 96.8             | 0.85                         | 0.85                         | 25062        | 2.00   | 0.60  | 4.35   | 140                       | 2900  |
| 2140                         | <b>1RQ6 564-8JJ</b>                                 | 743          | 250                   | 96.3             | 96.9             | 0.86                         | 0.85                         | 27504        | 2.05   | 0.65  | 4.50   | 155                       | 3200  |
| 2300                         | <b>1RQ6 566-8JJ</b>                                 | 744          | 270                   | 96.5             | 97.0             | 0.86                         | 0.84                         | 29520        | 2.15   | 0.65  | 4.85   | 171                       | 3550  |
| 2650                         | <b>1RQ4 630-8JE</b>                                 | 744          | 315                   | 96.4             | 96.4             | 0.84                         | 0.81                         | 34015        | 2.40   | 0.75  | 5.10   | 246                       | 3300  |
| 2850                         | <b>1RQ4 632-8JE</b>                                 | 745          | 340                   | 96.5             | 96.5             | 0.83                         | 0.79                         | 36534        | 2.50   | 0.81  | 5.50   | 272                       | 3600  |
| 3000                         | <b>1RQ4 634-8JE</b>                                 | 745          | 355                   | 96.5             | 96.6             | 0.84                         | 0.81                         | 38456        | 2.50   | 0.81  | 5.50   | 300                       | 3800  |
| 3200                         | <b>1RQ4 636-8JE</b>                                 | 745          | 375                   | 96.7             | 96.6             | 0.85                         | 0.82                         | 41020        | 2.50   | 0.80  | 5.50   | 331                       | 4200  |

## Voltage code:

3.3 kV, 50 Hz  
6 kV, 50 Hz  
6.6 kV, 50 Hz  
Other voltage

0  
6  
7  
9

## Type of construction:

IM B3  
IM V1 (with canopy)

0  
4

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Electrical data is also valid for operation with SINAMICS PERFECT HARMONY drives.  
For ordering, please note the 10th and 11th position of the article number code.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

## Motors for line operation

## Air-cooled motors

## H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

## Selection and ordering data (continued)

| Rated power<br>IEC           | High voltage motor<br>H-compact PLUS | Speed | Rated current              |          | Efficiency |               | Power factor  |                                 | Torque | Break-down torque | Locked-rotor torque | Locked-rotor current | Moment of inertia                |                                  |
|------------------------------|--------------------------------------|-------|----------------------------|----------|------------|---------------|---------------|---------------------------------|--------|-------------------|---------------------|----------------------|----------------------------------|----------------------------------|
|                              |                                      |       | $I_{\text{rated}}$ at 6 kV | 4/4 load | 3/4 load   | 4/4 load      | 3/4 load      | $T_{\text{B}}/T_{\text{rated}}$ |        |                   |                     |                      | $T_{\text{LR}}/T_{\text{rated}}$ | $I_{\text{LR}}/I_{\text{rated}}$ |
| kW                           | Article No.                          | rpm   | A                          | %        | %          | cos $\varphi$ | cos $\varphi$ | Nm                              | [-]    | [-]               | [-]                 | kgm <sup>2</sup>     | kgm <sup>2</sup>                 |                                  |
| <b>3.3 ... 6.6 kV, 50 Hz</b> |                                      |       |                            |          |            |               |               |                                 |        |                   |                     |                      |                                  |                                  |
| <b>10-pole</b>               |                                      |       |                            |          |            |               |               |                                 |        |                   |                     |                      |                                  |                                  |
| 450                          | <b>1RQ6 450-3JJ</b>                  | 592   | 59                         | 93.7     | 93.6       | 0.78          | 0.72          | 7259                            | 2.30   | 1.00              | 5.40                | 39                   | 1250                             |                                  |
| 500                          | <b>1RQ6 452-3JJ</b>                  | 592   | 66                         | 93.9     | 93.8       | 0.78          | 0.72          | 8066                            | 2.40   | 1.00              | 5.50                | 43                   | 1500                             |                                  |
| 560                          | <b>1RQ6 454-3JJ</b>                  | 592   | 74                         | 94.1     | 94.0       | 0.77          | 0.71          | 9034                            | 2.40   | 1.00              | 5.50                | 48                   | 1650                             |                                  |
| 610                          | <b>1RQ6 456-3JJ</b>                  | 593   | 82                         | 94.2     | 94.0       | 0.76          | 0.69          | 9824                            | 2.50   | 1.00              | 5.50                | 54                   | 1950                             |                                  |
| 740                          | <b>1RQ6 500-3JE</b>                  | 593   | 94                         | 94.6     | 94.6       | 0.80          | 0.76          | 11917                           | 2.20   | 0.83              | 5.20                | 74                   | 1600                             |                                  |
| 820                          | <b>1RQ6 502-3JE</b>                  | 593   | 104                        | 94.8     | 94.8       | 0.80          | 0.76          | 13206                           | 2.30   | 0.85              | 5.40                | 84                   | 1950                             |                                  |
| 900                          | <b>1RQ6 504-3JE</b>                  | 593   | 114                        | 94.9     | 94.9       | 0.80          | 0.76          | 14494                           | 2.30   | 0.90              | 5.40                | 92                   | 2500                             |                                  |
| 1020                         | <b>1RQ6 506-3JE</b>                  | 593   | 128                        | 95.1     | 95.1       | 0.80          | 0.74          | 16427                           | 2.30   | 0.90              | 5.50                | 103                  | 3100                             |                                  |
| 1220                         | <b>1RQ6 560-3JE</b>                  | 594   | 156                        | 95.2     | 95.1       | 0.79          | 0.74          | 19614                           | 2.30   | 0.85              | 5.20                | 128                  | 3000                             |                                  |
| 1400                         | <b>1RQ6 562-3JE</b>                  | 594   | 176                        | 95.5     | 95.4       | 0.80          | 0.75          | 22508                           | 2.30   | 0.85              | 5.40                | 146                  | 4600                             |                                  |
| 1550                         | <b>1RQ6 564-3JE</b>                  | 594   | 194                        | 95.6     | 95.6       | 0.80          | 0.75          | 24920                           | 2.40   | 0.85              | 5.50                | 163                  | 5100                             |                                  |
| 1660                         | <b>1RQ6 566-3JE</b>                  | 595   | 215                        | 95.7     | 95.7       | 0.78          | 0.72          | 26644                           | 2.40   | 0.85              | 5.50                | 178                  | 5700                             |                                  |
| 2000                         | <b>1RQ4 630-3JE</b>                  | 593   | 240                        | 96.0     | 96.2       | 0.84          | 0.81          | 32209                           | 2.10   | 0.74              | 4.80                | 246                  | 5000                             |                                  |
| 2200                         | <b>1RQ4 632-3JE</b>                  | 594   | 260                        | 96.1     | 96.3       | 0.84          | 0.81          | 35370                           | 2.20   | 0.76              | 4.90                | 272                  | 5700                             |                                  |
| 2400                         | <b>1RQ4 634-3JE</b>                  | 594   | 285                        | 96.3     | 96.5       | 0.84          | 0.81          | 38586                           | 2.20   | 0.77              | 4.90                | 300                  | 6600                             |                                  |
| 2600                         | <b>1RQ4 636-3JE</b>                  | 594   | 315                        | 96.4     | 96.6       | 0.83          | 0.79          | 41801                           | 2.50   | 0.88              | 5.50                | 331                  | 7300                             |                                  |
| <b>12-pole</b>               |                                      |       |                            |          |            |               |               |                                 |        |                   |                     |                      |                                  |                                  |
| 310                          | <b>1RQ6 450-5JJ</b>                  | 493   | 46.0                       | 92.7     | 92.5       | 0.71          | 0.64          | 6005                            | 2.00   | 0.72              | 4.60                | 39                   | 1250                             |                                  |
| 350                          | <b>1RQ6 452-5JJ</b>                  | 493   | 52                         | 93.1     | 92.7       | 0.70          | 0.62          | 6780                            | 2.20   | 0.78              | 4.90                | 43                   | 1600                             |                                  |
| 400                          | <b>1RQ6 454-5JJ</b>                  | 493   | 58                         | 93.4     | 93.2       | 0.71          | 0.66          | 7748                            | 2.00   | 0.72              | 4.60                | 48                   | 1800                             |                                  |
| 450                          | <b>1RQ6 456-5JJ</b>                  | 493   | 64                         | 93.6     | 93.4       | 0.72          | 0.66          | 8717                            | 2.10   | 0.75              | 4.80                | 54                   | 1950                             |                                  |
| 540                          | <b>1RQ6 500-5JE</b>                  | 492   | 76                         | 94.0     | 93.9       | 0.73          | 0.67          | 10482                           | 2.10   | 0.70              | 4.60                | 74                   | 2200                             |                                  |
| 610                          | <b>1RQ6 502-5JE</b>                  | 493   | 85                         | 94.3     | 94.2       | 0.73          | 0.67          | 11816                           | 2.20   | 0.75              | 4.80                | 84                   | 3000                             |                                  |
| 670                          | <b>1RQ6 504-5JE</b>                  | 493   | 95                         | 94.4     | 94.3       | 0.72          | 0.65          | 12979                           | 2.30   | 0.78              | 5.00                | 91                   | 3700                             |                                  |
| 740                          | <b>1RQ6 506-5JE</b>                  | 493   | 104                        | 94.6     | 94.4       | 0.72          | 0.65          | 14335                           | 2.30   | 0.78              | 5.20                | 102                  | 4400                             |                                  |
| 920                          | <b>1RQ6 560-5JE</b>                  | 494   | 128                        | 94.7     | 94.8       | 0.73          | 0.67          | 17785                           | 2.00   | 0.67              | 4.50                | 128                  | 4100                             |                                  |
| 1020                         | <b>1RQ6 562-5JE</b>                  | 495   | 144                        | 94.9     | 94.9       | 0.72          | 0.65          | 19679                           | 2.10   | 0.72              | 4.60                | 146                  | 4700                             |                                  |
| 1120                         | <b>1RQ6 564-5JE</b>                  | 495   | 158                        | 95.0     | 95.0       | 0.72          | 0.65          | 21608                           | 2.20   | 0.72              | 4.80                | 163                  | 5300                             |                                  |
| 1220                         | <b>1RQ6 566-5JE</b>                  | 495   | 172                        | 95.2     | 95.1       | 0.72          | 0.65          | 23537                           | 2.30   | 0.75              | 4.80                | 178                  | 5900                             |                                  |
| 1600                         | <b>1RQ4 630-5JE</b>                  | 494   | 205                        | 95.5     | 95.8       | 0.78          | 0.72          | 30931                           | 2.25   | 0.83              | 5.00                | 246                  | 5700                             |                                  |
| 1800                         | <b>1RQ4 632-5JE</b>                  | 494   | 230                        | 95.8     | 96.0       | 0.78          | 0.73          | 34798                           | 2.30   | 0.85              | 5.10                | 272                  | 7500                             |                                  |
| 1950                         | <b>1RQ4 634-5JE</b>                  | 494   | 250                        | 96.0     | 96.1       | 0.78          | 0.73          | 37697                           | 2.30   | 0.87              | 5.20                | 300                  | 8800                             |                                  |
| 2050                         | <b>1RQ4 636-5JE</b>                  | 495   | 265                        | 96.2     | 96.3       | 0.78          | 0.72          | 39551                           | 2.45   | 0.92              | 5.40                | 331                  | 10500                            |                                  |

## Voltage code:

3.3 kV, 50 Hz  
6 kV, 50 Hz  
6.6 kV, 50 Hz  
Other voltage

0  
6  
7  
9

## Type of construction:

IM B3  
IM V1 (with canopy)

0  
4

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Higher pole numbers are available on request.

Electrical data is also valid for operation with SINAMICS PERFECT HARMONY drives.  
For ordering, please note the 10th and 11th position of the article number code.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.



## Selection and ordering data

The following data also apply to explosion-protected motors 1SB7 (Ex pxb) and 1SG7 (Ex ec).

| Rated power<br><br>IEC<br><br>kW | High voltage motor<br>SIMOTICS HV M (modular)<br><br>Article No. | Speed<br><br>rpm | Rated current            |               | Efficiency    |                           | Power factor              |                           | Torque<br><br>Nm | Break-down torque<br><br>$T_B/T_{rated}$<br>[-] | Locked-rotor torque<br><br>$T_{LR}/T_{rated}$<br>[-] | Locked-rotor current<br><br>$I_{LR}/I_{rated}$<br>[-] | Moment of inertia                                |  |
|----------------------------------|--|------------------|--------------------------|---------------|---------------|---------------------------|---------------------------|---------------------------|------------------|---|--|---|--|--|
|                                  |  |                  | $I_{rated}$ at 6 kV<br>A | 4/4 load<br>% | 3/4 load<br>% | 4/4 load<br>cos $\varphi$ | 3/4 load<br>cos $\varphi$ | Motor<br>kgm <sup>2</sup> |                  |   |  |   | External, max. <sup>1)</sup><br>kgm <sup>2</sup> |  |
| <b>3.3 ... 6.6 kV, 50 Hz</b>     |  |                  |                          |               |               |                           |                           |                           |                  |   |  |   |  |  |
| 2-pole                           |  |                  |                          |               |               |                           |                           |                           |                  |   |  |   |  |  |
| 7100                             | <b>1RQ7710-2JA60-0CJ0</b>  | 2987             | 770                      | 96.8          | 96.5          | 0.92                      | 0.91                      | 22698                     | 2.30             | 0.85  | 5.20   | 149   | 271  |  |
| 8000                             | <b>1RQ7712-2JA60-0CJ0</b>  | 2986             | 850                      | 97.0          | 96.7          | 0.93                      | 0.92                      | 25584                     | 2.30             | 0.80  | 5.20   | 160   | 254  |  |
| 9000                             | <b>1RQ7714-2JA60-0CJ0</b>  | 2987             | 960                      | 97.2          | 97.0          | 0.93                      | 0.92                      | 28772                     | 2.35             | 0.85  | 5.30   | 175   | 269  |  |
| 10000                            | <b>1RQ7716-2JA60-0CJ0</b>  | 2987             | 1060                     | 97.3          | 97.1          | 0.93                      | 0.93                      | 31969                     | 2.35             | 0.80  | 5.30   | 189   | 264  |  |
| 4-pole                           |  |                  |                          |               |               |                           |                           |                           |                  |   |  |   |  |  |
| 7000                             | <b>1RQ7710-4JA60-0CJ0</b>  | 1492             | 750                      | 97.3          | 97.4          | 0.92                      | 0.91                      | 44802                     | 2.45             | 0.70  | 5.20   | 262   | 882  |  |
| 7800                             | <b>1RQ7712-4JA60-0CJ0</b>  | 1493             | 850                      | 97.5          | 97.4          | 0.91                      | 0.91                      | 49889                     | 2.50             | 0.60  | 5.40   | 286   | 982  |  |
| 8600                             | <b>1RQ7714-4JA60-0CJ0</b>  | 1493             | 930                      | 97.6          | 97.5          | 0.91                      | 0.91                      | 55005                     | 2.55             | 0.60  | 5.40   | 320   | 1175   |  |
| 9500                             | <b>1RQ7716-4JA60-0CJ0</b>  | 1493             | 1020                     | 97.7          | 97.7          | 0.92                      | 0.91                      | 60762                     | 2.55             | 0.60  | 5.50   | 361   | 1341   |  |
| 6-pole                           |  |                  |                          |               |               |                           |                           |                           |                  |   |  |   |  |  |
| 5450                             | <b>1RQ7710-6JA6-0CJ0</b>   | 995              | 630                      | 97.1          | 97.0          | 0.86                      | 0.84                      | 52305                     | 2.55             | 0.80  | 5.40   | 351   | 2429   |  |
| 5900                             | <b>1RQ7712-6JA6-0CJ0</b>   | 995              | 690                      | 97.2          | 97.1          | 0.85                      | 0.83                      | 56623                     | 2.60             | 0.70  | 5.40   | 396   | 3045   |  |
| 6350                             | <b>1RQ7714-6JA6-0CJ0</b>   | 996              | 740                      | 97.2          | 97.1          | 0.85                      | 0.83                      | 60881                     | 2.60             | 0.70  | 5.40   | 445   | 3889   |  |
| 6800                             | <b>1RQ7716-6JA6-0CJ0</b>   | 996              | 780                      | 97.3          | 97.2          | 0.86                      | 0.84                      | 65196                     | 2.60             | 0.65  | 5.30   | 493   | 4307   |  |
| 8-pole                           |  |                  |                          |               |               |                           |                           |                           |                  |   |  |   |  |  |
| 4000                             | <b>1RQ7710-8JA6-0CJ0</b>   | 745              | 465                      | 96.9          | 97.0          | 0.85                      | 0.84                      | 51271                     | 2.40             | 0.65  | 4.90   | 434   | 8159   |  |
| 4500                             | <b>1RQ7712-8JA6-0CJ0</b>   | 745              | 520                      | 96.9          | 97.1          | 0.86                      | 0.84                      | 57680                     | 2.40             | 0.70  | 4.90   | 493   | 6487   |  |
| 5000                             | <b>1RQ7714-8JA6-0CJ0</b>   | 746              | 580                      | 97.0          | 97.2          | 0.86                      | 0.85                      | 64003                     | 2.40             | 0.70  | 4.90   | 557   | 8162   |  |
| 5500                             | <b>1RQ7716-8JA6-0CJ0</b>   | 746              | 630                      | 97.2          | 97.3          | 0.86                      | 0.84                      | 70403                     | 2.40             | 0.60  | 4.90   | 616   | 9603   |  |
| 10-pole                          |  |                  |                          |               |               |                           |                           |                           |                  |   |  |   |  |  |
| 2950                             | <b>1RQ7710-3JA6-0CJ0</b>   | 595              | 345                      | 96.5          | 96.7          | 0.85                      | 0.83                      | 47345                     | 2.60             | 0.65  | 4.70   | 431   | 9751   |  |
| 3300                             | <b>1RQ7712-3JA6-0CJ0</b>   | 595              | 385                      | 96.6          | 96.8          | 0.85                      | 0.83                      | 52962                     | 2.65             | 0.65  | 4.70   | 490   | 11246  |  |
| 3700                             | <b>1RQ7714-3JA6-0CJ0</b>   | 595              | 430                      | 96.7          | 96.9          | 0.86                      | 0.84                      | 59382                     | 2.60             | 0.65  | 4.70   | 556   | 14728  |  |
| 4100                             | <b>1RQ7716-3JA6-0CJ0</b>   | 595              | 470                      | 96.8          | 97.0          | 0.87                      | 0.85                      | 65801                     | 2.55             | 0.65  | 4.70   | 618   | 15981  |  |

## Type of construction:

|  |          |
|--|----------|
| IM B3 (IM 1001)                          | <b>0</b> |
| IM V1, without protective hood (IM 3011) | <b>8</b> |

## Housing and bearing version

|   |          |
|---|----------|
| Steel fabricated housing/<br>anti-friction bearings | <b>G</b> |
| Steel fabricated housing/<br>sleeve bearing         | <b>J</b> |

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Higher pole numbers are available on request.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on [Page 2/2](#).

## Motors for line operation

Air-cooled motors

### H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Selection and ordering data

| Rated power<br>IEC          | High voltage motor<br>H-compact PLUS<br>Article No. | Speed<br>rpm | Rated current<br>$I_{rated}$<br>at<br>10 kV<br>A | Efficiency       |                  | Power factor                 |                              | Torque<br>Nm | Break-<br>down<br>torque<br>$T_B/$<br>$T_{rated}$<br>[-] | Locked-<br>rotor<br>torque<br>$T_{LR}/$<br>$T_{rated}$<br>[-] | Locked-<br>rotor<br>current<br>$I_{LR}/$<br>$I_{rated}$<br>[-] | Moment of inertia         |   |
|-----------------------------|---|--------------|--|------------------|------------------|------------------------------|------------------------------|--------------|--|---|--|---------------------------|---|
|                             |   |              |  | 4/4<br>load<br>% | 3/4<br>load<br>% | 4/4<br>load<br>cos $\varphi$ | 3/4<br>load<br>cos $\varphi$ |              |  |   |  | Motor<br>kgm <sup>2</sup> | External,<br>max. <sup>1)</sup><br>kgm <sup>2</sup> |
| <b>9.0 ... 11 kV, 50 Hz</b> |   |              |  |                  |                  |                              |                              |              |  |   |  |                           |   |
| <b>2-pole</b>               |   |              |  |                  |                  |                              |                              |              |  |   |  |                           |   |
| 1030                        | <b>1RQ6 450-2JJ</b>                                 | 2978         | 71   | 95.1             | 95.2             | 0.88                         | 0.87                         | 3302         | 2.20   | 0.60  | 5.00   | 12                        | 32  |
| 1130                        | <b>1RQ6 452-2JJ</b>                                 | 2980         | 77   | 95.5             | 95.5             | 0.89                         | 0.88                         | 3621         | 2.40   | 0.65  | 5.50   | 14                        | 34  |
| 1230                        | <b>1RQ6 454-2JJ</b>                                 | 2980         | 83   | 95.6             | 95.8             | 0.89                         | 0.89                         | 3941         | 2.40   | 0.60  | 5.50   | 15                        | 35  |
| 1330                        | <b>1RQ6 456-2JJ</b>                                 | 2981         | 88   | 95.9             | 96.1             | 0.91                         | 0.90                         | 4260         | 2.45   | 0.60  | 5.50   | 17                        | 38  |
| 1690                        | <b>1RQ6 500-2JJ</b>                                 | 2979         | 114  | 95.9             | 96.1             | 0.90                         | 0.90                         | 5417         | 2.30   | 0.60  | 5.15   | 19                        | 53  |
| 1800                        | <b>1RQ6 502-2JJ</b>                                 | 2979         | 118  | 96.0             | 96.3             | 0.91                         | 0.90                         | 5769         | 2.35   | 0.70  | 5.20   | 21                        | 59  |
| 1990                        | <b>1RQ6 504-2JJ</b>                                 | 2979         | 130  | 96.2             | 96.4             | 0.92                         | 0.91                         | 6379         | 2.35   | 0.70  | 5.15   | 25                        | 66  |
| 2130                        | <b>1RQ6 506-2JJ</b>                                 | 2979         | 138  | 96.3             | 96.6             | 0.92                         | 0.92                         | 6827         | 2.35   | 0.75  | 5.20   | 26                        | 73  |
| 2740                        | <b>1RQ6 560-2JJ</b>                                 | 2983         | 182  | 96.1             | 96.1             | 0.90                         | 0.90                         | 8771         | 2.45   | 0.55  | 5.25   | 39                        | 105   |
| 3000                        | <b>1RQ6 562-2JJ</b>                                 | 2982         | 200  | 96.3             | 96.4             | 0.90                         | 0.91                         | 9606         | 2.20   | 0.55  | 4.65   | 43                        | 115   |
| 3340                        | <b>1RQ6 564-2JJ</b>                                 | 2982         | 220  | 96.5             | 96.5             | 0.91                         | 0.91                         | 10695        | 2.30   | 0.55  | 4.90   | 49                        | 130   |
| 3550                        | <b>1RQ6 566-2JJ</b>                                 | 2983         | 230  | 96.6             | 96.7             | 0.92                         | 0.92                         | 11364        | 2.35   | 0.55  | 5.20   | 54                        | 145   |
| 3600                        | <b>1RQ4 630-2JE</b>                                 | 2986         | 240  | 96.5             | 96.2             | 0.89                         | 0.88                         | 11514        | 2.60   | 0.39  | 5.10   | 61                        | 100   |
| 4100                        | <b>1RQ4 632-2JE</b>                                 | 2987         | 270  | 96.8             | 96.7             | 0.90                         | 0.89                         | 13108        | 2.70   | 0.42  | 5.50   | 68                        | 140   |
| 4600                        | <b>1RQ4 634-2JE</b>                                 | 2987         | 305  | 97.1             | 96.9             | 0.90                         | 0.89                         | 14707        | 2.70   | 0.42  | 5.50   | 77                        | 160   |
| 5200                        | <b>1RQ4 636-2JE</b>                                 | 2987         | 340  | 97.3             | 97.1             | 0.91                         | 0.90                         | 16625        | 2.60   | 0.43  | 5.50   | 87                        | 200   |
| <b>4-pole</b>               |   |              |  |                  |                  |                              |                              |              |  |   |  |                           |   |
| 900                         | <b>1RQ6 450-4JJ</b>                                 | 1484         | 61   | 95.1             | 95.4             | 0.89                         | 0.89                         | 5791         | 2.45   | 0.65  | 5.05   | 21                        | 154   |
| 1000                        | <b>1RQ6 452-4JJ</b>                                 | 1485         | 68   | 95.4             | 95.7             | 0.89                         | 0.89                         | 6430         | 2.50   | 0.65  | 5.10   | 23                        | 194   |
| 1120                        | <b>1RQ6 454-4JJ</b>                                 | 1486         | 75   | 95.5             | 95.8             | 0.90                         | 0.89                         | 7197         | 2.55   | 0.65  | 5.25   | 27                        | 250   |
| 1250                        | <b>1RQ6 456-4JJ</b>                                 | 1485         | 84   | 95.7             | 96.0             | 0.90                         | 0.90                         | 8038         | 2.45   | 0.65  | 5.05   | 30                        | 310   |
| 1570 <sup>2)</sup>          | <b>1RQ6 500-4JJ</b>                                 | 1487         | 106  | 95.2             | 95.8             | 0.89                         | 0.89                         | 10082        | 2.50   | 0.75  | 5.20   | 45                        | 200   |
| 1670 <sup>2)</sup>          | <b>1RQ6 502-4JJ</b>                                 | 1486         | 114  | 95.3             | 95.8             | 0.89                         | 0.88                         | 10731        | 2.40   | 0.65  | 5.00   | 48                        | 220   |
| 1860 <sup>2)</sup>          | <b>1RQ6 504-4JJ</b>                                 | 1487         | 126  | 95.6             | 96.1             | 0.89                         | 0.89                         | 11944        | 2.35   | 0.60  | 4.90   | 55                        | 250   |
| 2060 <sup>2)</sup>          | <b>1RQ6 506-4JJ</b>                                 | 1488         | 140  | 95.8             | 96.3             | 0.89                         | 0.88                         | 13220        | 2.55   | 0.65  | 5.50   | 59                        | 280   |
| 2650 <sup>2)</sup>          | <b>1RQ6 560-4JJ</b>                                 | 1492         | 176  | 96.5             | 96.7             | 0.90                         | 0.90                         | 16960        | 2.25   | 0.60  | 5.35   | 86                        | 460   |
| 2930 <sup>2)</sup>          | <b>1RQ6 562-4JJ</b>                                 | 1492         | 192  | 96.7             | 96.9             | 0.91                         | 0.90                         | 18752        | 2.25   | 0.55  | 5.20   | 96                        | 510   |
| 3300 <sup>2)</sup>          | <b>1RQ6 564-4JJ</b>                                 | 1491         | 215  | 96.8             | 97.0             | 0.91                         | 0.91                         | 21135        | 2.20   | 0.60  | 5.10   | 107                       | 560   |
| 3550 <sup>2)</sup>          | <b>1RQ6 566-4JJ</b>                                 | 1492         | 230  | 96.9             | 97.1             | 0.91                         | 0.91                         | 22721        | 2.30   | 0.60  | 5.35   | 116                       | 620   |
| 3800                        | <b>1RQ4 630-4JE</b>                                 | 1491         | 255  | 96.7             | 96.6             | 0.89                         | 0.88                         | 24339        | 2.40   | 0.62  | 5.40   | 139                       | 600   |
| 4250                        | <b>1RQ4 632-4JE</b>                                 | 1491         | 280  | 96.8             | 96.9             | 0.90                         | 0.90                         | 27222        | 2.40   | 0.64  | 5.50   | 154                       | 720   |
| 4700                        | <b>1RQ4 634-4JE</b>                                 | 1492         | 310  | 97.0             | 97.0             | 0.90                         | 0.89                         | 30084        | 2.40   | 0.63  | 5.50   | 174                       | 850   |
| 5100                        | <b>1RQ4 636-4JE</b>                                 | 1492         | 340  | 97.2             | 97.1             | 0.89                         | 0.88                         | 32644        | 2.45   | 0.60  | 5.50   | 186                       | 850   |

#### Voltage code:

10 kV, 50 Hz  
Other voltage

8  
9

#### Type of construction:

IM B3  
IM V1 (with canopy)

0  
4

#### Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

<sup>2)</sup> Data of vertical motors (IM V1) on request.

## Selection and ordering data (continued)

| Rated power<br>IEC   | High voltage motor<br>H-compact PLUS<br>Article No. | Speed<br>rpm | Rated<br>current<br>I <sub>rated</sub><br>at<br>10 kV<br>A | Efficiency       |                  | Power factor         |                      | Torque<br>Nm | Break-<br>down<br>torque<br>T <sub>B</sub> /<br>T <sub>rated</sub><br>[-] | Locked-<br>rotor<br>torque<br>T <sub>LR</sub> /<br>T <sub>rated</sub><br>[-] | Locked-<br>rotor<br>current<br>I <sub>LR</sub> /<br>I <sub>rated</sub><br>[-] | Moment of<br>inertia      |   |
|----------------------|---|--------------|--|------------------|------------------|----------------------|----------------------|--------------|---|--|---|---------------------------|---|
|                      |   |              |  | 4/4<br>load<br>% | 3/4<br>load<br>% | 4/4<br>load<br>cos φ | 3/4<br>load<br>cos φ |              |   |  |   | Motor<br>kgm <sup>2</sup> | External,<br>max. <sup>1)</sup><br>kgm <sup>2</sup> |
| 9.0 ... 11 kV, 50 Hz |   |              |  |                  |                  |                      |                      |              |   |  |   |                           |   |
| 6-pole               |   |              |  |                  |                  |                      |                      |              |   |  |   |                           |   |
| 720                  | 1RQ6 450-6JJ  | 991          | 52   | 95.1             | 95.5             | 0.84                 | 0.82                 | 6937         | 2.55  | 0.85   | 5.25  | 28                        | 380   |
| 800                  | 1RQ6 452-6JJ  | 990          | 57   | 95.2             | 95.6             | 0.85                 | 0.84                 | 7716         | 2.50  | 0.90   | 5.25  | 31                        | 435   |
| 890                  | 1RQ6 454-6JJ  | 990          | 63   | 95.3             | 95.8             | 0.85                 | 0.85                 | 8584         | 2.40  | 0.85   | 5.05  | 35                        | 490   |
| 1030                 | 1RQ6 456-6JJ  | 992          | 73   | 95.7             | 96.0             | 0.85                 | 0.83                 | 9915         | 2.55  | 0.80   | 5.20  | 40                        | 570   |
| 1180                 | 1RQ6 500-6JJ  | 991          | 82   | 95.3             | 95.9             | 0.87                 | 0.86                 | 11370        | 2.30  | 0.75   | 4.90  | 55                        | 740   |
| 1320                 | 1RQ6 502-6JJ  | 991          | 93   | 95.7             | 96.2             | 0.86                 | 0.85                 | 12719        | 2.35  | 0.70   | 5.00  | 61                        | 820   |
| 1470                 | 1RQ6 504-6JJ  | 991          | 102  | 95.6             | 96.2             | 0.87                 | 0.86                 | 14164        | 2.25  | 0.70   | 4.95  | 68                        | 910   |
| 1570                 | 1RQ6 506-6JJ  | 991          | 108  | 95.7             | 96.3             | 0.87                 | 0.86                 | 15128        | 2.30  | 0.75   | 5.10  | 76                        | 1020  |
| 2050                 | 1RQ6 560-6JJ  | 992          | 140  | 96.0             | 96.4             | 0.88                 | 0.87                 | 19733        | 2.10  | 0.70   | 4.80  | 107                       | 1180  |
| 2230                 | 1RQ6 562-6JJ  | 992          | 152  | 96.2             | 96.5             | 0.88                 | 0.87                 | 21466        | 2.20  | 0.70   | 5.10  | 118                       | 1300  |
| 2500                 | 1RQ6 564-6JJ  | 992          | 170  | 96.3             | 96.7             | 0.88                 | 0.88                 | 24065        | 2.15  | 0.70   | 5.00  | 131                       | 1460  |
| 2710                 | 1RQ6 566-6JJ  | 993          | 182  | 96.5             | 96.8             | 0.89                 | 0.88                 | 26061        | 2.30  | 0.80   | 5.30  | 145                       | 1600  |
| 3100                 | 1RQ4 630-6JE  | 994          | 215  | 96.6             | 96.5             | 0.86                 | 0.84                 | 29784        | 2.30  | 0.66   | 5.40  | 188                       | 1400  |
| 3400                 | 1RQ4 632-6JE  | 994          | 235  | 96.7             | 96.7             | 0.87                 | 0.85                 | 32666        | 2.30  | 0.68   | 5.50  | 207                       | 1700  |
| 3700                 | 1RQ4 634-6JE  | 994          | 255  | 96.8             | 96.8             | 0.86                 | 0.85                 | 35548        | 2.30  | 0.67   | 5.50  | 228                       | 2000  |
| 4000                 | 1RQ4 636-6JE  | 994          | 275  | 97.0             | 96.9             | 0.86                 | 0.84                 | 38431        | 2.40  | 0.67   | 5.50  | 251                       | 2400  |
| 8-pole               |   |              |  |                  |                  |                      |                      |              |   |  |   |                           |   |
| 470                  | 1RQ6 450-8JJ  | 743          | 34   | 94.4             | 95.0             | 0.84                 | 0.82                 | 6040         | 2.35  | 0.75   | 4.95  | 35                        | 250   |
| 500                  | 1RQ6 452-8JJ  | 744          | 36.5   | 94.5             | 95.1             | 0.84                 | 0.81                 | 6417         | 2.55  | 0.80   | 5.35  | 39                        | 320   |
| 530                  | 1RQ6 454-8JJ  | 744          | 38.5   | 94.4             | 95.0             | 0.84                 | 0.82                 | 6802         | 2.45  | 0.80   | 5.20  | 44                        | 390   |
| 590                  | 1RQ6 456-8JJ  | 745          | 44   | 95.1             | 95.4             | 0.81                 | 0.78                 | 7562         | 2.55  | 0.70   | 5.10  | 50                        | 495   |
| 880                  | 1RQ6 500-8JJ  | 744          | 64   | 94.9             | 95.5             | 0.84                 | 0.81                 | 11294        | 2.20  | 0.55   | 4.65  | 68                        | 780   |
| 1000                 | 1RQ6 502-8JJ  | 744          | 72   | 95.1             | 95.7             | 0.84                 | 0.82                 | 12835        | 2.20  | 0.55   | 4.60  | 75                        | 860   |
| 1120                 | 1RQ6 504-8JJ  | 743          | 81   | 95.2             | 95.8             | 0.84                 | 0.83                 | 14394        | 2.15  | 0.55   | 4.45  | 83                        | 960   |
| 1200                 | 1RQ6 506-8JJ  | 744          | 85   | 95.4             | 96.0             | 0.85                 | 0.83                 | 15402        | 2.20  | 0.60   | 4.65  | 93                        | 1060  |
| 1480                 | 1RQ6 560-8JJ  | 744          | 104  | 95.9             | 96.4             | 0.85                 | 0.83                 | 18995        | 2.15  | 0.55   | 4.75  | 127                       | 1600  |
| 1650                 | 1RQ6 562-8JJ  | 744          | 116  | 96.0             | 96.6             | 0.85                 | 0.83                 | 21177        | 2.20  | 0.60   | 4.95  | 140                       | 1760  |
| 1830                 | 1RQ6 564-8JJ  | 744          | 130  | 96.1             | 96.6             | 0.85                 | 0.83                 | 23488        | 2.20  | 0.60   | 4.90  | 154                       | 1960  |
| 1960                 | 1RQ6 566-8JJ  | 745          | 138  | 96.2             | 96.7             | 0.85                 | 0.83                 | 25122        | 2.30  | 0.65   | 5.05  | 171                       | 2150  |
| 2300                 | 1RQ4 630-8JE  | 744          | 164  | 96.1             | 96.1             | 0.84                 | 0.81                 | 29523        | 2.40  | 0.76   | 5.30  | 246                       | 2000  |
| 2500                 | 1RQ4 632-8JE  | 745          | 180  | 96.2             | 96.2             | 0.83                 | 0.79                 | 32047        | 2.60  | 0.81   | 5.50  | 272                       | 2100  |
| 2700                 | 1RQ4 634-8JE  | 745          | 194  | 96.3             | 96.3             | 0.83                 | 0.79                 | 34611        | 2.60  | 0.80   | 5.50  | 300                       | 2400  |
| 2900                 | 1RQ4 636-8JE  | 745          | 205  | 96.5             | 96.5             | 0.84                 | 0.80                 | 37174        | 2.60  | 0.80   | 5.50  | 331                       | 2900  |

## Voltage code:

10 kV, 50 Hz  
Other voltage8  
9

## Type of construction:

IM B3  
IM V1 (with canopy)0  
4

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

1) Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

## Motors for line operation

Air-cooled motors

### H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Selection and ordering data (continued)

| Rated power<br>IEC          | High voltage motor<br>H-compact PLUS<br>Article No. | Speed<br>rpm | Rated current<br>$I_{rated}$<br>at<br>10 kV<br>A | Efficiency       |                  | Power factor                 |                              | Torque<br>Nm | Break-<br>down<br>torque<br>$T_B/$<br>$T_{rated}$<br>[-] | Locked-<br>rotor<br>torque<br>$T_{LR}/$<br>$T_{rated}$<br>[-] | Locked-<br>rotor<br>current<br>$I_{LR}/$<br>$I_{rated}$<br>[-] | Moment of inertia         |   |
|-----------------------------|---|--------------|--|------------------|------------------|------------------------------|------------------------------|--------------|--|---|--|---------------------------|---|
|                             |   |              |  | 4/4<br>load<br>% | 3/4<br>load<br>% | 4/4<br>load<br>cos $\varphi$ | 3/4<br>load<br>cos $\varphi$ |              |  |   |  | Motor<br>kgm <sup>2</sup> | External,<br>max. <sup>1)</sup><br>kgm <sup>2</sup> |
| <b>9.0 ... 11 kV, 50 Hz</b> |   |              |  |                  |                  |                              |                              |              |  |   |  |                           |   |
| 10-pole                     |   |              |  |                  |                  |                              |                              |              |  |   |  |                           |   |
| 600                         | <b>1RQ6 500-3JE</b>                                 | 595          | 48.0   | 93.8             | 93.6             | 0.77                         | 0.71                         | 9630         | 2.40   | 0.85  | 5.50   | 74                        | 900   |
| 680                         | <b>1RQ6 502-3JE</b>                                 | 594          | 51   | 94.2             | 94.2             | 0.81                         | 0.76                         | 10933        | 2.30   | 0.90  | 5.50   | 84                        | 1150  |
| 750                         | <b>1RQ6 504-3JE</b>                                 | 594          | 57   | 94.3             | 94.3             | 0.81                         | 0.76                         | 12058        | 2.30   | 0.90  | 5.50   | 92                        | 1300  |
| 820                         | <b>1RQ6 506-3JE</b>                                 | 594          | 61   | 94.5             | 94.5             | 0.82                         | 0.77                         | 13184        | 2.30   | 0.90  | 5.50   | 103                       | 1600  |
| 1050                        | <b>1RQ6 560-3JE</b>                                 | 594          | 81   | 94.7             | 94.7             | 0.79                         | 0.73                         | 16881        | 2.40   | 0.85  | 5.50   | 128                       | 1850  |
| 1180                        | <b>1RQ6 562-3JE</b>                                 | 594          | 90   | 95.0             | 95.0             | 0.80                         | 0.75                         | 18971        | 2.30   | 0.85  | 5.50   | 146                       | 2300  |
| 1300                        | <b>1RQ6 564-3JE</b>                                 | 595          | 100  | 95.2             | 95.1             | 0.79                         | 0.74                         | 20866        | 2.40   | 0.82  | 5.50   | 163                       | 2600  |
| 1400                        | <b>1RQ6 566-3JE</b>                                 | 595          | 112  | 95.3             | 95.0             | 0.76                         | 0.69                         | 22471        | 2.60   | 0.82  | 5.50   | 178                       | 2750  |
| 1800                        | <b>1RQ4 630-3JE</b>                                 | 594          | 132  | 95.8             | 95.9             | 0.82                         | 0.78                         | 28939        | 2.40   | 0.85  | 5.40   | 246                       | 2600  |
| 1950                        | <b>1RQ4 632-3JE</b>                                 | 595          | 146  | 96.0             | 96.0             | 0.80                         | 0.74                         | 31298        | 2.60   | 0.88  | 5.50   | 272                       | 3100  |
| 2100                        | <b>1RQ4 634-3JE</b>                                 | 595          | 156  | 96.1             | 96.1             | 0.81                         | 0.76                         | 33706        | 2.60   | 0.89  | 5.50   | 300                       | 3200  |
| 2250                        | <b>1RQ4 636-3JE</b>                                 | 595          | 166  | 96.2             | 96.1             | 0.81                         | 0.76                         | 36113        | 2.60   | 0.85  | 5.50   | 331                       | 3500  |
| 12-pole                     |   |              |  |                  |                  |                              |                              |              |  |   |  |                           |   |
| 480                         | <b>1RQ6 502-5JE</b>                                 | 494          | 42.0   | 93.4             | 93.4             | 0.70                         | 0.62                         | 9279         | 2.40   | 0.85  | 5.40   | 84                        | 1500  |
| 530                         | <b>1RQ6 504-5JE</b>                                 | 494          | 46.0   | 93.5             | 93.5             | 0.70                         | 0.62                         | 10246        | 2.40   | 0.85  | 5.40   | 91                        | 1650  |
| 580                         | <b>1RQ6 506-5JE</b>                                 | 494          | 50   | 93.7             | 93.9             | 0.72                         | 0.64                         | 11213        | 2.50   | 0.85  | 5.40   | 102                       | 1800  |
| 720                         | <b>1RQ6 560-5JE</b>                                 | 495          | 60   | 94.0             | 94.4             | 0.74                         | 0.67                         | 13891        | 2.10   | 0.70  | 4.80   | 128                       | 1950  |
| 840                         | <b>1RQ6 562-5JE</b>                                 | 495          | 71   | 94.4             | 94.7             | 0.72                         | 0.65                         | 16206        | 2.30   | 0.78  | 5.00   | 146                       | 2500  |
| 920                         | <b>1RQ6 564-5JE</b>                                 | 495          | 77   | 94.6             | 94.9             | 0.73                         | 0.66                         | 17749        | 2.30   | 0.75  | 5.00   | 163                       | 2950  |
| 1000                        | <b>1RQ6 566-5JE</b>                                 | 495          | 83   | 94.8             | 95.1             | 0.73                         | 0.67                         | 19293        | 2.30   | 0.75  | 5.00   | 178                       | 3400  |
| 1400                        | <b>1RQ4 630-5JE</b>                                 | 495          | 110  | 95.2             | 95.7             | 0.77                         | 0.71                         | 27010        | 2.50   | 0.91  | 5.40   | 246                       | 3100  |
| 1500                        | <b>1RQ4 632-5JE</b>                                 | 495          | 116  | 95.3             | 95.9             | 0.79                         | 0.73                         | 28939        | 2.35   | 0.86  | 5.30   | 272                       | 3300  |
| 1630                        | <b>1RQ4 634-5JE</b>                                 | 495          | 124  | 95.5             | 96.1             | 0.79                         | 0.75                         | 31447        | 2.30   | 0.84  | 5.20   | 300                       | 4100  |
| 1750                        | <b>1RQ4 636-5JE</b>                                 | 496          | 138  | 95.7             | 96.0             | 0.76                         | 0.69                         | 33695        | 2.70   | 1.00  | 5.50   | 331                       | 4300  |

#### Voltage code:

10 kV, 50 Hz  
Other voltage

8  
9

#### Type of construction:

IM B3  
IM V1 (with canopy)

0  
4

#### Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Higher pole numbers are available on request.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on [Page 2/2](#).

## Selection and ordering data

| Rated power<br>IEC<br>kW  | High voltage motor<br>SIMOTICS HV M (modular)<br>Article No. | Speed<br>rpm | Rated current             |               | Efficiency    |                           | Power factor              |                           | Torque<br>Nm | Break-down torque<br>$T_B/T_{rated}$<br>[-] | Locked-rotor torque<br>$T_{LR}/T_{rated}$<br>[-] | Locked-rotor current<br>$I_{LR}/I_{rated}$<br>[-] | Moment of inertia                                |  |
|---------------------------|--|--------------|---------------------------|---------------|---------------|---------------------------|---------------------------|---------------------------|--------------|---|--|---|--|--|
|                           |  |              | $I_{rated}$ at 10 kV<br>A | 4/4 load<br>% | 3/4 load<br>% | 4/4 load<br>cos $\varphi$ | 3/4 load<br>cos $\varphi$ | Motor<br>kgm <sup>2</sup> |              |   |  |   | External, max. <sup>1)</sup><br>kgm <sup>2</sup> |  |
| <b>9 ... 11 kV, 50 Hz</b> |  |              |                           |               |               |                           |                           |                           |              |   |  |   |  |  |
| 2-pole                    |  |              |                           |               |               |                           |                           |                           |              |   |  |   |  |  |
| 6000                      | <b>1RQ7710-2JA80-0CJ0</b>                                    | 2988         | 385                       | 96.4          | 96.1          | 0.93                      | 0.92                      | 19175                     | 2.30         | 0.65  | 5.10   | 148   | 294  |  |
| 6700                      | <b>1RQ7712-2JA80-0CJ0</b>                                    | 2987         | 430                       | 96.6          | 96.3          | 0.93                      | 0.92                      | 21419                     | 2.30         | 0.65  | 5.10   | 160   | 315  |  |
| 7500                      | <b>1RQ7714-2JA80-0CJ0</b>                                    | 2988         | 480                       | 96.9          | 96.6          | 0.93                      | 0.93                      | 23969                     | 2.35         | 0.75  | 5.40   | 175   | 354  |  |
| 8500                      | <b>1RQ7716-2JA80-0CJ0</b>                                    | 2988         | 540                       | 97.1          | 96.9          | 0.93                      | 0.93                      | 27165                     | 2.35         | 0.80  | 5.40   | 189   | 347  |  |
| 4-pole                    |  |              |                           |               |               |                           |                           |                           |              |   |  |   |  |  |
| 6000                      | <b>1RQ7710-4JA80-0C■0</b>                                    | 1493         | 385                       | 97.2          | 97.2          | 0.92                      | 0.91                      | 38376                     | 2.50         | 0.65  | 5.30   | 262   | 1002   |  |
| 6700                      | <b>1RQ7712-4JA80-0C■0</b>                                    | 1493         | 430                       | 97.3          | 97.3          | 0.92                      | 0.92                      | 42853                     | 2.50         | 0.65  | 5.30   | 287   | 1124   |  |
| 7500                      | <b>1RQ7714-4JA80-0C■0</b>                                    | 1492         | 485                       | 97.4          | 97.4          | 0.92                      | 0.92                      | 48002                     | 2.50         | 0.70  | 5.30   | 322   | 1268   |  |
| 8400                      | <b>1RQ7716-4JA80-0C■0</b>                                    | 1492         | 540                       | 97.5          | 97.5          | 0.92                      | 0.93                      | 53762                     | 2.50         | 0.70  | 5.30   | 363   | 1363   |  |
| 6-pole                    |  |              |                           |               |               |                           |                           |                           |              |   |  |   |  |  |
| 4750                      | <b>1RQ7710-6JA8■-0C■0</b>                                    | 995          | 330                       | 96.9          | 96.9          | 0.86                      | 0.84                      | 45587                     | 2.50         | 0.70  | 5.30   | 348   | 2773   |  |
| 5200                      | <b>1RQ7712-6JA8■-0C■0</b>                                    | 996          | 365                       | 97.0          | 96.9          | 0.85                      | 0.83                      | 49855                     | 2.50         | 0.60  | 5.20   | 393   | 3166   |  |
| 5700                      | <b>1RQ7714-6JA8■-0C■0</b>                                    | 996          | 395                       | 97.1          | 97.0          | 0.86                      | 0.84                      | 54649                     | 2.50         | 0.65  | 5.20   | 446   | 3136   |  |
| 6200                      | <b>1RQ7716-6JA8■-0C■0</b>                                    | 996          | 430                       | 97.2          | 97.1          | 0.86                      | 0.84                      | 59443                     | 2.60         | 0.65  | 5.40   | 493   | 3899   |  |
| 8-pole                    |  |              |                           |               |               |                           |                           |                           |              |   |  |   |  |  |
| 3350                      | <b>1RQ7710-8JA8■-0C■0</b>                                    | 746          | 235                       | 96.6          | 96.7          | 0.85                      | 0.83                      | 42882                     | 2.65         | 0.70  | 5.50   | 434   | 6504   |  |
| 3750                      | <b>1RQ7712-8JA8■-0C■0</b>                                    | 746          | 260                       | 96.8          | 96.8          | 0.86                      | 0.83                      | 48002                     | 2.70         | 0.70  | 5.50   | 493   | 7480   |  |
| 4200                      | <b>1RQ7714-8JA8■-0C■0</b>                                    | 746          | 295                       | 96.9          | 96.9          | 0.85                      | 0.83                      | 53762                     | 2.70         | 0.65  | 5.40   | 556   | 8649   |  |
| 4700                      | <b>1RQ7716-8JA8■-0C■0</b>                                    | 746          | 325                       | 96.9          | 97.0          | 0.86                      | 0.84                      | 60163                     | 2.65         | 0.70  | 5.40   | 616   | 7384   |  |
| 10-pole                   |  |              |                           |               |               |                           |                           |                           |              |   |  |   |  |  |
| 2850                      | <b>1RQ7710-3JA8■-0C■0</b>                                    | 595          | 198                       | 96.4          | 96.6          | 0.86                      | 0.83                      | 45740                     | 2.70         | 0.65  | 4.90   | 433   | 10565  |  |
| 3100                      | <b>1RQ7712-3JA8■-0C■0</b>                                    | 596          | 220                       | 96.5          | 96.7          | 0.85                      | 0.82                      | 49669                     | 2.75         | 0.70  | 5.00   | 490   | 10236  |  |
| 3350                      | <b>1RQ7714-3JA8■-0C■0</b>                                    | 596          | 235                       | 96.6          | 96.7          | 0.85                      | 0.83                      | 53674                     | 2.80         | 0.70  | 5.00   | 554   | 12357  |  |
| 3600                      | <b>1RQ7716-3JA8■-0C■0</b>                                    | 596          | 255                       | 96.6          | 96.7          | 0.85                      | 0.82                      | 57680                     | 2.85         | 0.70  | 5.10   | 612   | 10717  |  |

## Type of construction:

|  |          |
|--|----------|
| IM B3 (IM 1001)                          | <b>0</b> |
| IM V1, without protective hood (IM 3011) | <b>8</b> |

## Housing and bearing version

|   |          |
|---|----------|
| Steel fabricated housing/<br>anti-friction bearings | <b>G</b> |
| Steel fabricated housing/<br>sleeve bearing         | <b>J</b> |

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Higher pole numbers are available on request.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

## Motors for line operation

## Air-cooled motors

## H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

## Selection and ordering data

The following data also apply to explosion-protected motors 1SB4/1SB6 (Ex pxb) and 1SG4/1SG6 (Ex ec).

| Rated power<br>IEC<br>kW     | High voltage motor<br>H-compact PLUS<br>Article No. | Speed<br>rpm | Rated<br>current<br>A | Efficiency       |                  | Power factor                 |                              | Torque<br>Nm | Break-<br>down<br>torque<br>$T_B/T_{rated}$ | Locked-<br>rotor<br>torque<br>$T_{LR}/T_{rated}$ | Locked-<br>rotor<br>current<br>$I_{LR}/I_{rated}$ | Moment of inertia         |   |
|------------------------------|---|--------------|-----------------------|------------------|------------------|------------------------------|------------------------------|--------------|---|--|---|---------------------------|---|
|                              |   |              |                       | 4/4<br>load<br>% | 3/4<br>load<br>% | 4/4<br>load<br>cos $\varphi$ | 3/4<br>load<br>cos $\varphi$ |              |   |  |   | Motor<br>kgm <sup>2</sup> | External,<br>max. <sup>1)</sup><br>kgm <sup>2</sup> |
| <b>4.0 ... 6.6 kV, 60 Hz</b> |   |              |                       |                  |                  |                              |                              |              |   |  |   |                           |   |
| 2-pole                       |   |              |                       |                  |                  |                              |                              |              |   |  |   |                           |   |
| 1380                         | <b>1RQ6 450-2JJ</b>                                 | 3575         | 144                   | 95.3             | 95.3             | 0.88                         | 0.88                         | 3686         | 2.05  | 0.60   | 4.65  | 13                        | 44  |
| 1500                         | <b>1RQ6 452-2JJ</b>                                 | 3578         | 152                   | 95.7             | 95.6             | 0.90                         | 0.89                         | 4003         | 2.30  | 0.65   | 5.25  | 15                        | 46  |
| 1700                         | <b>1RQ6 454-2JJ</b>                                 | 3579         | 172                   | 95.9             | 95.8             | 0.90                         | 0.89                         | 4535         | 2.35  | 0.60   | 5.50  | 16                        | 48  |
| 1850                         | <b>1RQ6 456-2JJ</b>                                 | 3582         | 188                   | 96.1             | 96.0             | 0.90                         | 0.89                         | 4931         | 2.45  | 0.55   | 5.50  | 18                        | 51  |
| 2240                         | <b>1RQ6 500-2JJ</b>                                 | 3580         | 225                   | 96.2             | 96.1             | 0.90                         | 0.89                         | 5974         | 2.30  | 0.55   | 5.25  | 20                        | 63  |
| 2500                         | <b>1RQ6 502-2JJ</b>                                 | 3579         | 250                   | 96.3             | 96.3             | 0.91                         | 0.90                         | 6670         | 2.20  | 0.65   | 5.00  | 22                        | 70  |
| 2800                         | <b>1RQ6 504-2JJ</b>                                 | 3578         | 275                   | 96.5             | 96.6             | 0.92                         | 0.91                         | 7472         | 2.25  | 0.55   | 5.00  | 26                        | 78  |
| 3150                         | <b>1RQ6 506-2JJ</b>                                 | 3576         | 315                   | 96.6             | 96.8             | 0.91                         | 0.91                         | 8411         | 2.10  | 0.65   | 4.85  | 27                        | 86  |
| 3550                         | <b>1RQ6 560-2JJ</b>                                 | 3581         | 360                   | 96.2             | 96.0             | 0.89                         | 0.90                         | 9466         | 2.15  | 0.55   | 4.65  | 39                        | 130   |
| 4000                         | <b>1RQ6 562-2JJ</b>                                 | 3582         | 400                   | 96.4             | 96.2             | 0.90                         | 0.90                         | 10663        | 2.30  | 0.55   | 4.85  | 43                        | 145   |
| 4500                         | <b>1RQ6 564-2JJ</b>                                 | 3581         | 450                   | 96.6             | 96.5             | 0.91                         | 0.92                         | 11999        | 2.25  | 0.55   | 4.75  | 49                        | 160   |
| 4900                         | <b>1RQ6 566-2JJ</b>                                 | 3581         | 490                   | 96.7             | 96.6             | 0.91                         | 0.92                         | 13066        | 2.25  | 0.50   | 4.80  | 54                        | 180   |
| 4300                         | <b>1RQ4 630-2JE</b>                                 | 3584         | 435                   | 96.1             | 95.8             | 0.90                         | 0.89                         | 11458        | 2.30  | 0.33   | 4.70  | 61                        | 80  |
| 4900                         | <b>1RQ4 632-2JE</b>                                 | 3585         | 495                   | 96.5             | 96.2             | 0.90                         | 0.89                         | 13053        | 2.50  | 0.37   | 5.10  | 68                        | 110   |
| 5600                         | <b>1RQ4 634-2JE</b>                                 | 3586         | 560                   | 96.9             | 96.6             | 0.90                         | 0.90                         | 14914        | 2.60  | 0.38   | 5.30  | 77                        | 160   |
| 6300                         | <b>1RQ4 636-2JE</b>                                 | 3587         | 620                   | 97.1             | 96.8             | 0.91                         | 0.90                         | 16773        | 2.60  | 0.40   | 5.50  | 87                        | 190   |
| 4-pole                       |   |              |                       |                  |                  |                              |                              |              |   |  |   |                           |   |
| 1400                         | <b>1RQ6 450-4JJ</b>                                 | 1785         | 146                   | 95.6             | 95.7             | 0.88                         | 0.87                         | 7489         | 2.55  | 0.60   | 5.20  | 21                        | 200   |
| 1470                         | <b>1RQ6 452-4JJ</b>                                 | 1787         | 152                   | 95.7             | 95.7             | 0.88                         | 0.86                         | 7855         | 2.60  | 0.55   | 5.25  | 23                        | 240   |
| 1680                         | <b>1RQ6 454-4JJ</b>                                 | 1785         | 172                   | 96.0             | 96.1             | 0.89                         | 0.88                         | 8987         | 2.50  | 0.60   | 5.15  | 27                        | 295   |
| 1850                         | <b>1RQ6 456-4JJ</b>                                 | 1785         | 186                   | 96.2             | 96.3             | 0.90                         | 0.89                         | 9897         | 2.50  | 0.60   | 5.15  | 30                        | 355   |
| 2240 <sup>2)</sup>           | <b>1RQ6 500-4JJ</b>                                 | 1785         | 230                   | 95.6             | 95.9             | 0.89                         | 0.88                         | 11983        | 2.30  | 0.60   | 4.85  | 45                        | 250   |
| 2500 <sup>2)</sup>           | <b>1RQ6 502-4JJ</b>                                 | 1786         | 255                   | 95.8             | 96.1             | 0.89                         | 0.88                         | 13366        | 2.40  | 0.65   | 5.05  | 48                        | 290   |
| 2800 <sup>2)</sup>           | <b>1RQ6 504-4JJ</b>                                 | 1787         | 285                   | 96.1             | 96.4             | 0.89                         | 0.88                         | 14962        | 2.45  | 0.65   | 5.15  | 55                        | 320   |
| 3120 <sup>2)</sup>           | <b>1RQ6 506-4JJ</b>                                 | 1787         | 320                   | 96.2             | 96.5             | 0.89                         | 0.88                         | 16672        | 2.45  | 0.60   | 5.25  | 59                        | 360   |
| 3670 <sup>2)</sup>           | <b>1RQ6 560-4JJ</b>                                 | 1791         | 370                   | 96.7             | 96.7             | 0.90                         | 0.90                         | 19567        | 2.20  | 0.55   | 5.10  | 86                        | 660   |
| 4200 <sup>2)</sup>           | <b>1RQ6 562-4JJ</b>                                 | 1792         | 420                   | 96.9             | 96.8             | 0.90                         | 0.89                         | 22381        | 2.25  | 0.55   | 5.30  | 96                        | 730   |
| 4750 <sup>2)</sup>           | <b>1RQ6 564-4JJ</b>                                 | 1791         | 480                   | 97.1             | 97.1             | 0.90                         | 0.90                         | 25326        | 2.15  | 0.50   | 5.05  | 106                       | 800   |
| 5100 <sup>2)</sup>           | <b>1RQ6 566-4JJ</b>                                 | 1792         | 510                   | 97.1             | 97.1             | 0.90                         | 0.90                         | 27177        | 2.30  | 0.55   | 5.50  | 116                       | 880   |
| 5000                         | <b>1RQ4 630-4JE</b>                                 | 1791         | 500                   | 96.8             | 96.6             | 0.90                         | 0.89                         | 26661        | 2.40  | 0.60   | 5.30  | 139                       | 650   |
| 5500                         | <b>1RQ4 632-4JE</b>                                 | 1791         | 551                   | 96.9             | 96.8             | 0.90                         | 0.90                         | 29327        | 2.40  | 0.62   | 5.30  | 154                       | 750   |
| 6100                         | <b>1RQ4 634-4JE</b>                                 | 1791         | 610                   | 97.1             | 96.9             | 0.90                         | 0.90                         | 32527        | 2.40  | 0.65   | 5.50  | 174                       | 800   |
| 6700                         | <b>1RQ4 636-4JE</b>                                 | 1791         | 670                   | 97.2             | 97.1             | 0.90                         | 0.90                         | 35726        | 2.40  | 0.65   | 5.50  | 186                       | 820   |

## Voltage code:

4 kV, 60 Hz  
6.6 kV, 60 Hz  
Other voltage

4  
1  
9

## Type of construction:

IM B3  
IM V1 (with canopy)

0  
4

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Electrical data is also valid for operation with SINAMICS PERFECT HARMONY drives.  
For ordering, please note the 10th and 11th position of the article number code.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

<sup>2)</sup> Data of vertical motors (IM V1) on request.

## Selection and ordering data (continued)

| Rated power<br>IEC<br>kW     | High voltage motor<br>H-compact PLUS<br>Article No. | Speed<br>rpm | Rated<br>current<br>A | Efficiency       |                  | Power factor         |                      | Torque<br>Nm | Break-<br>down<br>torque<br>$T_B/T_{rated}$<br>[-] | Locked-<br>rotor<br>torque<br>$T_{LR}/T_{rated}$<br>[-] | Locked-<br>rotor<br>current<br>$I_{LR}/I_{rated}$<br>[-] | Moment of<br>inertia      |   |
|------------------------------|---|--------------|-----------------------|------------------|------------------|----------------------|----------------------|--------------|--|---|--|---------------------------|---|
|                              |   |              |                       | 4/4<br>load<br>% | 3/4<br>load<br>% | 4/4<br>load<br>cos φ | 3/4<br>load<br>cos φ |              |  |   |  | Motor<br>kgm <sup>2</sup> | External,<br>max. <sup>1)</sup><br>kgm <sup>2</sup> |
| <b>4.0 ... 6.6 kV, 60 Hz</b> |   |              |                       |                  |                  |                      |                      |              |  |   |  |                           |   |
| <b>6-pole</b>                |   |              |                       |                  |                  |                      |                      |              |  |   |  |                           |   |
| 1100                         | <b>1RQ6 450-6JJ</b>                                 | 1188         | 120                   | 95.7             | 96.0             | 0.84                 | 0.84                 | 8841         | 2.30   | 0.80  | 4.80   | 28                        | 530   |
| 1210                         | <b>1RQ6 452-6JJ</b>                                 | 1190         | 132                   | 95.9             | 96.1             | 0.84                 | 0.83                 | 9709         | 2.40   | 0.80  | 4.95   | 31                        | 600   |
| 1350                         | <b>1RQ6 454-6JJ</b>                                 | 1189         | 144                   | 96.0             | 96.2             | 0.85                 | 0.84                 | 10842        | 2.40   | 0.80  | 4.95   | 35                        | 660   |
| 1460                         | <b>1RQ6 456-6JJ</b>                                 | 1190         | 156                   | 96.3             | 96.5             | 0.85                 | 0.84                 | 11715        | 2.45   | 0.85  | 5.15   | 41                        | 770   |
| 1800                         | <b>1RQ6 500-6JJ</b>                                 | 1190         | 190                   | 96.2             | 96.6             | 0.86                 | 0.85                 | 14444        | 2.30   | 0.70  | 4.80   | 56                        | 1000  |
| 2000                         | <b>1RQ6 502-6JJ</b>                                 | 1190         | 210                   | 96.4             | 96.8             | 0.86                 | 0.84                 | 16049        | 2.30   | 0.70  | 5.00   | 61                        | 1120  |
| 2240                         | <b>1RQ6 504-6JJ</b>                                 | 1189         | 235                   | 96.1             | 96.5             | 0.86                 | 0.86                 | 17990        | 2.10   | 0.60  | 4.60   | 68                        | 1240  |
| 2500                         | <b>1RQ6 506-6JJ</b>                                 | 1190         | 265                   | 96.6             | 96.9             | 0.86                 | 0.85                 | 20061        | 2.25   | 0.60  | 4.70   | 76                        | 1380  |
| 2850                         | <b>1RQ6 560-6JJ</b>                                 | 1191         | 295                   | 96.7             | 97.0             | 0.88                 | 0.88                 | 22850        | 2.00   | 0.65  | 4.60   | 107                       | 1440  |
| 3200                         | <b>1RQ6 562-6JJ</b>                                 | 1190         | 330                   | 96.8             | 97.1             | 0.88                 | 0.87                 | 25678        | 1.95   | 0.65  | 4.65   | 118                       | 1580  |
| 3500                         | <b>1RQ6 564-6JJ</b>                                 | 1192         | 360                   | 96.9             | 97.2             | 0.88                 | 0.88                 | 28039        | 2.15   | 0.70  | 4.90   | 131                       | 1740  |
| 3830                         | <b>1RQ6 566-6JJ</b>                                 | 1192         | 390                   | 97.0             | 97.3             | 0.89                 | 0.88                 | 30682        | 2.15   | 0.70  | 5.00   | 145                       | 1940  |
| 4250                         | <b>1RQ4 630-6JE</b>                                 | 1193         | 445                   | 96.8             | 96.7             | 0.86                 | 0.84                 | 34021        | 2.30   | 0.62  | 5.20   | 188                       | 1850  |
| 4550                         | <b>1RQ4 632-6JE</b>                                 | 1193         | 480                   | 96.8             | 96.8             | 0.86                 | 0.85                 | 36423        | 2.20   | 0.62  | 5.20   | 207                       | 1700  |
| 4900                         | <b>1RQ4 634-6JE</b>                                 | 1194         | 510                   | 97.0             | 96.9             | 0.87                 | 0.85                 | 39192        | 2.30   | 0.66  | 5.40   | 228                       | 2300  |
| 5200                         | <b>1RQ4 636-6JE</b>                                 | 1194         | 540                   | 97.2             | 97.0             | 0.87                 | 0.85                 | 41591        | 2.40   | 0.67  | 5.50   | 251                       | 2600  |
| <b>8-pole</b>                |   |              |                       |                  |                  |                      |                      |              |  |   |  |                           |   |
| 780                          | <b>1RQ6 450-8JJ</b>                                 | 892          | 86                    | 95.4             | 95.8             | 0.83                 | 0.81                 | 8350         | 2.20   | 0.65  | 4.50   | 35                        | 660   |
| 880                          | <b>1RQ6 452-8JJ</b>                                 | 892          | 97                    | 95.6             | 96.0             | 0.83                 | 0.82                 | 9420         | 2.25   | 0.70  | 4.60   | 39                        | 770   |
| 980                          | <b>1RQ6 454-8JJ</b>                                 | 892          | 108                   | 95.7             | 96.1             | 0.83                 | 0.81                 | 10491        | 2.40   | 0.75  | 4.95   | 44                        | 890   |
| 1090                         | <b>1RQ6 456-8JJ</b>                                 | 893          | 120                   | 96.0             | 96.2             | 0.83                 | 0.81                 | 11655        | 2.50   | 0.80  | 5.20   | 51                        | 1080  |
| 1320                         | <b>1RQ6 500-8JJ</b>                                 | 893          | 146                   | 95.9             | 96.3             | 0.83                 | 0.81                 | 14115        | 2.05   | 0.45  | 4.40   | 68                        | 1060  |
| 1500                         | <b>1RQ6 502-8JJ</b>                                 | 893          | 164                   | 96.1             | 96.5             | 0.83                 | 0.81                 | 16040        | 2.15   | 0.50  | 4.50   | 75                        | 1180  |
| 1700                         | <b>1RQ6 504-8JJ</b>                                 | 893          | 184                   | 96.1             | 96.5             | 0.84                 | 0.82                 | 18178        | 2.10   | 0.50  | 4.50   | 83                        | 1320  |
| 1800                         | <b>1RQ6 506-8JJ</b>                                 | 893          | 194                   | 96.2             | 96.6             | 0.84                 | 0.82                 | 19248        | 2.20   | 0.55  | 4.65   | 93                        | 1460  |
| 2120                         | <b>1RQ6 560-8JJ</b>                                 | 894          | 230                   | 96.6             | 97.0             | 0.84                 | 0.82                 | 22644        | 2.30   | 0.60  | 5.00   | 127                       | 2100  |
| 2360                         | <b>1RQ6 562-8JJ</b>                                 | 893          | 250                   | 96.7             | 97.1             | 0.85                 | 0.83                 | 25236        | 2.10   | 0.60  | 4.85   | 140                       | 2350  |
| 2630                         | <b>1RQ6 564-8JJ</b>                                 | 894          | 280                   | 96.6             | 97.0             | 0.85                 | 0.83                 | 28092        | 2.20   | 0.55  | 4.80   | 155                       | 2550  |
| 2900                         | <b>1RQ6 566-8JJ</b>                                 | 893          | 310                   | 96.7             | 97.0             | 0.85                 | 0.84                 | 31011        | 2.10   | 0.55  | 4.85   | 171                       | 2850  |

## Voltage code:

4 kV, 60 Hz  
6.6 kV, 60 Hz  
Other voltage

4  
1  
9

## Type of construction:

IM B3  
IM V1 (with canopy)

0  
4

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Electrical data is also valid for operation with SINAMICS PERFECT HARMONY drives.  
For ordering, please note the 10th and 11th position of the article number code.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

## Motors for line operation

Air-cooled motors

### H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Selection and ordering data (continued)

| Rated power<br>IEC<br>kW     | High voltage motor<br>H-compact PLUS<br>Article No. | Speed<br>rpm | Rated<br>current<br>$I_{\text{rated}}$<br>at<br>6.6 kV<br>A | Efficiency       |                  | Power factor                  |                               | Torque<br>Nm | Break-<br>down<br>torque<br>$T_{\text{B}}/$<br>$T_{\text{rated}}$<br>[-] | Locked-<br>rotor<br>torque<br>$T_{\text{LR}}/$<br>$T_{\text{rated}}$<br>[-] | Locked-<br>rotor<br>current<br>$I_{\text{LR}}/$<br>$I_{\text{rated}}$<br>[-] | Moment of<br>inertia      |   |
|------------------------------|---|--------------|---|------------------|------------------|-------------------------------|-------------------------------|--------------|--|---|--|---------------------------|---|
|                              |   |              |   | 4/4<br>load<br>% | 3/4<br>load<br>% | 4/4<br>load<br>$\cos \varphi$ | 3/4<br>load<br>$\cos \varphi$ |              |  |   |  | Motor<br>kgm <sup>2</sup> | External,<br>max. <sup>1)</sup><br>kgm <sup>2</sup> |
| <b>4.0 ... 6.6 kV, 60 Hz</b> |   |              |   |                  |                  |                               |                               |              |  |   |  |                           |   |
| <b>10-pole</b>               |   |              |   |                  |                  |                               |                               |              |  |   |  |                           |   |
| 540                          | <b>1RQ6 450-3JJ</b>                                 | 711          | 63  | 93.9             | 93.8             | 0.80                          | 0.75                          | 7253         | 2.20   | 0.88  | 5.30   | 39                        | 700   |
| 600                          | <b>1RQ6 452-3JJ</b>                                 | 712          | 71  | 94.2             | 94.1             | 0.79                          | 0.73                          | 8048         | 2.30   | 0.90  | 5.50   | 43                        | 900   |
| 670                          | <b>1RQ6 454-3JJ</b>                                 | 712          | 80  | 94.3             | 94.2             | 0.78                          | 0.73                          | 8987         | 2.40   | 1.00  | 5.50   | 48                        | 950   |
| 730                          | <b>1RQ6 456-3JJ</b>                                 | 713          | 88  | 94.5             | 94.3             | 0.77                          | 0.72                          | 9778         | 2.40   | 0.90  | 5.50   | 54                        | 1100  |
| 900                          | <b>1RQ6 500-3JE</b>                                 | 713          | 104   | 94.9             | 94.7             | 0.80                          | 0.76                          | 12055        | 2.10   | 0.78  | 5.20   | 74                        | 1400  |
| 1000                         | <b>1RQ6 502-3JE</b>                                 | 713          | 114   | 95.1             | 94.9             | 0.80                          | 0.75                          | 13394        | 2.20   | 0.82  | 5.30   | 84                        | 1700  |
| 1100                         | <b>1RQ6 504-3JE</b>                                 | 713          | 126   | 95.1             | 94.9             | 0.80                          | 0.76                          | 14734        | 2.20   | 0.82  | 5.30   | 92                        | 1700  |
| 1250                         | <b>1RQ6 506-3JE</b>                                 | 713          | 144   | 95.4             | 95.1             | 0.80                          | 0.75                          | 16743        | 2.30   | 0.88  | 5.50   | 103                       | 2250  |
| 1460                         | <b>1RQ6 560-3JE</b>                                 | 714          | 172   | 95.4             | 95.2             | 0.78                          | 0.72                          | 19528        | 2.40   | 0.85  | 5.40   | 128                       | 2400  |
| 1680                         | <b>1RQ6 562-3JE</b>                                 | 714          | 196   | 95.7             | 95.5             | 0.78                          | 0.72                          | 22471        | 2.40   | 0.85  | 5.50   | 146                       | 2800  |
| 1820                         | <b>1RQ6 564-3JE</b>                                 | 714          | 210   | 95.7             | 95.6             | 0.80                          | 0.76                          | 24343        | 2.30   | 0.80  | 5.40   | 163                       | 3200  |
| 1930                         | <b>1RQ6 566-3JE</b>                                 | 715          | 225   | 95.9             | 95.6             | 0.79                          | 0.73                          | 25778        | 2.40   | 0.80  | 5.50   | 178                       | 3600  |
| <b>12-pole</b>               |   |              |   |                  |                  |                               |                               |              |  |   |  |                           |   |
| 370                          | <b>1RQ6 450-5JJ</b>                                 | 592          | 48.0  | 93.1             | 92.9             | 0.72                          | 0.66                          | 5969         | 2.00   | 0.68  | 4.60   | 39                        | 700   |
| 425                          | <b>1RQ6 452-5JJ</b>                                 | 593          | 57  | 93.5             | 93.0             | 0.70                          | 0.63                          | 6844         | 2.20   | 0.72  | 4.80   | 43                        | 1000  |
| 480                          | <b>1RQ6 454-5JJ</b>                                 | 593          | 63  | 94.0             | 93.7             | 0.71                          | 0.65                          | 7730         | 2.10   | 0.72  | 4.80   | 48                        | 1300  |
| 540                          | <b>1RQ6 456-5JJ</b>                                 | 593          | 69  | 94.1             | 93.9             | 0.73                          | 0.68                          | 8696         | 2.00   | 0.68  | 4.70   | 54                        | 1500  |
| 650                          | <b>1RQ6 500-5JE</b>                                 | 593          | 84  | 94.3             | 94.1             | 0.72                          | 0.66                          | 10468        | 2.20   | 0.70  | 4.80   | 74                        | 1600  |
| 730                          | <b>1RQ6 502-5JE</b>                                 | 593          | 91  | 94.5             | 94.3             | 0.74                          | 0.70                          | 11756        | 2.10   | 0.65  | 4.70   | 84                        | 1800  |
| 820                          | <b>1RQ6 504-5JE</b>                                 | 593          | 104   | 94.7             | 94.4             | 0.73                          | 0.68                          | 13206        | 2.20   | 0.70  | 4.80   | 91                        | 2100  |
| 900                          | <b>1RQ6 506-5JE</b>                                 | 593          | 116   | 94.8             | 94.5             | 0.72                          | 0.66                          | 14494        | 2.30   | 0.75  | 5.20   | 102                       | 2400  |
| 1100                         | <b>1RQ6 560-5JE</b>                                 | 594          | 138   | 95.0             | 94.9             | 0.73                          | 0.67                          | 17685        | 2.00   | 0.62  | 4.50   | 128                       | 2400  |
| 1220                         | <b>1RQ6 562-5JE</b>                                 | 594          | 152   | 95.2             | 95.1             | 0.74                          | 0.68                          | 19614        | 2.10   | 0.65  | 4.50   | 146                       | 3000  |
| 1320                         | <b>1RQ6 564-5JE</b>                                 | 595          | 166   | 95.3             | 95.1             | 0.73                          | 0.67                          | 21187        | 2.20   | 0.68  | 4.60   | 163                       | 3300  |
| 1450                         | <b>1RQ6 566-5JE</b>                                 | 595          | 180   | 95.4             | 95.3             | 0.74                          | 0.68                          | 23273        | 2.20   | 0.68  | 4.60   | 178                       | 3800  |

#### Voltage code:

4 kV, 60 Hz  
6.6 kV, 60 Hz  
Other voltage

4  
1  
9

#### Type of construction:

IM B3  
IM V1 (with canopy)

0  
4

#### Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Higher pole numbers are available on request.

Electrical data is also valid for operation with SINAMICS PERFECT HARMONY drives.  
For ordering, please note the 10th and 11th position of the article number code.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on [Page 2/2](#).



## Selection and ordering data

The following data also apply to explosion-protected motors 1SB7 (Ex pxb) and 1SG7 (Ex ec).

| Rated power                  | High voltage motor<br>SIMOTICS HV M (modular) | Speed                 | Rated current | Efficiency |          | Power factor  |                 | Torque             | Break-down torque  | Locked-rotor torque | Locked-rotor current         | Moment of inertia |                  |
|------------------------------|---|-----------------------|---------------|------------|----------|---------------|-----------------|--------------------|--------------------|---------------------|------------------------------|-------------------|------------------|
| IEC                          |   | $I_{rated}$ at 6.6 kV | 4/4 load      | 3/4 load   | 4/4 load | 3/4 load      | $T_B/T_{rated}$ | $T_{LR}/T_{rated}$ | $I_{LR}/I_{rated}$ | Motor               | External, max. <sup>1)</sup> |                   |                  |
| kW                           | Article No.                                   | rpm                   | A             | %          | %        | cos $\varphi$ | cos $\varphi$   | Nm                 | [-]                | [-]                 | [-]                          | kgm <sup>2</sup>  | kgm <sup>2</sup> |
| <b>4.0 ... 6.6 kV, 60 Hz</b> |   |                       |               |            |          |               |                 |                    |                    |                     |                              |                   |                  |
| 2-pole                       |   |                       |               |            |          |               |                 |                    |                    |                     |                              |                   |                  |
| 8000                         | <b>1RQ7710-2JA10-0CJ0</b>                     | 3587                  | 790           | 96.2       | 95.7     | 0.92          | 0.92            | 21297              | 2.30               | 0.75                | 5.30                         | 147               | 147              |
| 9000                         | <b>1RQ7712-2JA10-0CJ0</b>                     | 3587                  | 880           | 96.5       | 96.0     | 0.93          | 0.92            | 23959              | 2.35               | 0.75                | 5.30                         | 159               | 135              |
| 10000                        | <b>1RQ7714-2JA10-0CJ0</b>                     | 3587                  | 970           | 96.7       | 96.2     | 0.93          | 0.92            | 26621              | 2.40               | 0.65                | 5.30                         | 175               | 139              |
| 11000                        | <b>1RQ7716-2JA10-0CJ0</b>                     | 3587                  | 1060          | 96.9       | 96.4     | 0.93          | 0.93            | 29284              | 2.40               | 0.65                | 5.40                         | 189               | 135              |
| 4-pole                       |   |                       |               |            |          |               |                 |                    |                    |                     |                              |                   |                  |
| 8000                         | <b>1RQ7710-4JA10-0CJ0</b>                     | 1793                  | 790           | 97.3       | 97.1     | 0.91          | 0.91            | 42607              | 2.55               | 0.65                | 5.50                         | 262               | 529              |
| 9000                         | <b>1RQ7712-4JA10-0CJ0</b>                     | 1792                  | 880           | 97.4       | 97.3     | 0.92          | 0.92            | 47959              | 2.50               | 0.65                | 5.40                         | 288               | 533              |
| 10000                        | <b>1RQ7714-4JA10-0CJ0</b>                     | 1792                  | 980           | 97.5       | 97.4     | 0.92          | 0.92            | 53288              | 2.50               | 0.65                | 5.40                         | 322               | 634              |
| 11000                        | <b>1RQ7716-4JA10-0CJ0</b>                     | 1792                  | 1080          | 97.6       | 97.5     | 0.92          | 0.92            | 58617              | 2.50               | 0.65                | 5.40                         | 363               | 722              |
| 6-pole                       |   |                       |               |            |          |               |                 |                    |                    |                     |                              |                   |                  |
| 6300                         | <b>1RQ7710-6JA1-0CJ0</b>                      | 1195                  | 660           | 97.0       | 96.8     | 0.86          | 0.84            | 50343              | 2.55               | 0.70                | 5.40                         | 350               | 1496             |
| 6800                         | <b>1RQ7712-6JA1-0CJ0</b>                      | 1195                  | 710           | 97.1       | 96.9     | 0.86          | 0.84            | 54339              | 2.55               | 0.65                | 5.30                         | 396               | 1820             |
| 7350                         | <b>1RQ7714-6JA1-0CJ0</b>                      | 1196                  | 770           | 97.2       | 97.0     | 0.86          | 0.84            | 58685              | 2.55               | 0.65                | 5.30                         | 446               | 2258             |
| 7850                         | <b>1RQ7716-6JA1-0CJ0</b>                      | 1196                  | 820           | 97.3       | 97.0     | 0.86          | 0.85            | 62677              | 2.55               | 0.60                | 5.40                         | 493               | 2557             |
| 8-pole                       |   |                       |               |            |          |               |                 |                    |                    |                     |                              |                   |                  |
| 4500                         | <b>1RQ7710-8JA1-0CJ0</b>                      | 896                   | 475           | 96.8       | 96.8     | 0.86          | 0.84            | 47959              | 2.50               | 0.70                | 5.20                         | 434               | 5215             |
| 5000                         | <b>1RQ7712-8JA1-0CJ0</b>                      | 896                   | 520           | 97.0       | 97.0     | 0.86          | 0.85            | 53288              | 2.55               | 0.70                | 5.30                         | 494               | 6184             |
| 5600                         | <b>1RQ7714-8JA1-0CJ0</b>                      | 895                   | 590           | 97.1       | 97.1     | 0.86          | 0.85            | 59749              | 2.45               | 0.65                | 5.10                         | 560               | 7199             |
| 6300                         | <b>1RQ7716-8JA1-0CJ0</b>                      | 895                   | 650           | 97.2       | 97.3     | 0.87          | 0.86            | 67218              | 2.45               | 0.75                | 5.10                         | 619               | 7528             |
| 10-pole                      |   |                       |               |            |          |               |                 |                    |                    |                     |                              |                   |                  |
| 3550                         | <b>1RQ7710-3JA1-0CJ0</b>                      | 716                   | 380           | 96.6       | 96.6     | 0.85          | 0.81            | 47346              | 2.95               | 0.75                | 5.30                         | 433               | 8630             |
| 3900                         | <b>1RQ7712-3JA1-0CJ0</b>                      | 716                   | 415           | 96.8       | 96.8     | 0.85          | 0.83            | 52014              | 2.90               | 0.65                | 5.20                         | 493               | 9897             |
| 4300                         | <b>1RQ7714-3JA1-0CJ0</b>                      | 716                   | 455           | 96.9       | 96.8     | 0.85          | 0.82            | 57349              | 2.95               | 0.70                | 5.30                         | 557               | 11857            |
| 4750                         | <b>1RQ7716-3JA1-0CJ0</b>                      | 716                   | 510           | 97.0       | 96.9     | 0.84          | 0.80            | 63350              | 3.00               | 0.65                | 5.30                         | 612               | 13189            |

## Type of construction:

|  |          |
|--|----------|
| IM B3 (IM 1001)                          | <b>0</b> |
| IM V1, without protective hood (IM 3011) | <b>8</b> |

## Housing and bearing version

|   |          |
|---|----------|
| Steel fabricated housing/<br>anti-friction bearings | <b>G</b> |
| Steel fabricated housing/<br>sleeve bearing         | <b>J</b> |

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Higher pole numbers are available on request.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on [Page 2/2](#).

## Motors for line operation

Air-cooled motors

### H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Selection and ordering data

##### NEMA version

| Rated power<br><br>NEMA<br><br>hp | High voltage motor<br>H-compact PLUS<br><br>Article No. | Speed<br><br>rpm | Rated current              |               | Efficiency    |                   | Power factor      |                           | Torque<br><br>Nm | Break-down torque<br><br>$T_B/T_{rated}$<br>[-] | Locked-rotor torque<br><br>$T_{LR}/T_{rated}$<br>[-] | Locked-rotor current<br><br>$I_{LR}/I_{rated}$<br>[-] | Moment of inertia                                |  |
|-----------------------------------|---|------------------|----------------------------|---------------|---------------|-------------------|-------------------|---------------------------|------------------|---|--|---|--|--|
|                                   |   |                  | $I_{rated}$ at 6.6 kV<br>A | 4/4 load<br>% | 3/4 load<br>% | 4/4 load<br>cos φ | 3/4 load<br>cos φ | Motor<br>kgm <sup>2</sup> |                  |   |  |   | External, max. <sup>1)</sup><br>kgm <sup>2</sup> |  |
| <b>4.0 ... 6.6 kV, 60 Hz</b>      |   |                  |                            |               |               |                   |                   |                           |                  |   |  |   |  |  |
| 2-pole                            |   |                  |                            |               |               |                   |                   |                           |                  |   |  |   |  |  |
| 8000                              | <b>1RQ6 710-2BM</b> ■ 0                                 | 3588             | 603                        | 96.1          | 95.7          | 0.90              | 0.88              | 15881                     | 2.50             | 0.60  | 5.70   | 134   | 41   |  |
| 9000                              | <b>1RQ6 712-2BM</b> ■ 0                                 | 3587             | 664                        | 96.1          | 95.8          | 0.92              | 0.91              | 17868                     | 2.40             | 0.60  | 5.60   | 148   | 43   |  |
| 10000                             | <b>1RQ6 712-2BN</b> ■ 0                                 | 3588             | 742                        | 96.3          | 96.0          | 0.91              | 0.90              | 19852                     | 2.60             | 0.62  | 6.10   | 148   | 44   |  |
| 11000                             | <b>1RQ6 714-2BM</b> ■ 0                                 | 3587             | 807                        | 96.4          | 96.0          | 0.92              | 0.91              | 21841                     | 2.50             | 0.60  | 5.80   | 163   | 46   |  |
| 12000                             | <b>1RQ6 714-2BN</b> ■ 0                                 | 3587             | 883                        | 96.5          | 96.2          | 0.92              | 0.91              | 23827                     | 2.40             | 0.60  | 5.70   | 163   | 47   |  |
| 13000                             | <b>1RQ6 716-2BM</b> ■ 0                                 | 3587             | 948                        | 96.5          | 96.3          | 0.92              | 0.92              | 25815                     | 2.40             | 0.60  | 5.80   | 180   | 48   |  |
| 14000                             | <b>1RQ6 716-2BN</b> ■ 0                                 | 3587             | 1021                       | 96.6          | 96.4          | 0.92              | 0.92              | 27801                     | 2.50             | 0.65  | 6.00   | 180   | 49   |  |
| 4-pole                            |   |                  |                            |               |               |                   |                   |                           |                  |   |  |   |  |  |
| 10000                             | <b>1RQ6 710-4CJ</b> ■ 0                                 | 1794             | 745                        | 97.0          | 96.9          | 0.90              | 0.88              | 39707                     | 2.40             | 0.60  | 6.30   | 278   | 555  |  |
| 11000                             | <b>1RQ6 712-4CJ</b> ■ 0                                 | 1793             | 805                        | 97.1          | 97.0          | 0.91              | 0.90              | 43690                     | 2.40             | 0.61  | 6.20   | 305   | 661  |  |
| 12000                             | <b>1RQ6 714-4CJ</b> ■ 0                                 | 1793             | 873                        | 97.1          | 97.0          | 0.92              | 0.91              | 47659                     | 2.40             | 0.63  | 6.30   | 341   | 679  |  |
| 13000                             | <b>1RQ6 716-4CJ</b> ■ 0                                 | 1794             | 948                        | 97.2          | 97.1          | 0.91              | 0.91              | 51626                     | 2.30             | 0.60  | 6.10   | 374   | 695  |  |
| 6-pole                            |   |                  |                            |               |               |                   |                   |                           |                  |   |  |   |  |  |
| 8000                              | <b>1RQ6 710-6CJ</b> ■ ■                                 | 1194             | 626                        | 96.9          | 96.9          | 0.86              | 0.83              | 47715                     | 2.20             | 0.71  | 5.70   | 338   | 1847   |  |
| 9000                              | <b>1RQ6 714-6CJ</b> ■ ■                                 | 1195             | 703                        | 97.0          | 97.0          | 0.86              | 0.83              | 53642                     | 2.30             | 0.73  | 6.00   | 427   | 1954   |  |
| 10000                             | <b>1RQ6 716-6CJ</b> ■ ■                                 | 1195             | 770                        | 97.1          | 97.1          | 0.87              | 0.85              | 59613                     | 2.30             | 0.76  | 6.00   | 476   | 2043   |  |
| 8-pole                            |   |                  |                            |               |               |                   |                   |                           |                  |   |  |   |  |  |
| 5500                              | <b>1RQ6 710-8CJ</b> ■ ■ ■                               | 896              | 440                        | 96.7          | 96.8          | 0.84              | 0.81              | 43733                     | 2.30             | 0.86  | 6.00   | 426   | 3235   |  |
| 6000                              | <b>1RQ6 712-8CJ</b> ■ ■ ■                               | 896              | 481                        | 96.7          | 96.8          | 0.84              | 0.81              | 47703                     | 2.20             | 0.83  | 6.00   | 476   | 3437   |  |
| 7000                              | <b>1RQ6 714-8CJ</b> ■ ■ ■                               | 896              | 561                        | 96.9          | 96.9          | 0.84              | 0.81              | 55649                     | 2.20             | 0.83  | 6.00   | 542   | 3817   |  |
| 8000                              | <b>1RQ6 716-8CJ</b> ■ ■ ■                               | 896              | 645                        | 96.9          | 97.0          | 0.83              | 0.80              | 63590                     | 2.20             | 0.80  | 6.00   | 608   | 4154   |  |
| 10-pole                           |   |                  |                            |               |               |                   |                   |                           |                  |   |  |   |  |  |
| 4000                              | <b>1RQ6 710-3CJ</b> ■ ■ ■                               | 716              | 339                        | 96.5          | 96.5          | 0.80              | 0.75              | 39780                     | 2.40             | 0.77  | 5.80   | 426   | 4563   |  |
| 4500                              | <b>1RQ6 712-3CJ</b> ■ ■ ■                               | 716              | 375                        | 96.6          | 96.7          | 0.81              | 0.77              | 44763                     | 2.30             | 0.73  | 5.60   | 476   | 5006   |  |
| 5000                              | <b>1RQ6 714-3CJ</b> ■ ■ ■                               | 716              | 418                        | 96.7          | 96.7          | 0.80              | 0.76              | 49717                     | 2.40             | 0.80  | 6.00   | 542   | 5428   |  |
| 5500                              | <b>1RQ6 716-3CJ</b> ■ ■ ■                               | 717              | 464                        | 96.7          | 96.7          | 0.80              | 0.75              | 54660                     | 2.50             | 0.79  | 6.00   | 609   | 5833   |  |

#### Voltage code:

4 kV, 60 Hz  
4.16 kV, 60 Hz  
6.6 kV, 60 Hz  
Other voltage

4  
3  
1  
9

#### Type of construction:

IM B3  
IM V1 (with canopy)

0  
4

#### Note:

Higher pole numbers are available on request.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on [Page 2/2](#).

## Selection and ordering data

## NEMA version

| Rated power                    | High voltage motor<br>H-compact PLUS | Speed | Rated current          |          | Efficiency |               | Power factor  |                 | Torque | Break-down torque | Locked-rotor torque | Locked-rotor current | Moment of inertia  |                    |
|--------------------------------|--------------------------------------|-------|------------------------|----------|------------|---------------|---------------|-----------------|--------|-------------------|---------------------|----------------------|--------------------|--------------------|
| NEMA                           |                                      |       | $I_{rated}$ at 13.2 kV | 4/4 load | 3/4 load   | 4/4 load      | 3/4 load      | $T_B/T_{rated}$ |        |                   |                     |                      | $T_{LR}/T_{rated}$ | $I_{LR}/I_{rated}$ |
| hp                             | Article No.                          | rpm   | A                      | %        | %          | cos $\varphi$ | cos $\varphi$ | Nm              | [-]    | [-]               | [-]                 | kgm <sup>2</sup>     | kgm <sup>2</sup>   |                    |
| <b>12.5 ... 13.8 kV, 60 Hz</b> |                                      |       |                        |          |            |               |               |                 |        |                   |                     |                      |                    |                    |
| <b>2-pole</b>                  |                                      |       |                        |          |            |               |               |                 |        |                   |                     |                      |                    |                    |
| 7000                           | <b>1RQ6 710-2BM 0</b>                | 3589  | 263                    | 95.7     | 95.2       | 0.91          | 0.89          | 13894           | 2.50   | 0.60              | 5.70                | 134                  | 40                 |                    |
| 8000                           | <b>1RQ6 712-2BM 0</b>                | 3589  | 298                    | 95.8     | 95.3       | 0.91          | 0.90          | 15879           | 2.60   | 0.60              | 6.00                | 148                  | 41                 |                    |
| 9000                           | <b>1RQ6 714-2BM 0</b>                | 3588  | 332                    | 95.9     | 95.4       | 0.92          | 0.91          | 17865           | 2.50   | 0.60              | 5.80                | 163                  | 43                 |                    |
| 10000                          | <b>1RQ6 716-2BM 0</b>                | 3588  | 365                    | 95.9     | 95.6       | 0.93          | 0.93          | 19854           | 2.50   | 0.60              | 5.90                | 180                  | 44                 |                    |
| <b>4-pole</b>                  |                                      |       |                        |          |            |               |               |                 |        |                   |                     |                      |                    |                    |
| 7000                           | <b>1RQ6 710-4CJ 0</b>                | 1794  | 258                    | 96.4     | 96.2       | 0.91          | 0.90          | 27791           | 2.40   | 0.60              | 6.30                | 278                  | 520                |                    |
| 8000                           | <b>1RQ6 714-4CJ 0</b>                | 1794  | 291                    | 96.5     | 96.4       | 0.92          | 0.92          | 31772           | 2.30   | 0.60              | 6.10                | 341                  | 541                |                    |
| 9000                           | <b>1RQ6 714-4CK 0</b>                | 1794  | 328                    | 96.6     | 96.5       | 0.92          | 0.91          | 35738           | 2.40   | 0.60              | 6.20                | 341                  | 552                |                    |
| 10000                          | <b>1RQ6 716-4CJ 0</b>                | 1794  | 364                    | 96.7     | 96.6       | 0.92          | 0.91          | 39707           | 2.40   | 0.60              | 6.30                | 374                  | 555                |                    |
| <b>6-pole</b>                  |                                      |       |                        |          |            |               |               |                 |        |                   |                     |                      |                    |                    |
| 6000                           | <b>1RQ6 710-6CJ 0</b>                | 1195  | 237                    | 96.5     | 96.4       | 0.85          | 0.83          | 35757           | 2.40   | 0.69              | 6.00                | 338                  | 1571               |                    |
| 7000                           | <b>1RQ6 714-6CJ 0</b>                | 1195  | 274                    | 96.7     | 96.6       | 0.86          | 0.83          | 41709           | 2.40   | 0.67              | 6.00                | 427                  | 1720               |                    |
| 8000                           | <b>1RQ6 716-6CJ 0</b>                | 1195  | 310                    | 96.7     | 96.7       | 0.87          | 0.84          | 47674           | 2.40   | 0.68              | 6.00                | 476                  | 1846               |                    |
| <b>8-pole</b>                  |                                      |       |                        |          |            |               |               |                 |        |                   |                     |                      |                    |                    |
| 4000                           | <b>1RQ6 710-8CJ 0</b>                | 896   | 160                    | 96.2     | 96.2       | 0.85          | 0.82          | 31800           | 2.30   | 0.79              | 6.00                | 426                  | 2560               |                    |
| 4500                           | <b>1RQ6 712-8CJ 0</b>                | 896   | 179                    | 96.3     | 96.3       | 0.85          | 0.83          | 35780           | 2.20   | 0.79              | 5.90                | 476                  | 2796               |                    |
| 5000                           | <b>1RQ6 714-8CJ 0</b>                | 896   | 197                    | 96.4     | 96.5       | 0.86          | 0.84          | 39760           | 2.20   | 0.79              | 5.90                | 542                  | 3024               |                    |
| 5500                           | <b>1RQ6 716-8CJ 0</b>                | 896   | 216                    | 96.4     | 96.5       | 0.86          | 0.84          | 43719           | 2.20   | 0.81              | 6.00                | 608                  | 3235               |                    |
| <b>10-pole</b>                 |                                      |       |                        |          |            |               |               |                 |        |                   |                     |                      |                    |                    |
| 3000                           | <b>1RQ6 710-3CJ 0</b>                | 716   | 125                    | 96.0     | 96.1       | 0.81          | 0.78          | 29829           | 2.30   | 0.70              | 5.70                | 426                  | 3619               |                    |
| 3500                           | <b>1RQ6 712-3CJ 0</b>                | 717   | 147                    | 96.2     | 96.2       | 0.81          | 0.77          | 34792           | 2.50   | 0.77              | 6.00                | 476                  | 4104               |                    |
| 4000                           | <b>1RQ6 714-3CJ 0</b>                | 717   | 167                    | 96.2     | 96.2       | 0.81          | 0.77          | 39763           | 2.40   | 0.76              | 6.00                | 542                  | 4563               |                    |
| 4500                           | <b>1RQ6 716-3CJ 0</b>                | 717   | 190                    | 96.4     | 96.4       | 0.80          | 0.76          | 44718           | 2.50   | 0.74              | 6.00                | 609                  | 5006               |                    |

## Voltage code:

13.2 kV, 60 Hz  
Other voltage2  
9

## Type of construction:

IM B3  
IM V1 (with canopy)0  
4

## Note:

Higher pole numbers are available on request.


<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Dimension drawings

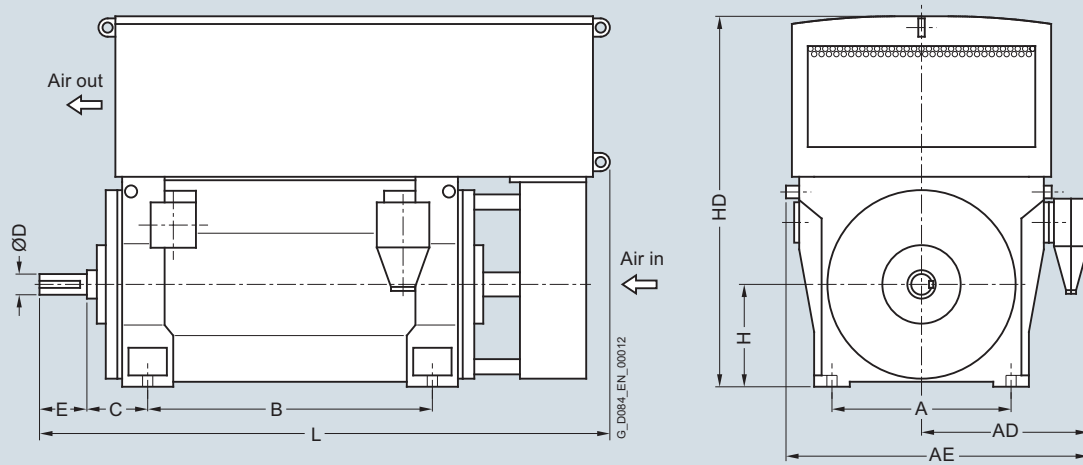

| Motor type   | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |                    |
|--|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|--------------------|
|  |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm            |
| <b>Up to 6.6 kV, IM B3 type of construction, anti-friction bearings – series 1RQ4, 1RQ6<sup>2)</sup></b> |              |            |                        |                        |         |         |         |         |         |          |                    |
| <b>2-pole</b>  |              |            |                        |                        |         |         |         |         |         |          |                    |
| 1RQ6 450-2JJ.0 <sup>3)</sup>   | 4250         | 850        | 930                    | 1620                   | 1180    | 280     | 95      | 130     | 450     | 1842     | 2425 <sup>4)</sup> |
| 1RQ6 452-2JJ.0 <sup>3)</sup>   | 4450         | 850        | 930                    | 1620                   | 1180    | 280     | 95      | 130     | 450     | 1842     | 2425 <sup>4)</sup> |
| 1RQ6 454-2JJ.0 <sup>3)</sup>   | 4800         | 850        | 930                    | 1620                   | 1400    | 280     | 95      | 130     | 450     | 1842     | 2635 <sup>4)</sup> |
| 1RQ6 456-2JJ.0 <sup>3)</sup>   | 5050         | 850        | 930                    | 1620                   | 1400    | 280     | 95      | 130     | 450     | 1842     | 2635 <sup>4)</sup> |
| 1RQ6 500-2JJ.0 <sup>3)</sup>   | 6100         | 950        | 1135                   | 1835                   | 1320    | 315     | 110     | 165     | 500     | 2040     | 3450 <sup>4)</sup> |
| 1RQ6 502-2JJ.0 <sup>3)</sup>   | 6250         | 950        | 1135                   | 1835                   | 1320    | 315     | 110     | 165     | 500     | 2040     | 3450 <sup>4)</sup> |
| <b>4-pole</b>  |              |            |                        |                        |         |         |         |         |         |          |                    |
| 1RQ6 450-4JJ.0   | 4550         | 850        | 930                    | 1620                   | 1180    | 250     | 130     | 200     | 450     | 1842     | 2455               |
| 1RQ6 452-4JJ.0   | 4750         | 850        | 930                    | 1620                   | 1180    | 250     | 130     | 200     | 450     | 1842     | 2455               |
| 1RQ6 454-4JJ.0   | 5200         | 850        | 930                    | 1620                   | 1400    | 250     | 130     | 200     | 450     | 1842     | 2665               |
| 1RQ6 456-4JJ.0   | 5450         | 850        | 930                    | 1620                   | 1400    | 250     | 130     | 200     | 450     | 1842     | 2665               |
| 1RQ6 500-4JJ.0   | 6600         | 950        | 1135                   | 1835                   | 1320    | 280     | 150     | 200     | 500     | 2040     | 2900               |
| 1RQ6 502-4JJ.0   | 6800         | 950        | 1135                   | 1835                   | 1320    | 280     | 150     | 200     | 500     | 2040     | 2900               |
| 1RQ6 504-4JJ.0   | 7550         | 950        | 1135                   | 1835                   | 1500    | 280     | 150     | 200     | 500     | 2040     | 3050               |
| 1RQ6 506-4JJ.0   | 7850         | 950        | 1135                   | 1835                   | 1500    | 280     | 150     | 200     | 500     | 2040     | 3050               |
| 1RQ6 560-4JJ.0   | 8250         | 1060       | 1205                   | 1975                   | 1400    | 315     | 170     | 240     | 560     | 2300     | 3000               |
| 1RQ6 562-4JJ.0   | 8600         | 1060       | 1205                   | 1975                   | 1400    | 315     | 170     | 240     | 560     | 2300     | 3000               |
| 1RQ6 564-4JJ.0   | 9550         | 1060       | 1205                   | 1975                   | 1600    | 315     | 170     | 240     | 560     | 2300     | 3250               |
| 1RQ6 566-4JJ.0   | 10100        | 1060       | 1205                   | 1975                   | 1600    | 315     | 170     | 240     | 560     | 2300     | 3250               |
| 1RQ4 630-4JE.0 <sup>3)</sup>   | 11100        | 1320       | 1330                   | 2210                   | 1600    | 335     | 190     | 280     | 630     | 2340     | 3140               |
| 1RQ4 632-4JE.0 <sup>3)</sup>   | 11800        | 1320       | 1330                   | 2210                   | 1600    | 335     | 190     | 280     | 630     | 2340     | 3140               |
| 1RQ4 634-4JE.0 <sup>3)</sup>   | 12900        | 1320       | 1330                   | 2210                   | 1800    | 335     | 200     | 280     | 630     | 2340     | 3380               |
| 1RQ4 636-4JE.0 <sup>3)</sup>   | 13450        | 1320       | 1330                   | 2210                   | 1800    | 335     | 200     | 280     | 630     | 2340     | 3380               |


<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> The dimensions are also valid for the 1SB4/1SB6 and 1SG4/1SG6 series.

<sup>3)</sup> Anti-friction bearings only for 50 Hz operation.

<sup>4)</sup> Including air inlet silencer.

## Dimension drawings (continued)

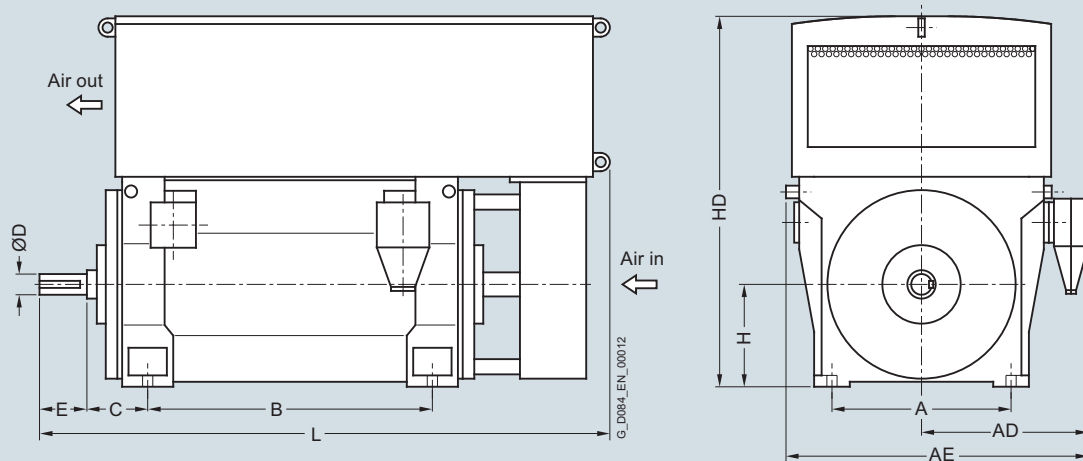

| Motor type   | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |         |
|--|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, anti-friction bearings – series 1RQ4, 1RQ6<sup>2)</sup></b> |              |            |                        |                        |         |         |         |         |         |          |         |
| <b>6-pole</b>  |              |            |                        |                        |         |         |         |         |         |          |         |
| 1RQ6 450-6JJ.0   | 4650         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1842     | 2455    |
| 1RQ6 452-6JJ.0   | 4900         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1842     | 2455    |
| 1RQ6 454-6JJ.0   | 5300         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1842     | 2665    |
| 1RQ6 456-6JJ.0   | 5650         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1842     | 2665    |
| 1RQ6 500-6JJ.0   | 6750         | 950        | 1135                   | 1835                   | 1320    | 315     | 160     | 240     | 500     | 1990     | 2850    |
| 1RQ6 502-6JJ.0   | 7050         | 950        | 1135                   | 1835                   | 1320    | 315     | 160     | 240     | 500     | 1990     | 2850    |
| 1RQ6 504-6JJ.0   | 7700         | 950        | 1135                   | 1835                   | 1500    | 315     | 160     | 240     | 500     | 1990     | 3300    |
| 1RQ6 506-6JJ.0   | 8050         | 950        | 1135                   | 1835                   | 1500    | 315     | 160     | 240     | 500     | 1990     | 3300    |
| 1RQ6 560-6JJ.0   | 9100         | 1060       | 1205                   | 1975                   | 1400    | 315     | 180     | 240     | 560     | 2240     | 3000    |
| 1RQ6 562-6JJ.0   | 9550         | 1060       | 1205                   | 1975                   | 1400    | 315     | 180     | 240     | 560     | 2240     | 3000    |
| 1RQ6 564-6JJ.0   | 10450        | 1060       | 1205                   | 1975                   | 1600    | 315     | 180     | 240     | 560     | 2240     | 3250    |
| 1RQ6 566-6JJ.0   | 11000        | 1060       | 1205                   | 1975                   | 1600    | 315     | 180     | 240     | 560     | 2240     | 3250    |
| 1RQ4 630-6JE.0   | 11400        | 1320       | 1330                   | 2210                   | 1600    | 335     | 200     | 280     | 630     | 2340     | 3140    |
| 1RQ4 632-6JE.0   | 12000        | 1320       | 1330                   | 2210                   | 1600    | 335     | 200     | 280     | 630     | 2340     | 3140    |
| 1RQ4 634-6JE.0   | 12900        | 1320       | 1330                   | 2210                   | 1800    | 335     | 200     | 280     | 630     | 2340     | 3380    |
| 1RQ4 636-6JE.0   | 13750        | 1320       | 1330                   | 2210                   | 1800    | 335     | 200     | 280     | 630     | 2340     | 3380    |
| <b>8-pole</b>  |              |            |                        |                        |         |         |         |         |         |          |         |
| 1RQ6 450-8JJ.0   | 4650         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1842     | 2455    |
| 1RQ6 452-8JJ.0   | 4950         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1842     | 2455    |
| 1RQ6 454-8JJ.0   | 5350         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1842     | 2665    |
| 1RQ6 456-8JJ.0   | 5700         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1842     | 2665    |
| 1RQ6 500-8JJ.0   | 6750         | 950        | 1135                   | 1835                   | 1320    | 315     | 160     | 240     | 500     | 1990     | 2850    |
| 1RQ6 502-8JJ.0   | 7000         | 950        | 1135                   | 1835                   | 1320    | 315     | 160     | 240     | 500     | 1990     | 2850    |
| 1RQ6 504-8JJ.0   | 7650         | 950        | 1135                   | 1835                   | 1500    | 315     | 160     | 240     | 500     | 1990     | 3300    |
| 1RQ6 506-8JJ.0   | 8000         | 950        | 1135                   | 1835                   | 1500    | 315     | 160     | 240     | 500     | 1990     | 3300    |
| 1RQ6 560-8JJ.0   | 9050         | 1060       | 1205                   | 1975                   | 1400    | 315     | 180     | 240     | 560     | 2240     | 3000    |
| 1RQ6 562-8JJ.0   | 9450         | 1060       | 1205                   | 1975                   | 1400    | 315     | 180     | 240     | 560     | 2240     | 3000    |
| 1RQ6 564-8JJ.0   | 10400        | 1060       | 1205                   | 1975                   | 1600    | 315     | 180     | 240     | 560     | 2240     | 3250    |
| 1RQ6 566-8JJ.0   | 10900        | 1060       | 1205                   | 1975                   | 1600    | 315     | 180     | 240     | 560     | 2240     | 3250    |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.


<sup>2)</sup> The dimensions are also valid for the 1SB4/1SB6 and 1SG4/1SG6 series.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Dimension drawings (continued)

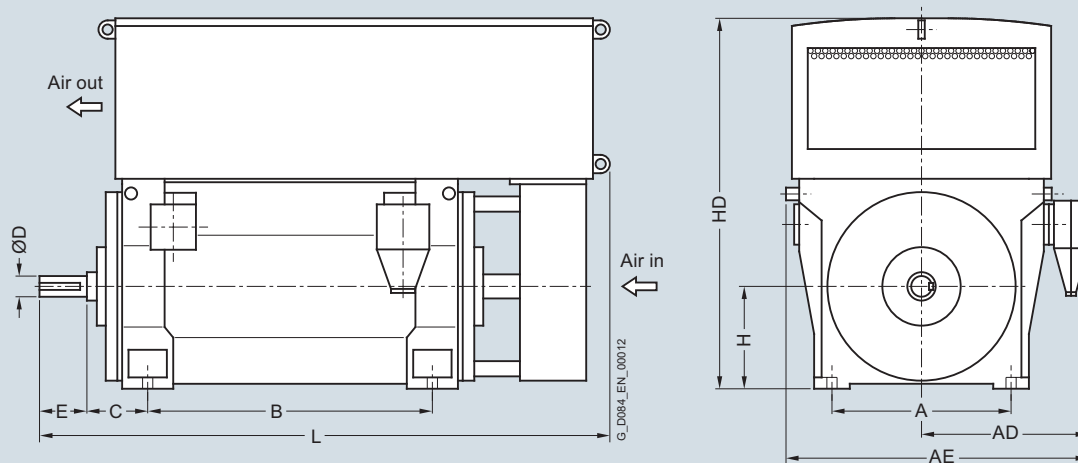

| Motor type | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |         |
|------------|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|---------|
|            |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |

#### Up to 6.6 kV, IM B3 type of construction, anti-friction bearings – series 1RQ4, 1RQ6<sup>2)</sup>

##### 8-pole

|                              |       |      |      |      |      |     |     |     |     |      |      |
|------------------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RQ4 630-8JE.0 <sup>3)</sup> | 11200 | 1320 | 1180 | 2060 | 1600 | 335 | 200 | 280 | 630 | 2340 | 3140 |
| 1RQ4 632-8JE.0 <sup>3)</sup> | 11950 | 1320 | 1330 | 2210 | 1600 | 335 | 200 | 280 | 630 | 2340 | 3140 |
| 1RQ4 634-8JE.0 <sup>3)</sup> | 12900 | 1320 | 1330 | 2210 | 1800 | 335 | 200 | 280 | 630 | 2340 | 3380 |
| 1RQ4 636-8JE.0 <sup>3)</sup> | 13650 | 1320 | 1330 | 2210 | 1800 | 335 | 200 | 280 | 630 | 2340 | 3380 |

##### 10-pole


|                              |       |      |      |      |      |     |     |     |     |      |      |
|------------------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RQ6 450-3JJ.0               | 4650  | 850  | 930  | 1620 | 1180 | 250 | 140 | 200 | 450 | 1842 | 2455 |
| 1RQ6 452-3JJ.0               | 4950  | 850  | 930  | 1620 | 1180 | 250 | 140 | 200 | 450 | 1842 | 2455 |
| 1RQ6 454-3JJ.0               | 5350  | 850  | 930  | 1620 | 1400 | 280 | 140 | 200 | 450 | 1842 | 2665 |
| 1RQ6 456-3JJ.0               | 5700  | 850  | 930  | 1620 | 1400 | 280 | 140 | 200 | 450 | 1842 | 2665 |
| 1RQ6 500-3JE.0               | 6000  | 950  | 1000 | 1760 | 1320 | 280 | 150 | 200 | 500 | 2000 | 2660 |
| 1RQ6 502-3JE.0               | 6300  | 950  | 1000 | 1760 | 1320 | 280 | 150 | 200 | 500 | 2000 | 2660 |
| 1RQ6 504-3JE.0               | 6900  | 950  | 1000 | 1760 | 1500 | 280 | 160 | 240 | 500 | 2000 | 2910 |
| 1RQ6 506-3JE.0               | 7300  | 950  | 1000 | 1760 | 1500 | 280 | 160 | 240 | 500 | 2000 | 2910 |
| 1RQ6 560-3JE.0               | 8000  | 1060 | 1070 | 1900 | 1400 | 315 | 170 | 240 | 560 | 2260 | 2950 |
| 1RQ6 562-3JE.0               | 8600  | 1060 | 1070 | 1900 | 1400 | 315 | 170 | 240 | 560 | 2260 | 2950 |
| 1RQ6 564-3JE.0               | 9450  | 1060 | 1070 | 1900 | 1600 | 315 | 180 | 240 | 560 | 2260 | 3180 |
| 1RQ6 566-3JE.0               | 9900  | 1060 | 1070 | 1900 | 1600 | 315 | 180 | 240 | 560 | 2260 | 3180 |
| 1RQ4 630-3JE.0 <sup>3)</sup> | 11200 | 1320 | 1180 | 2060 | 1600 | 335 | 200 | 280 | 630 | 2340 | 3140 |
| 1RQ4 632-3JE.0 <sup>3)</sup> | 11800 | 1320 | 1180 | 2060 | 1600 | 335 | 200 | 280 | 630 | 2340 | 3140 |
| 1RQ4 634-3JE.0 <sup>3)</sup> | 12900 | 1320 | 1180 | 2060 | 1800 | 335 | 200 | 280 | 630 | 2340 | 3380 |
| 1RQ4 636-3JE.0 <sup>3)</sup> | 13550 | 1320 | 1180 | 2060 | 1800 | 335 | 200 | 280 | 630 | 2340 | 3380 |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> The dimensions are also valid for the 1SB4/1SB6 and 1SG4/1SG6 series.

<sup>3)</sup> Anti-friction bearings only for 50 Hz operation.

## Dimension drawings (continued)

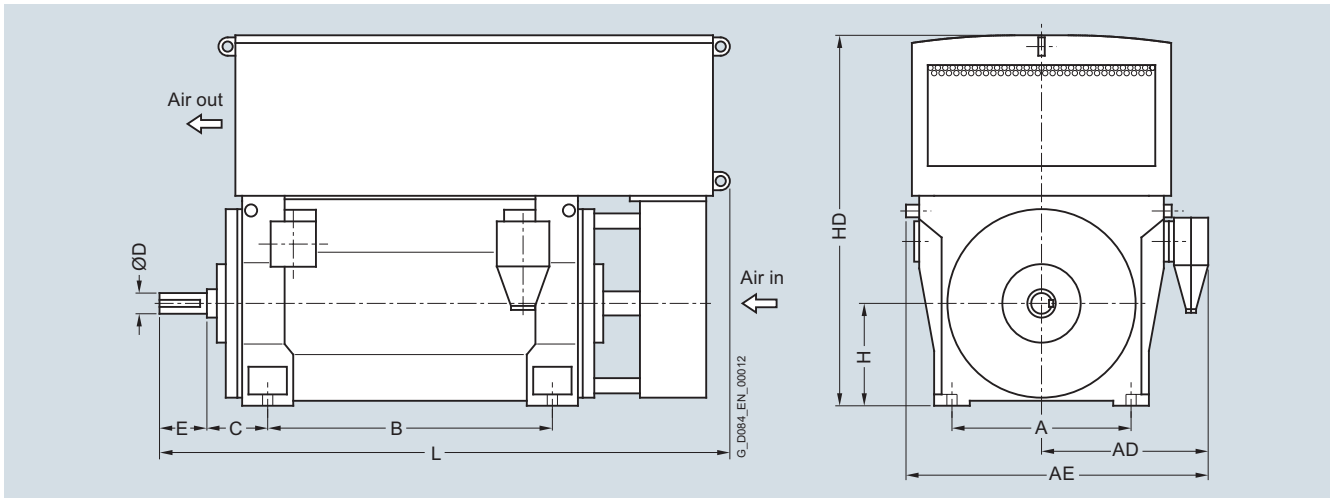

| Motor type | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |         |
|------------|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|---------|
|            |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |

Up to 6.6 kV, IM B3 type of construction, anti-friction bearings – series 1RQ4, 1RQ6<sup>2)</sup>

| 12-pole                      |       |      |      |      |      |     |     |     |     |      |      |
|------------------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RQ6 450-5JJ.0               | 4650  | 850  | 930  | 1620 | 1180 | 250 | 140 | 200 | 450 | 1842 | 2455 |
| 1RQ6 452-5JJ.0               | 4950  | 850  | 930  | 1620 | 1180 | 250 | 140 | 200 | 450 | 1842 | 2455 |
| 1RQ6 454-5JJ.0               | 5350  | 850  | 930  | 1620 | 1400 | 280 | 140 | 200 | 450 | 1842 | 2665 |
| 1RQ6 456-5JJ.0               | 5700  | 850  | 930  | 1620 | 1400 | 280 | 140 | 200 | 450 | 1842 | 2665 |
| 1RQ6 500-5JE.0               | 6000  | 950  | 1000 | 1760 | 1320 | 280 | 150 | 200 | 500 | 2000 | 2660 |
| 1RQ6 502-5JE.0               | 6300  | 950  | 1000 | 1760 | 1320 | 280 | 150 | 200 | 500 | 2000 | 2660 |
| 1RQ6 504-5JE.0               | 6900  | 950  | 1000 | 1760 | 1500 | 280 | 160 | 240 | 500 | 2000 | 2910 |
| 1RQ6 506-5JE.0               | 7300  | 950  | 1000 | 1760 | 1500 | 280 | 160 | 240 | 500 | 2000 | 2910 |
| 1RQ6 560-5JE.0               | 8050  | 1060 | 1070 | 1900 | 1400 | 315 | 170 | 240 | 560 | 2260 | 2950 |
| 1RQ6 562-5JE.0               | 8600  | 1060 | 1070 | 1900 | 1400 | 315 | 170 | 240 | 560 | 2260 | 2950 |
| 1RQ6 564-5JE.0               | 9400  | 1060 | 1070 | 1900 | 1600 | 315 | 180 | 240 | 560 | 2260 | 3180 |
| 1RQ6 566-5JE.0               | 9900  | 1060 | 1070 | 1900 | 1600 | 315 | 180 | 240 | 560 | 2260 | 3180 |
| 1RQ4 630-5JE.0 <sup>3)</sup> | 11100 | 1320 | 1180 | 2060 | 1600 | 335 | 200 | 280 | 630 | 2340 | 3140 |
| 1RQ4 632-5JE.0 <sup>3)</sup> | 11750 | 1320 | 1180 | 2060 | 1600 | 335 | 200 | 280 | 630 | 2340 | 3140 |
| 1RQ4 634-5JE.0 <sup>3)</sup> | 12800 | 1320 | 1180 | 2060 | 1800 | 335 | 200 | 280 | 630 | 2340 | 3380 |
| 1RQ4 636-5JE.0 <sup>3)</sup> | 13500 | 1320 | 1180 | 2060 | 1800 | 335 | 200 | 280 | 630 | 2340 | 3380 |

Note: Higher pole numbers are available on request.

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> The dimensions are also valid for the 1SB4/1SB6 and 1SG4/1SG6 series.


<sup>3)</sup> Anti-friction bearings only for 50 Hz operation.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Dimension drawings

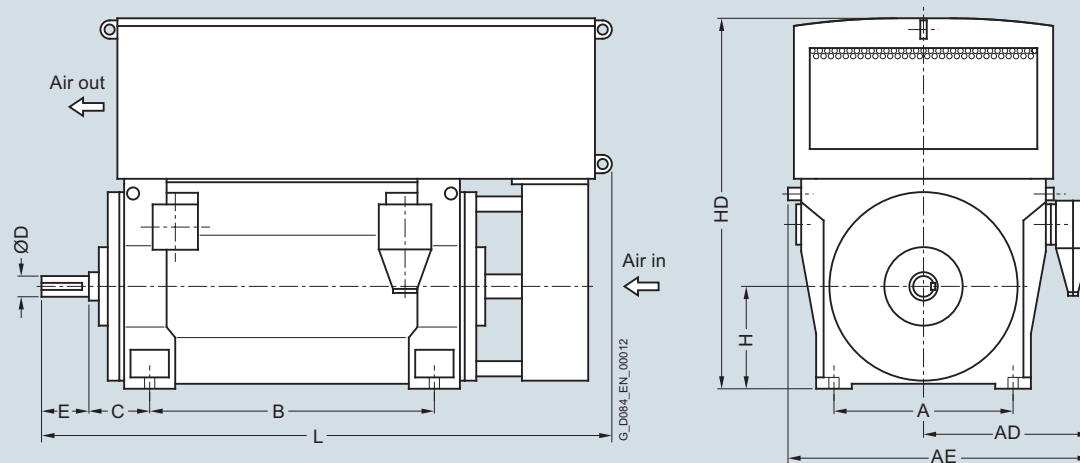

| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |                    |
|---|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|--------------------|
|   |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm            |
| <b>9 ... 11 kV, IM B3 type of construction, anti-friction bearings – series 1RQ4, 1RQ6<sup>1)</sup></b> |              |            |          |          |         |         |         |         |         |          |                    |
| <b>2-pole</b>   |              |            |          |          |         |         |         |         |         |          |                    |
| 1RQ6 450-2JJ.0 <sup>2)</sup>  | 4250         | 850        | 1070     | 1840     | 1180    | 280     | 95      | 130     | 450     | 1842     | 2425 <sup>3)</sup> |
| 1RQ6 452-2JJ.0 <sup>2)</sup>  | 4450         | 850        | 1070     | 1840     | 1180    | 280     | 95      | 130     | 450     | 1842     | 2425 <sup>3)</sup> |
| 1RQ6 454-2JJ.0 <sup>2)</sup>  | 4800         | 850        | 1070     | 1840     | 1400    | 280     | 95      | 130     | 450     | 1842     | 2635 <sup>3)</sup> |
| 1RQ6 456-2JJ.0 <sup>2)</sup>  | 5050         | 850        | 1070     | 1840     | 1400    | 280     | 95      | 130     | 450     | 1842     | 2635 <sup>3)</sup> |
| 1RQ6 500-2JJ.0 <sup>2)</sup>  | 6100         | 950        | 1270     | 1970     | 1320    | 315     | 110     | 165     | 500     | 2040     | 3450 <sup>3)</sup> |
| 1RQ6 502-2JJ.0 <sup>2)</sup>  | 6250         | 950        | 1270     | 1970     | 1320    | 315     | 110     | 165     | 500     | 2040     | 3450 <sup>3)</sup> |
| <b>4-pole</b>   |              |            |          |          |         |         |         |         |         |          |                    |
| 1RQ6 450-4JJ.0  | 4550         | 850        | 1070     | 1840     | 1180    | 250     | 130     | 200     | 450     | 1842     | 2455               |
| 1RQ6 452-4JJ.0  | 4750         | 850        | 1070     | 1840     | 1180    | 250     | 130     | 200     | 450     | 1842     | 2455               |
| 1RQ6 454-4JJ.0  | 5200         | 850        | 1070     | 1840     | 1400    | 250     | 130     | 200     | 450     | 1842     | 2665               |
| 1RQ6 456-4JJ.0  | 5450         | 850        | 1070     | 1840     | 1400    | 250     | 130     | 200     | 450     | 1842     | 2665               |
| 1RQ6 500-4JJ.0  | 6600         | 950        | 1270     | 1970     | 1320    | 280     | 150     | 200     | 500     | 2040     | 2900               |
| 1RQ6 502-4JJ.0  | 6800         | 950        | 1270     | 1970     | 1320    | 280     | 150     | 200     | 500     | 2040     | 2900               |
| 1RQ6 504-4JJ.0  | 7550         | 950        | 1270     | 1970     | 1500    | 280     | 150     | 200     | 500     | 2040     | 3050               |
| 1RQ6 506-4JJ.0  | 7850         | 950        | 1270     | 1970     | 1500    | 280     | 150     | 200     | 500     | 2040     | 3050               |
| 1RQ6 560-4JJ.0  | 8250         | 1060       | 1340     | 2110     | 1400    | 315     | 170     | 240     | 560     | 2300     | 3000               |
| 1RQ6 562-4JJ.0  | 8600         | 1060       | 1340     | 2110     | 1400    | 315     | 170     | 240     | 560     | 2300     | 3000               |
| 1RQ6 564-4JJ.0  | 9550         | 1060       | 1340     | 2110     | 1600    | 315     | 170     | 240     | 560     | 2300     | 3250               |
| 1RQ6 566-4JJ.0  | 10100        | 1060       | 1340     | 2110     | 1600    | 315     | 170     | 240     | 560     | 2300     | 3250               |
| 1RQ4 630-4JE.0 <sup>2)</sup>  | 11100        | 1320       | 1320     | 2200     | 1600    | 335     | 190     | 280     | 630     | 2340     | 3140               |
| 1RQ4 632-4JE.0 <sup>2)</sup>  | 11800        | 1320       | 1320     | 2200     | 1600    | 335     | 190     | 280     | 630     | 2340     | 3140               |
| 1RQ4 634-4JE.0 <sup>2)</sup>  | 12900        | 1320       | 1320     | 2200     | 1800    | 335     | 200     | 280     | 630     | 2340     | 3380               |
| 1RQ4 636-4JE.0 <sup>2)</sup>  | 13450        | 1320       | 1330     | 2210     | 1800    | 335     | 200     | 280     | 630     | 2340     | 3380               |
| <b>6-pole</b>   |              |            |          |          |         |         |         |         |         |          |                    |
| 1RQ6 450-6JJ.0  | 4650         | 850        | 1070     | 1840     | 1180    | 250     | 140     | 200     | 450     | 1842     | 2455               |
| 1RQ6 452-6JJ.0  | 4900         | 850        | 1070     | 1840     | 1180    | 250     | 140     | 200     | 450     | 1842     | 2455               |
| 1RQ6 454-6JJ.0  | 5300         | 850        | 1070     | 1840     | 1400    | 280     | 140     | 200     | 450     | 1842     | 2665               |
| 1RQ6 456-6JJ.0  | 5650         | 850        | 1070     | 1840     | 1400    | 280     | 140     | 200     | 450     | 1842     | 2665               |


<sup>1)</sup> The dimensions are also valid for the 1SB4/1SB6 and 1SG4/1SG6 series.

<sup>3)</sup> Including air inlet silencer.

<sup>2)</sup> Anti-friction bearings only for 50 Hz operation.



## Dimension drawings (continued)

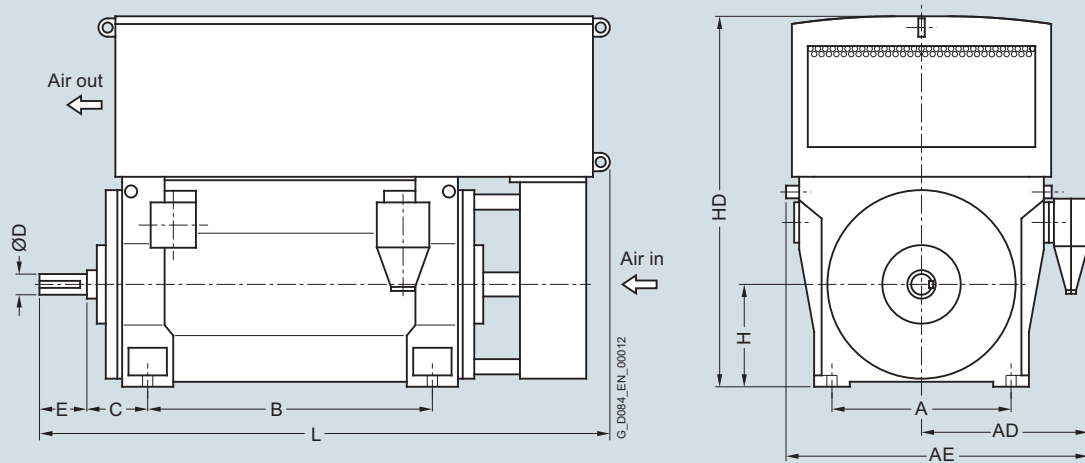

| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|---|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|   |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>9 ... 11 kV, IM B3 type of construction, anti-friction bearings – series 1RQ4, 1RQ6<sup>1)</sup></b> |              |            |          |          |         |         |         |         |         |          |         |
| <b>6-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ6 500-6JJ.0  | 6750         | 950        | 1270     | 1970     | 1320    | 315     | 160     | 240     | 500     | 1990     | 2850    |
| 1RQ6 502-6JJ.0  | 7050         | 950        | 1270     | 1970     | 1320    | 315     | 160     | 240     | 500     | 1990     | 2850    |
| 1RQ6 504-6JJ.0  | 7700         | 950        | 1270     | 1970     | 1500    | 315     | 160     | 240     | 500     | 1990     | 3300    |
| 1RQ6 506-6JJ.0  | 8050         | 950        | 1270     | 1970     | 1500    | 315     | 160     | 240     | 500     | 1990     | 3300    |
| 1RQ6 560-6JJ.0  | 9100         | 1060       | 1340     | 2110     | 1400    | 315     | 180     | 240     | 560     | 2240     | 3000    |
| 1RQ6 562-6JJ.0  | 9550         | 1060       | 1340     | 2110     | 1400    | 315     | 180     | 240     | 560     | 2240     | 3000    |
| 1RQ6 564-6JJ.0  | 10450        | 1060       | 1340     | 2110     | 1600    | 315     | 180     | 240     | 560     | 2240     | 3250    |
| 1RQ6 566-6JJ.0  | 11000        | 1060       | 1340     | 2110     | 1600    | 315     | 180     | 240     | 560     | 2240     | 3250    |
| 1RQ4 630-6JE.0  | 11400        | 1320       | 1320     | 2200     | 1600    | 335     | 200     | 280     | 630     | 2340     | 3140    |
| 1RQ4 632-6JE.0  | 12000        | 1320       | 1320     | 2200     | 1600    | 335     | 200     | 280     | 630     | 2340     | 3140    |
| 1RQ4 634-6JE.0  | 12900        | 1320       | 1320     | 2200     | 1800    | 335     | 200     | 280     | 630     | 2340     | 3380    |
| 1RQ4 636-6JE.0  | 13750        | 1320       | 1320     | 2200     | 1800    | 335     | 200     | 280     | 630     | 2340     | 3380    |
| <b>8-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ6 450-8JJ.0  | 4650         | 850        | 1070     | 1840     | 1180    | 250     | 140     | 200     | 450     | 1842     | 2455    |
| 1RQ6 452-8JJ.0  | 4950         | 850        | 1070     | 1840     | 1180    | 250     | 140     | 200     | 450     | 1842     | 2455    |
| 1RQ6 454-8JJ.0  | 5350         | 850        | 1070     | 1840     | 1400    | 280     | 140     | 200     | 450     | 1842     | 2665    |
| 1RQ6 456-8JJ.0  | 5700         | 850        | 1070     | 1840     | 1400    | 280     | 140     | 200     | 450     | 1842     | 2665    |
| 1RQ6 500-8JJ.0  | 6750         | 950        | 1270     | 1970     | 1320    | 315     | 160     | 240     | 500     | 1990     | 2850    |
| 1RQ6 502-8JJ.0  | 7000         | 950        | 1270     | 1970     | 1320    | 315     | 160     | 240     | 500     | 1990     | 2850    |
| 1RQ6 504-8JJ.0  | 7650         | 950        | 1270     | 1970     | 1500    | 315     | 160     | 240     | 500     | 1990     | 3300    |
| 1RQ6-506-8JJ.0  | 8000         | 950        | 1270     | 1970     | 1500    | 315     | 160     | 240     | 500     | 1990     | 3300    |
| 1RQ6 560-8JJ.0  | 9050         | 1060       | 1340     | 2110     | 1400    | 315     | 180     | 240     | 560     | 2240     | 3000    |
| 1RQ6 562-8JJ.0  | 9450         | 1060       | 1340     | 2110     | 1400    | 315     | 180     | 240     | 560     | 2240     | 3000    |
| 1RQ6 564-8JJ.0  | 10400        | 1060       | 1340     | 2110     | 1600    | 315     | 180     | 240     | 560     | 2240     | 3250    |
| 1RQ6-566-8JJ.0  | 10900        | 1060       | 1340     | 2110     | 1600    | 315     | 180     | 240     | 560     | 2240     | 3250    |
| 1RQ4 630-8JE.0  | 11200        | 1320       | 1320     | 2200     | 1600    | 335     | 200     | 280     | 630     | 2340     | 3140    |
| 1RQ4 632-8JE.0  | 11950        | 1320       | 1320     | 2200     | 1600    | 335     | 200     | 280     | 630     | 2340     | 3140    |
| 1RQ4 634-8JE.0  | 12900        | 1320       | 1320     | 2200     | 1800    | 335     | 200     | 280     | 630     | 2340     | 3380    |
| 1RQ4 636-8JE.0  | 13650        | 1320       | 1320     | 2200     | 1800    | 335     | 200     | 280     | 630     | 2340     | 3380    |


<sup>1)</sup> The dimensions are also valid for the 1SB4/1SB6 and 1SG4/1SG6 series.

## Motors for line operation

Air-cooled motors

H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Dimension drawings (continued)

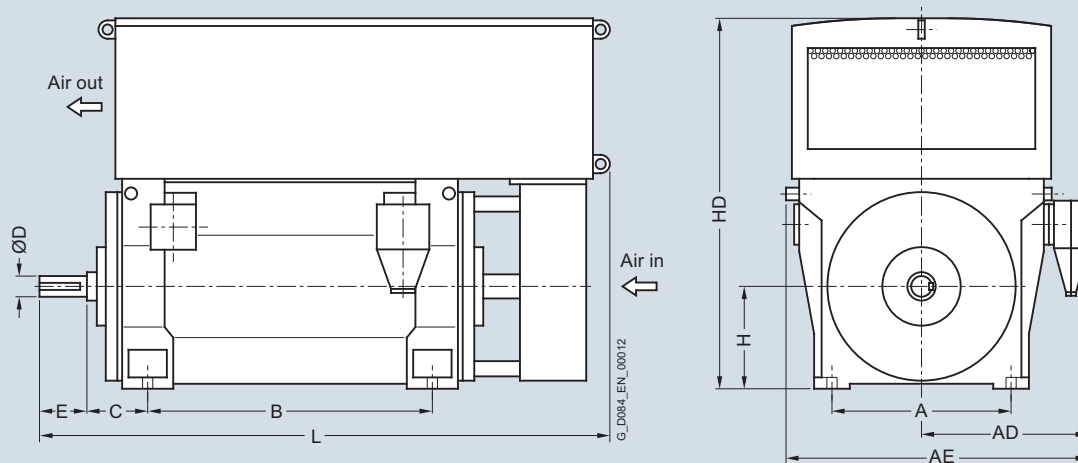


| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|---|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|   |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>9 ... 11 kV, IM B3 type of construction, anti-friction bearings – 1RQ4 series<sup>1)</sup></b> |              |            |          |          |         |         |         |         |         |          |         |
| 10-pole   |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ6 500-3JE.0  | 6000         | 950        | 1220     | 1980     | 1320    | 280     | 150     | 200     | 500     | 2000     | 2660    |
| 1RQ6 502-3JE.0  | 6300         | 950        | 1220     | 1980     | 1320    | 280     | 150     | 200     | 500     | 2000     | 2660    |
| 1RQ6 504-3JE.0  | 6850         | 950        | 1220     | 1980     | 1500    | 280     | 160     | 240     | 500     | 2000     | 2910    |
| 1RQ6 506-3JE.0  | 7250         | 950        | 1220     | 1980     | 1500    | 280     | 160     | 240     | 500     | 2000     | 2910    |
| 1RQ6 560-3JE.0  | 8200         | 1060       | 1210     | 2040     | 1400    | 315     | 170     | 240     | 560     | 2260     | 2950    |
| 1RQ6 562-3JE.0  | 8900         | 1060       | 1210     | 2040     | 1400    | 315     | 170     | 240     | 560     | 2260     | 2950    |
| 1RQ6 564-3JE.0  | 9700         | 1060       | 1210     | 2040     | 1600    | 315     | 180     | 240     | 560     | 2260     | 3180    |
| 1RQ6 566-3JE.0  | 10100        | 1060       | 1210     | 2040     | 1600    | 315     | 180     | 240     | 560     | 2260     | 3180    |
| 1RQ4 630-3JE.0  | 11200        | 1320       | 1320     | 2200     | 1600    | 335     | 200     | 280     | 630     | 2340     | 3140    |
| 1RQ4 632-3JE.0  | 11800        | 1320       | 1320     | 2200     | 1600    | 335     | 200     | 280     | 630     | 2340     | 3140    |
| 1RQ4 634-3JE.0  | 12900        | 1320       | 1320     | 2200     | 1800    | 335     | 200     | 280     | 630     | 2340     | 3380    |
| 1RQ4 636-3JE.0  | 13550        | 1320       | 1320     | 2200     | 1800    | 335     | 200     | 280     | 630     | 2340     | 3380    |
| 12-pole   |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ6 502-5JE.0  | 6350         | 950        | 1220     | 1980     | 1320    | 280     | 150     | 200     | 500     | 2000     | 2660    |
| 1RQ6 504-5JE.0  | 6850         | 950        | 1220     | 1980     | 1500    | 280     | 160     | 240     | 500     | 2000     | 2910    |
| 1RQ6 506-5JE.0  | 7250         | 950        | 1220     | 1980     | 1500    | 280     | 160     | 240     | 500     | 2000     | 2910    |
| 1RQ6 560-5JE.0  | 8000         | 1060       | 1210     | 2040     | 1400    | 315     | 170     | 240     | 560     | 2260     | 2950    |
| 1RQ6 562-5JE.0  | 8550         | 1060       | 1210     | 2040     | 1400    | 315     | 170     | 240     | 560     | 2260     | 2950    |
| 1RQ6 564-5JE.0  | 9400         | 1060       | 1210     | 2040     | 1600    | 315     | 180     | 240     | 560     | 2260     | 3180    |
| 1RQ6 566-5JE.0  | 9850         | 1060       | 1210     | 2040     | 1600    | 315     | 180     | 240     | 560     | 2260     | 3180    |
| 1RQ4 630-5JE.0  | 11100        | 1320       | 1320     | 2200     | 1600    | 335     | 200     | 280     | 630     | 2340     | 3140    |
| 1RQ4 632-5JE.0  | 11750        | 1320       | 1320     | 2200     | 1600    | 335     | 200     | 280     | 630     | 2340     | 3140    |
| 1RQ4 634-5JE.0  | 12800        | 1320       | 1320     | 2200     | 1800    | 335     | 200     | 280     | 630     | 2340     | 3380    |
| 1RQ4 636-5JE.0  | 13500        | 1320       | 1320     | 2200     | 1800    | 335     | 200     | 280     | 630     | 2340     | 3380    |

**Note:**

Higher pole numbers are available on request.

<sup>1)</sup> The dimensions are also valid for the 1SB4/1SB6 and 1SG4/1SG6 series.

## Dimension drawings

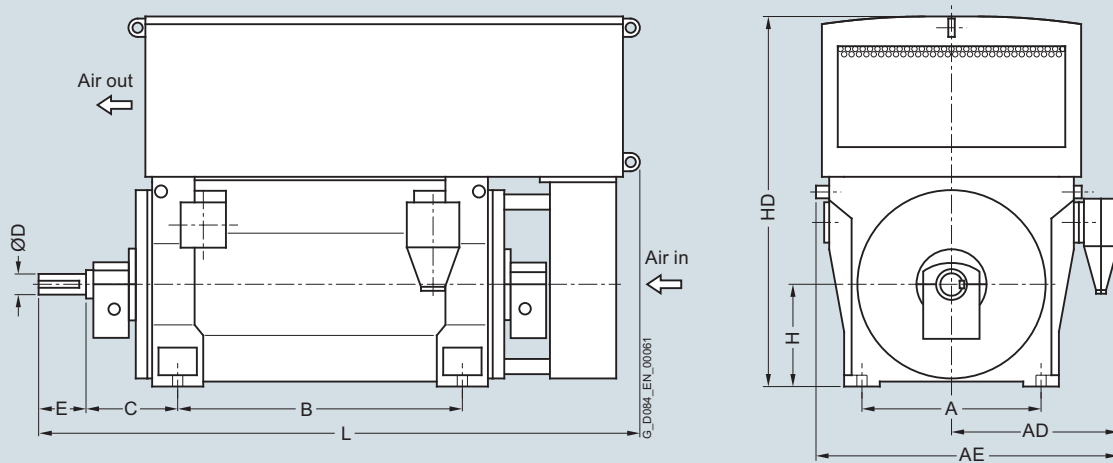

| Motor type  | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |                    |
|---|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|--------------------|
|   |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm            |
| <b>Up to 6.6 kV, IM B3 type of construction, sleeve bearings – series 1RQ4, 1RQ6<sup>2)</sup></b> |              |            |                        |                        |         |         |         |         |         |          |                    |
| <b>2-pole</b>   |              |            |                        |                        |         |         |         |         |         |          |                    |
| 1RQ6 450-2JJ.0-Z K96 <sup>3)</sup>  | 4250         | 850        | 930                    | 1620                   | 1180    | 425     | 95      | 130     | 450     | 1842     | 2575 <sup>4)</sup> |
| 1RQ6 452-2JJ.0-Z K96 <sup>3)</sup>  | 4500         | 850        | 930                    | 1620                   | 1180    | 425     | 95      | 130     | 450     | 1842     | 2575 <sup>4)</sup> |
| 1RQ6 454-2JJ.0-Z K96 <sup>3)</sup>  | 4850         | 850        | 930                    | 1620                   | 1400    | 425     | 95      | 130     | 450     | 1842     | 2790 <sup>4)</sup> |
| 1RQ6 456-2JJ.0-Z K96 <sup>3)</sup>  | 5100         | 850        | 930                    | 1620                   | 1400    | 425     | 95      | 130     | 450     | 1842     | 2790 <sup>4)</sup> |
| 1RQ6 500-2JJ.0-Z K96 <sup>3)</sup>  | 6100         | 950        | 1135                   | 1835                   | 1320    | 450     | 110     | 165     | 500     | 2040     | 3550 <sup>4)</sup> |
| 1RQ6 502-2JJ.0-Z K96 <sup>3)</sup>  | 6250         | 950        | 1135                   | 1835                   | 1320    | 450     | 110     | 165     | 500     | 2040     | 3550 <sup>4)</sup> |
| 1RQ6 504-2JJ.0  | 7100         | 950        | 1135                   | 1835                   | 1500    | 450     | 110     | 165     | 500     | 2040     | 3750 <sup>4)</sup> |
| 1RQ6 506-2JJ.0  | 7350         | 950        | 1135                   | 1835                   | 1500    | 450     | 110     | 165     | 500     | 2040     | 3750 <sup>4)</sup> |
| 1RQ6 560-2JJ.0  | 8150         | 1060       | 1205                   | 1975                   | 1400    | 600     | 130     | 200     | 560     | 2300     | 3900 <sup>4)</sup> |
| 1RQ6 562-2JJ.0  | 8550         | 1060       | 1205                   | 1975                   | 1400    | 600     | 130     | 200     | 560     | 2300     | 3900 <sup>4)</sup> |
| 1RQ6 564-2JJ.0  | 9500         | 1060       | 1205                   | 1975                   | 1600    | 600     | 130     | 200     | 560     | 2300     | 4130 <sup>4)</sup> |
| 1RQ6 566-2JJ.0  | 9950         | 1060       | 1205                   | 1975                   | 1600    | 600     | 130     | 200     | 560     | 2300     | 4130 <sup>4)</sup> |
| 1RQ4 630-2JE.0  | 10900        | 1320       | 1330                   | 2210                   | 1600    | 560     | 140     | 200     | 630     | 2340     | 3840 <sup>4)</sup> |
| 1RQ4 632-2JE.0  | 11550        | 1320       | 1330                   | 2210                   | 1600    | 560     | 140     | 200     | 630     | 2340     | 3840 <sup>4)</sup> |
| 1RQ4 634-2JE.0  | 12750        | 1320       | 1330                   | 2210                   | 1800    | 560     | 150     | 200     | 630     | 2340     | 4080 <sup>4)</sup> |
| 1RQ4 636-2JE.0  | 13600        | 1320       | 1330                   | 2210                   | 1800    | 560     | 150     | 200     | 630     | 2340     | 4080 <sup>4)</sup> |
| <b>4-pole</b>   |              |            |                        |                        |         |         |         |         |         |          |                    |
| 1RQ6 450-4JJ.0-Z K96  | 4650         | 850        | 930                    | 1620                   | 1180    | 500     | 130     | 200     | 450     | 1842     | 2705               |
| 1RQ6 452-4JJ.0-Z K96  | 4900         | 850        | 930                    | 1620                   | 1180    | 500     | 130     | 200     | 450     | 1842     | 2705               |
| 1RQ6 454-4JJ.0-Z K96  | 5300         | 850        | 930                    | 1620                   | 1400    | 500     | 130     | 200     | 450     | 1842     | 2915               |
| 1RQ6 456-4JJ.0-Z K96  | 5550         | 850        | 930                    | 1620                   | 1400    | 500     | 130     | 200     | 450     | 1842     | 2915               |
| 1RQ6 500-4JJ.0-Z K96  | 6900         | 950        | 1135                   | 1835                   | 1320    | 560     | 150     | 200     | 500     | 2040     | 3150               |
| 1RQ6 502-4JJ.0-Z K96  | 7100         | 950        | 1135                   | 1835                   | 1320    | 560     | 150     | 200     | 500     | 2040     | 3150               |
| 1RQ6 504-4JJ.0-Z K96  | 7800         | 950        | 1135                   | 1835                   | 1500    | 560     | 150     | 200     | 500     | 2040     | 3350               |
| 1RQ6 506-4JJ.0-Z K96  | 8100         | 950        | 1135                   | 1835                   | 1500    | 560     | 150     | 200     | 500     | 2040     | 3350               |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> The dimensions are also valid for the 1SB4/1SB6 and 1SG4/1SG6 series.

<sup>3)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.


<sup>4)</sup> Including air inlet silencer.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Dimension drawings (continued)

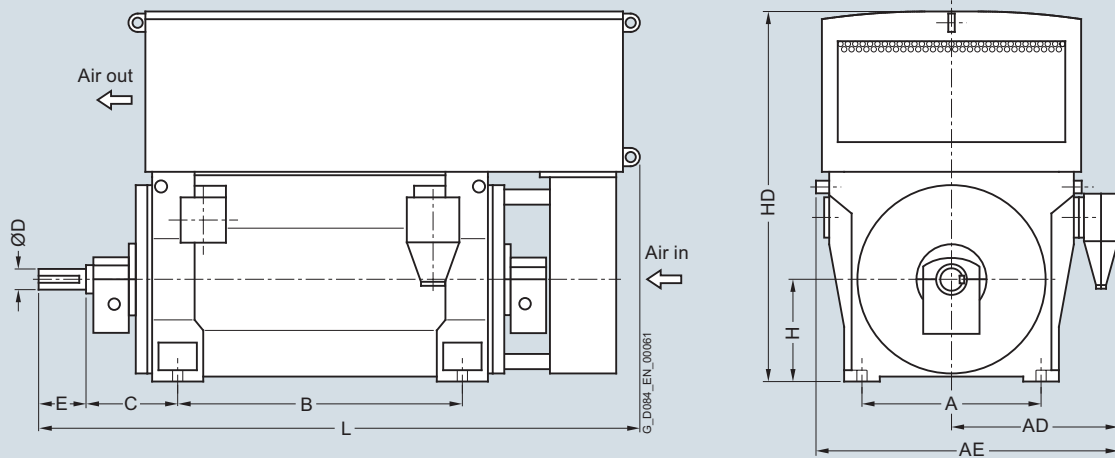


| Motor type  | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |         |
|---|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|---------|
|   |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, sleeve bearings – series 1RQ4, 1RQ6<sup>2)</sup></b> |              |            |                        |                        |         |         |         |         |         |          |         |
| <b>4-pole</b>   |              |            |                        |                        |         |         |         |         |         |          |         |
| 1RQ6 560-4JJ.0-Z K96  | 8350         | 1060       | 1205                   | 1975                   | 1400    | 600     | 170     | 240     | 560     | 2300     | 3270    |
| 1RQ6 562-4JJ.0-Z K96  | 8750         | 1060       | 1205                   | 1975                   | 1400    | 600     | 170     | 240     | 560     | 2300     | 3270    |
| 1RQ6 564-4JJ.0-Z K96  | 9700         | 1060       | 1205                   | 1975                   | 1600    | 600     | 170     | 240     | 560     | 2300     | 3500    |
| 1RQ6 566-4JJ.0-Z K96  | 10200        | 1060       | 1205                   | 1975                   | 1600    | 600     | 170     | 240     | 560     | 2300     | 3500    |
| 1RQ4 630-4JE.0-Z K96 <sup>3)</sup>  | 11350        | 1320       | 1330                   | 2210                   | 1600    | 600     | 190     | 280     | 630     | 2340     | 3400    |
| 1RQ4 632-4JE.0-Z K96 <sup>3)</sup>  | 12050        | 1320       | 1330                   | 2210                   | 1600    | 600     | 190     | 280     | 630     | 2340     | 3400    |
| 1RQ4 634-4JE.0-Z K96 <sup>3)</sup>  | 13150        | 1320       | 1330                   | 2210                   | 1800    | 600     | 200     | 280     | 630     | 2340     | 3640    |
| 1RQ4 636-4JE.0-Z K96 <sup>3)</sup>  | 13700        | 1320       | 1330                   | 2210                   | 1800    | 600     | 200     | 280     | 630     | 2340     | 3640    |
| <b>6-pole</b>   |              |            |                        |                        |         |         |         |         |         |          |         |
| 1RQ6 450-6JJ.0-Z K96  | 4800         | 850        | 930                    | 1620                   | 1180    | 500     | 140     | 200     | 450     | 1842     | 2705    |
| 1RQ6 452-6JJ.0-Z K96  | 5050         | 850        | 930                    | 1620                   | 1180    | 500     | 140     | 200     | 450     | 1842     | 2705    |
| 1RQ6 454-6JJ.0-Z K96  | 5450         | 850        | 930                    | 1620                   | 1400    | 500     | 140     | 200     | 450     | 1842     | 2915    |
| 1RQ6 456-6JJ.0-Z K96  | 5800         | 850        | 930                    | 1620                   | 1400    | 500     | 140     | 200     | 450     | 1842     | 2915    |
| 1RQ6 500-6JJ.0-Z K96  | 6900         | 950        | 1135                   | 1835                   | 1320    | 560     | 170     | 240     | 500     | 1990     | 2850    |
| 1RQ6 502-6JJ.0-Z K96  | 7200         | 950        | 1135                   | 1835                   | 1320    | 560     | 170     | 240     | 500     | 1990     | 2850    |
| 1RQ6 504-6JJ.0-Z K96  | 7850         | 950        | 1135                   | 1835                   | 1500    | 560     | 170     | 240     | 500     | 1990     | 3300    |
| 1RQ6 506-6JJ.0-Z K96  | 8200         | 950        | 1135                   | 1835                   | 1500    | 560     | 170     | 240     | 500     | 1990     | 3300    |
| 1RQ6 560-6JJ.0-Z K96  | 9300         | 1060       | 1205                   | 1975                   | 1400    | 600     | 170     | 240     | 560     | 2240     | 3300    |
| 1RQ6 562-6JJ.0-Z K96  | 9750         | 1060       | 1205                   | 1975                   | 1400    | 600     | 170     | 240     | 560     | 2240     | 3300    |
| 1RQ6 564-6JJ.0-Z K96  | 10650        | 1060       | 1205                   | 1975                   | 1600    | 600     | 170     | 240     | 560     | 2240     | 3500    |
| 1RQ6 566-6JJ.0-Z K96  | 11150        | 1060       | 1205                   | 1975                   | 1600    | 600     | 170     | 240     | 560     | 2240     | 3500    |
| 1RQ4 630-6JE.0-Z K96  | 11650        | 1320       | 1330                   | 2210                   | 1600    | 600     | 200     | 280     | 630     | 2340     | 3400    |
| 1RQ4 632-6JE.0-Z K96  | 12250        | 1320       | 1330                   | 2210                   | 1600    | 600     | 200     | 280     | 630     | 2340     | 3400    |
| 1RQ4 634-6JE.0-Z K96  | 13150        | 1320       | 1330                   | 2210                   | 1800    | 600     | 200     | 280     | 630     | 2340     | 3640    |
| 1RQ4 636-6JE.0-Z K96  | 14000        | 1320       | 1330                   | 2210                   | 1800    | 600     | 200     | 280     | 630     | 2340     | 3640    |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> The dimensions are also valid for the 1SB4/1SB6 and 1SG4/1SG6 series.

<sup>3)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.

## Dimension drawings (continued)

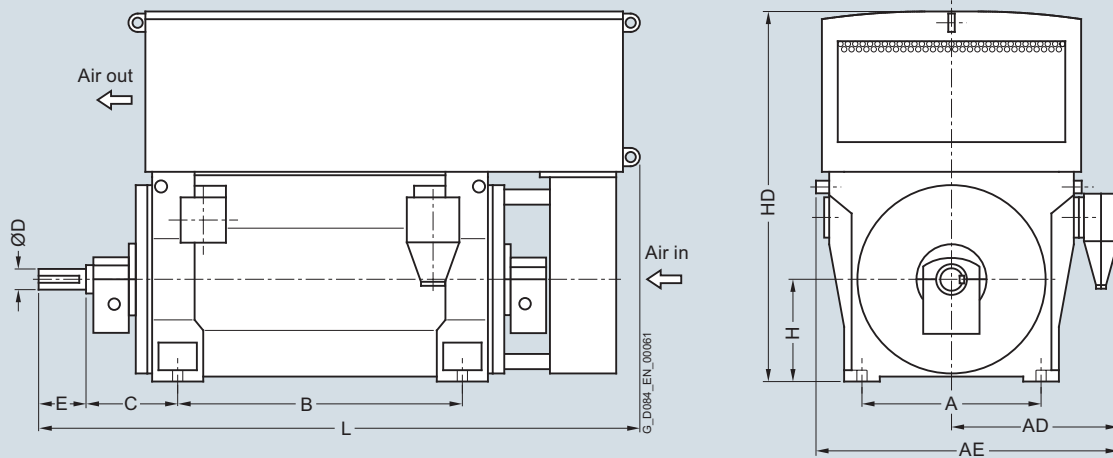

| Motor type  | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |         |
|---|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|---------|
|   |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, sleeve bearings – series 1RQ4, 1RQ6<sup>2)</sup></b> |              |            |                        |                        |         |         |         |         |         |          |         |
| <b>8-pole</b>   |              |            |                        |                        |         |         |         |         |         |          |         |
| 1RQ6 450-8JJ.0-Z K96  | 4800         | 850        | 930                    | 1620                   | 1180    | 500     | 140     | 200     | 450     | 1842     | 2705    |
| 1RQ6 452-8JJ.0-Z K96  | 5100         | 850        | 930                    | 1620                   | 1180    | 500     | 140     | 200     | 450     | 1842     | 2705    |
| 1RQ6 454-8JJ.0-Z K96  | 5500         | 850        | 930                    | 1620                   | 1400    | 500     | 140     | 200     | 450     | 1842     | 2915    |
| 1RQ6 456-8JJ.0-Z K96  | 5850         | 850        | 930                    | 1620                   | 1400    | 500     | 140     | 200     | 450     | 1842     | 2915    |
| 1RQ6 500-8JJ.0-Z K96  | 6900         | 950        | 1135                   | 1835                   | 1320    | 560     | 170     | 240     | 500     | 1990     | 2850    |
| 1RQ6 502-8JJ.0-Z K96  | 7150         | 950        | 1135                   | 1835                   | 1320    | 560     | 170     | 240     | 500     | 1990     | 2850    |
| 1RQ6 504-8JJ.0-Z K96  | 7800         | 950        | 1135                   | 1835                   | 1500    | 560     | 170     | 240     | 500     | 1990     | 3300    |
| 1RQ6 506-8JJ.0-Z K96  | 8150         | 950        | 1135                   | 1835                   | 1500    | 560     | 170     | 240     | 500     | 1990     | 3300    |
| 1RQ6 560-8JJ.0-Z K96  | 9250         | 1060       | 1205                   | 1975                   | 1400    | 600     | 170     | 240     | 560     | 2240     | 3300    |
| 1RQ6 562-8JJ.0-Z K96  | 9650         | 1060       | 1205                   | 1975                   | 1400    | 600     | 170     | 240     | 560     | 2240     | 3300    |
| 1RQ6 564-8JJ.0-Z K96  | 10550        | 1060       | 1205                   | 1975                   | 1600    | 600     | 170     | 240     | 560     | 2240     | 3500    |
| 1RQ6 566-8JJ.0-Z K96  | 11100        | 1060       | 1205                   | 1975                   | 1600    | 600     | 170     | 240     | 560     | 2240     | 3500    |
| 1RQ4 630-8JE.0-Z K96 <sup>3)</sup>  | 11450        | 1320       | 1180                   | 2060                   | 1600    | 600     | 200     | 280     | 630     | 2340     | 3400    |
| 1RQ4 632-8JE.0-Z K96 <sup>3)</sup>  | 12200        | 1320       | 1330                   | 2210                   | 1600    | 600     | 200     | 280     | 630     | 2340     | 3400    |
| 1RQ4 634-8JE.0-Z K96 <sup>3)</sup>  | 13150        | 1320       | 1330                   | 2210                   | 1800    | 600     | 200     | 280     | 630     | 2340     | 3640    |
| 1RQ4 636-8JE.0-Z K96 <sup>3)</sup>  | 13900        | 1320       | 1330                   | 2210                   | 1800    | 600     | 200     | 280     | 630     | 2340     | 3640    |
| <b>10-pole</b>  |              |            |                        |                        |         |         |         |         |         |          |         |
| 1RQ6 450-3JJ.0-Z K96  | 4800         | 850        | 930                    | 1620                   | 1180    | 500     | 140     | 200     | 450     | 1842     | 2705    |
| 1RQ6 452-3JJ.0-Z K96  | 5100         | 850        | 930                    | 1620                   | 1180    | 500     | 140     | 200     | 450     | 1842     | 2705    |
| 1RQ6 454-3JJ.0-Z K96  | 5500         | 850        | 930                    | 1620                   | 1400    | 500     | 140     | 200     | 450     | 1842     | 2915    |
| 1RQ6 456-3JJ.0-Z K96  | 5850         | 850        | 930                    | 1620                   | 1400    | 500     | 140     | 200     | 450     | 1842     | 2915    |
| 1RQ6 500-3JE.0-Z K96  | 6100         | 950        | 1000                   | 1760                   | 1320    | 500     | 150     | 200     | 500     | 2000     | 2880    |
| 1RQ6 502-3JE.0-Z K96  | 6500         | 950        | 1000                   | 1760                   | 1320    | 500     | 150     | 200     | 500     | 2000     | 2880    |
| 1RQ6 504-3JE.0-Z K96  | 7050         | 950        | 1000                   | 1760                   | 1500    | 500     | 160     | 240     | 500     | 2000     | 3130    |
| 1RQ6 506-3JE.0-Z K96  | 7400         | 950        | 1000                   | 1760                   | 1500    | 500     | 160     | 240     | 500     | 2000     | 3130    |
| 1RQ6 560-3JE.0-Z K96  | 8150         | 1060       | 1070                   | 1900                   | 1400    | 530     | 170     | 240     | 560     | 2260     | 3170    |
| 1RQ6 562-3JE.0-Z K96  | 8750         | 1060       | 1070                   | 1900                   | 1400    | 530     | 170     | 240     | 560     | 2260     | 3170    |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> The dimensions are also valid for the 1SB4/1SB6 and 1SG4/1SG6 series.


<sup>3)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Dimension drawings (continued)

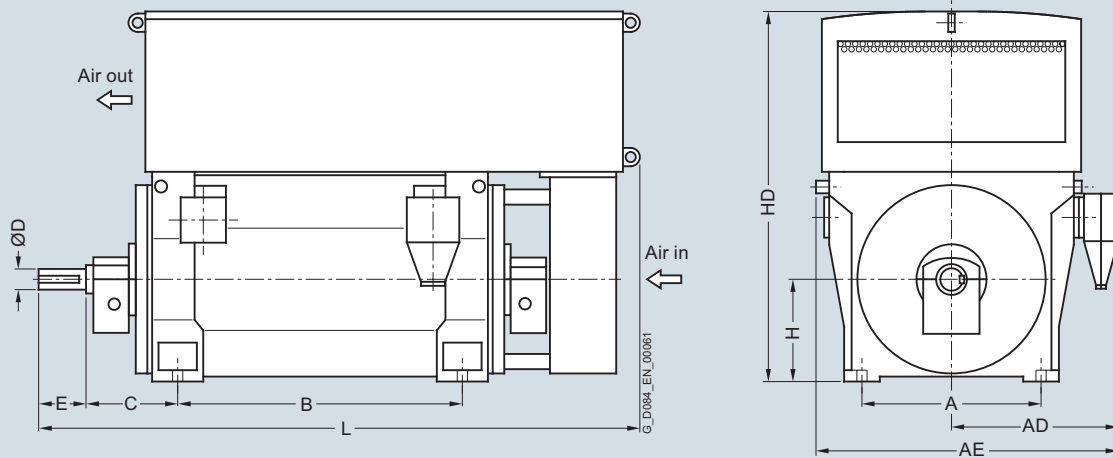

| Motor type  | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |         |
|---|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|---------|
|   |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, sleeve bearings – series 1RQ4, 1RQ6<sup>2)</sup></b> |              |            |                        |                        |         |         |         |         |         |          |         |
| <b>10-pole</b>  |              |            |                        |                        |         |         |         |         |         |          |         |
| 1RQ6 564-3JE.0-Z K96  | 9600         | 1060       | 1070                   | 1900                   | 1600    | 530     | 180     | 240     | 560     | 2260     | 3400    |
| 1RQ6 566-3JE.0-Z K96  | 10050        | 1060       | 1070                   | 1900                   | 1600    | 530     | 180     | 240     | 560     | 2260     | 3400    |
| 1RQ4 630-3JE.0-Z K96 <sup>3)</sup>  | 11450        | 1320       | 1180                   | 2060                   | 1600    | 600     | 200     | 280     | 630     | 2340     | 3400    |
| 1RQ4 632-3JE.0-Z K96 <sup>3)</sup>  | 12050        | 1320       | 1180                   | 2060                   | 1600    | 600     | 200     | 280     | 630     | 2340     | 3400    |
| 1RQ4 634-3JE.0-Z K96 <sup>3)</sup>  | 13150        | 1320       | 1180                   | 2060                   | 1800    | 600     | 200     | 280     | 630     | 2340     | 3640    |
| 1RQ4 636-3JE.0-Z K96 <sup>3)</sup>  | 13800        | 1320       | 1180                   | 2060                   | 1800    | 600     | 200     | 280     | 630     | 2340     | 3640    |
| <b>12-pole</b>  |              |            |                        |                        |         |         |         |         |         |          |         |
| 1RQ6 450-5JJ.0-Z K96  | 4800         | 850        | 930                    | 1620                   | 1180    | 500     | 140     | 200     | 450     | 1842     | 2705    |
| 1RQ6 452-5JJ.0-Z K96  | 5100         | 850        | 930                    | 1620                   | 1180    | 500     | 140     | 200     | 450     | 1842     | 2705    |
| 1RQ6 454-5JJ.0-Z K96  | 5500         | 850        | 930                    | 1620                   | 1400    | 500     | 140     | 200     | 450     | 1842     | 2915    |
| 1RQ6 456-5JJ.0-Z K96  | 5850         | 850        | 930                    | 1620                   | 1400    | 500     | 140     | 200     | 450     | 1842     | 2915    |
| 1RQ6 500-5JE.0-Z K96  | 6100         | 950        | 1000                   | 1760                   | 1320    | 500     | 150     | 200     | 500     | 2000     | 2880    |
| 1RQ6 502-5JE.0-Z K96  | 6500         | 950        | 1000                   | 1760                   | 1320    | 500     | 150     | 200     | 500     | 2000     | 2880    |
| 1RQ6 504-5JE.0-Z K96  | 7050         | 950        | 1000                   | 1760                   | 1500    | 500     | 160     | 240     | 500     | 2000     | 3130    |
| 1RQ6 506-5JE.0-Z K96  | 7450         | 950        | 1000                   | 1760                   | 1500    | 500     | 160     | 240     | 500     | 2000     | 3130    |
| 1RQ6 560-5JE.0-Z K96  | 8200         | 1060       | 1070                   | 1900                   | 1400    | 530     | 170     | 240     | 560     | 2260     | 3170    |
| 1RQ6 562-5JE.0-Z K96  | 8750         | 1060       | 1070                   | 1900                   | 1400    | 530     | 170     | 240     | 560     | 2260     | 3170    |
| 1RQ6 564-5JE.0-Z K96  | 9550         | 1060       | 1070                   | 1900                   | 1600    | 530     | 180     | 240     | 560     | 2260     | 3400    |
| 1RQ6 566-5JE.0-Z K96  | 10050        | 1060       | 1070                   | 1900                   | 1600    | 530     | 180     | 240     | 560     | 2260     | 3400    |
| 1RQ4 630-5JE.0-Z K96 <sup>3)</sup>  | 11350        | 1320       | 1180                   | 2060                   | 1600    | 600     | 200     | 280     | 630     | 2340     | 3400    |
| 1RQ4 632-5JE.0-Z K96 <sup>3)</sup>  | 12000        | 1320       | 1180                   | 2060                   | 1600    | 600     | 200     | 280     | 630     | 2340     | 3400    |
| 1RQ4 634-5JE.0-Z K96 <sup>3)</sup>  | 13050        | 1320       | 1180                   | 2060                   | 1800    | 600     | 200     | 280     | 630     | 2340     | 3640    |
| 1RQ4 636-5JE.0-Z K96 <sup>3)</sup>  | 13750        | 1320       | 1180                   | 2060                   | 1800    | 600     | 200     | 280     | 630     | 2340     | 3640    |

#### Note:


Higher pole numbers are available on request.

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> The dimensions are also valid for the 1SB4/1SB6 and 1SG4/1SG6 series.

<sup>3)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.

## Dimension drawings

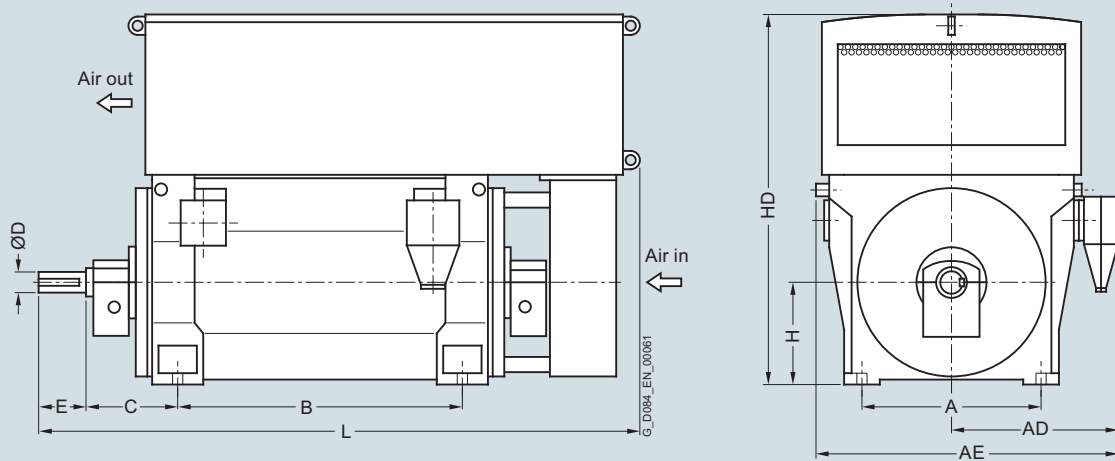

| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |                    |
|--|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|--------------------|
|  |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm            |
| <b>9 ... 11 kV, IM B3 type of construction, sleeve bearings – series 1RQ4, 1RQ6<sup>1)</sup></b> |              |            |          |          |         |         |         |         |         |          |                    |
| <b>2-pole</b>  |              |            |          |          |         |         |         |         |         |          |                    |
| 1RQ6 450-2JJ.0-Z K96 <sup>2)</sup>   | 4250         | 850        | 1070     | 1840     | 1180    | 425     | 95      | 130     | 450     | 1842     | 2575 <sup>3)</sup> |
| 1RQ6 452-2JJ.0-Z K96 <sup>2)</sup>   | 4500         | 850        | 1070     | 1840     | 1180    | 425     | 95      | 130     | 450     | 1842     | 2575 <sup>3)</sup> |
| 1RQ6 454-2JJ.0-Z K96 <sup>2)</sup>   | 4850         | 850        | 1070     | 1840     | 1400    | 425     | 95      | 130     | 450     | 1842     | 2790 <sup>3)</sup> |
| 1RQ6 456-2JJ.0-Z K96 <sup>2)</sup>   | 5100         | 850        | 1070     | 1840     | 1400    | 425     | 95      | 130     | 450     | 1842     | 2790 <sup>3)</sup> |
| 1RQ6 500-2JJ.0-Z K96 <sup>2)</sup>   | 6100         | 950        | 1270     | 1970     | 1320    | 450     | 110     | 165     | 500     | 2040     | 3550 <sup>3)</sup> |
| 1RQ6 502-2JJ.0-Z K96 <sup>2)</sup>   | 6250         | 950        | 1270     | 1970     | 1320    | 450     | 110     | 165     | 500     | 2040     | 3550 <sup>3)</sup> |
| 1RQ6 504-2JJ.0   | 7100         | 950        | 1270     | 1970     | 1500    | 450     | 110     | 165     | 500     | 2040     | 3750 <sup>3)</sup> |
| 1RQ6 506-2JJ.0   | 7350         | 950        | 1270     | 1970     | 1500    | 450     | 110     | 165     | 500     | 2040     | 3750 <sup>3)</sup> |
| 1RQ6 560-2JJ.0   | 8150         | 1060       | 1340     | 2110     | 1400    | 600     | 130     | 200     | 560     | 2300     | 3900 <sup>3)</sup> |
| 1RQ6 562-2JJ.0   | 8550         | 1060       | 1340     | 2110     | 1400    | 600     | 130     | 200     | 560     | 2300     | 3900 <sup>3)</sup> |
| 1RQ6 564-2JJ.0   | 9500         | 1060       | 1340     | 2110     | 1600    | 600     | 130     | 200     | 560     | 2300     | 4130 <sup>3)</sup> |
| 1RQ6 566-2JJ.0   | 9950         | 1060       | 1340     | 2110     | 1600    | 600     | 130     | 200     | 560     | 2300     | 4130 <sup>3)</sup> |
| 1RQ4 630-2JE.0   | 10800        | 1320       | 1320     | 2200     | 1600    | 560     | 140     | 200     | 630     | 2340     | 3840 <sup>3)</sup> |
| 1RQ4 632-2JE.0   | 11450        | 1320       | 1320     | 2200     | 1600    | 560     | 140     | 200     | 630     | 2340     | 3840 <sup>3)</sup> |
| 1RQ4 634-2JE.0   | 12600        | 1320       | 1320     | 2200     | 1800    | 560     | 150     | 200     | 630     | 2340     | 4080 <sup>3)</sup> |
| 1RQ4 636-2JE.0   | 13400        | 1320       | 1330     | 2210     | 1800    | 560     | 150     | 200     | 630     | 2340     | 4080 <sup>3)</sup> |
| <b>4-pole</b>  |              |            |          |          |         |         |         |         |         |          |                    |
| 1RQ6 450-4JJ.0-Z K96   | 4650         | 850        | 1070     | 1840     | 1180    | 500     | 130     | 200     | 450     | 1842     | 2705               |
| 1RQ6 452-4JJ.0-Z K96   | 4850         | 850        | 1070     | 1840     | 1180    | 500     | 130     | 200     | 450     | 1842     | 2705               |
| 1RQ6 454-4JJ.0-Z K96   | 5300         | 850        | 1070     | 1840     | 1400    | 500     | 130     | 200     | 450     | 1842     | 2915               |
| 1RQ6 456-4JJ.0-Z K96   | 5550         | 850        | 1070     | 1840     | 1400    | 500     | 130     | 200     | 450     | 1842     | 2915               |
| 1RQ6 500-4JJ.0-Z K96   | 6900         | 950        | 1270     | 1970     | 1320    | 560     | 150     | 200     | 500     | 2040     | 3150               |
| 1RQ6 502-4JJ.0-Z K96   | 7100         | 950        | 1270     | 1970     | 1320    | 560     | 150     | 200     | 500     | 2040     | 3150               |
| 1RQ6 504-4JJ.0-Z K96   | 7800         | 950        | 1270     | 1970     | 1500    | 560     | 150     | 200     | 500     | 2040     | 3350               |
| 1RQ6 506-4JJ.0-Z K96   | 8100         | 950        | 1270     | 1970     | 1500    | 560     | 150     | 200     | 500     | 2040     | 3350               |
| 1RQ6 560-4JJ.0-Z K96   | 8350         | 1060       | 1340     | 2110     | 1400    | 600     | 170     | 240     | 560     | 2300     | 3270               |
| 1RQ6 562-4JJ.0-Z K96   | 8750         | 1060       | 1340     | 2110     | 1400    | 600     | 170     | 240     | 560     | 2300     | 3270               |
| 1RQ6 564-4JJ.0-Z K96   | 9700         | 1060       | 1340     | 2110     | 1600    | 600     | 170     | 240     | 560     | 2300     | 3500               |
| 1RQ6 566-4JJ.0-Z K96   | 10200        | 1060       | 1340     | 2110     | 1600    | 600     | 170     | 240     | 560     | 2300     | 3500               |

<sup>1)</sup> The dimensions are also valid for the 1SB4/1SB6 and 1SG4/1SG6 series.

<sup>3)</sup> Including air inlet silencer.


<sup>2)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Dimension drawings (continued)

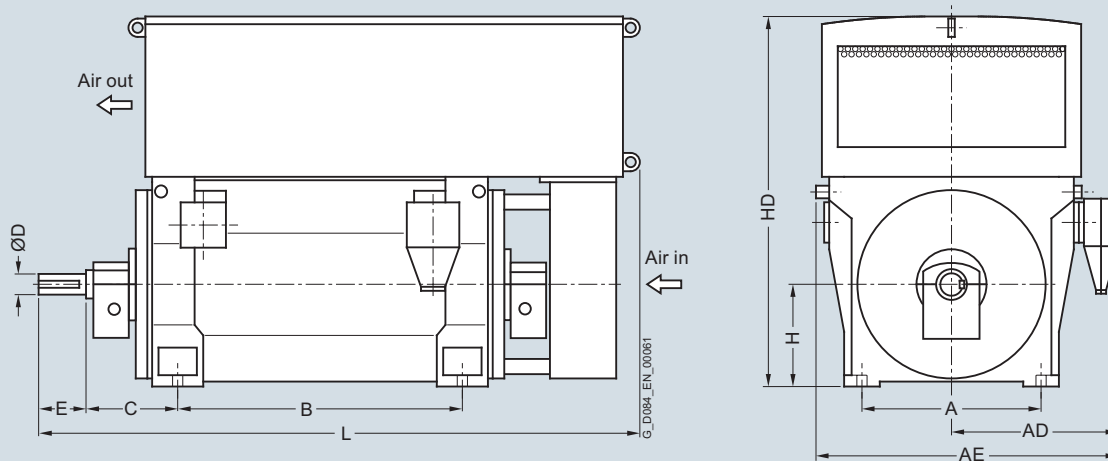


| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|--|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>9 ... 11 kV, IM B3 type of construction, sleeve bearings – series 1RQ4, 1RQ6<sup>1)</sup></b> |              |            |          |          |         |         |         |         |         |          |         |
| <b>4-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ4 630-4JE.0-Z K96 <sup>2)</sup>   | 11250        | 1320       | 1320     | 2200     | 1600    | 600     | 190     | 280     | 630     | 2340     | 3400    |
| 1RQ4 632-4JE.0-Z K96 <sup>2)</sup>   | 11950        | 1320       | 1320     | 2200     | 1600    | 600     | 190     | 280     | 630     | 2340     | 3400    |
| 1RQ4 634-4JE.0-Z K96 <sup>2)</sup>   | 13000        | 1320       | 1320     | 2200     | 1800    | 600     | 200     | 280     | 630     | 2340     | 3640    |
| 1RQ4 636-4JE.0-Z K96 <sup>2)</sup>   | 13600        | 1320       | 1330     | 2210     | 1800    | 600     | 200     | 280     | 630     | 2340     | 3640    |
| <b>6-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ6 450-6JJ.0-Z K96   | 4800         | 850        | 1070     | 1840     | 1180    | 500     | 140     | 200     | 450     | 1842     | 2705    |
| 1RQ6 452-6JJ.0-Z K96   | 5050         | 850        | 1070     | 1840     | 1180    | 500     | 140     | 200     | 450     | 1842     | 2705    |
| 1RQ6 454-6JJ.0-Z K96   | 5450         | 850        | 1070     | 1840     | 1400    | 500     | 140     | 200     | 450     | 1842     | 2915    |
| 1RQ6 456-6JJ.0-Z K96   | 5800         | 850        | 1070     | 1840     | 1400    | 500     | 140     | 200     | 450     | 1842     | 2915    |
| 1RQ6 500-6JJ.0-Z K96   | 6900         | 950        | 1270     | 1970     | 1320    | 560     | 170     | 240     | 500     | 1990     | 2850    |
| 1RQ6 502-6JJ.0-Z K96   | 7200         | 950        | 1270     | 1970     | 1320    | 560     | 170     | 240     | 500     | 1990     | 2850    |
| 1RQ6 504-6JJ.0-Z K96   | 7850         | 950        | 1270     | 1970     | 1500    | 560     | 170     | 240     | 500     | 1990     | 3300    |
| 1RQ6 506-6JJ.0-Z K96   | 8200         | 950        | 1270     | 1970     | 1500    | 560     | 170     | 240     | 500     | 1990     | 3300    |
| 1RQ6 560-6JJ.0-Z K96   | 9300         | 1060       | 1340     | 2110     | 1400    | 600     | 170     | 240     | 560     | 2240     | 3300    |
| 1RQ6 562-6JJ.0-Z K96   | 9750         | 1060       | 1340     | 2110     | 1400    | 600     | 170     | 240     | 560     | 2240     | 3300    |
| 1RQ6 564-6JJ.0-Z K96   | 10650        | 1060       | 1340     | 2110     | 1600    | 600     | 170     | 240     | 560     | 2240     | 3500    |
| 1RQ6 566-6JJ.0-Z K96   | 11150        | 1060       | 1340     | 2110     | 1600    | 600     | 170     | 240     | 560     | 2240     | 3500    |
| 1RQ4 630-6JE.0-Z K96   | 11450        | 1320       | 1320     | 2200     | 1600    | 600     | 200     | 280     | 630     | 2340     | 3400    |
| 1RQ4 632-6JE.0-Z K96   | 12100        | 1320       | 1320     | 2200     | 1600    | 600     | 200     | 280     | 630     | 2340     | 3400    |
| 1RQ4 634-6JE.0-Z K96   | 13150        | 1320       | 1320     | 2200     | 1800    | 600     | 200     | 280     | 630     | 2340     | 3640    |
| 1RQ4 636-6JE.0-Z K96   | 13850        | 1320       | 1320     | 2200     | 1800    | 600     | 200     | 280     | 630     | 2340     | 3640    |
| <b>8-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ6 450-8JJ.0-Z K96   | 4800         | 850        | 1070     | 1840     | 1180    | 500     | 140     | 200     | 450     | 1842     | 2705    |
| 1RQ6 452-8JJ.0-Z K96   | 5100         | 850        | 1070     | 1840     | 1180    | 500     | 140     | 200     | 450     | 1842     | 2705    |
| 1RQ6 454-8JJ.0-Z K96   | 5500         | 850        | 1070     | 1840     | 1400    | 500     | 140     | 200     | 450     | 1842     | 2915    |
| 1RQ6 456-8JJ.0-Z K96   | 5850         | 850        | 1070     | 1840     | 1400    | 500     | 140     | 200     | 450     | 1842     | 2915    |
| 1RQ6 500-8JJ.0-Z K96   | 6900         | 950        | 1270     | 1970     | 1320    | 560     | 170     | 240     | 500     | 1990     | 2850    |
| 1RQ6 502-8JJ.0-Z K96   | 7150         | 950        | 1270     | 1970     | 1320    | 560     | 170     | 240     | 500     | 1990     | 2850    |
| 1RQ6 504-8JJ.0-Z K96   | 7800         | 950        | 1270     | 1970     | 1500    | 560     | 170     | 240     | 500     | 1990     | 3300    |
| 1RQ6 506-8JJ.0-Z K96   | 8150         | 950        | 1270     | 1970     | 1500    | 560     | 170     | 240     | 500     | 1990     | 3300    |

<sup>1)</sup> The dimensions are also valid for the 1SB4/1SB6 and 1SG4/1SG6 series.

<sup>2)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.



## Dimension drawings (continued)

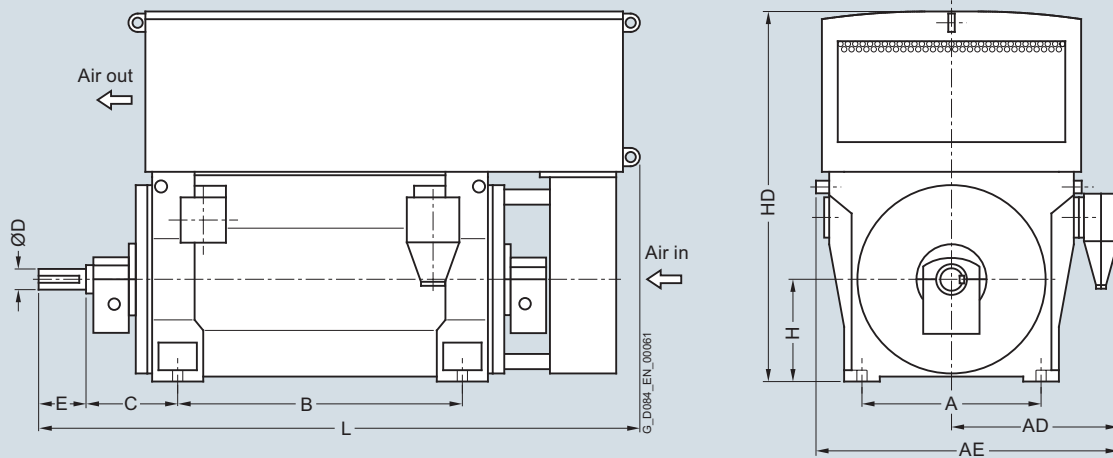

| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|--|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>9 ... 11 kV, IM B3 type of construction, sleeve bearings – 1RQ4 series<sup>1)</sup></b> |              |            |          |          |         |         |         |         |         |          |         |
| 8-pole   |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ6 560-8JJ.0-Z K96   | 9250         | 1060       | 1340     | 2110     | 1400    | 600     | 170     | 240     | 560     | 2240     | 3300    |
| 1RQ6 562-8JJ.0-Z K96   | 9650         | 1060       | 1340     | 2110     | 1400    | 600     | 170     | 240     | 560     | 2240     | 3300    |
| 1RQ6 564-8JJ.0-Z K96   | 10550        | 1060       | 1340     | 2110     | 1600    | 600     | 170     | 240     | 560     | 2240     | 3500    |
| 1RQ6 566-8JJ.0-Z K96   | 11100        | 1060       | 1340     | 2110     | 1600    | 600     | 170     | 240     | 560     | 2240     | 3500    |
| 1RQ4 630-8JE.0-Z K96   | 11450        | 1320       | 1320     | 2200     | 1600    | 600     | 200     | 280     | 630     | 2340     | 3400    |
| 1RQ4 632-8JE.0-Z K96   | 12000        | 1320       | 1320     | 2200     | 1600    | 600     | 200     | 280     | 630     | 2340     | 3400    |
| 1RQ4 634-8JE.0-Z K96   | 13050        | 1320       | 1320     | 2200     | 1800    | 600     | 200     | 280     | 630     | 2340     | 3640    |
| 1RQ4 636-8JE.0-Z K96   | 13800        | 1320       | 1320     | 2200     | 1800    | 600     | 200     | 280     | 630     | 2340     | 3640    |
| 10-pole  |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ6 500-3JE.0-Z K96   | 6100         | 950        | 1140     | 1980     | 1320    | 500     | 150     | 200     | 500     | 2000     | 2880    |
| 1RQ6 502-3JE.0-Z K96   | 6450         | 950        | 1140     | 1980     | 1320    | 500     | 150     | 200     | 500     | 2000     | 2880    |
| 1RQ6 504-3JE.0-Z K96   | 7050         | 950        | 1140     | 1980     | 1500    | 500     | 160     | 240     | 500     | 2000     | 3130    |
| 1RQ6 506-3JE.0-Z K96   | 7400         | 950        | 1140     | 1980     | 1500    | 500     | 160     | 240     | 500     | 2000     | 3130    |
| 1RQ6 560-3JE.0-Z K96   | 8400         | 1060       | 1210     | 2040     | 1400    | 530     | 170     | 240     | 560     | 2260     | 3170    |
| 1RQ6 562-3JE.0-Z K96   | 9400         | 1060       | 1210     | 2040     | 1400    | 530     | 170     | 240     | 560     | 2260     | 3170    |
| 1RQ6 564-3JE.0-Z K96   | 9900         | 1060       | 1210     | 2040     | 1600    | 530     | 180     | 240     | 560     | 2260     | 3400    |
| 1RQ6 566-3JE.0-Z K96   | 13000        | 1060       | 1210     | 2040     | 1600    | 530     | 180     | 240     | 560     | 2260     | 3400    |
| 1RQ4 630-3JE.0-Z K96   | 11400        | 1320       | 1320     | 2200     | 1600    | 600     | 200     | 280     | 630     | 2340     | 3400    |
| 1RQ4 632-3JE.0-Z K96   | 12000        | 1320       | 1320     | 2200     | 1600    | 600     | 200     | 280     | 630     | 2340     | 3400    |
| 1RQ4 634-3JE.0-Z K96   | 13000        | 1320       | 1320     | 2200     | 1800    | 600     | 200     | 280     | 630     | 2340     | 3640    |
| 1RQ4 636-3JE.0-Z K96   | 13750        | 1320       | 1320     | 2200     | 1800    | 600     | 200     | 280     | 630     | 2340     | 3640    |

<sup>1)</sup> The dimensions are also valid for the 1SB4/1SB6 and 1SG4/1SG6 series.


<sup>2)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.

## Motors for line operation

Air-cooled motors

H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Dimension drawings (continued)

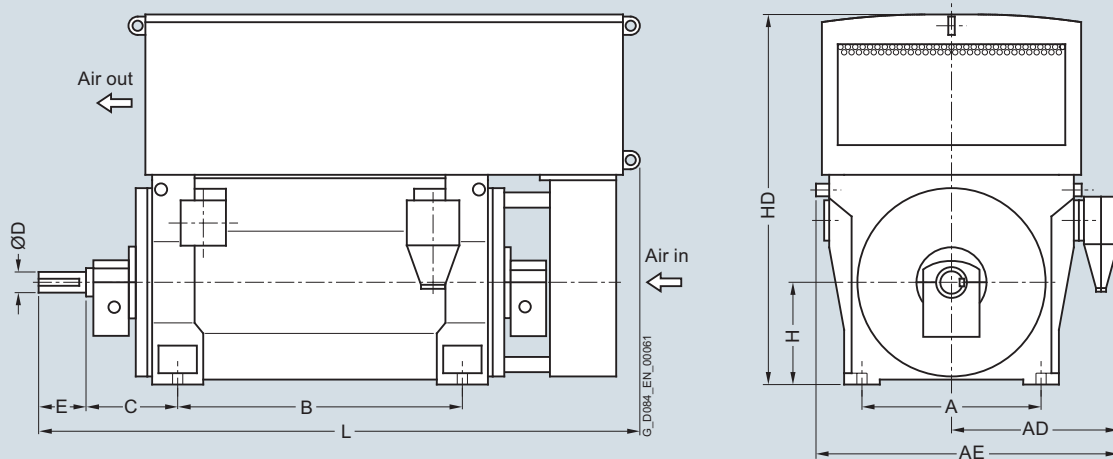

| Motor type | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|------------|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|            |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |

#### 9 ... 11 kV, IM B3 type of construction, sleeve bearings – 1RQ4 series<sup>1)</sup>

12-pole


|                      |       |      |      |      |      |     |     |     |     |      |      |
|----------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RQ6 502-5JE.0-Z K96 | 6500  | 950  | 1140 | 1980 | 1320 | 500 | 150 | 200 | 500 | 2000 | 2880 |
| 1RQ6 504-5JE.0-Z K96 | 7050  | 950  | 1140 | 1980 | 1500 | 500 | 160 | 240 | 500 | 2000 | 3130 |
| 1RQ6 506-5JE.0-Z K96 | 7400  | 950  | 1140 | 1980 | 1500 | 500 | 160 | 240 | 500 | 2000 | 3130 |
| 1RQ6 560-5JE.0-Z K96 | 8150  | 1060 | 1210 | 2040 | 1400 | 530 | 170 | 240 | 560 | 2260 | 3170 |
| 1RQ6 562-5JE.0-Z K96 | 8700  | 1060 | 1210 | 2040 | 1400 | 530 | 170 | 240 | 560 | 2260 | 3170 |
| 1RQ6 564-5JE.0-Z K96 | 9550  | 1060 | 1210 | 2040 | 1600 | 530 | 180 | 240 | 560 | 2260 | 3400 |
| 1RQ6 566-5JE.0-Z K96 | 10000 | 1060 | 1210 | 2040 | 1600 | 530 | 180 | 240 | 560 | 2260 | 3400 |
| 1RQ4 630-5JE.0-Z K96 | 11350 | 1320 | 1320 | 2200 | 1600 | 600 | 200 | 280 | 630 | 2340 | 3400 |
| 1RQ4 632-5JE.0-Z K96 | 11900 | 1320 | 1320 | 2200 | 1600 | 600 | 200 | 280 | 630 | 2340 | 3400 |
| 1RQ4 634-5JE.0-Z K96 | 12950 | 1320 | 1320 | 2200 | 1800 | 600 | 200 | 280 | 630 | 2340 | 3640 |
| 1RQ4 636-5JE.0-Z K96 | 13650 | 1320 | 1320 | 2200 | 1800 | 600 | 200 | 280 | 630 | 2340 | 3640 |

#### Note:

Higher pole numbers are available on request.

<sup>1)</sup> The dimensions are also valid for the 1SB4/1SB6 and 1SG4/1SG6 series.

## Dimension drawings

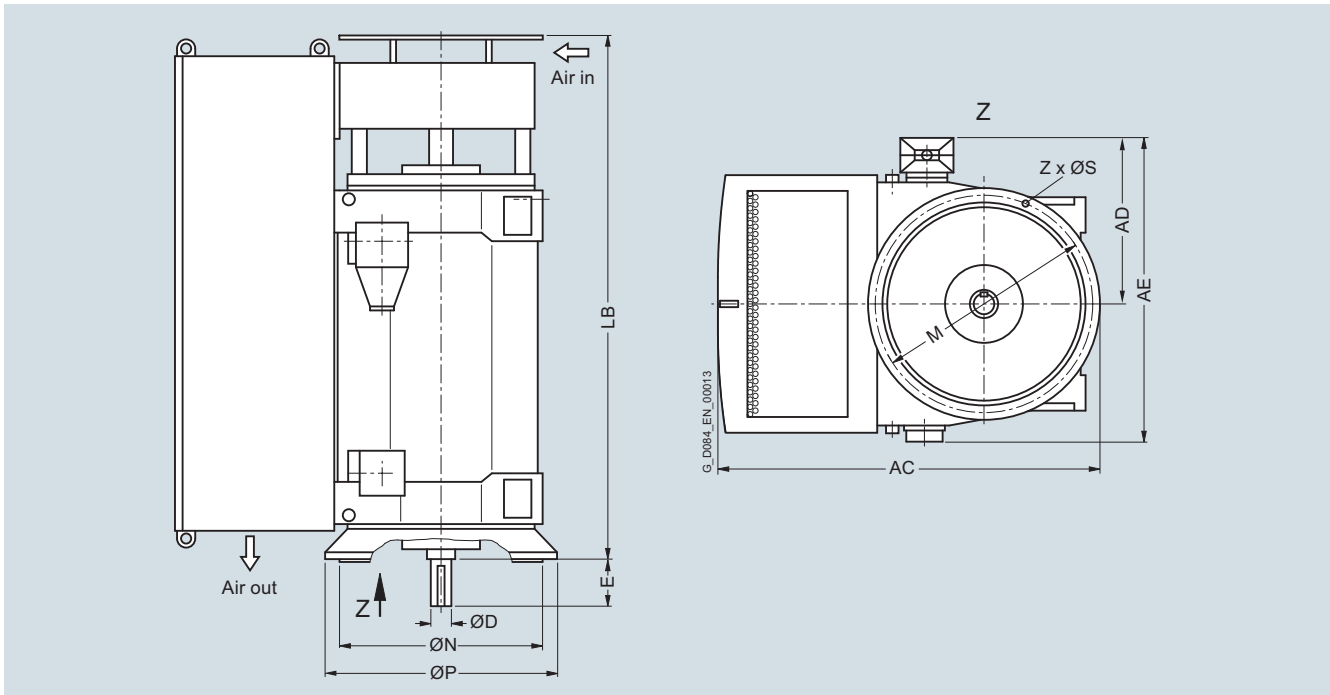

| Motor type   | Weight<br>kg | Dimensions |                        |                        |         |         |          |         |         |         |         |               |
|--|--------------|------------|------------------------|------------------------|---------|---------|----------|---------|---------|---------|---------|---------------|
|  |              | AC<br>mm   | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |
| <b>Up to 6.6 kV, IM V1 type of construction, anti-friction bearings – series 1RQ4, 1RQ6<sup>2)</sup></b> |              |            |                        |                        |         |         |          |         |         |         |         |               |
| 4-pole   |              |            |                        |                        |         |         |          |         |         |         |         |               |
| 1RQ6 450-4JJ.4   | 4750         | 1967       | 930                    | 1620                   | 130     | 200     | 2730     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6 452-4JJ.4   | 5000         | 1967       | 930                    | 1620                   | 130     | 200     | 2730     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6 454-4JJ.4   | 5400         | 1967       | 930                    | 1620                   | 140     | 200     | 2940     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6 456-4JJ.4   | 5700         | 1967       | 930                    | 1620                   | 140     | 200     | 2940     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6 500-4JE.4   | 6050         | 2130       | 1000                   | 1810                   | 140     | 200     | 2560     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 502-4JE.4   | 6250         | 2130       | 1000                   | 1810                   | 140     | 200     | 2560     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 504-4JE.4   | 6950         | 2130       | 1000                   | 1810                   | 150     | 200     | 2770     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 506-4JE.4   | 7300         | 2130       | 1000                   | 1810                   | 150     | 200     | 2770     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 560-4JE.4   | 8200         | 2400       | 1210                   | 2100                   | 170     | 240     | 2800     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ6 562-4JE.4   | 8600         | 2400       | 1210                   | 2100                   | 170     | 240     | 2800     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ6 564-4JE.4 <sup>3)</sup>   | 9500         | 2400       | 1210                   | 2100                   | 180     | 240     | 3030     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ6 566-4JE.4 <sup>3)</sup>   | 9950         | 2400       | 1210                   | 2100                   | 180     | 240     | 3030     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ4 630-4JE.4 <sup>3)</sup>   | 12750        | 2840       | 1330                   | 2300                   | 200     | 280     | 3170     | 2000    | 1800    | 1900    | 33      | 8             |
| 1RQ4 632-4JE.4 <sup>3)</sup>   | 13450        | 2840       | 1330                   | 2300                   | 200     | 280     | 3170     | 2000    | 1800    | 1900    | 33      | 8             |
| 1RQ4 634-4JE.4 <sup>3)</sup>   | 14550        | 2840       | 1330                   | 2300                   | 200     | 280     | 3410     | 2000    | 1800    | 1900    | 33      | 8             |
| 1RQ4 636-4JE.4 <sup>3)</sup>   | 15100        | 2840       | 1330                   | 2300                   | 200     | 280     | 3410     | 2000    | 1800    | 1900    | 33      | 8             |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> The dimensions are also valid for the 1SB4/1SB6 and 1SG4/1SG6 series.


<sup>3)</sup> Vertical type of construction, only in the 50 Hz version.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Dimension drawings (continued)

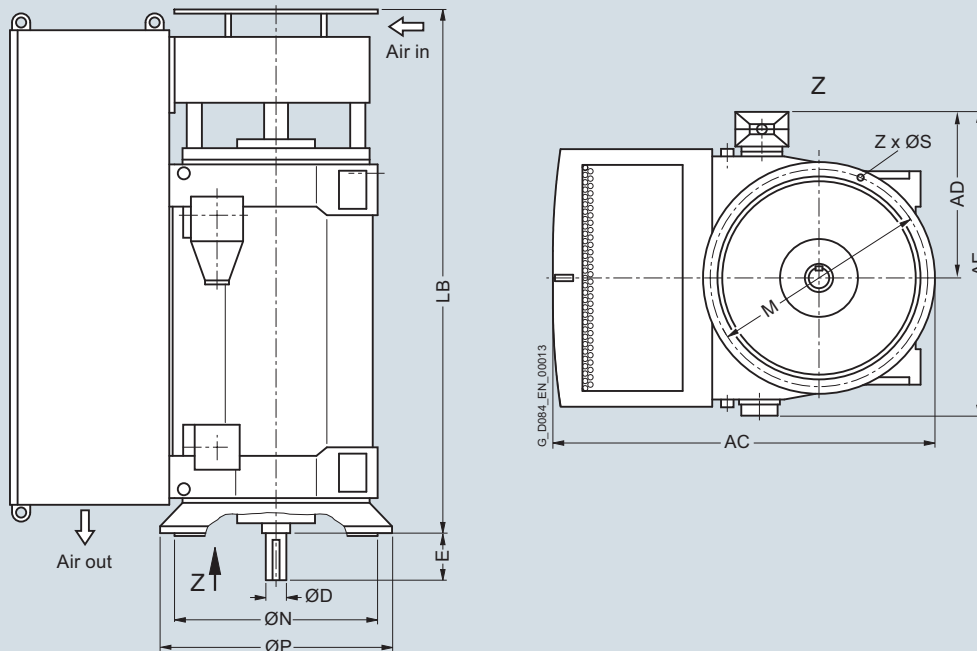


| Motor type   | Weight<br>kg | Dimensions |                        |                        |         |         |          |         |         |         |         |               |
|--|--------------|------------|------------------------|------------------------|---------|---------|----------|---------|---------|---------|---------|---------------|
|  |              | AC<br>mm   | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |
| <b>Up to 6.6 kV, IM V1 type of construction, anti-friction bearings – series 1RQ4, 1RQ6<sup>2)</sup></b> |              |            |                        |                        |         |         |          |         |         |         |         |               |
| <b>6-pole</b>  |              |            |                        |                        |         |         |          |         |         |         |         |               |
| 1RQ6 450-6JJ.4   | 4850         | 1967       | 930                    | 1620                   | 130     | 200     | 2730     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6 452-6JJ.4   | 5150         | 1967       | 930                    | 1620                   | 130     | 200     | 2730     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6 454-6JJ.4   | 5500         | 1967       | 930                    | 1620                   | 140     | 200     | 2940     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6 456-6JJ.4   | 5850         | 1967       | 930                    | 1620                   | 140     | 200     | 2940     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6 500-6JE.4   | 6200         | 2130       | 1000                   | 1810                   | 150     | 200     | 2560     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 502-6JE.4   | 6550         | 2130       | 1000                   | 1810                   | 150     | 200     | 2560     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 504-6JE.4   | 7100         | 2130       | 1000                   | 1810                   | 160     | 240     | 2770     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 506-6JE.4   | 7500         | 2130       | 1000                   | 1810                   | 160     | 240     | 2770     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 560-6JE.4   | 8300         | 2400       | 1070                   | 1960                   | 170     | 240     | 2800     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ6 562-6JE.4   | 8800         | 2400       | 1070                   | 1960                   | 170     | 240     | 2800     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ6 564-6JE.4   | 9750         | 2400       | 1210                   | 2100                   | 180     | 240     | 3030     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ6 566-6JE.4   | 10200        | 2400       | 1210                   | 2100                   | 180     | 240     | 3030     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ4 630-6JE.4   | 13050        | 2840       | 1330                   | 2300                   | 200     | 280     | 3170     | 2000    | 1800    | 1900    | 33      | 8             |
| 1RQ4 632-6JE.4   | 13650        | 2840       | 1330                   | 2300                   | 200     | 280     | 3170     | 2000    | 1800    | 1900    | 33      | 8             |
| 1RQ4 634-6JE.4   | 14550        | 2840       | 1330                   | 2300                   | 200     | 280     | 3410     | 2000    | 1800    | 1900    | 33      | 8             |
| 1RQ4 636-6JE.4   | 15400        | 2840       | 1330                   | 2300                   | 200     | 280     | 3410     | 2000    | 1800    | 1900    | 33      | 8             |
| <b>8-pole</b>  |              |            |                        |                        |         |         |          |         |         |         |         |               |
| 1RQ6 450-8JJ.4   | 4850         | 1967       | 930                    | 1620                   | 140     | 200     | 2730     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6 452-8JJ.4   | 5150         | 1967       | 930                    | 1620                   | 140     | 200     | 2730     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6 454-8JJ.4   | 5550         | 1967       | 930                    | 1620                   | 140     | 200     | 2940     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6 456-8JJ.4   | 5900         | 1967       | 930                    | 1620                   | 140     | 200     | 2940     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6 500-8JE.4   | 6200         | 2130       | 1000                   | 1810                   | 150     | 200     | 2560     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 502-8JE.4   | 6600         | 2130       | 1000                   | 1810                   | 150     | 200     | 2560     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 504-8JE.4   | 7100         | 2130       | 1000                   | 1810                   | 160     | 240     | 2770     | 1250    | 1120    | 1180    | 26      | 8             |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> The dimensions are also valid for the 1SB4/1SB6 and 1SG4/1SG6 series.

## Dimension drawings (continued)

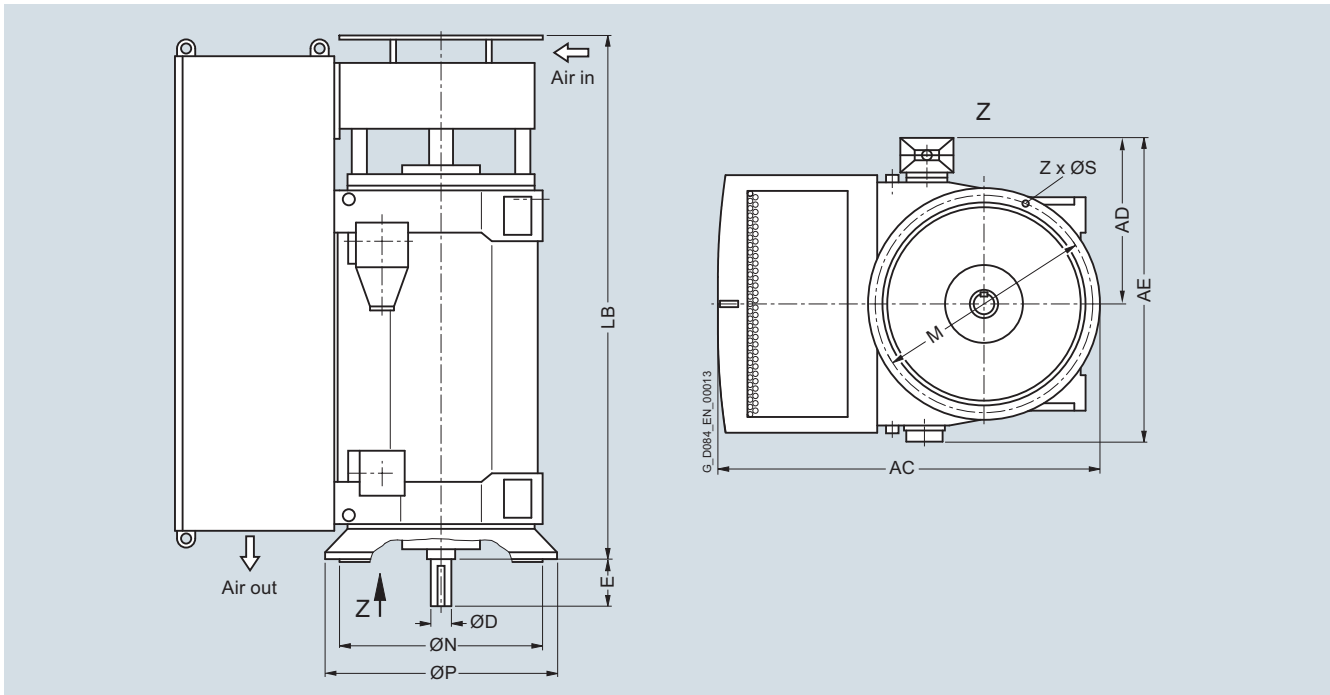

| Motor type   | Weight<br>kg | Dimensions |                        |                        |         |         |          |         |         |         |         |               |
|--|--------------|------------|------------------------|------------------------|---------|---------|----------|---------|---------|---------|---------|---------------|
|  |              | AC<br>mm   | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |
| <b>Up to 6.6 kV, IM V1 type of construction, anti-friction bearings – series 1RQ4, 1RQ6<sup>2)</sup></b> |              |            |                        |                        |         |         |          |         |         |         |         |               |
| <b>8-pole</b>  |              |            |                        |                        |         |         |          |         |         |         |         |               |
| 1RQ6 506-8JE.4   | 7500         | 2130       | 1000                   | 1810                   | 160     | 240     | 2770     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 560-8JE.4   | 8250         | 2400       | 1070                   | 1960                   | 170     | 240     | 2800     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ6 562-8JE.4   | 8800         | 2400       | 1070                   | 1960                   | 170     | 240     | 2800     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ6 564-8JE.4   | 9650         | 2400       | 1070                   | 1960                   | 180     | 240     | 3030     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ6 566-8JE.4   | 10100        | 2400       | 1070                   | 1960                   | 180     | 240     | 3030     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ4 630-8JE.4 <sup>3)</sup>   | 12850        | 2840       | 1180                   | 2150                   | 200     | 280     | 3170     | 2000    | 1800    | 1900    | 33      | 8             |
| 1RQ4 632-8JE.4 <sup>3)</sup>   | 13600        | 2840       | 1330                   | 2300                   | 200     | 280     | 3170     | 2000    | 1800    | 1900    | 33      | 8             |
| 1RQ4 634-8JE.4 <sup>3)</sup>   | 14550        | 2840       | 1330                   | 2300                   | 200     | 280     | 3410     | 2000    | 1800    | 1900    | 33      | 8             |
| 1RQ4 636-8JE.4 <sup>3)</sup>   | 15300        | 2840       | 1330                   | 2300                   | 200     | 280     | 3410     | 2000    | 1800    | 1900    | 33      | 8             |
| <b>10-pole</b>   |              |            |                        |                        |         |         |          |         |         |         |         |               |
| 1RQ6 450-3JJ.4   | 4850         | 1967       | 930                    | 1620                   | 140     | 200     | 2730     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6 452-3JJ.4   | 5150         | 1967       | 930                    | 1620                   | 140     | 200     | 2730     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6 454-3JJ.4   | 5550         | 1967       | 930                    | 1620                   | 140     | 200     | 2940     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6 456-3JJ.4   | 5900         | 1967       | 930                    | 1620                   | 140     | 200     | 2940     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6 500-3JE.4   | 6150         | 2130       | 1000                   | 1810                   | 150     | 200     | 2560     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 502-3JE.4   | 6450         | 2130       | 1000                   | 1810                   | 150     | 200     | 2560     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 504-3JE.4   | 7050         | 2130       | 1000                   | 1810                   | 160     | 240     | 2770     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 506-3JE.4   | 7450         | 2130       | 1000                   | 1810                   | 160     | 240     | 2770     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 560-3JE.4   | 8200         | 2400       | 1070                   | 1960                   | 170     | 240     | 2800     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ6 562-3JE.4   | 8750         | 2400       | 1070                   | 1960                   | 170     | 240     | 2800     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ6 564-3JE.4   | 9600         | 2400       | 1070                   | 1960                   | 180     | 240     | 3030     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ6 566-3JE.4   | 10050        | 2400       | 1070                   | 1960                   | 180     | 240     | 3030     | 1400    | 1250    | 1320    | 26      | 8             |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> The dimensions are also valid for the 1SB4/1SB6 and 1SG4/1SG6 series.


<sup>3)</sup> Vertical type of construction, only in the 50 Hz version.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Dimension drawings (continued)

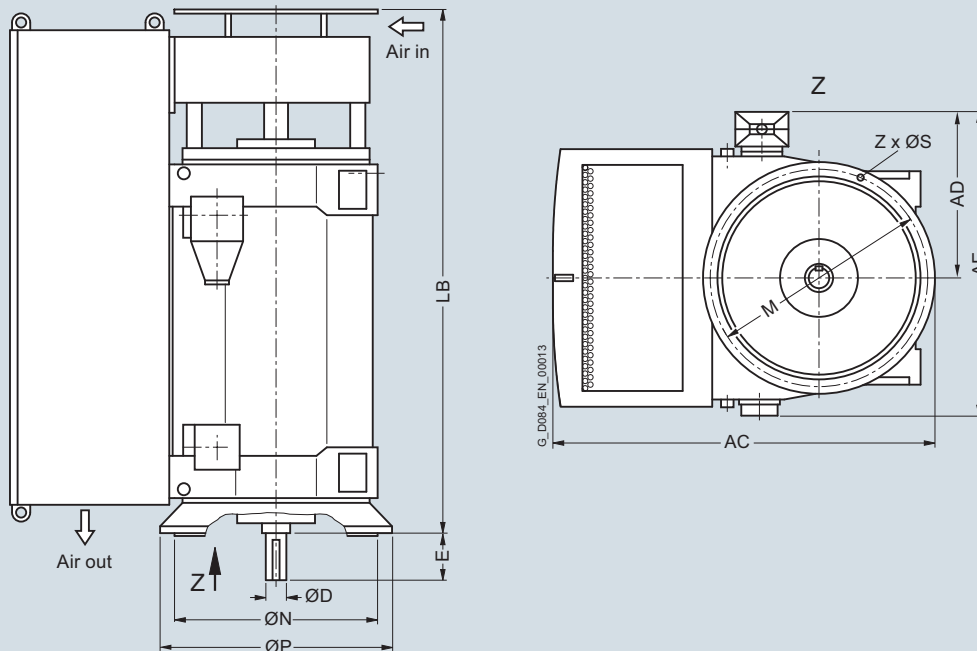

| Motor type | Weight<br>kg | Dimensions |                        |                        |         |         |          |         |         |         |         |               |
|------------|--------------|------------|------------------------|------------------------|---------|---------|----------|---------|---------|---------|---------|---------------|
|            |              | AC<br>mm   | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |

#### Up to 6.6 kV, IM V1 type of construction, anti-friction bearings – series 1RQ4, 1RQ6<sup>2)</sup>

| 10-pole                      |       |      |      |      |     |     |      |      |      |      |    |   |
|------------------------------|-------|------|------|------|-----|-----|------|------|------|------|----|---|
| 1RQ4 630-3JE.4 <sup>3)</sup> | 12850 | 2840 | 1180 | 2150 | 200 | 280 | 3170 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RQ4 632-3JE.4 <sup>3)</sup> | 13450 | 2840 | 1180 | 2150 | 200 | 280 | 3170 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RQ4 634-3JE.4 <sup>3)</sup> | 14550 | 2840 | 1180 | 2150 | 200 | 280 | 3410 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RQ4 636-3JE.4 <sup>3)</sup> | 15200 | 2840 | 1180 | 2150 | 200 | 280 | 3410 | 2000 | 1800 | 1900 | 33 | 8 |
| 12-pole                      |       |      |      |      |     |     |      |      |      |      |    |   |
| 1RQ6 450-5JJ.4               | 4850  | 1967 | 930  | 1620 | 140 | 200 | 2730 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RQ6 452-5JJ.4               | 5150  | 1967 | 930  | 1620 | 140 | 200 | 2730 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RQ6 454-5JJ.4               | 5550  | 1967 | 930  | 1620 | 140 | 200 | 2940 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RQ6 456-5JJ.4               | 5900  | 1967 | 930  | 1620 | 140 | 200 | 2940 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RQ6 500-5JE.4               | 6150  | 2130 | 1000 | 1810 | 150 | 200 | 2560 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RQ6 502-5JE.4               | 6500  | 2130 | 1000 | 1810 | 150 | 200 | 2560 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RQ6 504-5JE.4               | 7050  | 2130 | 1000 | 1810 | 160 | 240 | 2770 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RQ6 506-5JE.4               | 7500  | 2130 | 1000 | 1810 | 160 | 240 | 2770 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RQ6 560-5JE.4               | 8200  | 2400 | 1070 | 1960 | 170 | 240 | 2800 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RQ6 562-5JE.4               | 8750  | 2400 | 1070 | 1960 | 170 | 240 | 2800 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RQ6 564-5JE.4               | 9550  | 2400 | 1070 | 1960 | 180 | 240 | 3030 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RQ6 566-5JE.4               | 10050 | 2400 | 1070 | 1960 | 180 | 240 | 3030 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RQ4 630-5JE.4 <sup>3)</sup> | 12750 | 2840 | 1180 | 2150 | 200 | 280 | 3170 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RQ4 632-5JE.4 <sup>3)</sup> | 13400 | 2840 | 1180 | 2150 | 200 | 280 | 3170 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RQ4 634-5JE.4 <sup>3)</sup> | 14450 | 2840 | 1180 | 2150 | 200 | 280 | 3410 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RQ4 636-5JE.4 <sup>3)</sup> | 15150 | 2840 | 1180 | 2150 | 200 | 280 | 3410 | 2000 | 1800 | 1900 | 33 | 8 |

#### Note:


Higher pole numbers are available on request.

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> The dimensions are also valid for the 1SB4/1SB6 and 1SG4/1SG6 series.

<sup>3)</sup> Vertical type of construction, only in the 50 Hz version.

## Dimension drawings

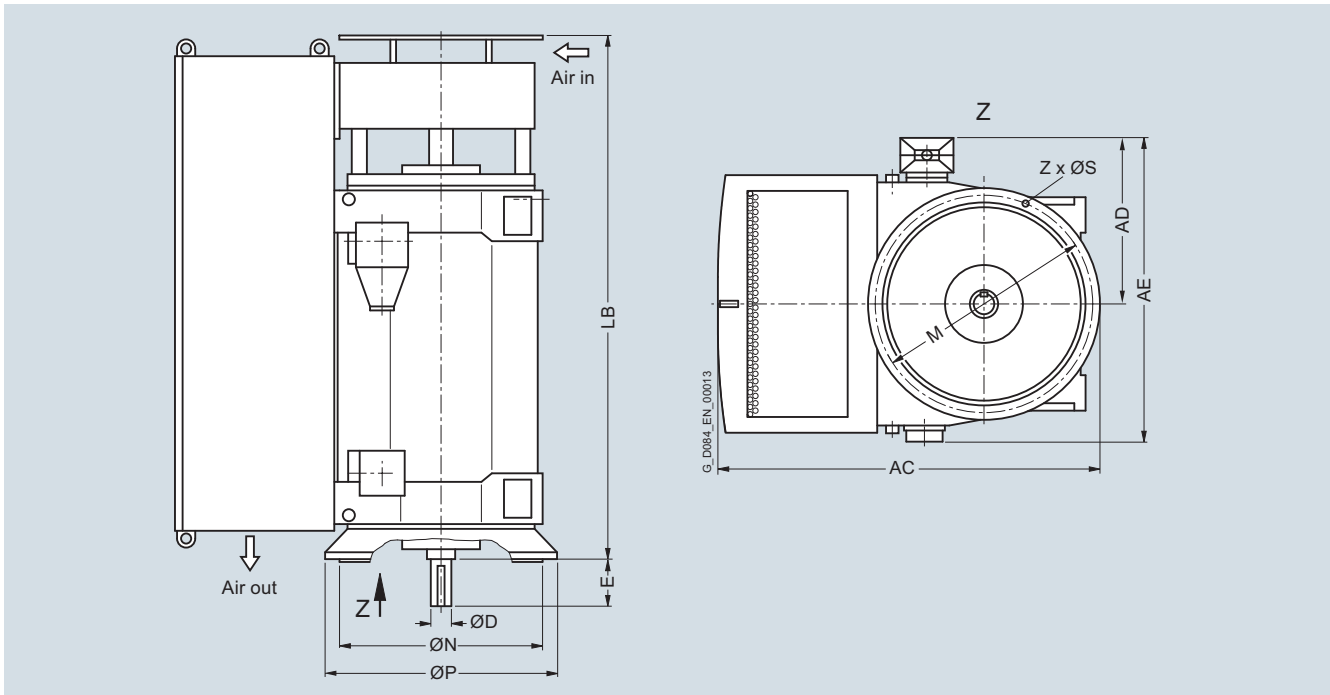

| Motor type | Weight<br>kg | Dimensions |          |          |         |         |          |         |         |         |         |               |
|------------|--------------|------------|----------|----------|---------|---------|----------|---------|---------|---------|---------|---------------|
|            |              | AC<br>mm   | AD<br>mm | AE<br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |

**9 ... 11 kV, IM V1 type of construction, anti-friction bearings – series 1RQ4, 1RQ6<sup>1)</sup>**

| 4-pole         |       |      |      |      |     |     |      |      |      |      |    |   |
|----------------|-------|------|------|------|-----|-----|------|------|------|------|----|---|
| 1RQ6 450-4JJ.4 | 4750  | 1967 | 1070 | 1840 | 130 | 200 | 2730 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RQ6 452-4JJ.4 | 5000  | 1967 | 1070 | 1840 | 130 | 200 | 2730 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RQ6 454-4JJ.4 | 5400  | 1967 | 1070 | 1840 | 130 | 200 | 2940 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RQ6 456-4JJ.4 | 5700  | 1967 | 1070 | 1840 | 130 | 200 | 2940 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RQ6 500-4JE.4 | 6050  | 2130 | 1140 | 1950 | 140 | 200 | 2560 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RQ6 502-4JE.4 | 6250  | 2130 | 1140 | 1950 | 140 | 200 | 2560 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RQ6 504-4JE.4 | 6950  | 2130 | 1140 | 1950 | 150 | 200 | 2770 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RQ6 506-4JE.4 | 7300  | 2130 | 1140 | 1950 | 150 | 200 | 2770 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RQ6 560-4JE.4 | 8050  | 2400 | 1210 | 2100 | 170 | 240 | 2800 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RQ6 562-4JE.4 | 8500  | 2400 | 1210 | 2100 | 170 | 240 | 2800 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RQ6 564-4JE.4 | 9400  | 2400 | 1210 | 2100 | 180 | 240 | 3030 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RQ6 566-4JE.4 | 9800  | 2400 | 1210 | 2100 | 180 | 240 | 3030 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RQ4 630-4JE.4 | 12750 | 2840 | 1320 | 2290 | 200 | 280 | 3170 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RQ4 632-4JE.4 | 13450 | 2840 | 1320 | 2290 | 200 | 280 | 3170 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RQ4 634-4JE.4 | 14550 | 2840 | 1320 | 2290 | 200 | 280 | 3410 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RQ4 636-4JE.4 | 15100 | 2840 | 1330 | 2300 | 200 | 280 | 3410 | 2000 | 1800 | 1900 | 33 | 8 |
| 6-pole         |       |      |      |      |     |     |      |      |      |      |    |   |
| 1RQ6 450-6JJ.4 | 4850  | 1967 | 1070 | 1840 | 140 | 200 | 2730 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RQ6 452-6JJ.4 | 5150  | 1967 | 1070 | 1840 | 140 | 200 | 2730 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RQ6 454-6JJ.4 | 5500  | 1967 | 1070 | 1840 | 140 | 200 | 2940 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RQ6 456-6JJ.4 | 5850  | 1967 | 1070 | 1840 | 140 | 200 | 2940 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RQ6 500-6JE.4 | 6150  | 2130 | 1140 | 1950 | 150 | 200 | 2560 | 1250 | 1120 | 1180 | 26 | 8 |


<sup>1)</sup> The dimensions are also valid for the 1SB4/1SB6 and 1SG4/1SG6 series.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Dimension drawings (continued)

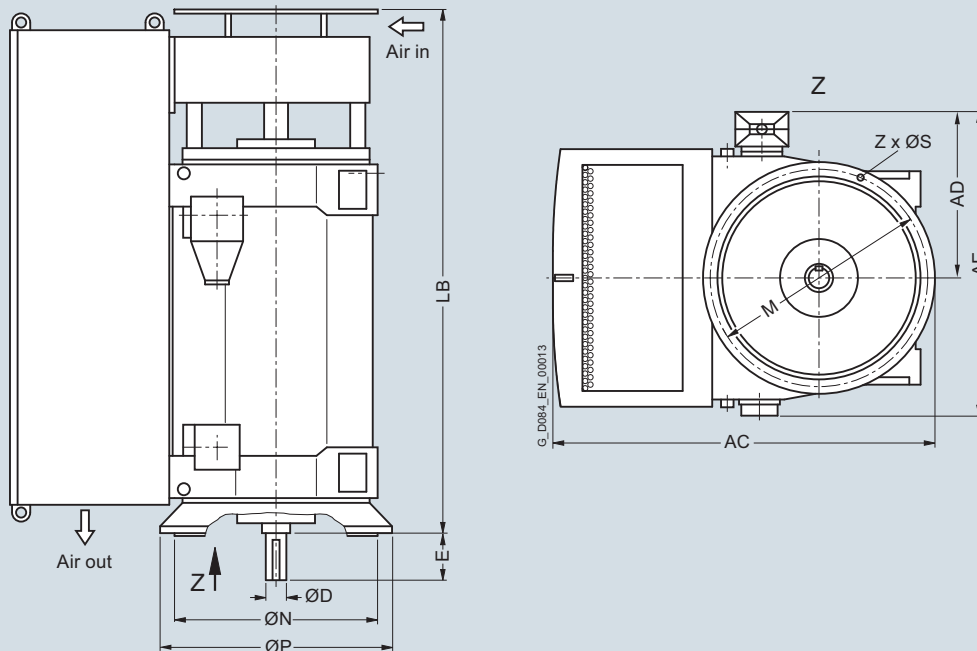


| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |          |         |         |         |         |               |
|---|--------------|------------|----------|----------|---------|---------|----------|---------|---------|---------|---------|---------------|
|   |              | AC<br>mm   | AD<br>mm | AE<br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |
| <b>9 ... 11 kV, IM V1 type of construction, anti-friction bearings – series 1RQ4, 1RQ6<sup>1)</sup></b> |              |            |          |          |         |         |          |         |         |         |         |               |
| 6-pole  |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RQ6 502-6JE.4  | 6550         | 2130       | 1140     | 1950     | 150     | 200     | 2560     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 504-6JE.4  | 7100         | 2130       | 1140     | 1950     | 160     | 240     | 2770     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 506-6JE.4  | 7500         | 2130       | 1140     | 1950     | 160     | 240     | 2770     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 560-6JE.4  | 8250         | 2400       | 1210     | 2100     | 170     | 240     | 2800     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ6 562-6JE.4  | 8750         | 2400       | 1210     | 2100     | 170     | 240     | 2800     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ6 564-6JE.4  | 9600         | 2400       | 1210     | 2100     | 180     | 240     | 3030     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ6 566-6JE.4  | 10050        | 2400       | 1210     | 2100     | 180     | 240     | 3030     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ4 630-6JE.4  | 13050        | 2840       | 1320     | 2290     | 200     | 280     | 3170     | 2000    | 1800    | 1900    | 33      | 8             |
| 1RQ4 632-6JE.4  | 13650        | 2840       | 1320     | 2290     | 200     | 280     | 3170     | 2000    | 1800    | 1900    | 33      | 8             |
| 1RQ4 634-6JE.4  | 14550        | 2840       | 1320     | 2290     | 200     | 280     | 3410     | 2000    | 1800    | 1900    | 33      | 8             |
| 1RQ4 636-6JE.4  | 15400        | 2840       | 1320     | 2290     | 200     | 280     | 3410     | 2000    | 1800    | 1900    | 33      | 8             |
| 8-pole  |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RQ6 450-8JJ.4  | 4850         | 1967       | 1070     | 1840     | 140     | 200     | 2730     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6 452-8JJ.4  | 5150         | 1967       | 1070     | 1840     | 140     | 200     | 2730     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6 454-8JJ.4  | 5550         | 1967       | 1070     | 1840     | 140     | 200     | 2940     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6 456-8JJ.4  | 5900         | 1967       | 1070     | 1840     | 140     | 200     | 2940     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6 500-8JE.4  | 6200         | 2130       | 1140     | 1950     | 150     | 200     | 2560     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 502-8JE.4  | 6550         | 2130       | 1140     | 1950     | 150     | 200     | 2560     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 504-8JE.4  | 7100         | 2130       | 1140     | 1950     | 160     | 240     | 2770     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 506-8JE.4  | 7500         | 2130       | 1140     | 1950     | 160     | 240     | 2770     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 560-8JE.4  | 8200         | 2400       | 1210     | 2100     | 170     | 240     | 2800     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ6 562-8JE.4  | 8750         | 2400       | 1210     | 2100     | 170     | 240     | 2800     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ6 564-8JE.4  | 9600         | 2400       | 1210     | 2100     | 180     | 240     | 3030     | 1400    | 1250    | 1320    | 26      | 8             |

<sup>1)</sup> The dimensions are also valid for the 1SB4/1SB6 and 1SG4/1SG6 series.



## Dimension drawings (continued)

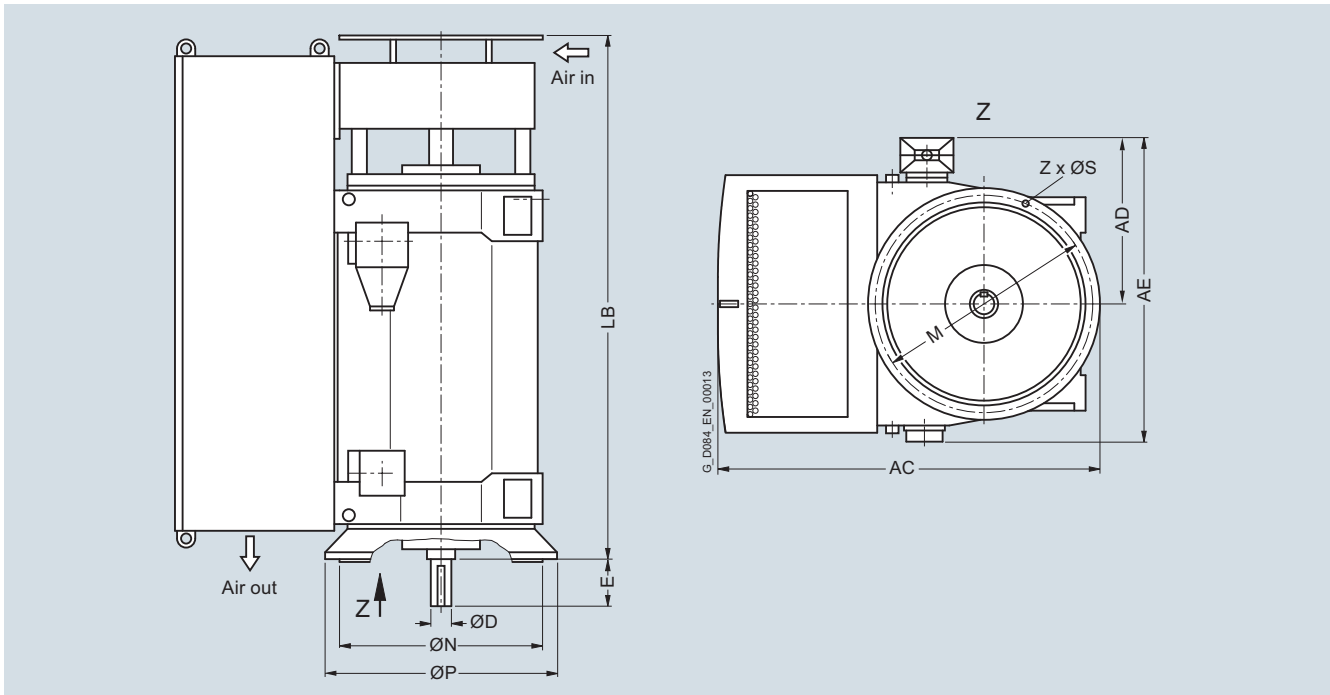

| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |          |         |         |         |         |               |
|---|--------------|------------|----------|----------|---------|---------|----------|---------|---------|---------|---------|---------------|
|   |              | AC<br>mm   | AD<br>mm | AE<br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |
| <b>9 ... 11 kV, IM V1 type of construction, anti-friction bearings – 1RQ4 series<sup>1)</sup></b> |              |            |          |          |         |         |          |         |         |         |         |               |
| 8-pole  |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RQ6 566-8JE.4  | 10000        | 2400       | 1210     | 2100     | 180     | 240     | 3030     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ4 630-8JE.4  | 12850        | 2840       | 1320     | 2290     | 200     | 280     | 3170     | 2000    | 1800    | 1900    | 33      | 8             |
| 1RQ4 632-8JE.4  | 13600        | 2840       | 1320     | 2290     | 200     | 280     | 3170     | 2000    | 1800    | 1900    | 33      | 8             |
| 1RQ4 634-8JE.4  | 14550        | 2840       | 1320     | 2290     | 200     | 280     | 3410     | 2000    | 1800    | 1900    | 33      | 8             |
| 1RQ4 636-8JE.4  | 15300        | 2840       | 1320     | 2290     | 200     | 280     | 3410     | 2000    | 1800    | 1900    | 33      | 8             |
| 10-pole   |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RQ6 500-3JE.4  | 6150         | 2130       | 1140     | 1950     | 150     | 200     | 2560     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 502-3JE.4  | 6450         | 2130       | 1140     | 1950     | 150     | 200     | 2560     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 504-3JE.4  | 7000         | 2130       | 1140     | 1950     | 160     | 240     | 2770     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 506-3JE.4  | 7450         | 2130       | 1140     | 1950     | 160     | 240     | 2770     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 560-3JE.4  | 8700         | 2400       | 1210     | 2100     | 170     | 240     | 2800     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ6 562-3JE.4  | 9350         | 2400       | 1210     | 2100     | 170     | 240     | 2800     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ6 564-3JE.4  | 10150        | 2400       | 1210     | 2100     | 180     | 240     | 3030     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ6 566-3JE.4  | 10600        | 2400       | 1210     | 2100     | 180     | 240     | 3030     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ4 630-3JE.4  | 12850        | 2840       | 1320     | 2290     | 200     | 280     | 3170     | 2000    | 1800    | 1900    | 33      | 8             |
| 1RQ4 632-3JE.4  | 13450        | 2840       | 1320     | 2290     | 200     | 280     | 3170     | 2000    | 1800    | 1900    | 33      | 8             |
| 1RQ4 634-3JE.4  | 14550        | 2840       | 1320     | 2290     | 200     | 280     | 3410     | 2000    | 1800    | 1900    | 33      | 8             |
| 1RQ4 636-3JE.4  | 15200        | 2840       | 1320     | 2290     | 200     | 280     | 3410     | 2000    | 1800    | 1900    | 33      | 8             |


<sup>1)</sup> The dimensions are also valid for the 1SB4/1SB6 and 1SG4/1SG6 series.

## Motors for line operation

Air-cooled motors

H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Dimension drawings (continued)

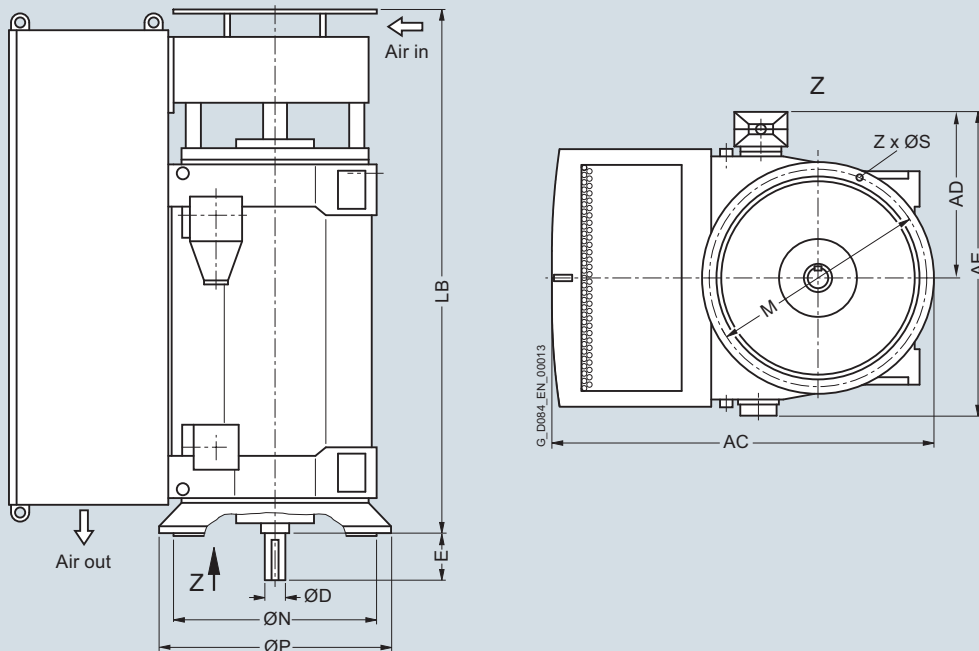


| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |          |         |         |         |         |               |
|---|--------------|------------|----------|----------|---------|---------|----------|---------|---------|---------|---------|---------------|
|   |              | AC<br>mm   | AD<br>mm | AE<br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |
| <b>9 ... 11 kV, IM V1 type of construction, anti-friction bearings – 1RQ4 series<sup>1)</sup></b> |              |            |          |          |         |         |          |         |         |         |         |               |
| 12-pole   |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RQ6 502-5JE.4  | 6500         | 2130       | 1140     | 1950     | 150     | 200     | 2560     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 504-5JE.4  | 7000         | 2130       | 1140     | 1950     | 160     | 240     | 2770     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 506-5JE.4  | 7450         | 2130       | 1140     | 1950     | 160     | 240     | 2770     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6 560-5JE.4  | 8200         | 2400       | 1210     | 2100     | 170     | 240     | 2800     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ6 562-5JE.4  | 8700         | 2400       | 1210     | 2100     | 170     | 240     | 2800     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ6 564-5JE.4  | 9550         | 2400       | 1210     | 2100     | 180     | 240     | 3030     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ6 566-5JE.4  | 10000        | 2400       | 1210     | 2100     | 180     | 240     | 3030     | 1400    | 1250    | 1320    | 26      | 8             |
| 1RQ4 630-5JE.4  | 12750        | 2840       | 1320     | 2290     | 200     | 280     | 3170     | 2000    | 1800    | 1900    | 33      | 8             |
| 1RQ4 632-5JE.4  | 13400        | 2840       | 1320     | 2290     | 200     | 280     | 3170     | 2000    | 1800    | 1900    | 33      | 8             |
| 1RQ4 634-5JE.4  | 14450        | 2840       | 1320     | 2290     | 200     | 280     | 3410     | 2000    | 1800    | 1900    | 33      | 8             |
| 1RQ4 636-5JE.4  | 15150        | 2840       | 1320     | 2290     | 200     | 280     | 3410     | 2000    | 1800    | 1900    | 33      | 8             |

**Note:**

Higher pole numbers are available on request.

<sup>1)</sup> The dimensions are also valid for the 1SB4/1SB6 and 1SG4/1SG6 series.

## Dimension drawings

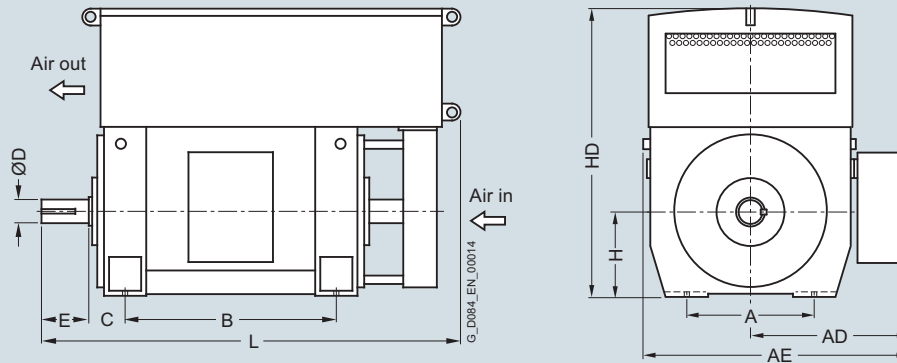

| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|---|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|   |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, NEMA version, IM B3 type of construction, anti-friction bearings – 1RQ6 series</b> |              |            |          |          |         |         |         |         |         |          |         |
| <b>4-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ6 710-4JJ.0 <sup>1)</sup>  | 21100        | 1500       | 1500     | 2530     | 2000    | 355     | 220     | 280     | 710     | 2820     | 4720    |
| 1RQ6 712-4JJ.0 <sup>1)</sup>  | 21900        | 1500       | 1500     | 2530     | 2000    | 355     | 220     | 280     | 710     | 2820     | 4720    |
| 1RQ6 714-4JJ.0 <sup>1)</sup>  | 23400        | 1500       | 1500     | 2530     | 2240    | 355     | 220     | 280     | 710     | 2820     | 4960    |
| 1RQ6 716-4JJ.0 <sup>1)</sup>  | 24400        | 1500       | 1500     | 2530     | 2240    | 355     | 220     | 280     | 710     | 2820     | 4960    |
| <b>6-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ6 710-6JJ.0  | 20400        | 1500       | 1500     | 2530     | 2000    | 355     | 240     | 330     | 710     | 2810     | 3890    |
| 1RQ6 712-6JJ.0  | 21100        | 1500       | 1500     | 2530     | 2000    | 355     | 240     | 330     | 710     | 2810     | 3890    |
| 1RQ6 714-6JJ.0  | 22800        | 1500       | 1500     | 2530     | 2240    | 355     | 240     | 330     | 710     | 2810     | 4130    |
| 1RQ6 716-6JJ.0  | 24000        | 1500       | 1500     | 2530     | 2240    | 355     | 240     | 330     | 710     | 2810     | 4130    |
| <b>8-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ6 710-8JJ.0  | 20200        | 1500       | 1500     | 2530     | 2000    | 355     | 240     | 330     | 710     | 2810     | 3890    |
| 1RQ6 712-8JJ.0  | 21000        | 1500       | 1500     | 2530     | 2000    | 355     | 240     | 330     | 710     | 2810     | 3890    |
| 1RQ6 714-8JJ.0  | 22600        | 1500       | 1500     | 2530     | 2240    | 355     | 240     | 330     | 710     | 2810     | 4130    |
| 1RQ6 716-8JJ.0  | 23700        | 1500       | 1500     | 2530     | 2240    | 355     | 240     | 330     | 710     | 2810     | 4130    |
| <b>10-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ6 710-3JJ.0  | 20000        | 1500       | 1500     | 2530     | 2000    | 355     | 240     | 330     | 710     | 2810     | 3890    |
| 1RQ6 712-3JJ.0  | 20900        | 1500       | 1500     | 2530     | 2000    | 355     | 240     | 330     | 710     | 2810     | 3890    |
| 1RQ6 714-3JJ.0  | 22500        | 1500       | 1500     | 2530     | 2240    | 355     | 240     | 330     | 710     | 2810     | 4130    |
| 1RQ6 716-3JJ.0  | 23600        | 1500       | 1500     | 2530     | 2240    | 355     | 240     | 330     | 710     | 2810     | 4130    |

Note:

Higher pole numbers are available on request.


1) Anti-friction bearings only for 50 Hz operation.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Dimension drawings

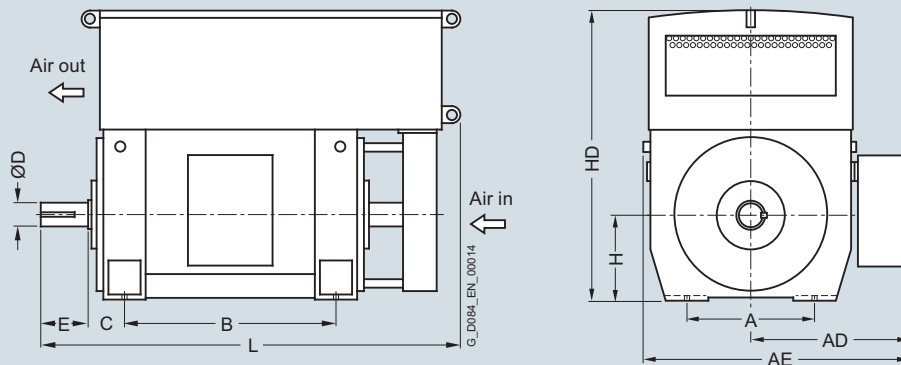


| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|--|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>9 ... 11 kV, NEMA version, IM B3 type of construction, anti-friction bearings – 1RQ6 series</b> |              |            |          |          |         |         |         |         |         |          |         |
| <b>4-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ6 710-4JJ.0 <sup>1)</sup>   | 20800        | 1500       | 1500     | 2530     | 2000    | 355     | 220     | 280     | 710     | 2820     | 4720    |
| 1RQ6 712-4JJ.0 <sup>1)</sup>   | 21600        | 1500       | 1500     | 2530     | 2000    | 355     | 220     | 280     | 710     | 2820     | 4720    |
| 1RQ6 714-4JJ.0 <sup>1)</sup>   | 23100        | 1500       | 1500     | 2530     | 2240    | 355     | 220     | 280     | 710     | 2820     | 4960    |
| 1RQ6 716-4JJ.0 <sup>1)</sup>   | 24000        | 1500       | 1500     | 2530     | 2240    | 355     | 220     | 280     | 710     | 2820     | 4960    |
| <b>6-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ6 710-6JJ.0   | 20200        | 1500       | 1500     | 2530     | 2000    | 355     | 240     | 330     | 710     | 2810     | 3890    |
| 1RQ6 712-6JJ.0   | 21000        | 1500       | 1500     | 2530     | 2000    | 355     | 240     | 330     | 710     | 2810     | 3890    |
| 1RQ6 714-6JJ.0   | 22600        | 1500       | 1500     | 2530     | 2240    | 355     | 240     | 330     | 710     | 2810     | 4130    |
| 1RQ6 716-6JJ.0   | 23700        | 1500       | 1500     | 2530     | 2240    | 355     | 240     | 330     | 710     | 2810     | 4130    |
| <b>8-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ6 710-8JJ.0   | 20100        | 1500       | 1500     | 2530     | 2000    | 355     | 240     | 330     | 710     | 2810     | 3890    |
| 1RQ6 712-8JJ.0   | 20800        | 1500       | 1500     | 2530     | 2000    | 355     | 240     | 330     | 710     | 2810     | 3890    |
| 1RQ6 714-8JJ.0   | 22400        | 1500       | 1500     | 2530     | 2240    | 355     | 240     | 330     | 710     | 2810     | 4130    |
| 1RQ6 716-8JJ.0   | 23600        | 1500       | 1500     | 2530     | 2240    | 355     | 240     | 330     | 710     | 2810     | 4130    |
| <b>10-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ6 710-3JJ.0   | 19900        | 1500       | 1500     | 2530     | 2000    | 355     | 240     | 330     | 710     | 2810     | 3890    |
| 1RQ6 712-3JJ.0   | 20700        | 1500       | 1500     | 2530     | 2000    | 355     | 240     | 330     | 710     | 2810     | 3890    |
| 1RQ6 714-3JJ.0   | 22400        | 1500       | 1500     | 2530     | 2240    | 355     | 240     | 330     | 710     | 2810     | 4130    |
| 1RQ6 716-3JJ.0   | 23500        | 1500       | 1500     | 2530     | 2240    | 355     | 240     | 330     | 710     | 2810     | 4130    |

**Note:**

Higher pole numbers are available on request.

<sup>1)</sup> Anti-friction bearings only for 50 Hz operation.

## Dimension drawings

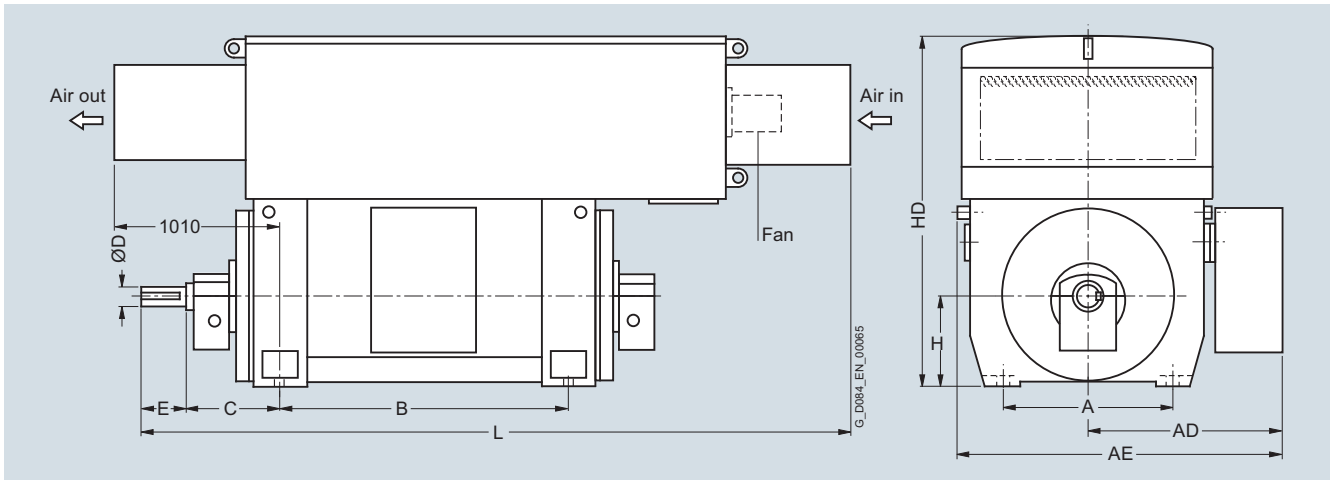

| Motor type | Weight<br>kg | Dimensions |    |    |   |   |   |   |   |    |   |
|------------|--------------|------------|----|----|---|---|---|---|---|----|---|
|            |              | A          | AD | AE | B | C | D | E | H | HD | L |

## Up to 6.6 kV, NEMA version, IM B3 type of construction, sleeve bearings – 1RQ6 series

2-pole

|                |       |      |      |      |      |     |     |     |     |      |      |
|----------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RQ6 710-2HJ.0 | 19300 | 1500 | 1500 | 2530 | 2000 | 600 | 180 | 240 | 710 | 2820 | 4940 |
| 1RQ6 712-2HJ.0 | 20100 | 1500 | 1500 | 2530 | 2000 | 600 | 180 | 240 | 710 | 2820 | 4940 |
| 1RQ6 714-2HJ.0 | 21400 | 1500 | 1500 | 2530 | 2240 | 600 | 180 | 240 | 710 | 2820 | 5180 |
| 1RQ6 716-2HJ.0 | 22400 | 1500 | 1500 | 2530 | 2240 | 600 | 180 | 240 | 710 | 2820 | 5180 |

| Motor type | Weight<br>kg | Dimensions |    |    |   |   |   |   |   |    |   |
|------------|--------------|------------|----|----|---|---|---|---|---|----|---|
|            |              | A          | AD | AE | B | C | D | E | H | HD | L |

## 9 ... 11 kV, NEMA version, IM B3 type of construction, sleeve bearings – 1RQ6 series

2-pole


|                |       |      |      |      |      |     |     |     |     |      |      |
|----------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RQ6 710-2HJ.0 | 19100 | 1500 | 1500 | 2530 | 2000 | 600 | 180 | 240 | 710 | 2820 | 4940 |
| 1RQ6 712-2HJ.0 | 19900 | 1500 | 1500 | 2530 | 2000 | 600 | 180 | 240 | 710 | 2820 | 4940 |
| 1RQ6 714-2HJ.0 | 21200 | 1500 | 1500 | 2530 | 2240 | 600 | 180 | 240 | 710 | 2820 | 5180 |
| 1RQ6 716-2HJ.0 | 22200 | 1500 | 1500 | 2530 | 2240 | 600 | 180 | 240 | 710 | 2820 | 5180 |

## Motors for line operation

Air-cooled motors

H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Dimension drawings

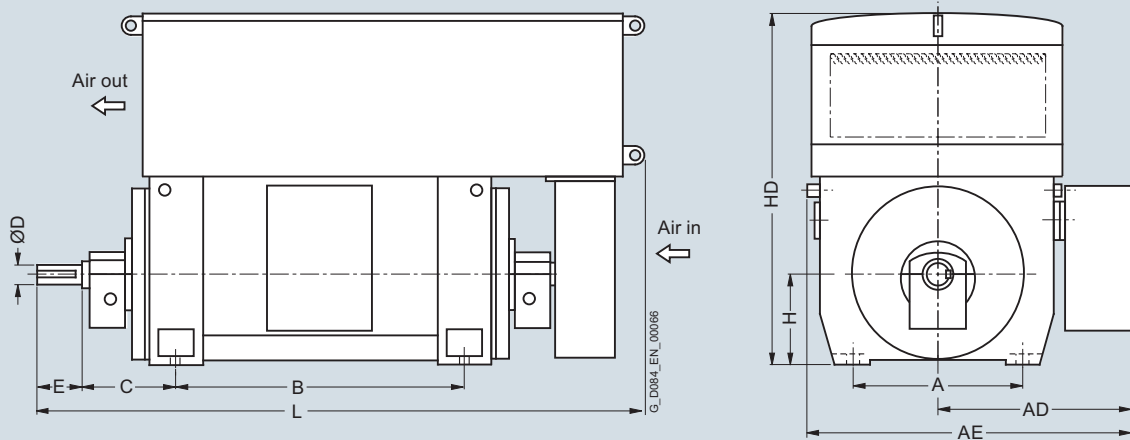


| Motor type  | Weight<br>kg | Dimensions |      |      |      |     |     |     |     |      |      |
|---|--------------|------------|------|------|------|-----|-----|-----|-----|------|------|
|   |              | A          | AD   | AE   | B    | C   | D   | E   | H   | HD   | L    |
| Up to 6.6 kV, NEMA version, IM B3 type of construction, sleeve bearings – 1RQ6 series |              |            |      |      |      |     |     |     |     |      |      |
| 4-pole  |              |            |      |      |      |     |     |     |     |      |      |
| 1RQ6 710-4JJ.0-Z K96 <sup>1)</sup>  | 21100        | 1500       | 1500 | 2530 | 2000 | 530 | 220 | 280 | 710 | 2820 | 4890 |
| 1RQ6 712-4JJ.0-Z K96 <sup>1)</sup>  | 21900        | 1500       | 1500 | 2530 | 2000 | 530 | 220 | 280 | 710 | 2820 | 4890 |
| 1RQ6 714-4JJ.0-Z K96 <sup>1)</sup>  | 23400        | 1500       | 1500 | 2530 | 2240 | 530 | 220 | 280 | 710 | 2820 | 5130 |
| 1RQ6 716-4JJ.0-Z K96 <sup>1)</sup>  | 24400        | 1500       | 1500 | 2530 | 2240 | 530 | 220 | 280 | 710 | 2820 | 5130 |
| 6-pole  |              |            |      |      |      |     |     |     |     |      |      |
| 1RQ6 710-6JJ.0-Z K96  | 21300        | 1500       | 1500 | 2530 | 2000 | 670 | 240 | 330 | 710 | 2810 | 4200 |
| 1RQ6 712-6JJ.0-Z K96  | 22000        | 1500       | 1500 | 2530 | 2000 | 670 | 240 | 330 | 710 | 2810 | 4200 |
| 1RQ6 714-6JJ.0-Z K96  | 23700        | 1500       | 1500 | 2530 | 2240 | 670 | 240 | 330 | 710 | 2810 | 4440 |
| 1RQ6 716-6JJ.0-Z K96  | 24900        | 1500       | 1500 | 2530 | 2240 | 670 | 240 | 330 | 710 | 2810 | 4440 |
| 8-pole  |              |            |      |      |      |     |     |     |     |      |      |
| 1RQ6 710-8JJ.0-Z K96  | 21100        | 1500       | 1500 | 2530 | 2000 | 670 | 240 | 330 | 710 | 2810 | 4200 |
| 1RQ6 712-8JJ.0-Z K96  | 21900        | 1500       | 1500 | 2530 | 2000 | 670 | 240 | 330 | 710 | 2810 | 4200 |
| 1RQ6 714-8JJ.0-Z K96  | 23500        | 1500       | 1500 | 2530 | 2240 | 670 | 240 | 330 | 710 | 2810 | 4440 |
| 1RQ6 716-8JJ.0-Z K96  | 24600        | 1500       | 1500 | 2530 | 2240 | 670 | 240 | 330 | 710 | 2810 | 4440 |
| 10-pole   |              |            |      |      |      |     |     |     |     |      |      |
| 1RQ6 710-3JJ.0-Z K96  | 20900        | 1500       | 1500 | 2530 | 2000 | 670 | 240 | 330 | 710 | 2810 | 4200 |
| 1RQ6 712-3JJ.0-Z K96  | 21800        | 1500       | 1500 | 2530 | 2000 | 670 | 240 | 330 | 710 | 2810 | 4200 |
| 1RQ6 714-3JJ.0-Z K96  | 23400        | 1500       | 1500 | 2530 | 2240 | 670 | 240 | 330 | 710 | 2810 | 4440 |
| 1RQ6 716-3JJ.0-Z K96  | 24500        | 1500       | 1500 | 2530 | 2240 | 670 | 240 | 330 | 710 | 2810 | 4440 |

**Note:**

Higher pole numbers are available on request.

<sup>1)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.

## Dimension drawings

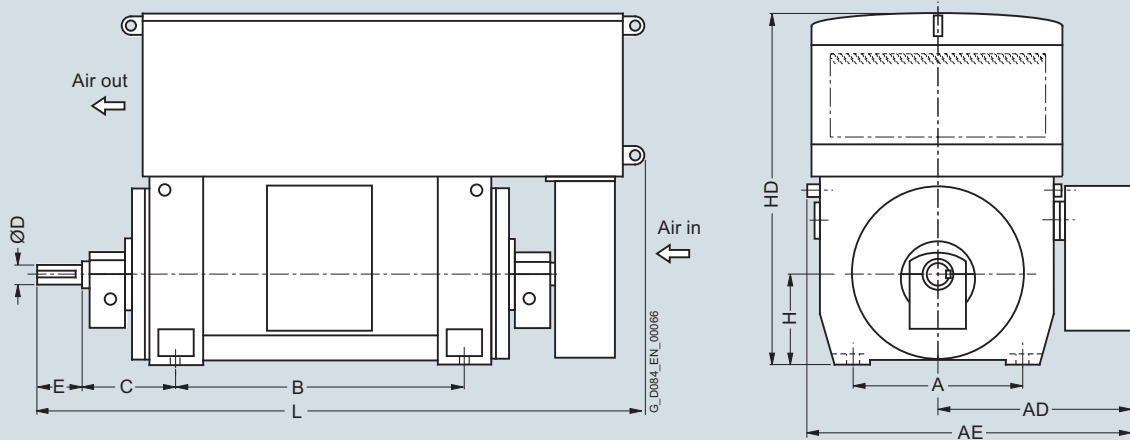

| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|---|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|   |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>9 ... 11 kV, NEMA version, IM B3 type of construction, sleeve bearings – 1RQ6 series</b> |              |            |          |          |         |         |         |         |         |          |         |
| <b>4-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ6 710-4JJ.0-Z K96 <sup>1)</sup>  | 20800        | 1500       | 1500     | 2530     | 2000    | 530     | 220     | 280     | 710     | 2820     | 4890    |
| 1RQ6 712-4JJ.0-Z K96 <sup>1)</sup>  | 21600        | 1500       | 1500     | 2530     | 2000    | 530     | 220     | 280     | 710     | 2820     | 4890    |
| 1RQ6 714-4JJ.0-Z K96 <sup>1)</sup>  | 23100        | 1500       | 1500     | 2530     | 2240    | 530     | 220     | 280     | 710     | 2820     | 5130    |
| 1RQ6 716-4JJ.0-Z K96 <sup>1)</sup>  | 24000        | 1500       | 1500     | 2530     | 2240    | 530     | 220     | 280     | 710     | 2820     | 5130    |
| <b>6-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ6 710-6JJ.0-Z K96  | 21100        | 1500       | 1500     | 2530     | 2000    | 670     | 240     | 330     | 710     | 2810     | 4200    |
| 1RQ6 712-6JJ.0-Z K96  | 21900        | 1500       | 1500     | 2530     | 2000    | 670     | 240     | 330     | 710     | 2810     | 4200    |
| 1RQ6 714-6JJ.0-Z K96  | 23500        | 1500       | 1500     | 2530     | 2240    | 670     | 240     | 330     | 710     | 2810     | 4440    |
| 1RQ6 716-6JJ.0-Z K96  | 24600        | 1500       | 1500     | 2530     | 2240    | 670     | 240     | 330     | 710     | 2810     | 4440    |
| <b>8-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ6 710-8JJ.0-Z K96  | 21000        | 1500       | 1500     | 2530     | 2000    | 670     | 240     | 330     | 710     | 2810     | 4200    |
| 1RQ6 712-8JJ.0-Z K96  | 21700        | 1500       | 1500     | 2530     | 2000    | 670     | 240     | 330     | 710     | 2810     | 4200    |
| 1RQ6 714-8JJ.0-Z K96  | 23300        | 1500       | 1500     | 2530     | 2240    | 670     | 240     | 330     | 710     | 2810     | 4440    |
| 1RQ6 716-8JJ.0-Z K96  | 24500        | 1500       | 1500     | 2530     | 2240    | 670     | 240     | 330     | 710     | 2810     | 4440    |
| <b>10-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ6 710-3JJ.0-Z K96  | 20800        | 1500       | 1500     | 2530     | 2000    | 670     | 240     | 330     | 710     | 2810     | 4200    |
| 1RQ6 712-3JJ.0-Z K96  | 21600        | 1500       | 1500     | 2530     | 2000    | 670     | 240     | 330     | 710     | 2810     | 4200    |
| 1RQ6 714-3JJ.0-Z K96  | 23300        | 1500       | 1500     | 2530     | 2240    | 670     | 240     | 330     | 710     | 2810     | 4440    |
| 1RQ6 716-3JJ.0-Z K96  | 24400        | 1500       | 1500     | 2530     | 2240    | 670     | 240     | 330     | 710     | 2810     | 4440    |

Note:

Higher pole numbers are available on request.


<sup>2)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.

## Motors for line operation

Air-cooled motors

H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Dimension drawings

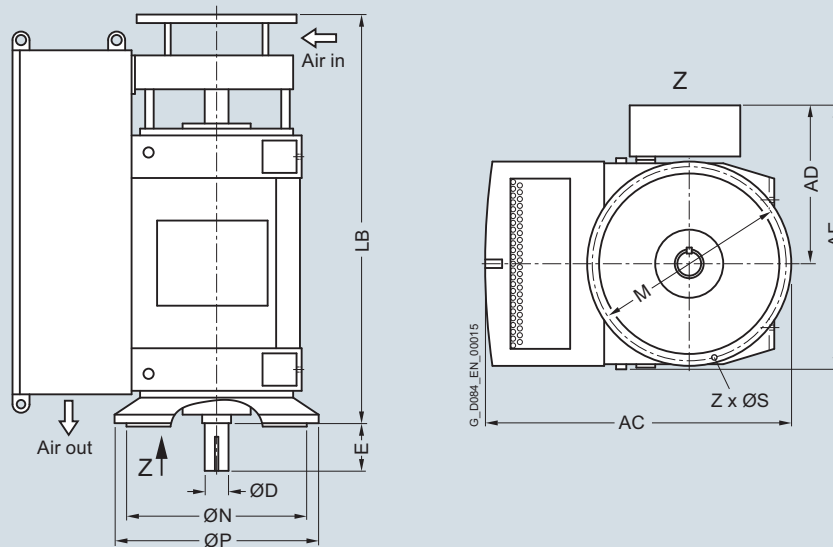


| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |          |         |         |         |         |               |
|---|--------------|------------|----------|----------|---------|---------|----------|---------|---------|---------|---------|---------------|
|   |              | AC<br>mm   | AD<br>mm | AE<br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |
| <b>Up to 6.6 kV, NEMA version, IM V1 type of construction, anti-friction bearings – 1RQ6 series</b> |              |            |          |          |         |         |          |         |         |         |         |               |
| <b>6-pole</b>   |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RQ6 710-6JJ.4  | 22500        | 3100       | 1500     | 2530     | 240     | 330     | 3920     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RQ6 712-6JJ.4  | 23200        | 3100       | 1500     | 2530     | 240     | 330     | 3920     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RQ6 714-6JJ.4  | 24900        | 3100       | 1500     | 2530     | 240     | 330     | 4160     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RQ6 716-6JJ.4  | 26100        | 3100       | 1500     | 2530     | 240     | 330     | 4160     | 2000    | 1800    | 1900    | 33      | 24            |
| <b>8-pole</b>   |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RQ6 710-8JJ.4  | 22300        | 3100       | 1500     | 2530     | 240     | 330     | 3920     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RQ6 712-8JJ.4  | 23100        | 3100       | 1500     | 2530     | 240     | 330     | 3920     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RQ6 714-8JJ.4  | 24700        | 3100       | 1500     | 2530     | 240     | 330     | 4160     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RQ6 716-8JJ.4  | 25800        | 3100       | 1500     | 2530     | 240     | 330     | 4160     | 2000    | 1800    | 1900    | 33      | 24            |
| <b>10-pole</b>  |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RQ6 710-3JJ.4  | 22100        | 3100       | 1500     | 2530     | 240     | 330     | 3920     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RQ6 712-3JJ.4  | 23000        | 3100       | 1500     | 2530     | 240     | 330     | 3920     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RQ6 714-3JJ.4  | 24600        | 3100       | 1500     | 2530     | 240     | 330     | 4160     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RQ6 716-3JJ.4  | 25700        | 3100       | 1500     | 2530     | 240     | 330     | 4160     | 2000    | 1800    | 1900    | 33      | 24            |

**Note:**

Higher pole numbers are available on request.



## Dimension drawings

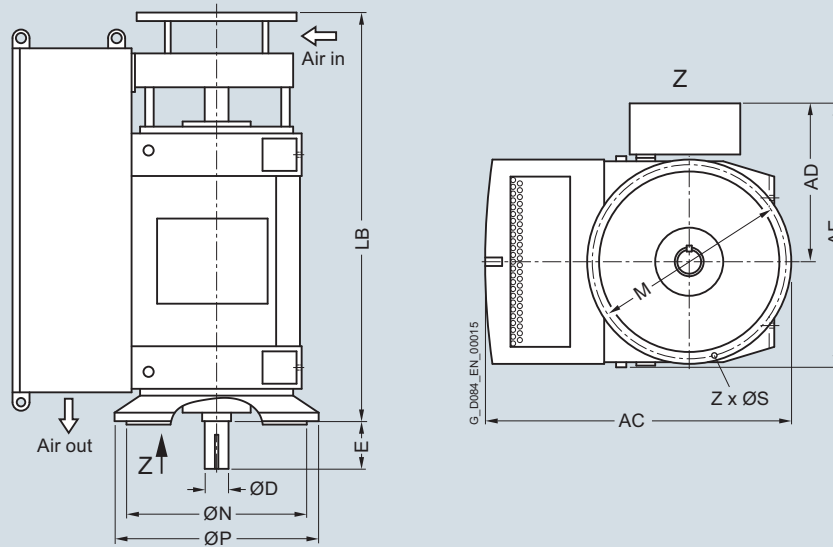

| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |          |         |         |         |         |               |
|--|--------------|------------|----------|----------|---------|---------|----------|---------|---------|---------|---------|---------------|
|  |              | AC<br>mm   | AD<br>mm | AE<br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |
| <b>9 ... 11 kV, NEMA version, IM V1 type of construction, anti-friction bearings – 1RQ6 series</b> |              |            |          |          |         |         |          |         |         |         |         |               |
| <b>6-pole</b>  |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RQ6 710-6JJ.4   | 22300        | 3100       | 1500     | 2530     | 240     | 330     | 3920     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RQ6 712-6JJ.4   | 23100        | 3100       | 1500     | 2530     | 240     | 330     | 3920     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RQ6 714-6JJ.4   | 24700        | 3100       | 1500     | 2530     | 240     | 330     | 4160     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RQ6 716-6JJ.4   | 25800        | 3100       | 1500     | 2530     | 240     | 330     | 4160     | 2000    | 1800    | 1900    | 33      | 24            |
| <b>8-pole</b>  |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RQ6 710-8JJ.4   | 22200        | 3100       | 1500     | 2530     | 240     | 330     | 3920     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RQ6 712-8JJ.4   | 23000        | 3100       | 1500     | 2530     | 240     | 330     | 3920     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RQ6 714-8JJ.4   | 24500        | 3100       | 1500     | 2530     | 240     | 330     | 4160     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RQ6 716-8JJ.4   | 25700        | 3100       | 1500     | 2530     | 240     | 330     | 4160     | 2000    | 1800    | 1900    | 33      | 24            |
| <b>10-pole</b>   |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RQ6 710-3JJ.4   | 22000        | 3100       | 1500     | 2530     | 240     | 330     | 3920     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RQ6 712-3JJ.4   | 22800        | 3100       | 1500     | 2530     | 240     | 330     | 3920     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RQ6 714-3JJ.4   | 24500        | 3100       | 1500     | 2530     | 240     | 330     | 4160     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RQ6 716-3JJ.4   | 25600        | 3100       | 1500     | 2530     | 240     | 330     | 4160     | 2000    | 1800    | 1900    | 33      | 24            |

Note:


Higher pole numbers are available on request.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Dimension drawings

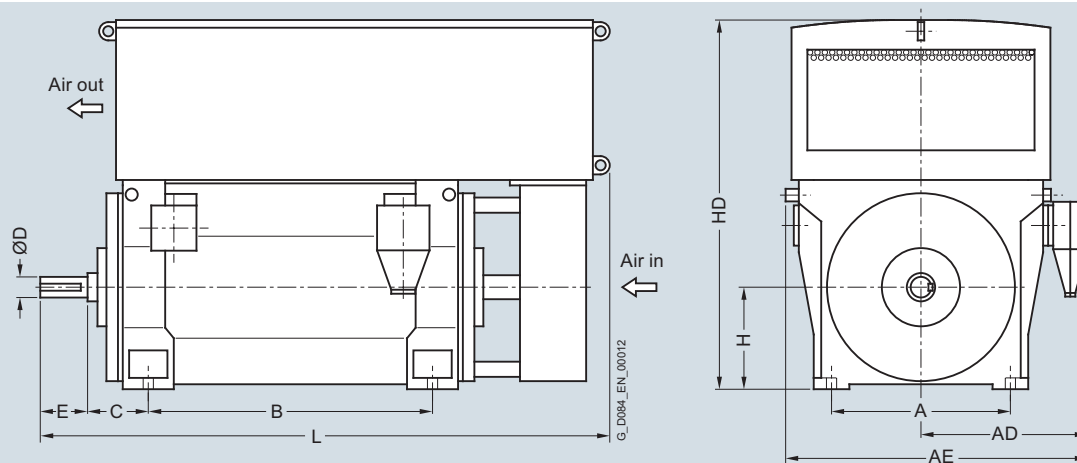


| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|--|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, anti-friction bearings – 1RQ7 series<sup>1)</sup> – IC611</b> |              |            |          |          |         |         |         |         |         |          |         |
| <b>4-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ7 710-4   | 17100        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 3080     | 4500    |
| 1RQ7 712-4   | 17800        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 3080     | 4500    |
| 1RQ7 714-4   | 19200        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 3080     | 4740    |
| 1RQ7 716-4   | 20500        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 3080     | 4740    |
| <b>6-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ7 710-6   | 17200        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 3080     | 3960    |
| 1RQ7 712-6   | 18300        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 3080     | 3960    |
| 1RQ7 714-6   | 19800        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 3080     | 4200    |
| 1RQ7 716-6   | 20800        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 3080     | 4200    |
| <b>8-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ7 710-8   | 16500        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2710     | 3960    |
| 1RQ7 712-8   | 17400        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2710     | 3960    |
| 1RQ7 714-8   | 18900        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2710     | 4200    |
| 1RQ7 716-8   | 19900        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2710     | 4200    |
| <b>10-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ7 710-3   | 16400        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2710     | 3960    |
| 1RQ7 712-3   | 17400        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2710     | 3960    |
| 1RQ7 714-3   | 18900        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2710     | 4200    |
| 1RQ7 716-3   | 20000        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2710     | 4200    |

**Note:**

Higher pole numbers are available on request.

<sup>1)</sup> The dimensions are also valid for the 1SB7 and 1SG7 series.

## Dimension drawings

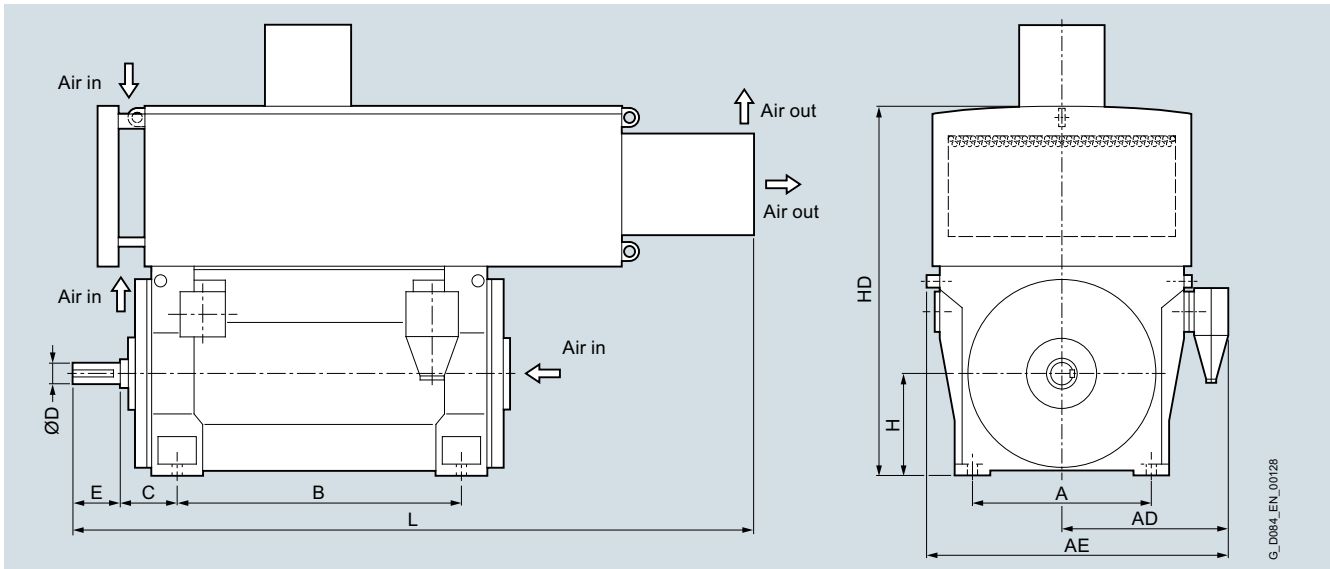

| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |                        |         |
|--|--------------|------------|----------|----------|---------|---------|---------|---------|---------|------------------------|---------|
|  |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>1)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, anti-friction bearings – 1RQ7 series<sup>2)</sup> – IC666</b> |              |            |          |          |         |         |         |         |         |                        |         |
| 4-pole   |              |            |          |          |         |         |         |         |         |                        |         |
| 1RQ7 710-4   | 16900        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 3550                   | 4330    |
| 1RQ7 712-4   | 17600        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 3550                   | 4330    |
| 1RQ7 714-4   | 19000        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 3550                   | 4570    |
| 1RQ7 716-4   | 20300        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 3550                   | 4570    |
| 6-pole   |              |            |          |          |         |         |         |         |         |                        |         |
| 1RQ7 710-6   | 17300        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 3550                   | 4330    |
| 1RQ7 712-6   | 18400        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 3550                   | 4330    |
| 1RQ7 714-6   | 19800        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 3550                   | 4570    |
| 1RQ7 716-6   | 20900        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 3550                   | 4570    |
| 8-pole   |              |            |          |          |         |         |         |         |         |                        |         |
| 1RQ7 710-8   | 16800        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 3550                   | 4330    |
| 1RQ7 712-8   | 17600        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 3550                   | 4330    |
| 1RQ7 714-8   | 19200        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 3550                   | 4570    |
| 1RQ7 716-8   | 20200        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 3550                   | 4570    |
| 10-pole  |              |            |          |          |         |         |         |         |         |                        |         |
| 1RQ7 710-3   | 16600        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 3550                   | 4330    |
| 1RQ7 712-3   | 17600        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 3550                   | 4330    |
| 1RQ7 714-3   | 19200        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 3550                   | 4570    |
| 1RQ7 716-3   | 20200        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 3550                   | 4570    |

Note:

Higher pole numbers are available on request.

<sup>1)</sup> Dimension HD without external blower  
(2 ... 6-pole = 600mm / ≥ 8-pole = 500 mm)


<sup>2)</sup> The dimensions are also valid for the 1SB7 and 1SG7 series.

## Motors for line operation

Air-cooled motors

H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Dimension drawings

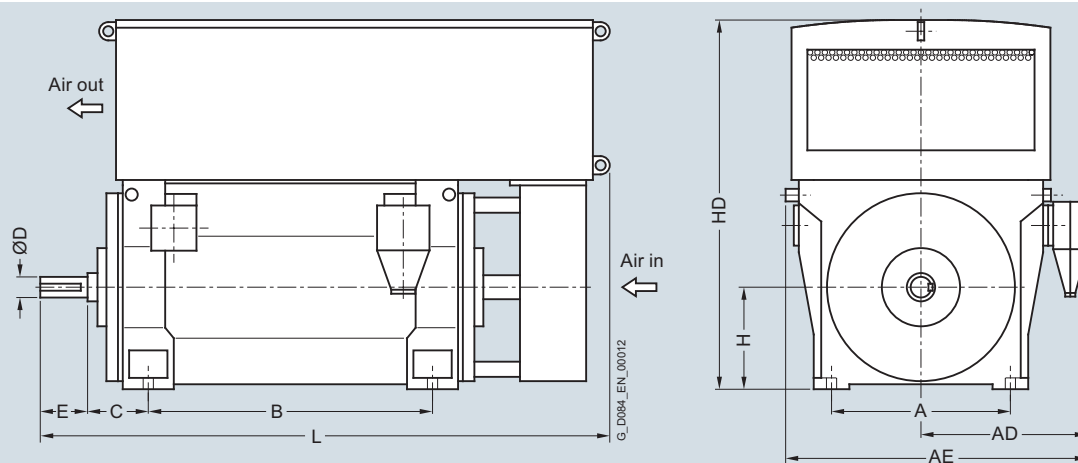


| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|---|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|   |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>9 ... 11 kV, IM B3 type of construction, anti-friction bearings – 1RQ7 series<sup>1)</sup> – IC611</b> |              |            |          |          |         |         |         |         |         |          |         |
| <b>4-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ7 710-4  | 17600        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 3080     | 4500    |
| 1RQ7 712-4  | 18400        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 3080     | 4500    |
| 1RQ7 714-4  | 19800        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 3080     | 4740    |
| 1RQ7 716-4  | 21000        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 3080     | 4740    |
| <b>6-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ7 710-6  | 17800        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 3080     | 3960    |
| 1RQ7 712-6  | 18800        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 3080     | 3960    |
| 1RQ7 714-6  | 20300        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 3080     | 4200    |
| 1RQ7 716-6  | 21400        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 3080     | 4200    |
| <b>8-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ7 710-8  | 16200        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2710     | 3960    |
| 1RQ7 712-8  | 17200        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2710     | 3960    |
| 1RQ7 714-8  | 19400        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2710     | 4200    |
| 1RQ7 716-8  | 20400        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2710     | 4200    |
| <b>10-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ7 710-3  | 16400        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2710     | 3960    |
| 1RQ7 712-3  | 17300        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2710     | 3960    |
| 1RQ7 714-3  | 19500        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2710     | 4200    |
| 1RQ7 716-3  | 20400        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2710     | 4200    |

**Note:**

Higher pole numbers are available on request.

<sup>1)</sup> The dimensions are also valid for the 1SB7 and 1SG7 series.

## Dimension drawings

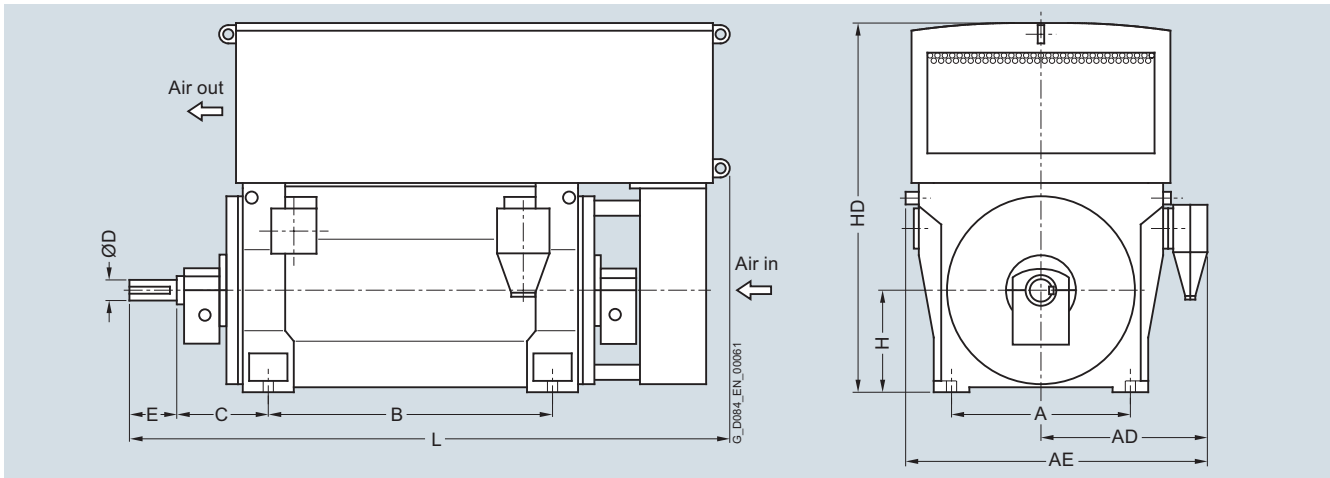

| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|---|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|   |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, sleeve bearings – 1RQ7 series<sup>1)</sup> – IC611</b> |              |            |          |          |         |         |         |         |         |          |         |
| <b>2-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ7 710-2  | 16500        | 1500       | 1800     | 2900     | 2000    | 560     | 200     | 280     | 710     | 3080     | 4630    |
| 1RQ7 712-2  | 17000        | 1500       | 1800     | 2900     | 2000    | 560     | 200     | 280     | 710     | 3080     | 4630    |
| 1RQ7 714-2  | 18400        | 1500       | 1800     | 2900     | 2240    | 560     | 200     | 280     | 710     | 3080     | 4870    |
| 1RQ7 716-2  | 19100        | 1500       | 1800     | 2900     | 2240    | 560     | 200     | 280     | 710     | 3080     | 4870    |
| <b>4-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ7 710-4  | 17500        | 1500       | 1800     | 2900     | 2000    | 710     | 220     | 350     | 710     | 3080     | 4840    |
| 1RQ7 712-4  | 18200        | 1500       | 1800     | 2900     | 2000    | 710     | 220     | 350     | 710     | 3080     | 4840    |
| 1RQ7 714-4  | 19500        | 1500       | 1800     | 2900     | 2240    | 710     | 220     | 350     | 710     | 3080     | 5080    |
| 1RQ7 716-4  | 20800        | 1500       | 1800     | 2900     | 2240    | 710     | 220     | 350     | 710     | 3080     | 5080    |
| <b>6-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ7 710-6  | 17300        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 3080     | 4250    |
| 1RQ7 712-6  | 18400        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 3080     | 4250    |
| 1RQ7 714-6  | 19900        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 3080     | 4490    |
| 1RQ7 716-6  | 20900        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 3080     | 4490    |
| <b>8-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ7 710-8  | 16500        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2710     | 4250    |
| 1RQ7 712-8  | 17400        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2710     | 4250    |
| 1RQ7 714-8  | 18900        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2710     | 4490    |
| 1RQ7 716-8  | 20000        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2710     | 4490    |
| <b>10-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ7 710-3  | 16400        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2710     | 4250    |
| 1RQ7 712-3  | 17400        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2710     | 4250    |
| 1RQ7 714-3  | 19000        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2710     | 4490    |
| 1RQ7 716-3  | 20000        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2710     | 4490    |

Note:

Higher pole numbers are available on request.


<sup>1)</sup> The dimensions are also valid for the 1SB7 and 1SG7 series.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Dimension drawings

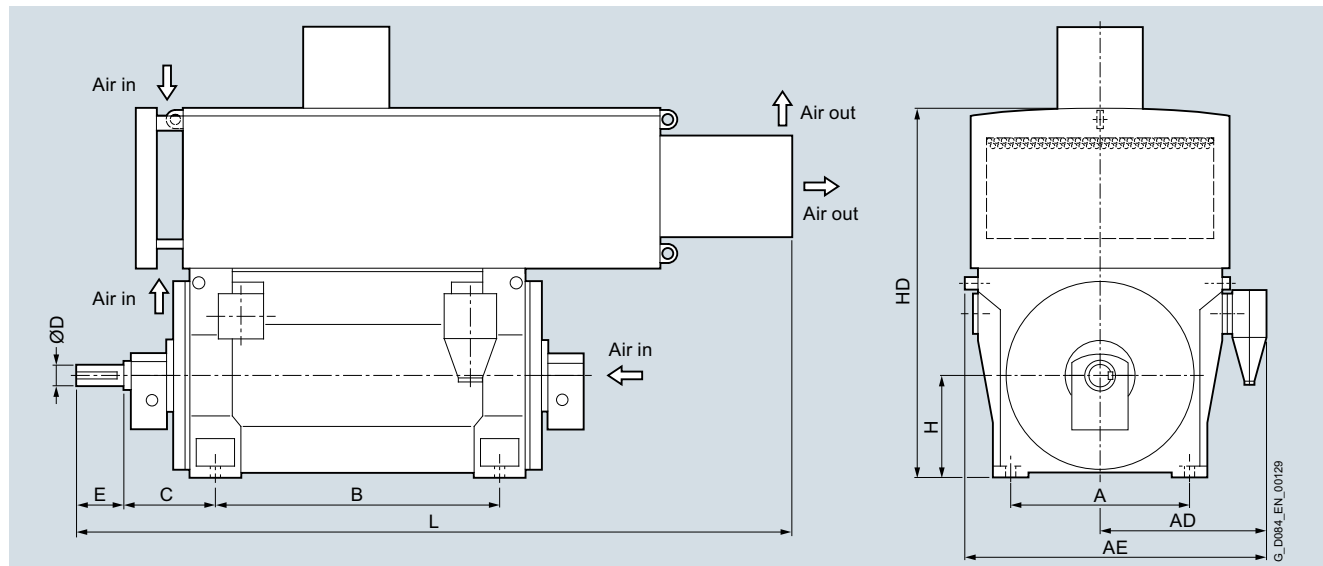

| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |                        |         |
|---|--------------|------------|----------|----------|---------|---------|---------|---------|---------|------------------------|---------|
|   |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>1)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, sleeve bearings – 1RQ7 series<sup>2)</sup> – IC666</b> |              |            |          |          |         |         |         |         |         |                        |         |
| 2-pole  |              |            |          |          |         |         |         |         |         |                        |         |
| 1RQ7 710-2  | 16200        | 1500       | 1800     | 2900     | 2000    | 560     | 200     | 710     | 280     | 3550                   | 4450    |
| 1RQ7 712-2  | 16700        | 1500       | 1800     | 2900     | 2000    | 560     | 200     | 710     | 280     | 3550                   | 4450    |
| 1RQ7 714-2  | 18000        | 1500       | 1800     | 2900     | 2240    | 560     | 200     | 710     | 280     | 3550                   | 4690    |
| 1RQ7 716-2  | 18700        | 1500       | 1800     | 2900     | 2240    | 560     | 200     | 710     | 280     | 3550                   | 4690    |
| 4-pole  |              |            |          |          |         |         |         |         |         |                        |         |
| 1RQ7 710-4  | 17200        | 1500       | 1800     | 2900     | 2000    | 710     | 220     | 710     | 350     | 3550                   | 4670    |
| 1RQ7 712-4  | 17900        | 1500       | 1800     | 2900     | 2000    | 710     | 220     | 710     | 350     | 3550                   | 4670    |
| 1RQ7 714-4  | 19300        | 1500       | 1800     | 2900     | 2240    | 710     | 220     | 710     | 350     | 3550                   | 4910    |
| 1RQ7 716-4  | 20600        | 1500       | 1800     | 2900     | 2240    | 710     | 220     | 710     | 350     | 3550                   | 4910    |
| 6-pole  |              |            |          |          |         |         |         |         |         |                        |         |
| 1RQ7 710-6  | 17300        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 710     | 350     | 3550                   | 4630    |
| 1RQ7 712-6  | 18500        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 710     | 350     | 3550                   | 4630    |
| 1RQ7 714-6  | 19900        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 710     | 350     | 3550                   | 4870    |
| 1RQ7 716-6  | 20900        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 710     | 350     | 3550                   | 4870    |
| 8-pole  |              |            |          |          |         |         |         |         |         |                        |         |
| 1RQ7 710-8  | 17000        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 710     | 350     | 3550                   | 4630    |
| 1RQ7 712-8  | 17900        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 710     | 350     | 3550                   | 4630    |
| 1RQ7 714-8  | 19200        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 710     | 350     | 3550                   | 4870    |
| 1RQ7 716-8  | 20200        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 710     | 350     | 3550                   | 4870    |
| 10-pole   |              |            |          |          |         |         |         |         |         |                        |         |
| 1RQ7 710-3  | 16900        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 710     | 350     | 3550                   | 4630    |
| 1RQ7 712-3  | 17900        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 710     | 350     | 3550                   | 4630    |
| 1RQ7 714-3  | 19200        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 710     | 350     | 3550                   | 4870    |
| 1RQ7 716-3  | 20200        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 710     | 350     | 3550                   | 4870    |


#### Note:

Higher pole numbers are available on request.

<sup>1)</sup> Dimension HD without external blower  
(2 ... 6-pole = 600mm / ≥ 8-pole = 500 mm)

<sup>2)</sup> The dimensions are also valid for the 1SB7 and 1SG7 series.

## Dimension drawings

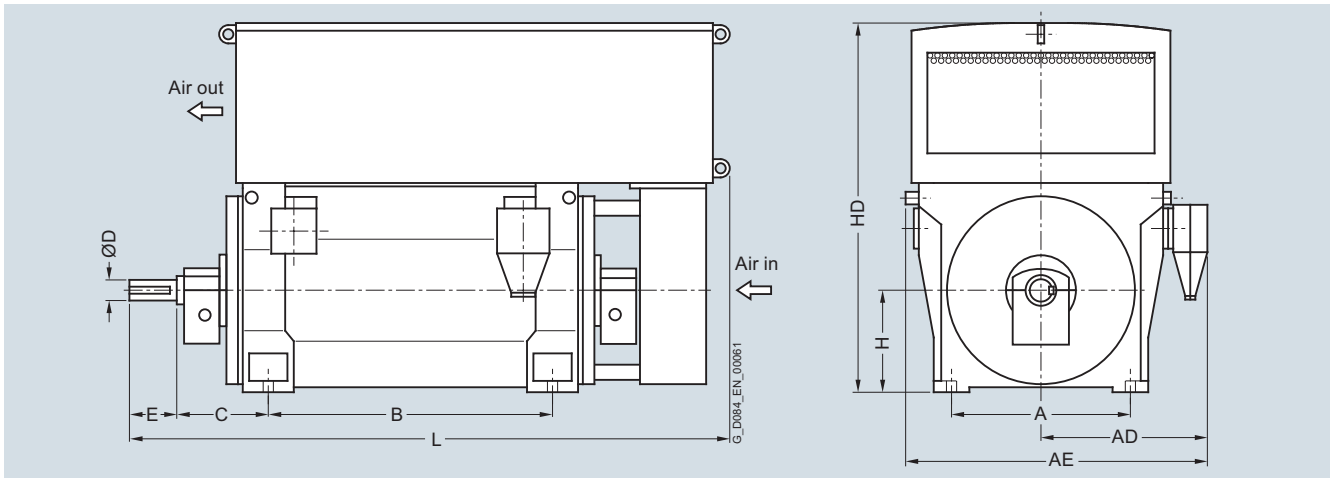

| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|--|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>9 ... 11 kV, IM B3 type of construction, sleeve bearings – 1RQ7 series<sup>1)</sup> – IC611</b> |              |            |          |          |         |         |         |         |         |          |         |
| <b>2-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ7 710-2   | 16900        | 1500       | 1800     | 2900     | 2000    | 560     | 200     | 280     | 710     | 3080     | 4630    |
| 1RQ7 712-2   | 17500        | 1500       | 1800     | 2900     | 2000    | 560     | 200     | 280     | 710     | 3080     | 4630    |
| 1RQ7 714-2   | 18700        | 1500       | 1800     | 2900     | 2240    | 560     | 200     | 280     | 710     | 3080     | 4870    |
| 1RQ7 716-2   | 19600        | 1500       | 1800     | 2900     | 2240    | 560     | 200     | 280     | 710     | 3080     | 4870    |
| <b>4-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ7 710-4   | 17900        | 1500       | 1800     | 2900     | 2000    | 710     | 220     | 350     | 710     | 3080     | 4840    |
| 1RQ7 712-4   | 18700        | 1500       | 1800     | 2900     | 2000    | 710     | 220     | 350     | 710     | 3080     | 4840    |
| 1RQ7 714-4   | 20100        | 1500       | 1800     | 2900     | 2240    | 710     | 220     | 350     | 710     | 3080     | 5080    |
| 1RQ7 716-4   | 21300        | 1500       | 1800     | 2900     | 2240    | 710     | 220     | 350     | 710     | 3080     | 5080    |
| <b>6-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ7 710-6   | 17800        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 3080     | 4250    |
| 1RQ7 712-6   | 18900        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 3080     | 4250    |
| 1RQ7 714-6   | 20400        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 3080     | 4490    |
| 1RQ7 716-6   | 21500        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 3080     | 4490    |
| <b>8-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ7 710-8   | 16300        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2710     | 4250    |
| 1RQ7 712-8   | 17300        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2710     | 4250    |
| 1RQ7 714-8   | 19500        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2710     | 4490    |
| 1RQ7 716-8   | 20400        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2710     | 4490    |
| <b>10-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ7 710-3   | 16400        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2710     | 4250    |
| 1RQ7 712-3   | 17400        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2710     | 4250    |
| 1RQ7 714-3   | 19600        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2710     | 4490    |
| 1RQ7 716-3   | 20500        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2710     | 4490    |

Note:

Higher pole numbers are available on request.


<sup>1)</sup> The dimensions are also valid for the 1SB7 and 1SG7 series.

## Motors for line operation

Air-cooled motors

H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Dimension drawings

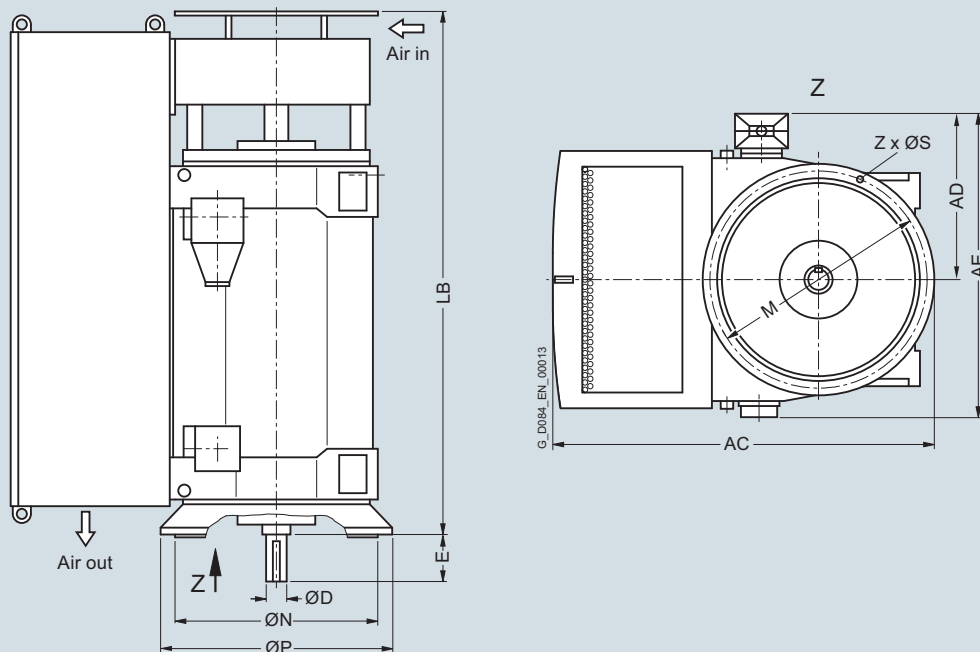

| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |          |         |         |         |         |               |
|---|--------------|------------|----------|----------|---------|---------|----------|---------|---------|---------|---------|---------------|
|   |              | AC<br>mm   | AD<br>mm | AE<br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |
| <b>Up to 6.6 kV, IM V1 type of construction, anti-friction bearings, Z ventilation – 1RQ7 series<sup>1)</sup> – IC611</b> |              |            |          |          |         |         |          |         |         |         |         |               |
| <b>6-pole</b>   |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RQ7 710-6  | 18100        | 3420       | 1800     | 2900     | 220     | 350     | 4020     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RQ7 712-6  | 19200        | 3420       | 1800     | 2900     | 220     | 350     | 4020     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RQ7 714-6  | 20700        | 3420       | 1800     | 2900     | 220     | 350     | 4260     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RQ7 716-6  | 21700        | 3420       | 1800     | 2900     | 220     | 350     | 4260     | 2000    | 1800    | 1900    | 35      | 24            |
| <b>8-pole</b>   |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RQ7 710-8  | 16900        | 3050       | 1800     | 2900     | 220     | 350     | 4020     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RQ7 712-8  | 17800        | 3050       | 1800     | 2900     | 220     | 350     | 4020     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RQ7 714-8  | 19400        | 3050       | 1800     | 2900     | 220     | 350     | 4260     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RQ7 716-8  | 20400        | 3050       | 1800     | 2900     | 220     | 350     | 4260     | 2000    | 1800    | 1900    | 35      | 24            |
| <b>10-pole</b>  |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RQ7 710-3  | 16700        | 3050       | 1800     | 2900     | 220     | 350     | 4020     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RQ7 712-3  | 17700        | 3050       | 1800     | 2900     | 220     | 350     | 4020     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RQ7 714-3  | 19300        | 3050       | 1800     | 2900     | 220     | 350     | 4260     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RQ7 716-3  | 20400        | 3050       | 1800     | 2900     | 220     | 350     | 4260     | 2000    | 1800    | 1900    | 35      | 24            |


#### Note:

Higher pole numbers are available on request.

<sup>1)</sup> The dimensions are also valid for the 1SB7 and 1SG7 series.



## Dimension drawings

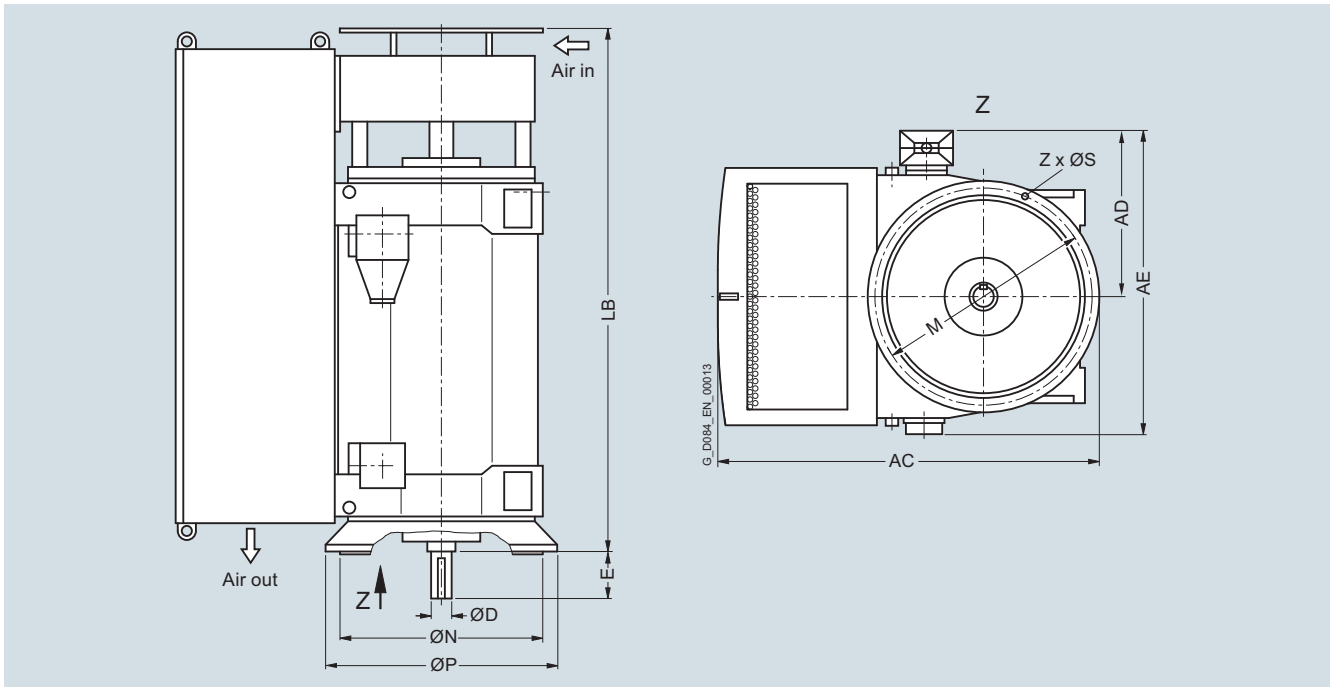

| Motor type | Weight<br>kg | Dimensions |    |    |   |   |    |   |   |   |   |   |
|------------|--------------|------------|----|----|---|---|----|---|---|---|---|---|
|            |              | AC         | AD | AE | D | E | LB | P | N | M | S | Z |

**9 ... 11 kV, IM V1 type of construction, anti-friction bearings, Z ventilation – 1RQ7 series<sup>1)</sup> – IC611**

| 6-pole     |       |      |      |      |     |     |      |      |      |      |    |    |
|------------|-------|------|------|------|-----|-----|------|------|------|------|----|----|
| 1RQ7 710-6 | 17900 | 3420 | 1800 | 2900 | 220 | 350 | 4020 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RQ7 712-6 | 19000 | 3420 | 1800 | 2900 | 220 | 350 | 4020 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RQ7 714-6 | 20500 | 3420 | 1800 | 2900 | 220 | 350 | 4260 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RQ7 716-6 | 21600 | 3420 | 1800 | 2900 | 220 | 350 | 4260 | 2000 | 1800 | 1900 | 35 | 24 |
| 8-pole     |       |      |      |      |     |     |      |      |      |      |    |    |
| 1RQ7 710-8 | 16600 | 3050 | 1800 | 2900 | 220 | 350 | 4020 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RQ7 712-8 | 17600 | 3050 | 1800 | 2900 | 220 | 350 | 4020 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RQ7 714-8 | 19100 | 3050 | 1800 | 2900 | 220 | 350 | 4260 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RQ7 716-8 | 20000 | 3050 | 1800 | 2900 | 220 | 350 | 4260 | 2000 | 1800 | 1900 | 35 | 24 |
| 10-pole    |       |      |      |      |     |     |      |      |      |      |    |    |
| 1RQ7 710-3 | 16800 | 3050 | 1800 | 2900 | 220 | 350 | 4020 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RQ7 712-3 | 17700 | 3050 | 1800 | 2900 | 220 | 350 | 4020 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RQ7 714-3 | 19200 | 3050 | 1800 | 2900 | 220 | 350 | 4260 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RQ7 716-3 | 20100 | 3050 | 1800 | 2900 | 220 | 350 | 4260 | 2000 | 1800 | 1900 | 35 | 24 |

**Note:**

Higher pole numbers are available on request.

<sup>1)</sup> The dimensions are also valid for the 1SB7 and 1SG7 series.

## Motors for line operation

Air-cooled motors

### H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Overview



#### Technical data

##### Overview of technical data

##### H-compact PLUS 1RA4/1RA6/1RP6, SIMOTICS HV M 1RA7

|   |  |
|---|--|
| Rated voltage                                 | 3.3 ... 13.8 kV                                |
| Rated frequency                               | 50/60 Hz                                       |
| Motor type                                    | Induction motor with squirrel-cage rotor       |
| Type of construction                          | IM B3, IM V1                                   |
| Degree of protection                          | IP23/IP24W                                     |
| Cooling method                                | IC01   |
| Stator winding insulation                     | Thermal class 155 (F), utilized to 130 (B)     |
| Shaft height                                  | 450 ... 710 mm                                 |
| Bearings                                      | Anti-friction bearings, sleeve bearings        |
| Cage material                                 | Copper   |
| Standards                                     | IEC, EN, NEMA                                  |
| Frame design for shaft heights 450 ... 560 mm | Housing: Cast iron<br>Cooling enclosure: Steel |
| Frame design for shaft heights 630 ... 710 mm | Housing: Steel<br>Cooling enclosure: Steel     |

#### Technical data (continued)

##### Power ranges for IEC motors for line operation

##### 1RA4, 1RA6, 1RP6 series


##### 1RA7 series

Insulation system, thermal class 155 (F), utilized to 130 (B).


Ambient temperature up to 40 °C, installation altitude up to 1000 m.

3.3 to 6.6 kV; 50 Hz

4.0 to 6.6 kV; 60 Hz

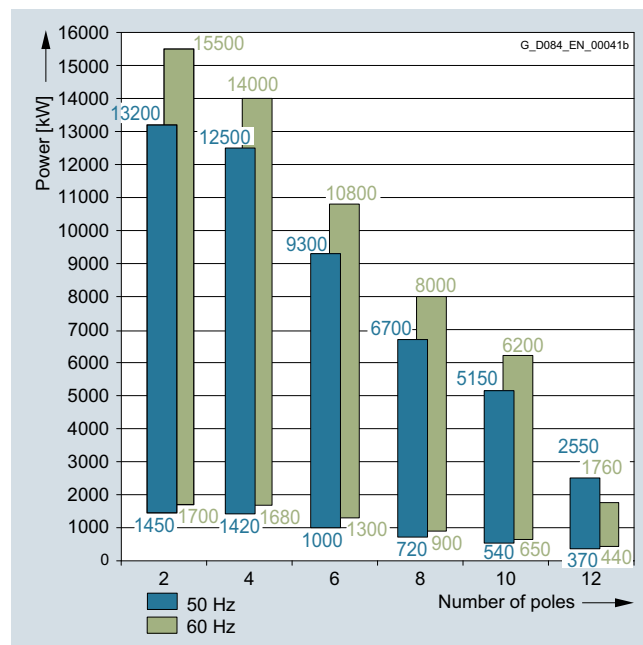

9 to 11 kV; 50 Hz

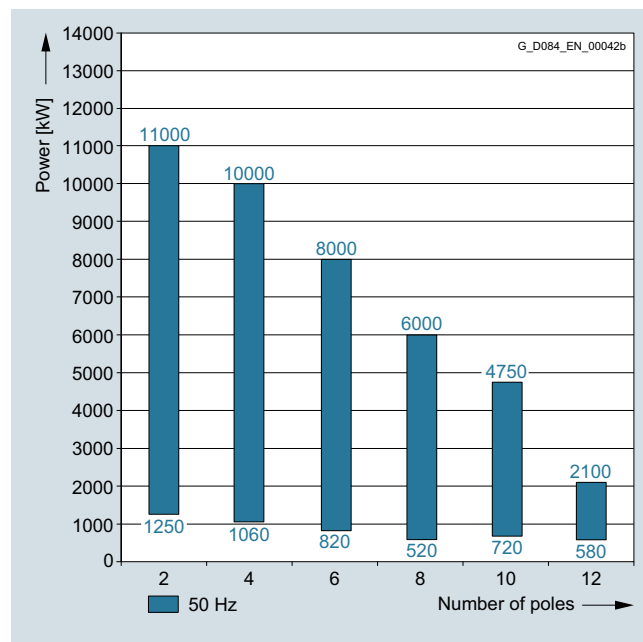


### Technical data (continued)


#### Power ranges for NEMA motors for line operation

Insulation system, thermal class 155 (F), utilized to 130 (B)

4 to 6.6 kV; 60 Hz

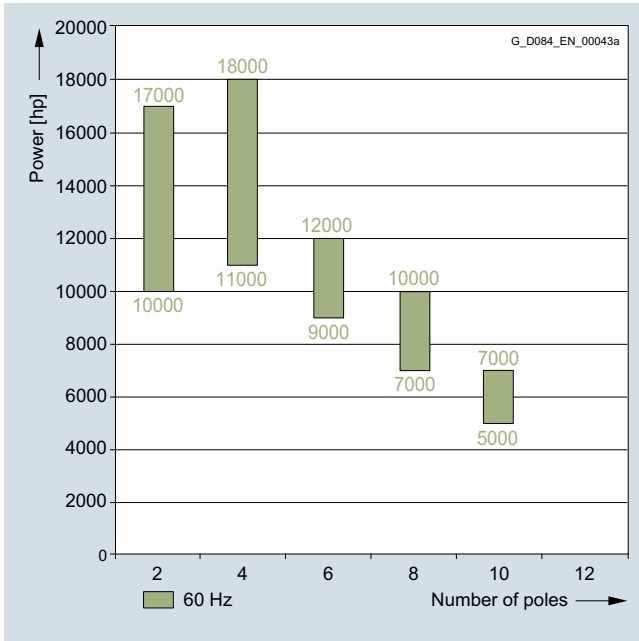

12.5 to 13.8 kV; 60 Hz

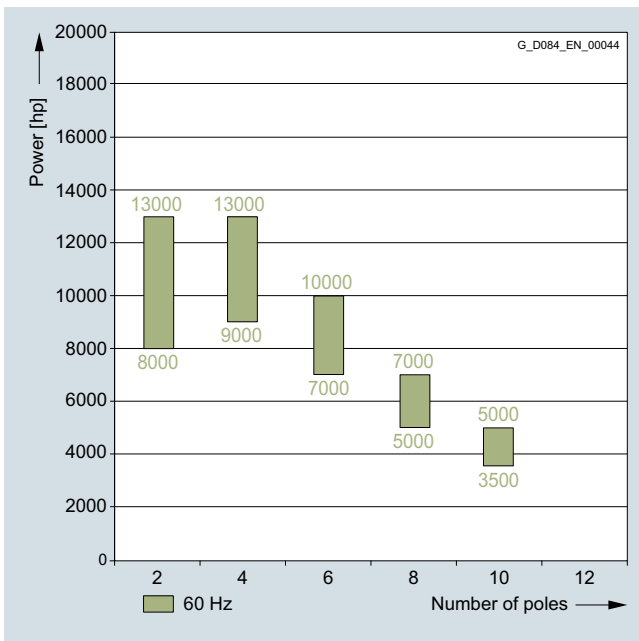

## Motors for line operation

Air-cooled motors

### H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Selection and ordering data

| Rated power                  | High voltage motor<br>H-compact PLUS | Speed                     | Rated current | Efficiency  |             | Power factor |                 | Torque             | Break-down torque  | Locked-rotor torque | Locked-rotor current | Moment of inertia |                  |
|------------------------------|--------------------------------------|---------------------------|---------------|-------------|-------------|--------------|-----------------|--------------------|--------------------|---------------------|----------------------|-------------------|------------------|
| IEC                          |                                      | $I_{rated}$<br>at<br>6 kV | 4/4<br>load   | 3/4<br>load | 4/4<br>load | 3/4<br>load  | $T_B/T_{rated}$ | $T_{LR}/T_{rated}$ | $I_{LR}/I_{rated}$ | Motor               | External,<br>max. 1) |                   |                  |
| kW                           |                                      | Article No.               | rpm           | A           | %           | %            | cos $\varphi$   | cos $\varphi$      | Nm                 | [-]                 | [-]                  | [-]               | kgm <sup>2</sup> |
| <b>3.3 ... 6.6 kV, 50 Hz</b> |                                      |                           |               |             |             |              |                 |                    |                    |                     |                      |                   |                  |
| 2-pole                       |                                      |                           |               |             |             |              |                 |                    |                    |                     |                      |                   |                  |
| 1450                         | <b>1RA6 450-2HJ</b> ■ 0              | 2970                      | 166           | 95.6        | 96.0        | 0.88         | 0.87            | 4662               | 2.00               | 0.60                | 4.35                 | 12                | 64               |
| 1700                         | <b>1RA6 452-2HJ</b> ■ 0              | 2971                      | 192           | 95.9        | 96.3        | 0.89         | 0.89            | 5464               | 2.05               | 0.60                | 4.50                 | 14                | 70               |
| 1900                         | <b>1RA6 454-2HJ</b> ■ 0              | 2974                      | 210           | 96.2        | 96.5        | 0.90         | 0.89            | 6100               | 2.30               | 0.70                | 5.15                 | 15                | 74               |
| 2120                         | <b>1RA6 456-2HJ</b> ■ 0              | 2978                      | 235           | 96.5        | 96.6        | 0.90         | 0.89            | 6798               | 2.45               | 0.70                | 5.50                 | 17                | 81               |
| 2500                         | <b>1RA6 500-2HJ</b> ■ 0              | 2972                      | 280           | 96.4        | 96.8        | 0.89         | 0.88            | 8032               | 1.95               | 0.55                | 4.30                 | 19                | 83               |
| 2680                         | <b>1RA6 502-2HJ</b> ■ 0              | 2974                      | 300           | 96.3        | 96.7        | 0.90         | 0.89            | 8605               | 2.05               | 0.50                | 4.45                 | 21                | 93               |
| 3150                         | <b>1RA6 504-2HJ</b> ■ 0              | 2978                      | 345           | 96.8        | 97.1        | 0.91         | 0.90            | 10100              | 2.30               | 0.55                | 5.20                 | 25                | 103              |
| 3400                         | <b>1RA6 506-2HJ</b> ■ 0              | 2975                      | 370           | 96.8        | 97.2        | 0.91         | 0.91            | 10913              | 2.15               | 0.55                | 4.85                 | 26                | 115              |
| 4000                         | <b>1RA6 560-2HJ</b> ■ 0              | 2974                      | 450           | 96.5        | 96.8        | 0.89         | 0.90            | 12843              | 1.95               | 0.50                | 4.05                 | 39                | 160              |
| 4600                         | <b>1RA6 562-2HJ</b> ■ 0              | 2977                      | 520           | 96.7        | 97.0        | 0.89         | 0.90            | 14755              | 2.00               | 0.50                | 4.30                 | 44                | 180              |
| 5140                         | <b>1RA6 564-2HJ</b> ■ 0              | 2978                      | 560           | 97.0        | 97.2        | 0.91         | 0.91            | 16481              | 2.25               | 0.60                | 4.75                 | 49                | 200              |
| 5660                         | <b>1RA6 566-2HJ</b> ■ 0              | 2980                      | 620           | 97.1        | 97.3        | 0.91         | 0.91            | 18137              | 2.40               | 0.60                | 5.25                 | 55                | 220              |
| 4900                         | <b>1RA4 630-2HE</b> ■ 0              | 2982                      | 550           | 96.9        | 97.1        | 0.88         | 0.88            | 15692              | 2.10               | 0.31                | 4.00                 | 60                | 110              |
| 5700                         | <b>1RA4 632-2HE</b> ■ 0              | 2983                      | 630           | 97.3        | 97.3        | 0.89         | 0.89            | 18248              | 2.20               | 0.34                | 4.30                 | 67                | 150              |
| 6500                         | <b>1RA4 634-2HE</b> ■ 0              | 2985                      | 710           | 97.5        | 97.6        | 0.90         | 0.89            | 20796              | 2.50               | 0.41                | 5.00                 | 77                | 190              |
| 7500                         | <b>1RA4 636-2HE</b> ■ 0              | 2986                      | 820           | 97.7        | 97.8        | 0.90         | 0.89            | 23987              | 2.60               | 0.46                | 5.40                 | 86                | 240              |
| 4-pole                       |                                      |                           |               |             |             |              |                 |                    |                    |                     |                      |                   |                  |
| 1420                         | <b>1RA6 450-4HJ</b> ■ ■              | 1482                      | 160           | 95.6        | 96.1        | 0.89         | 0.88            | 9149               | 2.35               | 0.65                | 4.65                 | 21                | 340              |
| 1560                         | <b>1RA6 452-4HJ</b> ■ ■              | 1483                      | 176           | 95.9        | 96.3        | 0.89         | 0.88            | 10045              | 2.45               | 0.65                | 4.95                 | 24                | 385              |
| 1730                         | <b>1RA6 454-4HJ</b> ■ ■              | 1484                      | 194           | 96.0        | 96.4        | 0.89         | 0.88            | 11132              | 2.50               | 0.65                | 5.05                 | 27                | 440              |
| 1950                         | <b>1RA6 456-4HJ</b> ■ ■              | 1486                      | 220           | 96.2        | 96.5        | 0.89         | 0.87            | 12531              | 2.60               | 0.65                | 5.25                 | 30                | 500              |
| 2240 <sup>2)</sup>           | <b>1RA6 500-4HJ</b> ■ 0              | 1485                      | 250           | 96.2        | 96.9        | 0.89         | 0.88            | 14404              | 2.30               | 0.65                | 4.70                 | 45                | 410              |
| 2500 <sup>2)</sup>           | <b>1RA6 502-4HJ</b> ■ 0              | 1485                      | 280           | 96.3        | 96.9        | 0.89         | 0.88            | 16076              | 2.35               | 0.65                | 4.90                 | 48                | 460              |
| 2800 <sup>2)</sup>           | <b>1RA6 504-4HJ</b> ■ 0              | 1486                      | 315           | 96.4        | 97.0        | 0.89         | 0.88            | 17993              | 2.30               | 0.60                | 4.80                 | 55                | 510              |
| 3080 <sup>2)</sup>           | <b>1RA6 506-4HJ</b> ■ 0              | 1485                      | 345           | 96.4        | 97.1        | 0.89         | 0.87            | 19805              | 2.45               | 0.65                | 5.15                 | 60                | 560              |
| 3800 <sup>2)</sup>           | <b>1RA6 560-4HJ</b> ■ 0              | 1489                      | 420           | 96.9        | 97.3        | 0.90         | 0.90            | 24370              | 2.10               | 0.65                | 4.95                 | 86                | 730              |
| 4300 <sup>2)</sup>           | <b>1RA6 562-4HJ</b> ■ 0              | 1489                      | 470           | 97.1        | 97.5        | 0.91         | 0.91            | 27576              | 2.05               | 0.65                | 4.85                 | 97                | 800              |
| 4800 <sup>2)</sup>           | <b>1RA6 564-4HJ</b> ■ 0              | 1490                      | 520           | 97.2        | 97.6        | 0.91         | 0.91            | 30762              | 2.10               | 0.60                | 5.00                 | 107               | 880              |
| 5260 <sup>2)</sup>           | <b>1RA6 566-4HJ</b> ■ 0              | 1490                      | 580           | 97.3        | 97.6        | 0.90         | 0.90            | 33710              | 2.10               | 0.60                | 5.15                 | 117               | 970              |
| 5300                         | <b>1RA4 630-4HE</b> ■ ■              | 1489                      | 590           | 97.1        | 97.3        | 0.89         | 0.89            | 33993              | 2.00               | 0.54                | 4.60                 | 134               | 780              |
| 6000                         | <b>1RA4 632-4HE</b> ■ ■              | 1490                      | 670           | 97.3        | 97.4        | 0.89         | 0.89            | 38456              | 2.15               | 0.60                | 4.90                 | 150               | 1050             |
| 6600                         | <b>1RA4 634-4HE</b> ■ ■              | 1490                      | 720           | 97.4        | 97.6        | 0.90         | 0.90            | 42302              | 2.20               | 0.63                | 5.10                 | 168               | 1200             |
| 7100                         | <b>1RA4 636-4HE</b> ■ ■              | 1491                      | 780           | 97.6        | 97.6        | 0.90         | 0.89            | 45476              | 2.40               | 0.70                | 5.50                 | 197               | 1100             |

#### Voltage code:

3.3 kV, 50 Hz  
6 kV, 50 Hz  
6.6 kV, 50 Hz  
Other voltage

0  
6  
7  
9

#### Type of construction:

IM B3  
IM V1 (without canopy)

0  
8

#### Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Electrical data is also valid for operation with SINAMICS PERFECT HARMONY drives.  
For ordering, please note the 10th and 11th position of the article number code.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

<sup>2)</sup> Data of vertical motors (IM V1) on request.

## H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

## Selection and ordering data (continued)

| Rated power<br>IEC<br>kW     | High voltage motor<br>H-compact PLUS<br>Article No. | Speed<br>rpm | Rated<br>current<br>A | Efficiency       |                  | Power factor                 |                              | Torque<br>Nm | Break-<br>down<br>torque<br>$\frac{T_B}{T_{rated}}$ | Locked-<br>rotor<br>torque<br>$\frac{T_{LR}}{T_{rated}}$ | Locked-<br>rotor<br>current<br>$\frac{I_{LR}}{I_{rated}}$ | Moment of inertia         |   |
|------------------------------|---|--------------|-----------------------|------------------|------------------|------------------------------|------------------------------|--------------|---|--|---|---------------------------|---|
|                              |   |              |                       | 4/4<br>load<br>% | 3/4<br>load<br>% | 4/4<br>load<br>cos $\varphi$ | 3/4<br>load<br>cos $\varphi$ |              |   |  |   | Motor<br>kgm <sup>2</sup> | External,<br>max. <sup>1)</sup><br>kgm <sup>2</sup> |
| <b>3.3 ... 6.6 kV, 50 Hz</b> |   |              |                       |                  |                  |                              |                              |              |   |  |   |                           |   |
| <b>6-pole</b>                |   |              |                       |                  |                  |                              |                              |              |   |  |   |                           |   |
| 1000                         | <b>1RA6 450-6HJ</b>                                 | 988          | 118                   | 95.5             | 96.1             | 0.85                         | 0.84                         | 9665         | 2.25  | 0.95   | 4.65  | 28                        | 660   |
| 1120                         | <b>1RA6 452-6HJ</b>                                 | 989          | 132                   | 95.7             | 96.2             | 0.85                         | 0.84                         | 10814        | 2.35  | 0.85   | 4.80  | 32                        | 770   |
| 1250                         | <b>1RA6 454-6HJ</b>                                 | 989          | 148                   | 95.8             | 96.3             | 0.85                         | 0.84                         | 12069        | 2.40  | 0.95   | 4.95  | 35                        | 870   |
| 1400                         | <b>1RA6 456-6HJ</b>                                 | 990          | 164                   | 96.1             | 96.5             | 0.85                         | 0.84                         | 13504        | 2.45  | 0.90   | 5.05  | 41                        | 1040  |
| 1850                         | <b>1RA6 500-6HJ</b>                                 | 988          | 215                   | 95.8             | 96.5             | 0.86                         | 0.85                         | 17880        | 2.05  | 0.65   | 4.35  | 56                        | 1280  |
| 2090                         | <b>1RA6 502-6HJ</b>                                 | 988          | 245                   | 95.9             | 96.6             | 0.86                         | 0.85                         | 20200        | 2.00  | 0.65   | 4.15  | 61                        | 1420  |
| 2300                         | <b>1RA6 504-6HJ</b>                                 | 989          | 270                   | 96.0             | 96.7             | 0.86                         | 0.85                         | 22207        | 2.20  | 0.70   | 4.60  | 68                        | 1560  |
| 2500                         | <b>1RA6 506-6HJ</b>                                 | 989          | 285                   | 96.2             | 96.8             | 0.87                         | 0.86                         | 24138        | 2.20  | 0.75   | 4.65  | 76                        | 1760  |
| 2900                         | <b>1RA6 560-6HJ</b>                                 | 990          | 330                   | 96.4             | 96.9             | 0.87                         | 0.87                         | 27972        | 1.95  | 0.70   | 4.40  | 107                       | 1640  |
| 3250                         | <b>1RA6 562-6HJ</b>                                 | 990          | 370                   | 96.6             | 97.1             | 0.88                         | 0.88                         | 31348        | 1.95  | 0.70   | 4.40  | 118                       | 1820  |
| 3640                         | <b>1RA6 564-6HJ</b>                                 | 990          | 410                   | 96.6             | 97.1             | 0.88                         | 0.88                         | 35110        | 1.90  | 0.70   | 4.25  | 131                       | 2000  |
| 3930                         | <b>1RA6 566-6HJ</b>                                 | 990          | 440                   | 96.8             | 97.2             | 0.88                         | 0.88                         | 37907        | 1.95  | 0.70   | 4.45  | 145                       | 2250  |
| 4200                         | <b>1RA4 630-6HE</b>                                 | 992          | 490                   | 96.8             | 97.2             | 0.85                         | 0.84                         | 40433        | 2.00  | 0.57   | 4.50  | 183                       | 2000  |
| 4700                         | <b>1RA4 632-6HE</b>                                 | 993          | 540                   | 97.0             | 97.3             | 0.86                         | 0.85                         | 45201        | 2.10  | 0.62   | 4.80  | 202                       | 2100  |
| 5100                         | <b>1RA4 634-6HE</b>                                 | 993          | 590                   | 97.2             | 97.4             | 0.86                         | 0.84                         | 49048        | 2.25  | 0.69   | 5.20  | 223                       | 2800  |
| 5600                         | <b>1RA4 636-6HE</b>                                 | 994          | 640                   | 97.3             | 97.4             | 0.86                         | 0.84                         | 53803        | 2.30  | 0.70   | 5.30  | 246                       | 3300  |
| <b>8-pole</b>                |   |              |                       |                  |                  |                              |                              |              |   |  |   |                           |   |
| 720                          | <b>1RA6 450-8HJ</b>                                 | 741          | 88                    | 95.0             | 95.7             | 0.83                         | 0.82                         | 9278         | 2.10  | 0.75   | 4.30  | 35                        | 730   |
| 780                          | <b>1RA6 452-8HJ</b>                                 | 742          | 95                    | 95.2             | 95.9             | 0.83                         | 0.82                         | 10038        | 2.15  | 0.75   | 4.40  | 39                        | 890   |
| 900                          | <b>1RA6 454-8HJ</b>                                 | 743          | 110                   | 95.6             | 96.0             | 0.82                         | 0.79                         | 11567        | 2.55  | 0.85   | 5.20  | 44                        | 1040  |
| 1030                         | <b>1RA6 456-8HJ</b>                                 | 743          | 124                   | 95.6             | 96.2             | 0.83                         | 0.81                         | 13237        | 2.40  | 0.80   | 4.90  | 51                        | 1300  |
| 1320                         | <b>1RA6 500-8HJ</b>                                 | 742          | 160                   | 95.6             | 96.2             | 0.83                         | 0.81                         | 16987        | 2.15  | 0.55   | 4.55  | 68                        | 1420  |
| 1480                         | <b>1RA6 502-8HJ</b>                                 | 743          | 178                   | 95.6             | 96.3             | 0.84                         | 0.81                         | 19021        | 2.15  | 0.60   | 4.50  | 75                        | 1560  |
| 1680                         | <b>1RA6 504-8HJ</b>                                 | 743          | 200                   | 95.9             | 96.4             | 0.84                         | 0.81                         | 21591        | 2.25  | 0.60   | 4.60  | 84                        | 1740  |
| 1850                         | <b>1RA6 506-8HJ</b>                                 | 743          | 220                   | 96.0             | 96.5             | 0.84                         | 0.82                         | 23776        | 2.25  | 0.65   | 4.75  | 93                        | 1920  |
| 2120                         | <b>1RA6 560-8HJ</b>                                 | 743          | 250                   | 96.3             | 96.9             | 0.85                         | 0.83                         | 27246        | 2.10  | 0.65   | 4.50  | 127                       | 2700  |
| 2400                         | <b>1RA6 562-8HJ</b>                                 | 743          | 280                   | 96.4             | 97.0             | 0.85                         | 0.84                         | 30845        | 2.05  | 0.65   | 4.50  | 140                       | 2950  |
| 2640                         | <b>1RA6 564-8HJ</b>                                 | 743          | 310                   | 96.5             | 97.1             | 0.85                         | 0.83                         | 33930        | 2.10  | 0.65   | 4.75  | 155                       | 3300  |
| 2850                         | <b>1RA6 566-8HJ</b>                                 | 744          | 330                   | 96.6             | 97.2             | 0.85                         | 0.83                         | 36579        | 2.15  | 0.60   | 4.75  | 171                       | 3650  |
| 3200                         | <b>1RA4 630-8HE</b>                                 | 743          | 375                   | 96.5             | 96.7             | 0.85                         | 0.83                         | 41131        | 1.90  | 0.60   | 4.30  | 239                       | 3100  |
| 3500                         | <b>1RA4 632-8HE</b>                                 | 743          | 410                   | 96.7             | 96.8             | 0.85                         | 0.82                         | 44987        | 2.10  | 0.67   | 4.60  | 265                       | 3400  |
| 3750                         | <b>1RA4 634-8HE</b>                                 | 743          | 440                   | 96.7             | 96.9             | 0.85                         | 0.84                         | 48200        | 2.00  | 0.65   | 4.60  | 293                       | 3600  |
| 4100                         | <b>1RA4 636-8HE</b>                                 | 744          | 485                   | 96.9             | 96.9             | 0.84                         | 0.81                         | 52628        | 2.30  | 0.76   | 5.30  | 324                       | 3800  |

## Voltage code:

3.3 kV, 50 Hz  
6 kV, 50 Hz  
6.6 kV, 50 Hz  
Other voltage

0  
6  
7  
9

## Type of construction:

IM B3  
IM V1 (without canopy)

0  
8

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Electrical data is also valid for operation with SINAMICS PERFECT HARMONY drives.  
For ordering, please note the 10th and 11th position of the article number code.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

## Motors for line operation

Air-cooled motors

## H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

## Selection and ordering data (continued)

| Rated power<br>IEC<br>kW     | High voltage motor<br>H-compact PLUS<br>Article No. | Speed<br>rpm | Rated current                  |                  | Efficiency       |                              | Power factor                 |                           | Torque<br>Nm | Break-down<br>torque<br>$T_B/T_{rated}$ | Locked-<br>rotor<br>torque<br>$T_{LR}/T_{rated}$ | Locked-<br>rotor<br>current<br>$I_{LR}/I_{rated}$ | Moment of inertia                                   |  |
|------------------------------|---|--------------|--------------------------------|------------------|------------------|------------------------------|------------------------------|---------------------------|--------------|---|--|---|---|--|
|                              |   |              | $I_{rated}$<br>at<br>6 kV<br>A | 4/4<br>load<br>% | 3/4<br>load<br>% | 4/4<br>load<br>cos $\varphi$ | 3/4<br>load<br>cos $\varphi$ | Motor<br>kgm <sup>2</sup> |              |   |  |   | External,<br>max. <sup>1)</sup><br>kgm <sup>2</sup> |  |
| <b>3.3 ... 6.6 kV, 50 Hz</b> |   |              |                                |                  |                  |                              |                              |                           |              |   |  |   |   |  |
| 10-pole                      |   |              |                                |                  |                  |                              |                              |                           |              |   |  |   |   |  |
| 540                          | <b>1RA6 450-3HJ</b>                                 | 590          | 70                             | 93.4             | 93.7             | 0.80                         | 0.76                         | 8741                      | 2.00         | 0.80                                    | 4.60   | 37  | 1150  |  |
| 600                          | <b>1RA6 452-3HJ</b>                                 | 590          | 76                             | 93.7             | 93.9             | 0.81                         | 0.76                         | 9712                      | 2.00         | 0.80                                    | 4.70   | 41  | 1350  |  |
| 670                          | <b>1RA6 454-3HJ</b>                                 | 591          | 86                             | 93.9             | 94.1             | 0.80                         | 0.75                         | 10827                     | 2.10         | 0.82                                    | 4.90   | 46  | 1450  |  |
| 760                          | <b>1RA6 456-3HJ</b>                                 | 591          | 97                             | 94.1             | 94.2             | 0.80                         | 0.75                         | 12281                     | 2.20         | 0.90                                    | 5.20   | 52  | 1800  |  |
| 900                          | <b>1RA6 500-3HE</b>                                 | 591          | 112                            | 94.4             | 94.7             | 0.82                         | 0.80                         | 14543                     | 1.90         | 0.68                                    | 4.30   | 70  | 1400  |  |
| 1000                         | <b>1RA6 502-3HE</b>                                 | 592          | 122                            | 95.7             | 94.9             | 0.83                         | 0.80                         | 16132                     | 1.90         | 0.70                                    | 4.50   | 80  | 1700  |  |
| 1100                         | <b>1RA6 504-3HE</b>                                 | 592          | 134                            | 94.8             | 95.0             | 0.83                         | 0.80                         | 17745                     | 1.90         | 0.72                                    | 4.60   | 88  | 2200  |  |
| 1250                         | <b>1RA6 506-3HE</b>                                 | 592          | 152                            | 95.0             | 95.1             | 0.83                         | 0.80                         | 20165                     | 1.90         | 0.75                                    | 4.70   | 99  | 2600  |  |
| 1480                         | <b>1RA6 560-3HE</b>                                 | 593          | 184                            | 95.1             | 95.4             | 0.81                         | 0.77                         | 23835                     | 2.00         | 0.70                                    | 4.50   | 123   | 2700  |  |
| 1700                         | <b>1RA6 562-3HE</b>                                 | 593          | 210                            | 95.4             | 95.7             | 0.82                         | 0.78                         | 27378                     | 2.00         | 0.70                                    | 4.50   | 141   | 4100  |  |
| 1880                         | <b>1RA6 564-3HE</b>                                 | 593          | 230                            | 95.6             | 95.7             | 0.82                         | 0.78                         | 30277                     | 2.00         | 0.72                                    | 4.70   | 158   | 4400  |  |
| 2050                         | <b>1RA6 566-3HE</b>                                 | 593          | 255                            | 95.7             | 95.8             | 0.81                         | 0.76                         | 33014                     | 2.10         | 0.78                                    | 5.00   | 173   | 5200  |  |
| 2400                         | <b>1RA4 630-3HE</b>                                 | 592          | 285                            | 95.8             | 96.4             | 0.84                         | 0.83                         | 38716                     | 1.80         | 0.62                                    | 4.00   | 239   | 4700  |  |
| 2650                         | <b>1RA4 632-3HE</b>                                 | 592          | 315                            | 96.0             | 96.5             | 0.84                         | 0.83                         | 42749                     | 1.80         | 0.65                                    | 4.20   | 265   | 5300  |  |
| 2900                         | <b>1RA4 634-3HE</b>                                 | 593          | 345                            | 96.2             | 96.6             | 0.84                         | 0.82                         | 46703                     | 2.00         | 0.70                                    | 4.50   | 293   | 6300  |  |
| 3150                         | <b>1RA4 636-3HE</b>                                 | 593          | 375                            | 96.4             | 96.7             | 0.84                         | 0.82                         | 50729                     | 2.00         | 0.73                                    | 4.60   | 324   | 7500  |  |
| 12-pole                      |   |              |                                |                  |                  |                              |                              |                           |              |   |  |   |   |  |
| 370                          | <b>1RA6 450-5HJ</b>                                 | 491          | 53                             | 92.4             | 92.7             | 0.73                         | 0.68                         | 7197                      | 1.80         | 0.60                                    | 4.00   | 37  | 1100  |  |
| 425                          | <b>1RA6 452-5HJ</b>                                 | 492          | 60                             | 92.8             | 93.0             | 0.73                         | 0.67                         | 8249                      | 1.80         | 0.63                                    | 4.20   | 41  | 1400  |  |
| 475                          | <b>1RA6 454-5HJ</b>                                 | 491          | 66                             | 93.1             | 93.3             | 0.74                         | 0.69                         | 9239                      | 1.80         | 0.60                                    | 4.00   | 46  | 1600  |  |
| 540                          | <b>1RA6 456-5HJ</b>                                 | 492          | 77                             | 93.5             | 93.5             | 0.72                         | 0.65                         | 10482                     | 2.00         | 0.68                                    | 4.40   | 52  | 2000  |  |
| 680                          | <b>1RA6 500-5HE</b>                                 | 491          | 94                             | 93.9             | 94.0             | 0.74                         | 0.69                         | 13226                     | 1.90         | 0.62                                    | 4.10   | 70  | 2350  |  |
| 760                          | <b>1RA6 502-5HE</b>                                 | 491          | 102                            | 94.1             | 94.2             | 0.76                         | 0.71                         | 14782                     | 1.80         | 0.60                                    | 4.00   | 79  | 2600  |  |
| 840                          | <b>1RA6 504-5HE</b>                                 | 491          | 112                            | 94.3             | 94.4             | 0.76                         | 0.71                         | 16338                     | 1.90         | 0.62                                    | 4.10   | 87  | 3100  |  |
| 930                          | <b>1RA6 506-5HE</b>                                 | 492          | 128                            | 94.5             | 94.6             | 0.74                         | 0.69                         | 18052                     | 1.90         | 0.62                                    | 4.30   | 98  | 3700  |  |
| 1100                         | <b>1RA6 560-5HE</b>                                 | 493          | 150                            | 94.5             | 94.8             | 0.75                         | 0.71                         | 21308                     | 1.80         | 0.57                                    | 3.90   | 123   | 3600  |  |
| 1230                         | <b>1RA6 562-5HE</b>                                 | 493          | 168                            | 94.9             | 95.0             | 0.74                         | 0.68                         | 23827                     | 1.80         | 0.60                                    | 4.00   | 141   | 4100  |  |
| 1350                         | <b>1RA6 564-5HE</b>                                 | 494          | 184                            | 95.0             | 95.1             | 0.74                         | 0.68                         | 26098                     | 2.00         | 0.63                                    | 4.30   | 158   | 4700  |  |
| 1470                         | <b>1RA6 566-5HE</b>                                 | 494          | 198                            | 95.1             | 95.2             | 0.75                         | 0.69                         | 28418                     | 2.00         | 0.65                                    | 4.30   | 173   | 5200  |  |
| 1900                         | <b>1RA4 630-5HE</b>                                 | 493          | 245                            | 95.4             | 95.8             | 0.79                         | 0.76                         | 36805                     | 1.90         | 0.70                                    | 4.30   | 239   | 5500  |  |
| 2150                         | <b>1RA4 632-5HE</b>                                 | 493          | 270                            | 95.6             | 96.0             | 0.80                         | 0.76                         | 41648                     | 1.90         | 0.71                                    | 4.30   | 265   | 7000  |  |
| 2350                         | <b>1RA4 634-5HE</b>                                 | 493          | 295                            | 95.8             | 96.3             | 0.80                         | 0.77                         | 45522                     | 1.90         | 0.72                                    | 4.40   | 293   | 8300  |  |
| 2550                         | <b>1RA4 636-5HE</b>                                 | 493          | 320                            | 95.9             | 96.4             | 0.80                         | 0.77                         | 49397                     | 2.00         | 0.74                                    | 4.50   | 324   | 9800  |  |

## Voltage code:

3.3 kV, 50 Hz  
6 kV, 50 Hz  
6.6 kV, 50 Hz  
Other voltage

0  
6  
7  
9

## Type of construction:

IM B3  
IM V1 (without canopy)

0  
8

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Higher pole numbers are available on request.

Electrical data is also valid for operation with SINAMICS PERFECT HARMONY drives.  
For ordering, please note the 10th and 11th position of the article number code.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

## H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

## Selection and ordering data

| Rated power<br>IEC<br>kW     | High voltage motor<br>SIMOTICS HV M (modular)<br>Article No. | Speed<br>rpm | Rated current<br>$I_{rated}$<br>at<br>6 kV<br>A | Efficiency    |               | Power factor              |                           | Torque<br>Nm | Break-down torque<br>$T_B/T_{rated}$<br>[-] | Locked-rotor torque<br>$T_{LR}/T_{rated}$<br>[-] | Locked-rotor current<br>$I_{LR}/I_{rated}$<br>[-] | Moment of inertia         |   |
|------------------------------|--|--------------|---|---------------|---------------|---------------------------|---------------------------|--------------|---|--|---|---------------------------|---|
|                              |  |              |   | 4/4 load<br>% | 3/4 load<br>% | 4/4 load<br>cos $\varphi$ | 3/4 load<br>cos $\varphi$ |              |   |  |   | Motor<br>kgm <sup>2</sup> | External,<br>max. <sup>1)</sup><br>kgm <sup>2</sup> |
| <b>3.3 ... 6.6 kV, 50 Hz</b> |  |              |   |               |               |                           |                           |              |   |  |   |                           |   |
| 2-pole                       |  |              |   |               |               |                           |                           |              |   |  |   |                           |   |
| 9500                         | <b>1RA7710-2FA60-0CJ0</b>                                    | 2985         | 1040  | 97.4          | 97.4          | 0.91                      | 0.91                      | 30391        | 2.00  | 0.60   | 4.50  | 149                       | 216   |
| 10600                        | <b>1RA7712-2FA60-0CJ0</b>                                    | 2985         | 1140  | 97.5          | 97.5          | 0.91                      | 0.91                      | 33910        | 2.10  | 0.60   | 4.70  | 160                       | 207   |
| 11800                        | <b>1RA7714-2FA60-0CJ0</b>                                    | 2986         | 1260  | 97.6          | 97.6          | 0.92                      | 0.92                      | 37736        | 2.25  | 0.65   | 5.00  | 176                       | 207   |
| 13200                        | <b>1RA7716-2FA60-0CJ0</b>                                    | 2986         | 1400  | 97.8          | 97.7          | 0.93                      | 0.92                      | 42213        | 2.30  | 0.75   | 5.30  | 189                       | 197   |
| 4-pole                       |  |              |   |               |               |                           |                           |              |   |  |   |                           |   |
| 9000                         | <b>1RA7710-4FA60-0C 0</b>                                    | 1492         | 980   | 97.6          | 97.7          | 0.91                      | 0.91                      | 57602        | 2.35  | 0.65   | 4.90  | 262                       | 753   |
| 10000                        | <b>1RA7712-4FA60-0C 0</b>                                    | 1492         | 1080  | 97.6          | 97.7          | 0.91                      | 0.91                      | 64003        | 2.35  | 0.70   | 5.00  | 288                       | 804   |
| 11200                        | <b>1RA7714-4FA60-0C 0</b>                                    | 1492         | 1200  | 97.7          | 97.8          | 0.92                      | 0.92                      | 71683        | 2.40  | 0.70   | 5.10  | 323                       | 917   |
| 12500                        | <b>1RA7716-4FA60-0C 0</b>                                    | 1492         | 1340  | 97.8          | 97.9          | 0.92                      | 0.91                      | 80004        | 2.45  | 0.65   | 5.20  | 362                       | 1063  |
| 6-pole                       |  |              |   |               |               |                           |                           |              |   |  |   |                           |   |
| 6700                         | <b>1RA7710-6FA6 0C 0</b>                                     | 993          | 770   | 97.2          | 97.4          | 0.86                      | 0.86                      | 64431        | 2.15  | 0.65   | 4.50  | 352                       | 2121  |
| 7500                         | <b>1RA7712-6FA6 0C 0</b>                                     | 994          | 860   | 97.3          | 97.4          | 0.86                      | 0.85                      | 72052        | 2.20  | 0.65   | 4.60  | 398                       | 2500  |
| 8300                         | <b>1RA7714-6FA6 0C 0</b>                                     | 994          | 950   | 97.4          | 97.5          | 0.86                      | 0.85                      | 79737        | 2.25  | 0.65   | 4.70  | 450                       | 3024  |
| 9300                         | <b>1RA7716-6FA6 0C 0</b>                                     | 994          | 1060  | 97.5          | 97.6          | 0.86                      | 0.86                      | 89344        | 2.25  | 0.65   | 4.70  | 498                       | 3260  |
| 8-pole                       |  |              |   |               |               |                           |                           |              |   |  |   |                           |   |
| 5000                         | <b>1RA7710-8FA6 0C 0</b>                                     | 744          | 580   | 96.8          | 97.1          | 0.85                      | 0.84                      | 64175        | 2.10  | 0.55   | 4.30  | 434                       | 5604  |
| 5600                         | <b>1RA7712-8FA6 0C 0</b>                                     | 745          | 650   | 97.0          | 97.2          | 0.86                      | 0.84                      | 71779        | 2.25  | 0.70   | 4.60  | 494                       | 7372  |
| 6100                         | <b>1RA7714-8FA6 0C 0</b>                                     | 745          | 700   | 97.1          | 97.3          | 0.86                      | 0.84                      | 78188        | 2.30  | 0.70   | 4.70  | 558                       | 7899  |
| 6700                         | <b>1RA7716-8FA6 0C 0</b>                                     | 745          | 780   | 97.2          | 97.4          | 0.85                      | 0.84                      | 85879        | 2.35  | 0.65   | 4.80  | 617                       | 9308  |
| 10-pole                      |  |              |   |               |               |                           |                           |              |   |  |   |                           |   |
| 3750                         | <b>1RA7710-3FA6 0C 0</b>                                     | 595          | 440   | 96.6          | 96.8          | 0.85                      | 0.82                      | 60184        | 2.50  | 0.60   | 4.40  | 432                       | 11689   |
| 4200                         | <b>1RA7712-3FA6 0C 0</b>                                     | 595          | 490   | 96.7          | 96.9          | 0.85                      | 0.82                      | 67406        | 2.55  | 0.60   | 4.60  | 491                       | 13437   |
| 4700                         | <b>1RA7714-3FA6 0C 0</b>                                     | 595          | 540   | 96.8          | 97.1          | 0.86                      | 0.84                      | 75431        | 2.50  | 0.65   | 4.50  | 558                       | 15129   |
| 5150                         | <b>1RA7716-3FA6 0C 0</b>                                     | 594          | 590   | 96.9          | 97.2          | 0.86                      | 0.85                      | 82792        | 2.45  | 0.65   | 4.50  | 618                       | 15557   |

## Type of construction:

|  |   |
|--|---|
| IM B3 (IM 1001)                          | 0 |
| IM V1, without protective hood (IM 3011) | 8 |

## Housing and bearing version

|   |   |
|---|---|
| Steel fabricated housing/<br>anti-friction bearings | G |
| Steel fabricated housing/<br>sleeve bearing         | J |

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Higher pole numbers are available on request.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

## Motors for line operation

Air-cooled motors

## H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

## Selection and ordering data

| Rated power<br>IEC<br>kW  | High voltage motor<br>H-compact PLUS<br>Article No. | Speed<br>rpm | Rated current             |               | Efficiency    |                   | Power factor      |                           | Torque<br>Nm | Break-down torque<br>$T_B/T_{rated}$<br>[-] | Locked-rotor torque<br>$T_{LR}/T_{rated}$<br>[-] | Locked-rotor current<br>$I_{LR}/I_{rated}$<br>[-] | Moment of inertia                                |  |
|---------------------------|---|--------------|---------------------------|---------------|---------------|-------------------|-------------------|---------------------------|--------------|---|--|---|--|--|
|                           |   |              | $I_{rated}$ at 10 kV<br>A | 4/4 load<br>% | 3/4 load<br>% | 4/4 load<br>cos φ | 3/4 load<br>cos φ | Motor<br>kgm <sup>2</sup> |              |   |  |   | External, max. <sup>1)</sup><br>kgm <sup>2</sup> |  |
| <b>9 ... 11 kV, 50 Hz</b> |   |              |                           |               |               |                   |                   |                           |              |   |  |   |  |  |
| 2-pole                    |   |              |                           |               |               |                   |                   |                           |              |   |  |   |  |  |
| 1250                      | <b>1RA6 450-2HJ</b> ■ 0                             | 2974         | 86                        | 95.5          | 95.8          | 0.88              | 0.88              | 4013                      | 2.15         | 0.70  | 4.80   | 12  | 31   |  |
| 1400                      | <b>1RA6 452-2HJ</b> ■ 0                             | 2977         | 94                        | 95.8          | 96.1          | 0.90              | 0.89              | 4490                      | 2.40         | 0.75  | 5.40   | 14  | 33   |  |
| 1550                      | <b>1RA6 454-2HJ</b> ■ 0                             | 2979         | 104                       | 95.9          | 96.2          | 0.89              | 0.89              | 4968                      | 2.40         | 0.70  | 5.50   | 15  | 36   |  |
| 1750                      | <b>1RA6 456-2HJ</b> ■ 0                             | 2980         | 116                       | 96.2          | 96.5          | 0.90              | 0.90              | 5607                      | 2.45         | 0.70  | 5.50   | 17  | 39   |  |
| 2180                      | <b>1RA6 500-2HJ</b> ■ 0                             | 2977         | 146                       | 96.1          | 96.6          | 0.90              | 0.89              | 6992                      | 2.15         | 0.55  | 4.80   | 19  | 37   |  |
| 2420                      | <b>1RA6 502-2HJ</b> ■ 0                             | 2976         | 162                       | 96.3          | 96.7          | 0.90              | 0.90              | 7765                      | 2.10         | 0.65  | 4.60   | 21  | 41   |  |
| 2660                      | <b>1RA6 504-2HJ</b> ■ 0                             | 2978         | 174                       | 96.5          | 97.0          | 0.91              | 0.91              | 8529                      | 2.25         | 0.55  | 4.90   | 25  | 45   |  |
| 2900                      | <b>1RA6 506-2HJ</b> ■ 0                             | 2976         | 190                       | 96.6          | 97.1          | 0.91              | 0.91              | 9305                      | 2.10         | 0.70  | 4.90   | 26  | 51   |  |
| 3550                      | <b>1RA6 560-2HJ</b> ■ 0                             | 2978         | 240                       | 96.5          | 96.8          | 0.89              | 0.90              | 11383                     | 2.00         | 0.50  | 4.05   | 39  | 115  |  |
| 4050                      | <b>1RA6 562-2HJ</b> ■ 0                             | 2982         | 270                       | 96.7          | 96.8          | 0.90              | 0.90              | 12969                     | 2.30         | 0.60  | 4.95   | 44  | 130  |  |
| 4630                      | <b>1RA6 564-2HJ</b> ■ 0                             | 2981         | 305                       | 96.9          | 97.1          | 0.91              | 0.91              | 14831                     | 2.25         | 0.60  | 4.80   | 49  | 145  |  |
| 5290                      | <b>1RA6 566-2HJ</b> ■ 0                             | 2984         | 345                       | 97.1          | 97.1          | 0.91              | 0.91              | 16928                     | 2.50         | 0.60  | 5.40   | 54  | 160  |  |
| 4300                      | <b>1RA4 630-2HE</b> ■ 0                             | 2984         | 290                       | 96.8          | 96.9          | 0.89              | 0.88              | 13762                     | 2.30         | 0.34  | 4.50   | 60  | 75   |  |
| 5000                      | <b>1RA4 632-2HE</b> ■ 0                             | 2985         | 330                       | 97.3          | 97.3          | 0.9               | 0.89              | 15997                     | 2.50         | 0.39  | 4.90   | 67  | 100  |  |
| 5700                      | <b>1RA4 634-2HE</b> ■ 0                             | 2986         | 375                       | 97.4          | 97.4          | 0.90              | 0.89              | 18230                     | 2.60         | 0.42  | 5.20   | 77  | 110  |  |
| 6700                      | <b>1RA4 636-2HE</b> ■ 0                             | 2987         | 440                       | 97.6          | 97.7          | 0.90              | 0.89              | 21421                     | 2.60         | 0.45  | 5.50   | 86  | 160  |  |
| 4-pole                    |   |              |                           |               |               |                   |                   |                           |              |   |  |   |  |  |
| 1060                      | <b>1RA6 450-4HJ</b> ■ ■                             | 1485         | 72                        | 95.4          | 95.9          | 0.89              | 0.89              | 6816                      | 2.50         | 0.70  | 5.15   | 21  | 170  |  |
| 1210                      | <b>1RA6 452-4HJ</b> ■ ■                             | 1484         | 82                        | 95.5          | 96.1          | 0.89              | 0.89              | 7786                      | 2.45         | 0.65  | 5.00   | 24  | 194  |  |
| 1360                      | <b>1RA6 454-4HJ</b> ■ ■                             | 1486         | 91                        | 95.8          | 96.2          | 0.90              | 0.89              | 8739                      | 2.55         | 0.65  | 5.30   | 27  | 225  |  |
| 1560                      | <b>1RA6 456-4HJ</b> ■ ■                             | 1487         | 104                       | 96.0          | 96.4          | 0.90              | 0.88              | 10018                     | 2.60         | 0.65  | 5.35   | 30  | 260  |  |
| 1980 <sup>2)</sup>        | <b>1RA6 500-4HJ</b> ■ 0                             | 1486         | 134                       | 95.9          | 96.7          | 0.89              | 0.88              | 12723                     | 2.45         | 0.75  | 5.15   | 45  | 200  |  |
| 2180 <sup>2)</sup>        | <b>1RA6 502-4HJ</b> ■ 0                             | 1486         | 148                       | 96.0          | 96.8          | 0.89              | 0.88              | 14009                     | 2.40         | 0.70  | 5.20   | 48  | 220  |  |
| 2420 <sup>2)</sup>        | <b>1RA6 504-4HJ</b> ■ 0                             | 1488         | 164                       | 96.2          | 96.9          | 0.89              | 0.88              | 15530                     | 2.50         | 0.65  | 5.20   | 55  | 250  |  |
| 2610 <sup>2)</sup>        | <b>1RA6 506-4HJ</b> ■ 0                             | 1488         | 176                       | 96.3          | 97.0          | 0.89              | 0.88              | 16749                     | 2.55         | 0.70  | 5.40   | 60  | 280  |  |
| 3250 <sup>2)</sup>        | <b>1RA6 560-4HJ</b> ■ 0                             | 1490         | 215                       | 96.8          | 97.2          | 0.91              | 0.91              | 20829                     | 2.15         | 0.60  | 5.00   | 86  | 420  |  |
| 3600 <sup>2)</sup>        | <b>1RA6 562-4HJ</b> ■ 0                             | 1491         | 235                       | 96.9          | 97.3          | 0.91              | 0.91              | 23056                     | 2.15         | 0.65  | 5.05   | 97  | 460  |  |
| 4100 <sup>2)</sup>        | <b>1RA6 564-4HJ</b> ■ 0                             | 1491         | 270                       | 97.1          | 97.4          | 0.91              | 0.90              | 26258                     | 2.15         | 0.55  | 5.10   | 107   | 510  |  |
| 4450 <sup>2)</sup>        | <b>1RA6 566-4HJ</b> ■ 0                             | 1492         | 290                       | 97.2          | 97.5          | 0.91              | 0.90              | 28481                     | 2.25         | 0.55  | 5.20   | 116   | 560  |  |
| 4500                      | <b>1RA4 630-4HE</b> ■ ■                             | 1490         | 300                       | 96.9          | 97.1          | 0.89              | 0.89              | 28842                     | 2.10         | 0.57  | 4.90   | 134   | 550  |  |
| 5000                      | <b>1RA4 632-4HE</b> ■ ■                             | 1490         | 330                       | 97.1          | 97.2          | 0.90              | 0.90              | 32047                     | 2.15         | 0.59  | 5.00   | 150   | 650  |  |
| 5600                      | <b>1RA4 634-4HE</b> ■ ■                             | 1490         | 370                       | 97.3          | 97.4          | 0.90              | 0.90              | 35893                     | 2.20         | 0.63  | 5.30   | 168   | 750  |  |
| 6200                      | <b>1RA4 636-4HE</b> ■ ■                             | 1491         | 410                       | 97.4          | 97.5          | 0.90              | 0.90              | 39712                     | 2.40         | 0.68  | 5.50   | 197   | 780  |  |

## Voltage code:

10 kV, 50 Hz  
Other voltage8  
9

## Type of construction:

IM B3  
IM V1 (without canopy)0  
8

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

1) Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

2) Data of vertical motors (IM V1) on request.



## H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

## Selection and ordering data (continued)

| Rated power<br>IEC<br>kW  | High voltage motor<br>H-compact PLUS<br>Article No. | Speed<br>rpm | Rated current<br>$I_{rated}$<br>at<br>10 kV<br>A | Efficiency    |               | Power factor              |                           | Torque<br>Nm | Break-down torque<br>$T_B/T_{rated}$<br>[-] | Locked-rotor torque<br>$T_{LR}/T_{rated}$<br>[-] | Locked-rotor current<br>$I_{LR}/I_{rated}$<br>[-] | Moment of inertia         |  |
|---------------------------|---|--------------|--|---------------|---------------|---------------------------|---------------------------|--------------|---|--|---|---------------------------|--|
|                           |   |              |  | 4/4 load<br>% | 3/4 load<br>% | 4/4 load<br>cos $\varphi$ | 3/4 load<br>cos $\varphi$ |              |   |  |   | Motor<br>kgm <sup>2</sup> | External, max. <sup>1)</sup><br>kgm <sup>2</sup> |
| <b>9 ... 11 kV, 50 Hz</b> |   |              |  |               |               |                           |                           |              |   |  |   |                           |  |
| <b>6-pole</b>             |   |              |  |               |               |                           |                           |              |   |  |   |                           |  |
| 820                       | <b>1RA6 450-6HJ</b>                                 | 990          | 59   | 95.2          | 95.7          | 0.85                      | 0.83                      | 7909         | 2.45  | 0.90   | 5.15  | 28                        | 340  |
| 920                       | <b>1RA6 452-6HJ</b>                                 | 990          | 65   | 95.2          | 95.8          | 0.86                      | 0.85                      | 8874         | 2.40  | 0.95   | 5.10  | 32                        | 400  |
| 1000                      | <b>1RA6 454-6HJ</b>                                 | 990          | 70   | 95.4          | 96.0          | 0.86                      | 0.85                      | 9645         | 2.40  | 0.95   | 5.10  | 35                        | 460  |
| 1150                      | <b>1RA6 456-6HJ</b>                                 | 991          | 81   | 95.8          | 96.3          | 0.86                      | 0.84                      | 11081        | 2.45  | 0.85   | 5.15  | 41                        | 560  |
| 1450                      | <b>1RA6 500-6HJ</b>                                 | 990          | 102  | 95.5          | 96.3          | 0.86                      | 0.86                      | 13986        | 2.15  | 0.70   | 4.55  | 56                        | 830  |
| 1650                      | <b>1RA6 502-6HJ</b>                                 | 989          | 114  | 95.6          | 96.4          | 0.87                      | 0.86                      | 15931        | 2.10  | 0.70   | 4.50  | 61                        | 910  |
| 1850                      | <b>1RA6 504-6HJ</b>                                 | 989          | 128  | 95.7          | 96.5          | 0.87                      | 0.87                      | 17862        | 2.10  | 0.70   | 4.65  | 68                        | 1020   |
| 2020                      | <b>1RA6 506-6HJ</b>                                 | 990          | 140  | 95.9          | 96.6          | 0.87                      | 0.86                      | 19484        | 2.20  | 0.70   | 4.65  | 76                        | 1140   |
| 2500                      | <b>1RA6 560-6HJ</b>                                 | 991          | 170  | 96.2          | 96.7          | 0.88                      | 0.87                      | 24090        | 2.05  | 0.70   | 4.85  | 107                       | 1060   |
| 2800                      | <b>1RA6 562-6HJ</b>                                 | 992          | 190  | 96.5          | 96.9          | 0.88                      | 0.87                      | 26953        | 2.15  | 0.70   | 5.00  | 118                       | 1160   |
| 3150                      | <b>1RA6 564-6HJ</b>                                 | 992          | 215  | 96.6          | 97.0          | 0.88                      | 0.88                      | 30322        | 2.10  | 0.70   | 4.75  | 131                       | 1280   |
| 3430                      | <b>1RA6 566-6HJ</b>                                 | 992          | 230  | 96.7          | 97.1          | 0.89                      | 0.88                      | 33018        | 2.25  | 0.80   | 5.10  | 145                       | 1420   |
| 3600                      | <b>1RA4 630-6HE</b>                                 | 993          | 250  | 96.7          | 96.9          | 0.86                      | 0.84                      | 34622        | 2.20  | 0.63   | 5.00  | 183                       | 1200   |
| 4000                      | <b>1RA4 632-6HE</b>                                 | 993          | 275  | 96.8          | 97.0          | 0.87                      | 0.85                      | 38469        | 2.10  | 0.64   | 5.00  | 202                       | 1500   |
| 4400                      | <b>1RA4 634-6HE</b>                                 | 993          | 300  | 97.0          | 97.1          | 0.87                      | 0.86                      | 42316        | 2.20  | 0.66   | 5.20  | 223                       | 1750   |
| 4800                      | <b>1RA4 636-6HE</b>                                 | 994          | 330  | 97.1          | 97.2          | 0.87                      | 0.86                      | 46117        | 2.30  | 0.71   | 5.50  | 246                       | 2000   |
| <b>8-pole</b>             |   |              |  |               |               |                           |                           |              |   |  |   |                           |  |
| 520                       | <b>1RA6 450-8HJ</b>                                 | 743          | 38.5   | 94.4          | 95.0          | 0.83                      | 0.81                      | 6683         | 2.35  | 0.80   | 4.95  | 35                        | 215  |
| 560                       | <b>1RA6 452-8HJ</b>                                 | 743          | 41   | 94.4          | 95.2          | 0.84                      | 0.83                      | 7197         | 2.25  | 0.75   | 4.80  | 39                        | 290  |
| 590                       | <b>1RA6 454-8HJ</b>                                 | 743          | 43   | 94.3          | 95.1          | 0.84                      | 0.83                      | 7582         | 2.20  | 0.70   | 4.70  | 44                        | 365  |
| 750                       | <b>1RA6 456-8HJ</b>                                 | 744          | 54   | 95.0          | 95.6          | 0.84                      | 0.82                      | 9626         | 2.45  | 0.80   | 5.15  | 51                        | 485  |
| 1060                      | <b>1RA6 500-8HJ</b>                                 | 743          | 77   | 95.1          | 95.8          | 0.84                      | 0.82                      | 13623        | 2.20  | 0.60   | 4.75  | 68                        | 830  |
| 1180                      | <b>1RA6 502-8HJ</b>                                 | 744          | 85   | 95.5          | 96.1          | 0.84                      | 0.81                      | 15145        | 2.35  | 0.65   | 4.95  | 75                        | 910  |
| 1320                      | <b>1RA6 504-8HJ</b>                                 | 744          | 95   | 95.6          | 96.2          | 0.84                      | 0.82                      | 16942        | 2.35  | 0.65   | 5.00  | 84                        | 1020   |
| 1490                      | <b>1RA6 506-8HJ</b>                                 | 744          | 108  | 95.7          | 96.3          | 0.84                      | 0.82                      | 19124        | 2.25  | 0.60   | 4.90  | 93                        | 1120   |
| 1800                      | <b>1RA6 560-8HJ</b>                                 | 743          | 128  | 95.9          | 96.6          | 0.85                      | 0.84                      | 23134        | 2.00  | 0.60   | 4.50  | 127                       | 1540   |
| 1980                      | <b>1RA6 562-8HJ</b>                                 | 744          | 140  | 96.0          | 96.7          | 0.85                      | 0.84                      | 25413        | 2.10  | 0.65   | 4.75  | 140                       | 1700   |
| 2200                      | <b>1RA6 564-8HJ</b>                                 | 744          | 154  | 96.2          | 96.8          | 0.86                      | 0.84                      | 28237        | 2.10  | 0.60   | 4.75  | 155                       | 1880   |
| 2380                      | <b>1RA6 566-8HJ</b>                                 | 744          | 166  | 96.3          | 96.9          | 0.86                      | 0.84                      | 30547        | 2.15  | 0.65   | 5.00  | 172                       | 2100   |
| 2600                      | <b>1RA4 630-8HE</b>                                 | 744          | 186  | 96.3          | 96.4          | 0.84                      | 0.81                      | 33374        | 2.40  | 0.75   | 5.20  | 239                       | 1800   |
| 2900                      | <b>1RA4 632-8HE</b>                                 | 744          | 205  | 96.4          | 96.5          | 0.84                      | 0.81                      | 37224        | 2.30  | 0.75   | 5.20  | 265                       | 2000   |
| 3200                      | <b>1RA4 634-8HE</b>                                 | 744          | 225  | 96.6          | 96.7          | 0.85                      | 0.82                      | 41075        | 2.30  | 0.74   | 5.10  | 293                       | 2200   |
| 3500                      | <b>1RA4 636-8HE</b>                                 | 744          | 245  | 96.7          | 96.8          | 0.86                      | 0.83                      | 44926        | 2.30  | 0.75   | 5.20  | 324                       | 2600   |

## Voltage code:

10 kV, 50 Hz  
Other voltage8  
9

## Type of construction:

IM B3  
IM V1 (without canopy)0  
8

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

1) Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

## Motors for line operation

Air-cooled motors

### H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Selection and ordering data (continued)

| Rated power<br>IEC<br>kW  | High voltage motor<br>H-compact PLUS<br>Article No. | Speed<br>rpm | Rated current             |               | Efficiency    |                           | Power factor              |                           | Torque<br>Nm | Break-down torque<br>$T_B/T_{rated}$<br>[-] | Locked-rotor torque<br>$T_{LR}/T_{rated}$<br>[-] | Locked-rotor current<br>$I_{LR}/I_{rated}$<br>[-] | Moment of inertia                                |  |
|---------------------------|---|--------------|---------------------------|---------------|---------------|---------------------------|---------------------------|---------------------------|--------------|---|--|---|--|--|
|                           |   |              | $I_{rated}$ at 10 kV<br>A | 4/4 load<br>% | 3/4 load<br>% | 4/4 load<br>cos $\varphi$ | 3/4 load<br>cos $\varphi$ | Motor<br>kgm <sup>2</sup> |              |   |  |   | External, max. <sup>1)</sup><br>kgm <sup>2</sup> |  |
| <b>9 ... 11 kV, 50 Hz</b> |   |              |                           |               |               |                           |                           |                           |              |   |  |   |  |  |
| 10-pole                   |   |              |                           |               |               |                           |                           |                           |              |   |  |   |  |  |
| 720                       | <b>1RA6 500-3HE</b>                                 | 593          | 55                        | 93.8          | 93.9          | 0.80                      | 0.76                      | 11595                     | 2.20         | 0.82  | 5.20   | 70  | 900  |  |
| 830                       | <b>1RA6 502-3HE</b>                                 | 594          | 64                        | 94.2          | 94.2          | 0.79                      | 0.74                      | 13344                     | 2.20         | 0.82  | 5.30   | 80  | 1100   |  |
| 920                       | <b>1RA6 504-3HE</b>                                 | 594          | 71                        | 94.3          | 94.3          | 0.79                      | 0.74                      | 14791                     | 2.20         | 0.82  | 5.30   | 88  | 1200   |  |
| 1020                      | <b>1RA6 506-3HE</b>                                 | 594          | 79                        | 94.5          | 94.5          | 0.79                      | 0.75                      | 16399                     | 2.20         | 0.80  | 5.30   | 99  | 1400   |  |
| 1250                      | <b>1RA6 560-3HE</b>                                 | 593          | 94                        | 94.8          | 94.9          | 0.81                      | 0.77                      | 20131                     | 2.10         | 0.72  | 4.70   | 123   | 1650   |  |
| 1420                      | <b>1RA6 562-3HE</b>                                 | 593          | 106                       | 94.9          | 95.2          | 0.82                      | 0.78                      | 22868                     | 2.00         | 0.70  | 4.70   | 141   | 2050   |  |
| 1570                      | <b>1RA6 564-3HE</b>                                 | 593          | 116                       | 95.1          | 95.4          | 0.82                      | 0.78                      | 25284                     | 2.00         | 0.72  | 5.00   | 158   | 2500   |  |
| 1700                      | <b>1RA6 566-3HE</b>                                 | 595          | 128                       | 95.3          | 95.4          | 0.80                      | 0.75                      | 27286                     | 2.40         | 0.85  | 5.50   | 173   | 2700   |  |
| 2100                      | <b>1RA4 630-3HE</b>                                 | 593          | 152                       | 95.8          | 96.1          | 0.83                      | 0.80                      | 33820                     | 2.10         | 0.73  | 4.70   | 239   | 2500   |  |
| 2350                      | <b>1RA4 632-3HE</b>                                 | 594          | 172                       | 96.0          | 96.2          | 0.82                      | 0.78                      | 37782                     | 2.30         | 0.82  | 5.10   | 265   | 2900   |  |
| 2550                      | <b>1RA4 634-3HE</b>                                 | 594          | 184                       | 96.0          | 96.3          | 0.83                      | 0.79                      | 40997                     | 2.30         | 0.80  | 5.10   | 293   | 3000   |  |
| 2750                      | <b>1RA4 636-3HE</b>                                 | 594          | 196                       | 96.2          | 96.5          | 0.84                      | 0.80                      | 44213                     | 2.30         | 0.83  | 5.20   | 324   | 3500   |  |
| 12-pole                   |   |              |                           |               |               |                           |                           |                           |              |   |  |   |  |  |
| 580                       | <b>1RA6 502-5HE</b>                                 | 493          | 48.0                      | 93.3          | 93.3          | 0.74                      | 0.68                      | 11235                     | 2.00         | 0.70  | 4.70   | 79  | 1350   |  |
| 640                       | <b>1RA6 504-5HE</b>                                 | 493          | 53                        | 93.5          | 93.6          | 0.74                      | 0.68                      | 12398                     | 2.00         | 0.70  | 4.80   | 87  | 1500   |  |
| 700                       | <b>1RA6 506-5HE</b>                                 | 493          | 58                        | 93.6          | 93.7          | 0.75                      | 0.69                      | 13560                     | 2.10         | 0.70  | 4.80   | 98  | 1600   |  |
| 850                       | <b>1RA6 560-5HE</b>                                 | 494          | 69                        | 93.8          | 94.1          | 0.76                      | 0.71                      | 16432                     | 1.85         | 0.60  | 4.20   | 123   | 1750   |  |
| 1000                      | <b>1RA6 562-5HE</b>                                 | 494          | 82                        | 94.4          | 94.6          | 0.75                      | 0.69                      | 19332                     | 1.95         | 0.65  | 4.50   | 141   | 2200   |  |
| 1100                      | <b>1RA6 564-5HE</b>                                 | 494          | 88                        | 94.5          | 94.7          | 0.76                      | 0.71                      | 21265                     | 1.95         | 0.63  | 4.40   | 158   | 2500   |  |
| 1200                      | <b>1RA6 566-5HE</b>                                 | 494          | 96                        | 94.8          | 94.8          | 0.76                      | 0.71                      | 23198                     | 1.95         | 0.63  | 4.40   | 173   | 2900   |  |
| 1650                      | <b>1RA4 630-5HE</b>                                 | 494          | 126                       | 95.1          | 95.5          | 0.79                      | 0.74                      | 31898                     | 2.10         | 0.75  | 4.60   | 239   | 3000   |  |
| 1800                      | <b>1RA4 632-5HE</b>                                 | 494          | 142                       | 95.4          | 95.7          | 0.77                      | 0.71                      | 34798                     | 2.40         | 0.88  | 5.20   | 265   | 3500   |  |
| 1950                      | <b>1RA4 634-5HE</b>                                 | 494          | 152                       | 95.5          | 95.7          | 0.78                      | 0.73                      | 37697                     | 2.30         | 0.85  | 5.10   | 293   | 3400   |  |
| 2100                      | <b>1RA4 636-5HE</b>                                 | 495          | 162                       | 95.7          | 95.9          | 0.78                      | 0.73                      | 40515                     | 2.35         | 0.88  | 5.30   | 324   | 4000   |  |

#### Voltage code:

10 kV, 50 Hz  
Other voltage

8  
9

#### Type of construction:

IM B3  
IM V1 (without canopy)

0  
8

#### Note:

Efficiencies according to IEC 60034-2-1:2007; stray load losses determined by statistical evaluation of measurements. NEMA version on request.

Higher pole numbers are available on request.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on [Page 2/2](#).

## H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

## Selection and ordering data

| Rated power<br>IEC<br>kW  | High voltage motor<br>SIMOTICS HV M (modular)<br>Article No. | Speed<br>rpm | Rated current             |               | Efficiency    |                           | Power factor              |                           | Torque<br>Nm | Break-down torque<br>$T_B/T_{rated}$<br>[-] | Locked-rotor torque<br>$T_{LR}/T_{rated}$<br>[-] | Locked-rotor current<br>$I_{LR}/I_{rated}$<br>[-] | Moment of inertia                                |  |
|---------------------------|--|--------------|---------------------------|---------------|---------------|---------------------------|---------------------------|---------------------------|--------------|---|--|---|--|--|
|                           |  |              | $I_{rated}$ at 10 kV<br>A | 4/4 load<br>% | 3/4 load<br>% | 4/4 load<br>cos $\varphi$ | 3/4 load<br>cos $\varphi$ | Motor<br>kgm <sup>2</sup> |              |   |  |   | External, max. <sup>1)</sup><br>kgm <sup>2</sup> |  |
| <b>9 ... 11 kV, 50 Hz</b> |  |              |                           |               |               |                           |                           |                           |              |   |  |   |  |  |
| 2-pole                    |  |              |                           |               |               |                           |                           |                           |              |   |  |   |  |  |
| 8300                      | <b>1RA7710-2FA80-0CJ0</b>                                    | 2986         | 540                       | 97.3          | 97.2          | 0.91                      | 0.91                      | 26543                     | 2.15         | 0.60  | 4.80   | 149   | 272  |  |
| 9200                      | <b>1RA7712-2FA80-0CJ0</b>                                    | 2986         | 590                       | 97.4          | 97.4          | 0.92                      | 0.91                      | 29421                     | 2.20         | 0.65  | 5.00   | 160   | 273  |  |
| 10000                     | <b>1RA7714-2FA80-0CJ0</b>                                    | 2988         | 640                       | 97.6          | 97.5          | 0.92                      | 0.92                      | 31958                     | 2.30         | 0.70  | 5.50   | 174   | 309  |  |
| 11000                     | <b>1RA7716-2FA80-0CJ0</b>                                    | 2988         | 700                       | 97.6          | 97.6          | 0.93                      | 0.92                      | 35154                     | 2.40         | 0.65  | 5.40   | 190   | 303  |  |
| 4-pole                    |  |              |                           |               |               |                           |                           |                           |              |   |  |   |  |  |
| 7100                      | <b>1RA7710-4FA80-0C 0</b>                                    | 1493         | 460                       | 97.4          | 97.5          | 0.91                      | 0.91                      | 45411                     | 2.45         | 0.60  | 5.30   | 262   | 1077   |  |
| 8000                      | <b>1RA7712-4FA80-0C 0</b>                                    | 1493         | 520                       | 97.5          | 97.6          | 0.91                      | 0.91                      | 51168                     | 2.45         | 0.65  | 5.30   | 288   | 1140   |  |
| 9000                      | <b>1RA7714-4FA80-0C 0</b>                                    | 1493         | 580                       | 97.6          | 97.7          | 0.92                      | 0.92                      | 57564                     | 2.45         | 0.65  | 5.30   | 322   | 1317   |  |
| 10000                     | <b>1RA7716-4FA80-0C 0</b>                                    | 1493         | 640                       | 97.7          | 97.8          | 0.92                      | 0.92                      | 63960                     | 2.50         | 0.65  | 5.30   | 362   | 1506   |  |
| 6-pole                    |  |              |                           |               |               |                           |                           |                           |              |   |  |   |  |  |
| 5600                      | <b>1RA7710-6FA8 0C 0</b>                                     | 995          | 385                       | 97.1          | 97.2          | 0.86                      | 0.84                      | 53744                     | 2.45         | 0.75  | 5.20   | 350   | 2627   |  |
| 6300                      | <b>1RA7712-6FA8 0C 0</b>                                     | 995          | 435                       | 97.3          | 97.3          | 0.86                      | 0.85                      | 60462                     | 2.45         | 0.75  | 5.20   | 397   | 3212   |  |
| 7100                      | <b>1RA7714-6FA8 0C 0</b>                                     | 995          | 490                       | 97.3          | 97.3          | 0.86                      | 0.84                      | 68140                     | 2.50         | 0.70  | 5.20   | 448   | 3232   |  |
| 8000                      | <b>1RA7716-6FA8 0C 0</b>                                     | 995          | 550                       | 97.4          | 97.4          | 0.87                      | 0.85                      | 76778                     | 2.45         | 0.70  | 5.20   | 497   | 3931   |  |
| 8-pole                    |  |              |                           |               |               |                           |                           |                           |              |   |  |   |  |  |
| 4250                      | <b>1RA7710-8FA8 0C 0</b>                                     | 745          | 300                       | 96.6          | 96.9          | 0.85                      | 0.83                      | 54475                     | 2.35         | 0.60  | 4.90   | 434   | 4820   |  |
| 4750                      | <b>1RA7712-8FA8 0C 0</b>                                     | 746          | 335                       | 96.8          | 97.0          | 0.85                      | 0.83                      | 60803                     | 2.35         | 0.60  | 4.80   | 492   | 5704   |  |
| 5300                      | <b>1RA7714-8FA8 0C 0</b>                                     | 746          | 365                       | 96.9          | 97.1          | 0.86                      | 0.84                      | 67843                     | 2.45         | 0.70  | 5.00   | 559   | 6953   |  |
| 6000                      | <b>1RA7716-8FA8 0C 0</b>                                     | 746          | 420                       | 97.0          | 97.2          | 0.85                      | 0.83                      | 76803                     | 2.50         | 0.65  | 5.10   | 616   | 6922   |  |
| 10-pole                   |  |              |                           |               |               |                           |                           |                           |              |   |  |   |  |  |
| 3500                      | <b>1RA7710-3FA8 0C 0</b>                                     | 595          | 245                       | 96.5          | 96.7          | 0.85                      | 0.82                      | 56172                     | 2.65         | 0.65  | 4.70   | 433   | 11504  |  |
| 3900                      | <b>1RA7712-3FA8 0C 0</b>                                     | 595          | 275                       | 96.7          | 96.9          | 0.85                      | 0.83                      | 62592                     | 2.60         | 0.65  | 4.70   | 493   | 12639  |  |
| 4300                      | <b>1RA7714-3FA8 0C 0</b>                                     | 595          | 300                       | 96.8          | 97.0          | 0.85                      | 0.83                      | 69011                     | 2.60         | 0.65  | 4.70   | 557   | 13791  |  |
| 4750                      | <b>1RA7716-3FA8 0C 0</b>                                     | 595          | 335                       | 96.7          | 97.0          | 0.85                      | 0.83                      | 76233                     | 2.65         | 0.65  | 4.70   | 615   | 10027  |  |

## Type of construction:

|  |          |
|--|----------|
| IM B3 (IM 1001)                          | <b>0</b> |
| IM V1, without protective hood (IM 3011) | <b>8</b> |

## Housing and bearing version

|   |          |
|---|----------|
| Steel fabricated housing/<br>anti-friction bearings | <b>G</b> |
| Steel fabricated housing/<br>sleeve bearing         | <b>J</b> |

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Higher pole numbers are available on request.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

## Motors for line operation

Air-cooled motors

### H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Selection and ordering data

| Rated power<br><br>IEC | High voltage motor<br>H-compact PLUS<br><br>Article No. | Speed<br><br>rpm | Rated current<br><br>$I_{\text{rated}}$<br>at<br>6.6 kV<br>A | Efficiency       |                  | Power factor                 |                              | Torque<br><br>Nm | Break-down<br>torque<br><br>$T_{\text{B}}/$<br>$T_{\text{rated}}$<br>[-] | Locked-<br>rotor<br>torque<br><br>$T_{\text{LR}}/$<br>$T_{\text{rated}}$<br>[-] | Locked-<br>rotor<br>current<br><br>$I_{\text{LR}}/$<br>$I_{\text{rated}}$<br>[-] | Moment of inertia         |   |
|------------------------|---|------------------|--|------------------|------------------|------------------------------|------------------------------|------------------|--|---|--|---------------------------|---|
|                        |   |                  |  | 4/4<br>load<br>% | 3/4<br>load<br>% | 4/4<br>load<br>cos $\varphi$ | 3/4<br>load<br>cos $\varphi$ |                  |  |   |  | Motor<br>kgm <sup>2</sup> | External,<br>max. <sup>1)</sup><br>kgm <sup>2</sup> |
| 4 ... 6.6 kV, 60 Hz    |   |                  |  |                  |                  |                              |                              |                  |  |   |  |                           |   |
| 2-pole                 |   |                  |  |                  |                  |                              |                              |                  |  |   |  |                           |   |
| 1700                   | <b>1RA6 450-2HJ</b> ■ 0                                 | 3573             | 174  | 95.9             | 96.1             | 0.89                         | 0.89                         | 4543             | 2.05   | 0.60  | 4.60   | 13                        | 34  |
| 2000                   | <b>1RA6 452-2HJ</b> ■ 0                                 | 3573             | 200  | 96.1             | 96.4             | 0.90                         | 0.90                         | 5345             | 2.10   | 0.65  | 4.75   | 15                        | 40  |
| 2240                   | <b>1RA6 454-2HJ</b> ■ 0                                 | 3576             | 225  | 96.3             | 96.4             | 0.90                         | 0.89                         | 5981             | 2.25   | 0.65  | 5.10   | 16                        | 45  |
| 2500                   | <b>1RA6 456-2HJ</b> ■ 0                                 | 3580             | 250  | 96.5             | 96.6             | 0.90                         | 0.89                         | 6668             | 2.40   | 0.60  | 5.50   | 18                        | 52  |
| 3000                   | <b>1RA6 500-2HJ</b> ■ 0                                 | 3574             | 305  | 96.5             | 96.8             | 0.89                         | 0.89                         | 8015             | 1.95   | 0.45  | 4.15   | 20                        | 64  |
| 3300                   | <b>1RA6 502-2HJ</b> ■ 0                                 | 3575             | 330  | 96.6             | 96.9             | 0.90                         | 0.89                         | 8814             | 1.95   | 0.45  | 4.35   | 22                        | 72  |
| 3880                   | <b>1RA6 504-2HJ</b> ■ 0                                 | 3579             | 385  | 96.9             | 97.1             | 0.91                         | 0.90                         | 10352            | 2.30   | 0.55  | 5.05   | 26                        | 80  |
| 4250                   | <b>1RA6 506-2HJ</b> ■ 0                                 | 3578             | 420  | 97.1             | 97.3             | 0.91                         | 0.91                         | 11342            | 2.20   | 0.65  | 4.95   | 27                        | 88  |
| 4750                   | <b>1RA6 560-2HJ</b> ■ 0                                 | 3576             | 480  | 96.6             | 96.8             | 0.89                         | 0.90                         | 12684            | 1.90   | 0.50  | 4.15   | 39                        | 145   |
| 5400                   | <b>1RA6 562-2HJ</b> ■ 0                                 | 3578             | 540  | 96.8             | 96.9             | 0.90                         | 0.91                         | 14412            | 2.15   | 0.55  | 4.45   | 44                        | 160   |
| 6100                   | <b>1RA6 564-2HJ</b> ■ 0                                 | 3578             | 600  | 97.0             | 97.1             | 0.91                         | 0.91                         | 16280            | 2.15   | 0.55  | 4.70   | 49                        | 180   |
| 6900                   | <b>1RA6 566-2HJ</b> ■ 0                                 | 3581             | 680  | 97.2             | 97.2             | 0.91                         | 0.91                         | 18399            | 2.35   | 0.60  | 5.15   | 55                        | 200   |
| 5700                   | <b>1RA4 630-2HE</b> ■ 0                                 | 3583             | 580  | 97.0             | 96.9             | 0.88                         | 0.87                         | 15193            | 2.10   | 0.30  | 4.20   | 60                        | 95  |
| 6500                   | <b>1RA4 632-2HE</b> ■ 0                                 | 3584             | 660  | 97.2             | 97.2             | 0.89                         | 0.89                         | 17320            | 2.30   | 0.34  | 4.60   | 67                        | 140   |
| 7500                   | <b>1RA4 634-2HE</b> ■ 0                                 | 3585             | 750  | 97.5             | 97.5             | 0.90                         | 0.89                         | 19979            | 2.60   | 0.41  | 5.30   | 77                        | 150   |
| 8200                   | <b>1RA4 636-2HE</b> ■ 0                                 | 3585             | 820  | 97.6             | 97.6             | 0.90                         | 0.90                         | 21844            | 2.60   | 0.42  | 5.40   | 86                        | 110   |
| 4-pole                 |   |                  |  |                  |                  |                              |                              |                  |  |   |  |                           |   |
| 1680                   | <b>1RA6 450-4HJ</b> ■ ■                                 | 1782             | 172  | 95.9             | 96.1             | 0.89                         | 0.88                         | 9002             | 2.40   | 0.65  | 4.90   | 21                        | 178   |
| 1820                   | <b>1RA6 452-4HJ</b> ■ ■                                 | 1784             | 186  | 96.0             | 96.2             | 0.89                         | 0.88                         | 9741             | 2.55   | 0.65  | 5.15   | 23                        | 225   |
| 2120                   | <b>1RA6 454-4HJ</b> ■ ■                                 | 1784             | 215  | 96.2             | 96.5             | 0.89                         | 0.89                         | 11347            | 2.55   | 0.65  | 5.20   | 27                        | 285   |
| 2400                   | <b>1RA6 456-4HJ</b> ■ ■                                 | 1785             | 245  | 96.4             | 96.6             | 0.89                         | 0.87                         | 12839            | 2.60   | 0.65  | 5.30   | 30                        | 355   |
| 2700 <sup>2)</sup>     | <b>1RA6 500-4HJ</b> ■ 0                                 | 1785             | 275  | 96.4             | 97.0             | 0.89                         | 0.88                         | 14444            | 2.40   | 0.70  | 5.00   | 45                        | 250   |
| 3000 <sup>2)</sup>     | <b>1RA6 502-4HJ</b> ■ 0                                 | 1786             | 305  | 96.5             | 97.0             | 0.89                         | 0.88                         | 16040            | 2.45   | 0.70  | 5.15   | 48                        | 280   |
| 3400 <sup>2)</sup>     | <b>1RA6 504-4HJ</b> ■ 0                                 | 1786             | 345  | 96.5             | 97.1             | 0.89                         | 0.88                         | 18178            | 2.35   | 0.65  | 4.95   | 55                        | 310   |
| 3820 <sup>2)</sup>     | <b>1RA6 506-4HJ</b> ■ 0                                 | 1786             | 390  | 96.7             | 97.2             | 0.89                         | 0.88                         | 20424            | 2.35   | 0.65  | 5.00   | 60                        | 350   |
| 4500 <sup>2)</sup>     | <b>1RA6 560-4HJ</b> ■ 0                                 | 1790             | 450  | 97.2             | 97.4             | 0.91                         | 0.90                         | 24006            | 2.20   | 0.65  | 5.10   | 86                        | 550   |
| 5000 <sup>2)</sup>     | <b>1RA6 562-4HJ</b> ■ 0                                 | 1790             | 490  | 97.3             | 97.5             | 0.91                         | 0.91                         | 26674            | 2.20   | 0.60  | 5.10   | 97                        | 610   |
| 5600 <sup>2)</sup>     | <b>1RA6 564-4HJ</b> ■ 0                                 | 1791             | 550  | 97.4             | 97.6             | 0.91                         | 0.90                         | 29858            | 2.20   | 0.55  | 5.15   | 107                       | 670   |
| 6150 <sup>2)</sup>     | <b>1RA6 566-4HJ</b> ■ 0                                 | 1790             | 610  | 97.4             | 97.6             | 0.91                         | 0.91                         | 32809            | 2.10   | 0.55  | 4.95   | 117                       | 740   |
| 6500                   | <b>1RA4 630-4HE</b> ■ 0                                 | 1789             | 660  | 97.2             | 97.3             | 0.88                         | 0.88                         | 34698            | 2.10   | 0.52  | 4.80   | 134                       | 600   |
| 7300                   | <b>1RA4 632-4HE</b> ■ 0                                 | 1789             | 740  | 97.3             | 97.5             | 0.89                         | 0.89                         | 38969            | 2.10   | 0.54  | 4.80   | 150                       | 650   |
| 8000                   | <b>1RA4 634-4HE</b> ■ 0                                 | 1790             | 810  | 97.5             | 97.6             | 0.89                         | 0.89                         | 42682            | 2.20   | 0.59  | 5.20   | 168                       | 680   |
| 8600                   | <b>1RA4 636-4HE</b> ■ 0                                 | 1791             | 870  | 97.7             | 97.7             | 0.89                         | 0.88                         | 45857            | 2.40   | 0.61  | 5.50   | 197                       | 800   |

#### Voltage code:

4 kV, 60 Hz  
6.6 kV, 60 Hz  
Other voltage

4  
1  
9

#### Type of construction:

IM B3  
IM V1 (without canopy)

0  
8

#### Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Electrical data is also valid for operation with SINAMICS PERFECT HARMONY drives.  
For ordering, please note the 10th and 11th position of the article number code.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

<sup>2)</sup> Data of vertical motors (IM V1) on request.

## H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

## Selection and ordering data (continued)

| Rated power<br>IEC  | High voltage motor<br>H-compact PLUS<br>Article No. | Speed<br>rpm | Rated current<br>$I_{rated}$<br>at<br>6.6 kV<br>A | Efficiency    |               | Power factor              |                           | Torque<br>Nm | Break-down torque<br>$T_B/T_{rated}$<br>[-] | Locked-rotor torque<br>$T_{LR}/T_{rated}$<br>[-] | Locked-rotor current<br>$I_{LR}/I_{rated}$<br>[-] | Moment of inertia         |  |
|---------------------|---|--------------|---|---------------|---------------|---------------------------|---------------------------|--------------|---|--|---|---------------------------|--|
|                     |   |              |   | 4/4 load<br>% | 3/4 load<br>% | 4/4 load<br>cos $\varphi$ | 3/4 load<br>cos $\varphi$ |              |   |  |   | Motor<br>kgm <sup>2</sup> | External, max. <sup>1)</sup><br>kgm <sup>2</sup> |
| 4 ... 6.6 kV, 60 Hz |   |              |   |               |               |                           |                           |              |   |  |   |                           |  |
| 6-pole              |   |              |   |               |               |                           |                           |              |   |  |   |                           |  |
| 1300                | 1RA6 450-6HJ  | 1186         | 140   | 95.8          | 96.3          | 0.85                      | 0.84                      | 10467        | 2.10  | 0.80   | 4.35  | 28                        | 550  |
| 1450                | 1RA6 452-6HJ  | 1187         | 156   | 96.0          | 96.4          | 0.85                      | 0.84                      | 11665        | 2.15  | 0.75   | 4.50  | 32                        | 610  |
| 1600                | 1RA6 454-6HJ  | 1188         | 172   | 96.1          | 96.5          | 0.85                      | 0.85                      | 12861        | 2.30  | 0.85   | 4.75  | 35                        | 660  |
| 1730                | 1RA6 456-6HJ  | 1189         | 182   | 96.4          | 96.7          | 0.86                      | 0.85                      | 13894        | 2.45  | 0.95   | 5.10  | 41                        | 730  |
| 2240                | 1RA6 500-6HJ  | 1188         | 240   | 96.2          | 96.8          | 0.85                      | 0.85                      | 18005        | 2.05  | 0.65   | 4.35  | 56                        | 970  |
| 2500                | 1RA6 502-6HJ  | 1188         | 265   | 96.3          | 96.9          | 0.86                      | 0.85                      | 20095        | 2.05  | 0.65   | 4.45  | 61                        | 1060   |
| 2800                | 1RA6 504-6HJ  | 1188         | 295   | 96.4          | 97.0          | 0.86                      | 0.85                      | 22506        | 2.05  | 0.60   | 4.55  | 68                        | 1200   |
| 3100                | 1RA6 506-6HJ  | 1189         | 325   | 96.5          | 97.1          | 0.87                      | 0.86                      | 24897        | 2.10  | 0.70   | 4.45  | 76                        | 1320   |
| 3500                | 1RA6 560-6HJ  | 1190         | 360   | 96.9          | 97.2          | 0.88                      | 0.87                      | 28086        | 1.95  | 0.65   | 4.50  | 107                       | 1380   |
| 4000                | 1RA6 562-6HJ  | 1190         | 420   | 96.9          | 97.3          | 0.87                      | 0.87                      | 32098        | 1.95  | 0.65   | 4.40  | 118                       | 1520   |
| 4500                | 1RA6 564-6HJ  | 1191         | 470   | 97.0          | 97.4          | 0.87                      | 0.87                      | 36080        | 2.00  | 0.65   | 4.65  | 131                       | 1680   |
| 4950                | 1RA6 566-6HJ  | 1191         | 510   | 97.2          | 97.5          | 0.88                      | 0.88                      | 39688        | 2.05  | 0.70   | 4.65  | 145                       | 1860   |
| 5100                | 1RA4 630-6HE  | 1192         | 530   | 97.1          | 97.2          | 0.86                      | 0.85                      | 40860        | 1.90  | 0.51   | 4.30  | 183                       | 1700   |
| 5700                | 1RA4 632-6HE  | 1193         | 600   | 97.2          | 97.2          | 0.85                      | 0.84                      | 45629        | 2.00  | 0.56   | 4.70  | 202                       | 2100   |
| 6200                | 1RA4 634-6HE  | 1193         | 650   | 97.3          | 97.3          | 0.86                      | 0.85                      | 49631        | 2.10  | 0.61   | 4.90  | 223                       | 2000   |
| 6700                | 1RA4 636-6HE  | 1193         | 700   | 97.4          | 97.4          | 0.86                      | 0.84                      | 53634        | 2.30  | 0.64   | 5.20  | 246                       | 2600   |
| 8-pole              |   |              |   |               |               |                           |                           |              |   |  |   |                           |  |
| 900                 | 1RA6 450-8HJ  | 890          | 100   | 95.3          | 95.9          | 0.83                      | 0.82                      | 9656         | 1.90  | 0.55   | 3.90  | 35                        | 475  |
| 1000                | 1RA6 452-8HJ  | 892          | 110   | 95.5          | 96.0          | 0.83                      | 0.81                      | 10705        | 2.20  | 0.65   | 4.50  | 39                        | 570  |
| 1120                | 1RA6 454-8HJ  | 891          | 124   | 95.7          | 96.2          | 0.83                      | 0.82                      | 12003        | 2.10  | 0.65   | 4.35  | 44                        | 670  |
| 1220                | 1RA6 456-8HJ  | 892          | 132   | 95.9          | 96.3          | 0.84                      | 0.82                      | 13060        | 2.30  | 0.70   | 4.80  | 51                        | 820  |
| 1600                | 1RA6 500-8HJ  | 893          | 178   | 96.0          | 96.4          | 0.82                      | 0.79                      | 17109        | 2.20  | 0.55   | 4.80  | 68                        | 1080   |
| 1800                | 1RA6 502-8HJ  | 892          | 196   | 96.1          | 96.6          | 0.84                      | 0.82                      | 19269        | 2.10  | 0.55   | 4.40  | 75                        | 1200   |
| 2000                | 1RA6 504-8HJ  | 892          | 215   | 96.2          | 96.7          | 0.84                      | 0.82                      | 21410        | 2.10  | 0.55   | 4.40  | 84                        | 1340   |
| 2200                | 1RA6 506-8HJ  | 893          | 240   | 96.3          | 96.7          | 0.84                      | 0.82                      | 23525        | 2.15  | 0.60   | 4.75  | 93                        | 1480   |
| 2500                | 1RA6 560-8HJ  | 893          | 270   | 96.7          | 97.2          | 0.84                      | 0.83                      | 26733        | 2.00  | 0.50   | 4.60  | 127                       | 1960   |
| 2800                | 1RA6 562-8HJ  | 893          | 300   | 96.8          | 97.3          | 0.85                      | 0.83                      | 29941        | 2.10  | 0.55   | 4.60  | 140                       | 2150   |
| 3150                | 1RA6 564-8HJ  | 893          | 330   | 96.8          | 97.3          | 0.85                      | 0.84                      | 33684        | 2.10  | 0.55   | 4.65  | 155                       | 2400   |
| 3400                | 1RA6 566-8HJ  | 893          | 360   | 96.8          | 97.3          | 0.85                      | 0.84                      | 36357        | 1.95  | 0.55   | 4.65  | 171                       | 2650   |

## Voltage code:

4 kV, 60 Hz  
6.6 kV, 60 Hz  
Other voltage

4  
1  
9

## Type of construction:

IM B3  
IM V1 (without canopy)

0  
8

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Electrical data is also valid for operation with SINAMICS PERFECT HARMONY drives.  
For ordering, please note the 10th and 11th position of the article number code.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

## Motors for line operation

Air-cooled motors

## H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

## Selection and ordering data (continued)

| Rated power<br>IEC<br>kW   | High voltage motor<br>H-compact PLUS<br>Article No. | Speed<br>rpm | Rated current                    |                  | Efficiency       |                      | Power factor         |                           | Torque<br>Nm | Break-down<br>torque<br>$T_B/T_{rated}$<br>[-] | Locked-<br>rotor<br>torque<br>$T_{LR}/T_{rated}$<br>[-] | Locked-<br>rotor<br>current<br>$I_{LR}/I_{rated}$<br>[-] | Moment of<br>inertia                                |  |
|----------------------------|---|--------------|----------------------------------|------------------|------------------|----------------------|----------------------|---------------------------|--------------|--|---|--|---|--|
|                            |   |              | $I_{rated}$<br>at<br>6.6 kV<br>A | 4/4<br>load<br>% | 3/4<br>load<br>% | 4/4<br>load<br>cos φ | 3/4<br>load<br>cos φ | Motor<br>kgm <sup>2</sup> |              |  |   |  | External,<br>max. <sup>1)</sup><br>kgm <sup>2</sup> |  |
| <b>4 ... 6.6 kV, 60 Hz</b> |   |              |                                  |                  |                  |                      |                      |                           |              |  |   |  |   |  |
| 10-pole                    |   |              |                                  |                  |                  |                      |                      |                           |              |  |   |  |   |  |
| 650                        | <b>1RA6 450-3HJ</b>                                 | 710          | 74                               | 93.7             | 94.0             | 0.82                 | 0.78                 | 8743                      | 1.90         | 0.72   | 4.50  | 37   | 650   |  |
| 720                        | <b>1RA6 452-3HJ</b>                                 | 710          | 83                               | 94.1             | 94.3             | 0.81                 | 0.77                 | 9685                      | 2.00         | 0.75   | 4.70  | 41   | 850   |  |
| 800                        | <b>1RA6 454-3HJ</b>                                 | 711          | 92                               | 94.3             | 94.4             | 0.81                 | 0.76                 | 10745                     | 2.10         | 0.80   | 4.90  | 46   | 900   |  |
| 910                        | <b>1RA6 456-3HJ</b>                                 | 711          | 104                              | 94.5             | 94.6             | 0.81                 | 0.77                 | 12223                     | 2.10         | 0.80   | 5.00  | 52   | 1100  |  |
| 1080                       | <b>1RA6 500-3HE</b>                                 | 711          | 122                              | 94.8             | 95.0             | 0.82                 | 0.80                 | 14506                     | 1.80         | 0.65   | 4.40  | 70   | 1200  |  |
| 1200                       | <b>1RA6 502-3HE</b>                                 | 712          | 134                              | 95.2             | 95.2             | 0.82                 | 0.80                 | 16096                     | 1.90         | 0.68   | 4.70  | 80   | 1500  |  |
| 1320                       | <b>1RA6 504-3HE</b>                                 | 712          | 146                              | 95.1             | 95.2             | 0.83                 | 0.80                 | 17705                     | 1.90         | 0.70   | 4.70  | 88   | 1450  |  |
| 1500                       | <b>1RA6 506-3HE</b>                                 | 712          | 166                              | 95.4             | 95.5             | 0.83                 | 0.79                 | 20119                     | 2.00         | 0.72   | 4.90  | 99   | 1900  |  |
| 1780                       | <b>1RA6 560-3HE</b>                                 | 713          | 205                              | 95.5             | 95.6             | 0.80                 | 0.76                 | 23842                     | 2.00         | 0.70   | 4.60  | 123  | 2100  |  |
| 2040                       | <b>1RA6 562-3HE</b>                                 | 713          | 235                              | 95.8             | 95.8             | 0.80                 | 0.76                 | 27324                     | 2.00         | 0.70   | 4.80  | 141  | 2600  |  |
| 2200                       | <b>1RA6 564-3HE</b>                                 | 713          | 245                              | 95.9             | 95.8             | 0.82                 | 0.79                 | 29467                     | 2.00         | 0.68   | 4.60  | 158  | 2800  |  |
| 2400                       | <b>1RA6 566-3HE</b>                                 | 713          | 270                              | 96.0             | 96.0             | 0.81                 | 0.77                 | 32146                     | 2.10         | 0.75   | 5.00  | 173  | 3300  |  |
| 12-pole                    |   |              |                                  |                  |                  |                      |                      |                           |              |  |   |  |   |  |
| 440                        | <b>1RA6 450-5HJ</b>                                 | 591          | 56                               | 92.9             | 93.1             | 0.74                 | 0.71                 | 7110                      | 1.80         | 0.56   | 4.00  | 37   | 630   |  |
| 510                        | <b>1RA6 452-5HJ</b>                                 | 591          | 65                               | 93.3             | 93.3             | 0.73                 | 0.68                 | 8241                      | 1.80         | 0.60   | 4.20  | 41   | 850   |  |
| 570                        | <b>1RA6 454-5HJ</b>                                 | 592          | 73                               | 93.9             | 93.9             | 0.73                 | 0.68                 | 9195                      | 1.80         | 0.60   | 4.20  | 46   | 1150  |  |
| 650                        | <b>1RA6 456-5HJ</b>                                 | 592          | 82                               | 94.0             | 93.9             | 0.74                 | 0.68                 | 10486                     | 1.90         | 0.60   | 4.30  | 52   | 1300  |  |
| 820                        | <b>1RA6 500-5HE</b>                                 | 592          | 102                              | 94.4             | 94.3             | 0.74                 | 0.68                 | 13228                     | 2.00         | 0.62   | 4.50  | 70   | 1650  |  |
| 920                        | <b>1RA6 502-5HE</b>                                 | 592          | 114                              | 94.6             | 94.6             | 0.75                 | 0.70                 | 14841                     | 1.90         | 0.62   | 4.40  | 79   | 2000  |  |
| 1020                       | <b>1RA6 504-5HE</b>                                 | 592          | 128                              | 94.8             | 94.7             | 0.74                 | 0.68                 | 16454                     | 2.00         | 0.65   | 4.70  | 87   | 2400  |  |
| 1120                       | <b>1RA6 506-5HE</b>                                 | 592          | 136                              | 94.8             | 94.8             | 0.76                 | 0.71                 | 18068                     | 1.90         | 0.60   | 4.40  | 98   | 2200  |  |
| 1300                       | <b>1RA6 560-5HE</b>                                 | 593          | 160                              | 95.0             | 95.1             | 0.75                 | 0.70                 | 20936                     | 1.80         | 0.53   | 3.90  | 123  | 2050  |  |
| 1470                       | <b>1RA6 562-5HE</b>                                 | 593          | 182                              | 95.2             | 95.3             | 0.74                 | 0.69                 | 23674                     | 1.80         | 0.55   | 4.00  | 141  | 2500  |  |
| 1620                       | <b>1RA6 564-5HE</b>                                 | 594          | 205                              | 95.4             | 95.4             | 0.73                 | 0.67                 | 26045                     | 2.00         | 0.63   | 4.30  | 158  | 3500  |  |
| 1760                       | <b>1RA6 566-5HE</b>                                 | 594          | 220                              | 95.5             | 95.5             | 0.73                 | 0.68                 | 28296                     | 2.00         | 0.63   | 4.40  | 173  | 3900  |  |

## Voltage code:

4 kV, 60 Hz  
6.6 kV, 60 Hz  
Other voltage

4  
1  
9

## Type of construction:

IM B3  
IM V1 (without canopy)

0  
8

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Higher pole numbers are available on request.

Electrical data is also valid for operation with SINAMICS PERFECT HARMONY drives.  
For ordering, please note the 10th and 11th position of the article number code.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

## H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

## Selection and ordering data

| Rated power<br>IEC<br>kW   | High voltage motor<br>SIMOTICS HV M (modular)<br>Article No. | Speed<br>rpm | Rated current<br>$I_{rated}$<br>at<br>6.6 kV<br>A | Efficiency    |               | Power factor      |                   | Torque<br>Nm | Break-down torque<br>$T_B/T_{rated}$<br>[-] | Locked-rotor torque<br>$T_{LR}/T_{rated}$<br>[-] | Locked-rotor current<br>$I_{LR}/I_{rated}$<br>[-] | Moment of inertia         |  |
|----------------------------|--|--------------|---|---------------|---------------|-------------------|-------------------|--------------|---|--|---|---------------------------|--|
|                            |  |              |   | 4/4 load<br>% | 3/4 load<br>% | 4/4 load<br>cos φ | 3/4 load<br>cos φ |              |   |  |   | Motor<br>kgm <sup>2</sup> | External, max. <sup>1)</sup><br>kgm <sup>2</sup> |
| <b>4 ... 6.6 kV, 60 Hz</b> |  |              |   |               |               |                   |                   |              |   |  |   |                           |  |
| <b>2-pole</b>              |  |              |   |               |               |                   |                   |              |   |  |   |                           |  |
| 11200                      | <b>1RA7710-2FA10-0CJ0</b>                                    | 3585         | 1100  | 97.3          | 97.1          | 0.91              | 0.91              | 29833        | 2.05  | 0.60   | 4.70  | 148                       | 102  |
| 12500                      | <b>1RA7712-2FA10-0CJ0</b>                                    | 3585         | 1220  | 97.4          | 97.3          | 0.92              | 0.91              | 33296        | 2.05  | 0.60   | 4.70  | 159                       | 91   |
| 14000                      | <b>1RA7714-2FA10-0CJ0</b>                                    | 3586         | 1340  | 97.6          | 97.4          | 0.93              | 0.92              | 37281        | 2.30  | 0.75   | 5.30  | 174                       | 84   |
| 15500                      | <b>1RA7716-2FA10-0CJ0</b>                                    | 3586         | 1500  | 97.6          | 97.5          | 0.93              | 0.92              | 41275        | 2.30  | 0.70   | 5.40  | 188                       | 72   |
| <b>4-pole</b>              |  |              |   |               |               |                   |                   |              |   |  |   |                           |  |
| 10000                      | <b>1RA7710-4FA10-0CJ0</b>                                    | 1793         | 980   | 97.6          | 97.5          | 0.91              | 0.90              | 53258        | 2.55  | 0.65   | 5.50  | 262                       | 462  |
| 11200                      | <b>1RA7712-4FA10-0CJ0</b>                                    | 1792         | 1100  | 97.7          | 97.6          | 0.91              | 0.91              | 59683        | 2.50  | 0.65   | 5.40  | 288                       | 491  |
| 12500                      | <b>1RA7714-4FA10-0CJ0</b>                                    | 1793         | 1220  | 97.7          | 97.7          | 0.91              | 0.91              | 66573        | 2.50  | 0.65   | 5.40  | 321                       | 585  |
| 14000                      | <b>1RA7716-4FA10-0CJ0</b>                                    | 1793         | 1360  | 97.8          | 97.8          | 0.92              | 0.92              | 74562        | 2.50  | 0.60   | 5.40  | 363                       | 649  |
| <b>6-pole</b>              |  |              |   |               |               |                   |                   |              |   |  |   |                           |  |
| 7800                       | <b>1RA7710-6FA1-0C0</b>                                      | 1194         | 820   | 97.3          | 97.2          | 0.86              | 0.84              | 62382        | 2.30  | 0.70   | 4.90  | 351                       | 1276   |
| 8700                       | <b>1RA7712-6FA1-0C0</b>                                      | 1194         | 900   | 97.5          | 97.4          | 0.87              | 0.86              | 69580        | 2.30  | 0.65   | 4.90  | 399                       | 1491   |
| 9700                       | <b>1RA7714-6FA1-0C0</b>                                      | 1194         | 1000  | 97.5          | 97.5          | 0.87              | 0.86              | 77578        | 2.35  | 0.70   | 5.00  | 451                       | 1813   |
| 10800                      | <b>1RA7716-6FA1-0C0</b>                                      | 1194         | 1120  | 97.6          | 97.5          | 0.87              | 0.86              | 86375        | 2.30  | 0.65   | 4.90  | 498                       | 1886   |
| <b>8-pole</b>              |  |              |   |               |               |                   |                   |              |   |  |   |                           |  |
| 5600                       | <b>1RA7710-8FA1-0C0</b>                                      | 895          | 590   | 97.0          | 97.1          | 0.85              | 0.84              | 59749        | 2.25  | 0.65   | 4.70  | 434                       | 4686   |
| 6300                       | <b>1RA7712-8FA1-0C0</b>                                      | 895          | 670   | 97.1          | 97.2          | 0.85              | 0.84              | 67218        | 2.20  | 0.60   | 4.60  | 493                       | 5419   |
| 7100                       | <b>1RA7714-8FA1-0C0</b>                                      | 895          | 740   | 97.2          | 97.3          | 0.86              | 0.85              | 75754        | 2.35  | 0.70   | 4.90  | 559                       | 6194   |
| 8000                       | <b>1RA7716-8FA1-0C0</b>                                      | 895          | 850   | 97.3          | 97.4          | 0.85              | 0.84              | 85356        | 2.30  | 0.55   | 4.70  | 616                       | 6874   |
| <b>10-pole</b>             |  |              |   |               |               |                   |                   |              |   |  |   |                           |  |
| 4500                       | <b>1RA7710-3FA1-0C0</b>                                      | 715          | 485   | 96.7          | 96.8          | 0.84              | 0.81              | 60100        | 2.70  | 0.65   | 4.80  | 433                       | 7417   |
| 5000                       | <b>1RA7712-3FA1-0C0</b>                                      | 715          | 530   | 96.9          | 97.0          | 0.85              | 0.82              | 66778        | 2.65  | 0.60   | 4.80  | 493                       | 8467   |
| 5600                       | <b>1RA7714-3FA1-0C0</b>                                      | 715          | 590   | 96.9          | 97.0          | 0.85              | 0.82              | 74791        | 2.75  | 0.70   | 4.90  | 557                       | 9936   |
| 6200                       | <b>1RA7716-3FA1-0C0</b>                                      | 715          | 660   | 97.0          | 97.1          | 0.85              | 0.83              | 82805        | 2.75  | 0.70   | 5.00  | 618                       | 10760  |

## Type of construction:

|  |          |
|--|----------|
| IM B3 (IM 1001)                          | <b>0</b> |
| IM V1, without protective hood (IM 3011) | <b>8</b> |

## Housing and bearing version

|   |          |
|---|----------|
| Steel fabricated housing/<br>anti-friction bearings | <b>G</b> |
| Steel fabricated housing/<br>sleeve bearing         | <b>J</b> |

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Higher pole numbers are available on request.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

## Motors for line operation

Air-cooled motors

## H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

## Selection and ordering data

## NEMA version

| Rated power<br><br>NEMA<br><br>hp | High voltage motor<br>H-compact PLUS<br><br>Article No. | Speed<br><br>rpm | Rated current<br><br>A | Efficiency            |          | Power factor |          | Torque<br><br>Nm | Break-down torque<br><br>$T_B/T_{rated}$<br>[-] | Locked-rotor torque<br><br>$T_{LR}/T_{rated}$<br>[-] | Locked-rotor current<br><br>$I_{LR}/I_{rated}$<br>[-] | Moment of inertia |       |
|-----------------------------------|---|------------------|------------------------|-----------------------|----------|--------------|----------|------------------|---|--|---|-------------------|-------|
|                                   |   |                  |                        | $I_{rated}$ at 6.6 kV | 4/4 load | 3/4 load     | 4/4 load |                  |   |  |   | 3/4 load          | Motor |
| <b>4 ... 6.6 kV, 60 Hz</b>        |   |                  |                        |                       |          |              |          |                  |   |  |   |                   |       |
| <b>2-pole</b>                     |   |                  |                        |                       |          |              |          |                  |   |  |   |                   |       |
| 10000 <sup>2)</sup>               | <b>1RP6 710-2BM</b> ■ 0                                 | 3586             | 747                    | 96.4                  | 96.2     | 0.90         | 0.89     | 19861            | 2.20  | 0.60   | 5.20  | 132               | 56    |
| 11000 <sup>2)</sup>               | <b>1RP6 712-2BM</b> ■ 0                                 | 3588             | 828                    | 96.5                  | 96.2     | 0.89         | 0.88     | 21837            | 2.50  | 0.60   | 5.80  | 147               | 55    |
| 12000 <sup>2)</sup>               | <b>1RP6 712-2BN</b> ■ 0                                 | 3587             | 898                    | 96.6                  | 96.4     | 0.90         | 0.89     | 23827            | 2.30  | 0.60   | 5.40  | 147               | 54    |
| 13000 <sup>2)</sup>               | <b>1RP6 714-2BM</b> ■ 0                                 | 3587             | 956                    | 96.6                  | 96.4     | 0.92         | 0.91     | 25814            | 2.50  | 0.64   | 6.00  | 162               | 54    |
| 14000 <sup>2)</sup>               | <b>1RP6 714-2BN</b> ■ 0                                 | 3587             | 1036                   | 96.7                  | 96.5     | 0.91         | 0.90     | 27801            | 2.40  | 0.60   | 5.70  | 162               | 53    |
| 16000 <sup>2)</sup>               | <b>1RP6 716-2BM</b> ■ 0                                 | 3586             | 1166                   | 96.8                  | 96.7     | 0.92         | 0.92     | 31777            | 2.40  | 0.62   | 5.80  | 179               | 51    |
| 17000 <sup>2)</sup>               | <b>1RP6 716-2BN</b> ■ 0                                 | 3587             | 1251                   | 96.9                  | 96.8     | 0.91         | 0.90     | 33759            | 2.40  | 0.60   | 5.80  | 179               | 49    |
| <b>4-pole</b>                     |   |                  |                        |                       |          |              |          |                  |   |  |   |                   |       |
| 11000 <sup>2)</sup>               | <b>1RP6 710-4BJ</b> ■ 0                                 | 1793             | 815                    | 97.4                  | 97.6     | 0.90         | 0.89     | 43695            | 2.30  | 0.60   | 5.90  | 273               | 603   |
| 12000 <sup>2)</sup>               | <b>1RP6 712-4BJ</b> ■ 0                                 | 1793             | 880                    | 97.5                  | 97.6     | 0.91         | 0.90     | 47668            | 2.20  | 0.60   | 5.90  | 300               | 637   |
| 13000 <sup>2)</sup>               | <b>1RP6 712-4BK</b> ■ 0                                 | 1793             | 962                    | 97.5                  | 97.6     | 0.90         | 0.89     | 51635            | 2.30  | 0.60   | 5.90  | 300               | 620   |
| 14000 <sup>2)</sup>               | <b>1RP6 714-4BJ</b> ■ 0                                 | 1793             | 1021                   | 97.4                  | 97.6     | 0.91         | 0.91     | 55625            | 2.20  | 0.60   | 5.80  | 337               | 651   |
| 15000 <sup>2)</sup>               | <b>1RP6 714-4BK</b> ■ 0                                 | 1793             | 1104                   | 97.5                  | 97.7     | 0.91         | 0.89     | 59583            | 2.30  | 0.60   | 6.00  | 337               | 665   |
| 16000 <sup>2)</sup>               | <b>1RP6 716-4BJ</b> ■ 0                                 | 1793             | 1161                   | 97.5                  | 97.7     | 0.92         | 0.91     | 63575            | 2.20  | 0.61   | 5.80  | 369               | 678   |
| 17000 <sup>2)</sup>               | <b>1RP6 716-4BK</b> ■ 0                                 | 1792             | 1238                   | 97.5                  | 97.7     | 0.92         | 0.91     | 67557            | 2.10  | 0.60   | 5.60  | 369               | 691   |
| 18000 <sup>2)</sup>               | <b>1RP6 716-4BL</b> ■ 0                                 | 1793             | 1324                   | 97.6                  | 97.7     | 0.91         | 0.90     | 71504            | 2.20  | 0.61   | 5.90  | 369               | 702   |
| <b>6-pole</b>                     |   |                  |                        |                       |          |              |          |                  |   |  |   |                   |       |
| 9000                              | <b>1RP6 710-6BJ</b> ■ ■                                 | 1194             | 702                    | 97.1                  | 97.3     | 0.86         | 0.84     | 53690            | 2.10  | 0.71   | 5.50  | 330               | 1954  |
| 10000                             | <b>1RP6 712-6BJ</b> ■ ■                                 | 1194             | 781                    | 97.2                  | 97.4     | 0.86         | 0.83     | 59647            | 2.20  | 0.71   | 5.60  | 367               | 2043  |
| 11000                             | <b>1RP6 714-6BJ</b> ■ ■                                 | 1194             | 846                    | 97.3                  | 97.4     | 0.87         | 0.85     | 65612            | 2.20  | 0.75   | 5.70  | 419               | 2113  |
| 12000                             | <b>1RP6 716-6BJ</b> ■ ■                                 | 1194             | 915                    | 97.2                  | 97.3     | 0.88         | 0.86     | 71577            | 2.20  | 0.77   | 5.70  | 468               | 2168  |
| <b>8-pole</b>                     |   |                  |                        |                       |          |              |          |                  |   |  |   |                   |       |
| 7000                              | <b>1RP6 710-8BJ</b> ■ ■ ■                               | 895              | 566                    | 96.9                  | 97.1     | 0.83         | 0.80     | 55695            | 2.10  | 0.79   | 5.50  | 415               | 3817  |
| 8000                              | <b>1RP6 712-8BJ</b> ■ ■ ■                               | 895              | 646                    | 97.0                  | 97.1     | 0.83         | 0.81     | 63651            | 2.00  | 0.80   | 5.50  | 465               | 4154  |
| 9000                              | <b>1RP6 714-8BJ</b> ■ ■ ■                               | 895              | 721                    | 97.1                  | 97.2     | 0.84         | 0.81     | 71587            | 2.10  | 0.83   | 5.70  | 531               | 4458  |
| 10000                             | <b>1RP6 716-8BJ</b> ■ ■ ■                               | 896              | 810                    | 97.1                  | 97.2     | 0.83         | 0.80     | 79506            | 2.20  | 0.87   | 6.00  | 597               | 4732  |
| <b>10-pole</b>                    |   |                  |                        |                       |          |              |          |                  |   |  |   |                   |       |
| 5000                              | <b>1RP6 710-3BJ</b> ■ ■ ■                               | 716              | 427                    | 96.6                  | 96.7     | 0.79         | 0.75     | 49758            | 2.20  | 0.73   | 5.30  | 415               | 5006  |
| 5500                              | <b>1RP6 712-3BJ</b> ■ ■ ■                               | 716              | 464                    | 96.7                  | 96.9     | 0.80         | 0.76     | 54720            | 2.20  | 0.72   | 5.30  | 465               | 5428  |
| 6000                              | <b>1RP6 714-3BJ</b> ■ ■ ■                               | 716              | 502                    | 96.8                  | 96.9     | 0.80         | 0.77     | 59682            | 2.20  | 0.74   | 5.50  | 531               | 6221  |
| 7000                              | <b>1RP6 716-3BJ</b> ■ ■ ■                               | 716              | 584                    | 96.9                  | 97.0     | 0.80         | 0.77     | 69631            | 2.20  | 0.77   | 5.60  | 598               | 6955  |

## Voltage code:

4 kV, 60 Hz  
4.16 kV, 60 Hz  
6.6 kV, 60 Hz  
Other voltage

4  
3  
1  
9

## Type of construction:

IM B3  
IM V1 (with canopy)

0  
4

## Note:

Higher pole numbers are available on request.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on [Page 2/2](#).

<sup>2)</sup>  $V_{rated} < 6$  kV on request.



## Selection and ordering data

## NEMA version

| Rated power                    | High voltage motor<br>H-compact PLUS | Speed | Rated<br>current | Efficiency                          |             | Power factor  |               | Torque | Break-<br>down<br>torque | Locked-<br>rotor<br>torque | Locked-<br>rotor<br>current | Moment of<br>inertia |                                       |
|--------------------------------|--------------------------------------|-------|------------------|-------------------------------------|-------------|---------------|---------------|--------|--------------------------|----------------------------|-----------------------------|----------------------|---------------------------------------|
| NEMA                           |                                      |       |                  | $I_{\text{rated}}$<br>at<br>13.2 kV | 4/4<br>load | 3/4<br>load   | 4/4<br>load   |        |                          |                            |                             | 3/4<br>load          | $T_{\text{B}}/$<br>$T_{\text{rated}}$ |
| hp                             | Article No.                          | rpm   | A                | %                                   | %           | cos $\varphi$ | cos $\varphi$ | Nm     | [-]                      | [-]                        | [-]                         | kgm <sup>2</sup>     | kgm <sup>2</sup>                      |
| <b>12.5 ... 13.8 kV, 60 Hz</b> |                                      |       |                  |                                     |             |               |               |        |                          |                            |                             |                      |                                       |
| <b>2-pole</b>                  |                                      |       |                  |                                     |             |               |               |        |                          |                            |                             |                      |                                       |
| 8000                           | <b>1RP6 710-2BM 0</b>                | 3588  | 301              | 96.0                                | 95.6        | 0.90          | 0.89          | 15881  | 2.50                     | 0.60                       | 5.60                        | 132                  | 52                                    |
| 9000                           | <b>1RP6 712-2BM 0</b>                | 3588  | 334              | 96.0                                | 95.6        | 0.91          | 0.90          | 17864  | 2.60                     | 0.60                       | 6.00                        | 147                  | 51                                    |
| 10000                          | <b>1RP6 712-2BN 0</b>                | 3588  | 375              | 96.2                                | 95.9        | 0.90          | 0.89          | 19849  | 2.60                     | 0.60                       | 6.00                        | 147                  | 49                                    |
| 11000                          | <b>1RP6 714-2BM 0</b>                | 3588  | 407              | 96.2                                | 95.9        | 0.91          | 0.90          | 21837  | 2.50                     | 0.60                       | 6.00                        | 162                  | 48                                    |
| 12000                          | <b>1RP6 716-2BM 0</b>                | 3587  | 437              | 96.3                                | 96.0        | 0.93          | 0.92          | 23827  | 2.40                     | 0.60                       | 5.80                        | 179                  | 47                                    |
| 13000                          | <b>1RP6 716-2BN 0</b>                | 3588  | 478              | 96.4                                | 96.2        | 0.92          | 0.91          | 25806  | 2.50                     | 0.60                       | 6.00                        | 179                  | 45                                    |
| <b>4-pole</b>                  |                                      |       |                  |                                     |             |               |               |        |                          |                            |                             |                      |                                       |
| 9000                           | <b>1RP6 710-4BJ 0</b>                | 1794  | 337              | 97.1                                | 97.2        | 0.89          | 0.88          | 35727  | 2.40                     | 0.60                       | 6.20                        | 273                  | 553                                   |
| 10000                          | <b>1RP6 712-4BJ 0</b>                | 1794  | 368              | 97.1                                | 97.3        | 0.91          | 0.90          | 39708  | 2.30                     | 0.60                       | 6.20                        | 300                  | 555                                   |
| 11000                          | <b>1RP6 714-4BJ 0</b>                | 1794  | 403              | 97.2                                | 97.3        | 0.91          | 0.90          | 43682  | 2.30                     | 0.60                       | 6.20                        | 337                  | 603                                   |
| 12000                          | <b>1RP6 716-4BJ 0</b>                | 1793  | 436              | 97.2                                | 97.3        | 0.92          | 0.92          | 47662  | 2.30                     | 0.63                       | 6.20                        | 369                  | 620                                   |
| 13000                          | <b>1RP6 716-4BK 0</b>                | 1794  | 475              | 97.2                                | 97.4        | 0.91          | 0.91          | 51625  | 2.30                     | 0.60                       | 6.10                        | 369                  | 637                                   |
| <b>6-pole</b>                  |                                      |       |                  |                                     |             |               |               |        |                          |                            |                             |                      |                                       |
| 7000                           | <b>1RP6 710-6BJ 0</b>                | 1195  | 278              | 96.9                                | 97.0        | 0.85          | 0.82          | 41723  | 2.40                     | 0.72                       | 6.00                        | 330                  | 1722                                  |
| 8000                           | <b>1RP6 712-6BJ 0</b>                | 1195  | 315              | 97.0                                | 97.1        | 0.85          | 0.82          | 47688  | 2.40                     | 0.73                       | 6.00                        | 367                  | 1849                                  |
| 9000                           | <b>1RP6 714-6BJ 0</b>                | 1195  | 350              | 97.0                                | 97.1        | 0.86          | 0.84          | 53642  | 2.30                     | 0.73                       | 6.00                        | 419                  | 1954                                  |
| 10000                          | <b>1RP6 716-6BJ 0</b>                | 1195  | 388              | 97.1                                | 97.2        | 0.86          | 0.84          | 59600  | 2.30                     | 0.72                       | 6.00                        | 468                  | 2042                                  |
| <b>8-pole</b>                  |                                      |       |                  |                                     |             |               |               |        |                          |                            |                             |                      |                                       |
| 5000                           | <b>1RP6 710-8BJ 0</b>                | 896   | 201              | 96.5                                | 96.6        | 0.84          | 0.81          | 39760  | 2.20                     | 0.79                       | 5.90                        | 415                  | 3024                                  |
| 5500                           | <b>1RP6 712-8BJ 0</b>                | 896   | 220              | 96.6                                | 96.7        | 0.84          | 0.81          | 43721  | 2.20                     | 0.80                       | 6.00                        | 465                  | 3235                                  |
| 6000                           | <b>1RP6 714-8BJ 0</b>                | 896   | 239              | 96.6                                | 96.7        | 0.84          | 0.82          | 47691  | 2.30                     | 0.80                       | 6.00                        | 531                  | 3438                                  |
| 7000                           | <b>1RP6 716-8BJ 0</b>                | 896   | 279              | 96.7                                | 96.8        | 0.85          | 0.82          | 55642  | 2.20                     | 0.79                       | 6.00                        | 597                  | 3817                                  |
| <b>10-pole</b>                 |                                      |       |                  |                                     |             |               |               |        |                          |                            |                             |                      |                                       |
| 3500                           | <b>1RP6 710-3BJ 0</b>                | 717   | 151              | 96.2                                | 96.2        | 0.79          | 0.74          | 34788  | 2.50                     | 0.78                       | 6.00                        | 415                  | 4104                                  |
| 4000                           | <b>1RP6 712-3BJ 0</b>                | 717   | 172              | 96.3                                | 96.3        | 0.79          | 0.74          | 39757  | 2.50                     | 0.78                       | 6.00                        | 465                  | 4564                                  |
| 4500                           | <b>1RP6 714-3BJ 0</b>                | 717   | 188              | 96.4                                | 96.5        | 0.81          | 0.77          | 44739  | 2.40                     | 0.79                       | 6.00                        | 531                  | 5006                                  |
| 5000                           | <b>1RP6 716-3BJ 0</b>                | 717   | 207              | 96.5                                | 96.6        | 0.82          | 0.78          | 49713  | 2.40                     | 0.78                       | 6.00                        | 598                  | 5428                                  |

## Voltage code:

13.2 kV, 60 Hz  
Other voltage2  
9

## Type of construction:

IM B3  
IM V1 (with canopy)0  
4

## Note:

Higher pole numbers are available on request.


<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Dimension drawings

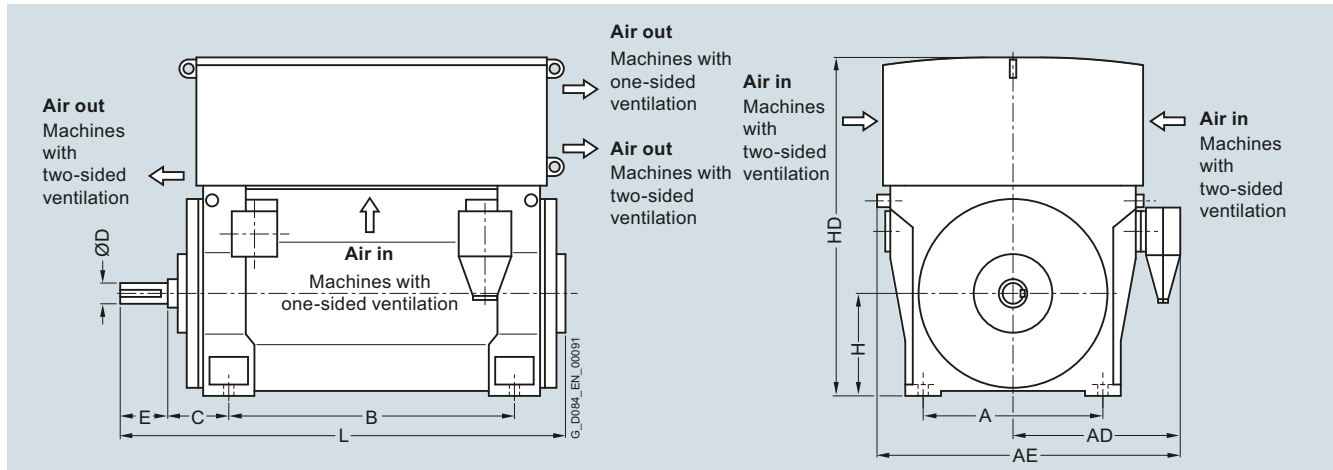

| Motor type | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |                        |         |
|------------|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|------------------------|---------|
|            |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>3)</sup><br>mm | L<br>mm |

#### Up to 6.6 kV, IM B3 type of construction, anti-friction bearings – 1RA4, 1RA6 series


| 2-pole                       |       |      |      |      |      |     |     |     |     |      |      |
|------------------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RA6 450-2HJ.0 <sup>2)</sup> | 3700  | 850  | 930  | 1620 | 1180 | 280 | 95  | 130 | 450 | 1628 | 1843 |
| 1RA6 452-2HJ.0 <sup>2)</sup> | 3900  | 850  | 930  | 1620 | 1180 | 280 | 95  | 130 | 450 | 1628 | 1843 |
| 1RA6 454-2HJ.0 <sup>2)</sup> | 4300  | 850  | 930  | 1620 | 1400 | 280 | 95  | 130 | 450 | 1628 | 2053 |
| 1RA6 456-2HJ.0 <sup>2)</sup> | 4550  | 850  | 930  | 1620 | 1400 | 280 | 95  | 130 | 450 | 1628 | 2053 |
| 1RA6 500-2HJ.0 <sup>2)</sup> | 5450  | 950  | 1135 | 1835 | 1320 | 315 | 110 | 165 | 500 | 1850 | 2150 |
| 1RA6 502-2HJ.0 <sup>2)</sup> | 5600  | 950  | 1135 | 1835 | 1320 | 315 | 110 | 165 | 500 | 1850 | 2150 |
| 4-pole                       |       |      |      |      |      |     |     |     |     |      |      |
| 1RA6 450-4HJ.0               | 4050  | 850  | 930  | 1620 | 1180 | 250 | 130 | 200 | 450 | 1408 | 1896 |
| 1RA6 452-4HJ.0               | 4250  | 850  | 930  | 1620 | 1180 | 250 | 130 | 200 | 450 | 1408 | 1896 |
| 1RA6 454-4HJ.0               | 4650  | 850  | 930  | 1620 | 1400 | 250 | 130 | 200 | 450 | 1408 | 2106 |
| 1RA6 456-4HJ.0               | 4950  | 850  | 930  | 1620 | 1400 | 250 | 130 | 200 | 450 | 1408 | 2106 |
| 1RA6 500-4HJ.0               | 5950  | 950  | 1135 | 1835 | 1320 | 280 | 150 | 200 | 500 | 1850 | 2150 |
| 1RA6 502-4HJ.0               | 6150  | 950  | 1135 | 1835 | 1320 | 280 | 150 | 200 | 500 | 1850 | 2150 |
| 1RA6 504-4HJ.0               | 6800  | 950  | 1135 | 1835 | 1500 | 280 | 150 | 200 | 500 | 1850 | 2300 |
| 1RA6 506-4HJ.0               | 7150  | 950  | 1135 | 1835 | 1500 | 280 | 150 | 200 | 500 | 1850 | 2300 |
| 1RA6 560-4HJ.0               | 7450  | 1060 | 1205 | 1975 | 1400 | 315 | 170 | 240 | 560 | 2100 | 2300 |
| 1RA6 562-4HJ.0               | 7850  | 1060 | 1205 | 1975 | 1400 | 315 | 170 | 240 | 560 | 2100 | 2300 |
| 1RA6 564-4HJ.0               | 8700  | 1060 | 1205 | 1975 | 1600 | 315 | 170 | 240 | 560 | 2100 | 2550 |
| 1RA6 566-4HJ.0               | 9250  | 1060 | 1205 | 1975 | 1600 | 315 | 170 | 240 | 560 | 2100 | 2550 |
| 1RA4 630-4HE.0 <sup>2)</sup> | 9950  | 1320 | 1330 | 2210 | 1600 | 335 | 200 | 280 | 630 | 2400 | 2500 |
| 1RA4 632-4HE.0 <sup>2)</sup> | 10650 | 1320 | 1330 | 2210 | 1600 | 335 | 200 | 280 | 630 | 2400 | 2500 |
| 1RA4 634-4HE.0 <sup>2)</sup> | 11700 | 1320 | 1330 | 2210 | 1800 | 335 | 220 | 280 | 630 | 2400 | 2740 |
| 1RA4 636-4HE.0 <sup>2)</sup> | 12250 | 1320 | 1330 | 2210 | 1800 | 335 | 220 | 280 | 630 | 2400 | 2740 |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> Anti-friction bearings only for 50 Hz operation.

<sup>3)</sup> Dimension HD for 1RP6 on request.

## Dimension drawings (continued)

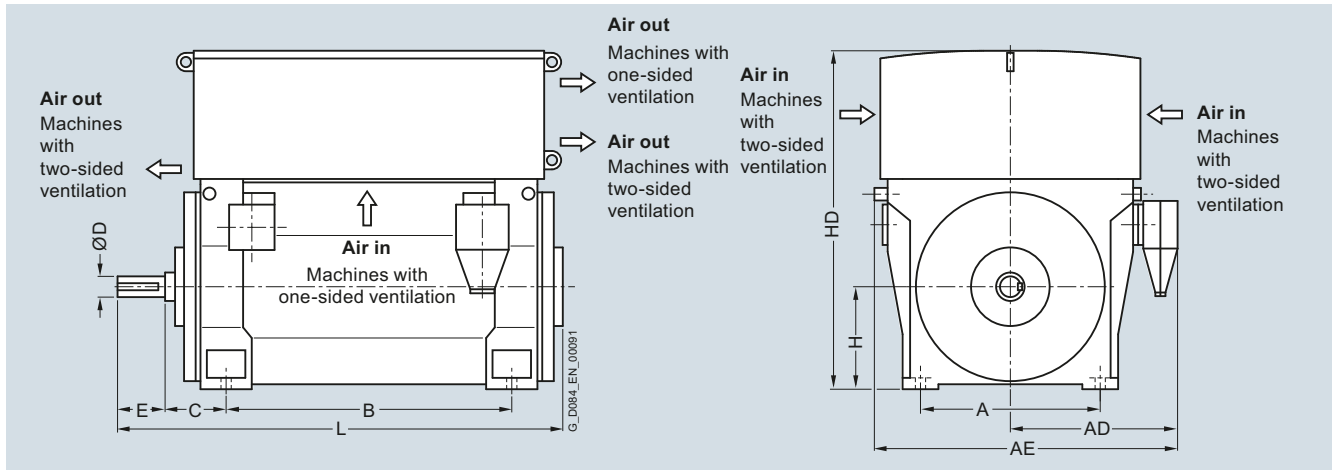

| Motor type  | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |                        |         |
|---|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|------------------------|---------|
|   |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>3)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, anti-friction bearings – 1RA4, 1RA6 series</b> |              |            |                        |                        |         |         |         |         |         |                        |         |
| <b>6-pole</b>   |              |            |                        |                        |         |         |         |         |         |                        |         |
| 1RA6 450-6HJ.0  | 4150         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1408                   | 1896    |
| 1RA6 452-6HJ.0  | 4400         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1408                   | 1896    |
| 1RA6 454-6HJ.0  | 4750         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1408                   | 2136    |
| 1RA6 456-6HJ.0  | 5100         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1408                   | 2136    |
| 1RA6 500-6HJ.0  | 6050         | 950        | 1135                   | 1835                   | 1320    | 315     | 160     | 240     | 500     | 1610                   | 2150    |
| 1RA6 502-6HJ.0  | 6350         | 950        | 1135                   | 1835                   | 1320    | 315     | 160     | 240     | 500     | 1610                   | 2150    |
| 1RA6 504-6HJ.0  | 6900         | 950        | 1135                   | 1835                   | 1500    | 315     | 160     | 240     | 500     | 1610                   | 2360    |
| 1RA6 506-6HJ.0  | 7300         | 950        | 1135                   | 1835                   | 1500    | 315     | 160     | 240     | 500     | 1610                   | 2360    |
| 1RA6 560-6HJ.0  | 8200         | 1060       | 1205                   | 1975                   | 1400    | 315     | 180     | 240     | 560     | 1760                   | 2300    |
| 1RA6 562-6HJ.0  | 8600         | 1060       | 1205                   | 1975                   | 1400    | 315     | 180     | 240     | 560     | 1760                   | 2300    |
| 1RA6 564-6HJ.0  | 9450         | 1060       | 1205                   | 1975                   | 1600    | 315     | 180     | 240     | 560     | 1760                   | 2550    |
| 1RA6 566-6HJ.0  | 10000        | 1060       | 1205                   | 1975                   | 1600    | 315     | 180     | 240     | 560     | 1760                   | 2550    |
| 1RA4 630-6HE.0  | 10250        | 1320       | 1330                   | 2210                   | 1600    | 335     | 220     | 280     | 630     | 2400                   | 2500    |
| 1RA4 632-6HE.0  | 10800        | 1320       | 1330                   | 2210                   | 1600    | 335     | 220     | 280     | 630     | 2400                   | 2500    |
| 1RA4 634-6HE.0  | 11800        | 1320       | 1330                   | 2210                   | 1800    | 335     | 220     | 280     | 630     | 2400                   | 2740    |
| 1RA4 636-6HE.0  | 12550        | 1320       | 1330                   | 2210                   | 1800    | 335     | 220     | 280     | 630     | 2400                   | 2740    |
| <b>8-pole</b>   |              |            |                        |                        |         |         |         |         |         |                        |         |
| 1RA6 450-8HJ.0  | 4150         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1408                   | 1896    |
| 1RA6 452-8HJ.0  | 4450         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1408                   | 1896    |
| 1RA6 454-8HJ.0  | 4800         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1408                   | 2136    |
| 1RA6 456-8HJ.0  | 5150         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1408                   | 2136    |
| 1RA6 500-8HJ.0  | 6000         | 950        | 1135                   | 1835                   | 1320    | 315     | 160     | 240     | 500     | 1610                   | 2150    |
| 1RA6 502-8HJ.0  | 6300         | 950        | 1135                   | 1835                   | 1320    | 315     | 160     | 240     | 500     | 1610                   | 2150    |
| 1RA6 504-8HJ.0  | 6900         | 950        | 1135                   | 1835                   | 1500    | 315     | 160     | 240     | 500     | 1610                   | 2360    |
| 1RA6 506-8HJ.0  | 7250         | 950        | 1135                   | 1835                   | 1500    | 315     | 160     | 240     | 500     | 1610                   | 2360    |
| 1RA6 560-8HJ.0  | 8150         | 1060       | 1205                   | 1975                   | 1400    | 315     | 180     | 240     | 560     | 1760                   | 2300    |
| 1RA6 562-8HJ.0  | 8600         | 1060       | 1205                   | 1975                   | 1400    | 315     | 180     | 240     | 560     | 1760                   | 2300    |
| 1RA6 564-8HJ.0  | 9400         | 1060       | 1205                   | 1975                   | 1600    | 315     | 180     | 240     | 560     | 1760                   | 2550    |
| 1RA6 566-8HJ.0  | 9950         | 1060       | 1205                   | 1975                   | 1600    | 315     | 180     | 240     | 560     | 1760                   | 2550    |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> Anti-friction bearings only for 50 Hz operation.


<sup>3)</sup> Dimension HD for 1RP6 on request.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Dimension drawings (continued)

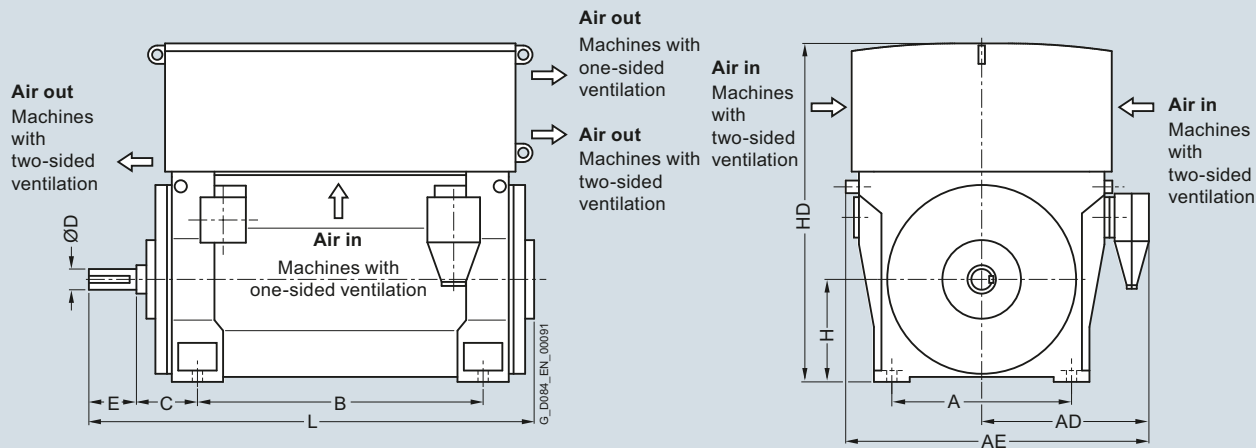


| Motor type  | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |                        |         |
|---|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|------------------------|---------|
|   |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>3)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, anti-friction bearings – 1RA4, 1RA6 series</b> |              |            |                        |                        |         |         |         |         |         |                        |         |
| <b>8-pole</b>   |              |            |                        |                        |         |         |         |         |         |                        |         |
| 1RA4 630-8HE.0 <sup>2)</sup>  | 10150        | 1320       | 1330                   | 2210                   | 1600    | 335     | 220     | 280     | 630     | 2400                   | 2500    |
| 1RA4 632-8HE.0 <sup>2)</sup>  | 10800        | 1320       | 1330                   | 2210                   | 1600    | 335     | 220     | 280     | 630     | 2400                   | 2500    |
| 1RA4 634-8HE.0 <sup>2)</sup>  | 11700        | 1320       | 1330                   | 2210                   | 1800    | 335     | 220     | 280     | 630     | 2400                   | 2740    |
| 1RA4 636-8HE.0 <sup>2)</sup>  | 12450        | 1320       | 1330                   | 2210                   | 1800    | 335     | 220     | 280     | 630     | 2400                   | 2740    |
| <b>10-pole</b>  |              |            |                        |                        |         |         |         |         |         |                        |         |
| 1RA6 450-3HJ.0  | 4150         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1408                   | 1896    |
| 1RA6 452-3HJ.0  | 4450         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1408                   | 1896    |
| 1RA6 454-3HJ.0  | 4800         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1408                   | 2136    |
| 1RA6 456-3HJ.0  | 5150         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1408                   | 2136    |
| 1RA6 500-3HE.0  | 5250         | 950        | 1000                   | 1760                   | 1320    | 280     | 160     | 240     | 500     | 1520                   | 2270    |
| 1RA6 502-3HE.0  | 5600         | 950        | 1000                   | 1760                   | 1320    | 280     | 160     | 240     | 500     | 1520                   | 2270    |
| 1RA6 504-3HE.0  | 6150         | 950        | 1000                   | 1760                   | 1500    | 280     | 170     | 240     | 500     | 1520                   | 2480    |
| 1RA6 506-3HE.0  | 6550         | 950        | 1000                   | 1760                   | 1500    | 280     | 170     | 240     | 500     | 1520                   | 2480    |
| 1RA6 560-3HE.0  | 7100         | 1060       | 1070                   | 1900                   | 1400    | 315     | 180     | 240     | 560     | 1750                   | 2300    |
| 1RA6 562-3HE.0  | 7700         | 1060       | 1070                   | 1900                   | 1400    | 315     | 180     | 240     | 560     | 1750                   | 2300    |
| 1RA6 564-3HE.0  | 8500         | 1060       | 1070                   | 1900                   | 1600    | 315     | 190     | 280     | 560     | 1750                   | 2570    |
| 1RA6 566-3HE.0  | 8950         | 1060       | 1070                   | 1900                   | 1600    | 315     | 190     | 280     | 560     | 1750                   | 2570    |
| 1RA4 630-3HE.0 <sup>2)</sup>  | 10050        | 1320       | 1180                   | 2060                   | 1600    | 335     | 220     | 280     | 630     | 2400                   | 2500    |
| 1RA4 632-3HE.0 <sup>2)</sup>  | 10750        | 1320       | 1330                   | 2210                   | 1600    | 335     | 220     | 280     | 630     | 2400                   | 2500    |
| 1RA4 634-3HE.0 <sup>2)</sup>  | 11750        | 1320       | 1330                   | 2210                   | 1800    | 335     | 220     | 280     | 630     | 2400                   | 2740    |
| 1RA4 636-3HE.0 <sup>2)</sup>  | 12450        | 1320       | 1330                   | 2210                   | 1800    | 335     | 220     | 280     | 630     | 2400                   | 2740    |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> Anti-friction bearings only for 50 Hz operation.

<sup>3)</sup> Dimension HD for 1RP6 on request.

## Dimension drawings (continued)

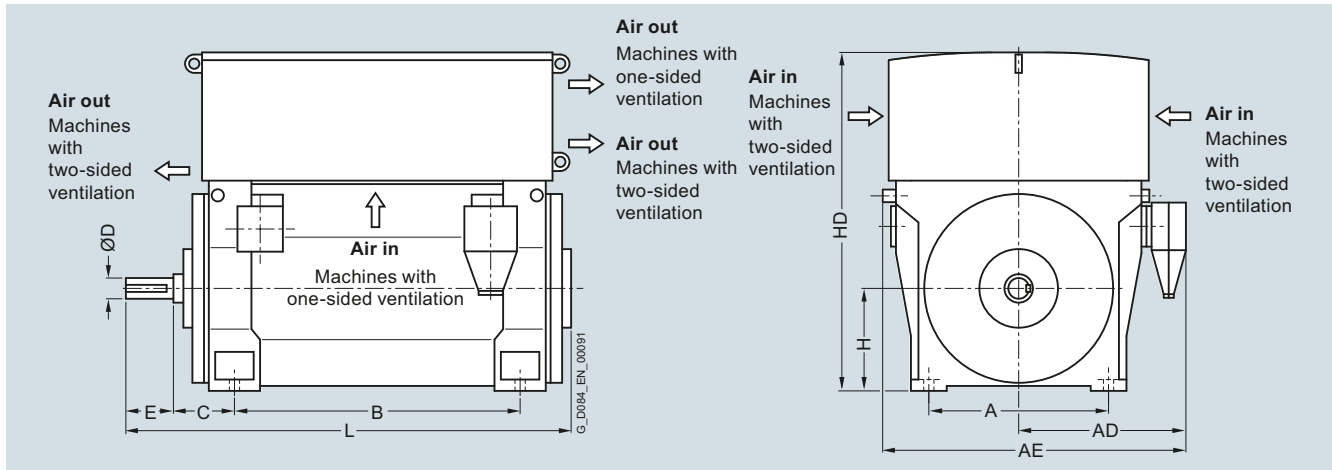

| Motor type  | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |                        |         |
|---|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|------------------------|---------|
|   |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>3)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, anti-friction bearings – 1RA4, 1RA6 series</b> |              |            |                        |                        |         |         |         |         |         |                        |         |
| 12-pole   |              |            |                        |                        |         |         |         |         |         |                        |         |
| 1RA6 450-5HJ.0  | 4150         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1408                   | 1896    |
| 1RA6 452-5HJ.0  | 4450         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1408                   | 1896    |
| 1RA6 454-5HJ.0  | 4800         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1408                   | 2136    |
| 1RA6 456-5HJ.0  | 5150         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1408                   | 2136    |
| 1RA6 500-5HE.0  | 5250         | 950        | 1000                   | 1760                   | 1320    | 280     | 160     | 240     | 500     | 1520                   | 2270    |
| 1RA6 502-5HE.0  | 5650         | 950        | 1000                   | 1760                   | 1320    | 280     | 160     | 240     | 500     | 1520                   | 2270    |
| 1RA6 504-5HE.0  | 6100         | 950        | 1000                   | 1760                   | 1500    | 280     | 170     | 240     | 500     | 1520                   | 2480    |
| 1RA6 506-5HE.0  | 6550         | 950        | 1000                   | 1760                   | 1500    | 280     | 170     | 240     | 500     | 1520                   | 2480    |
| 1RA6 560-5HE.0  | 7150         | 1060       | 1070                   | 1900                   | 1400    | 315     | 180     | 240     | 560     | 1750                   | 2300    |
| 1RA6 562-5HE.0  | 7700         | 1060       | 1070                   | 1900                   | 1400    | 315     | 180     | 240     | 560     | 1750                   | 2300    |
| 1RA6 564-5HE.0  | 8500         | 1060       | 1070                   | 1900                   | 1600    | 315     | 190     | 280     | 560     | 1750                   | 2570    |
| 1RA6 566-5HE.0  | 8950         | 1060       | 1070                   | 1900                   | 1600    | 315     | 190     | 280     | 560     | 1750                   | 2570    |
| 1RA4 630-5HE.0 <sup>2)</sup>  | 9950         | 1320       | 1180                   | 2060                   | 1600    | 335     | 220     | 280     | 630     | 2400                   | 2500    |
| 1RA4 632-5HE.0 <sup>2)</sup>  | 10600        | 1320       | 1180                   | 2060                   | 1600    | 335     | 220     | 280     | 630     | 2400                   | 2500    |
| 1RA4 634-5HE.0 <sup>2)</sup>  | 11600        | 1320       | 1180                   | 2060                   | 1800    | 335     | 220     | 280     | 630     | 2400                   | 2740    |
| 1RA4 636-5HE.0 <sup>2)</sup>  | 12400        | 1320       | 1330                   | 2210                   | 1800    | 335     | 220     | 280     | 630     | 2400                   | 2740    |

Note: Higher pole numbers are available on request.

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> Anti-friction bearings only for 50 Hz operation.


<sup>3)</sup> Dimension HD for 1RP6 on request.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Dimension drawings

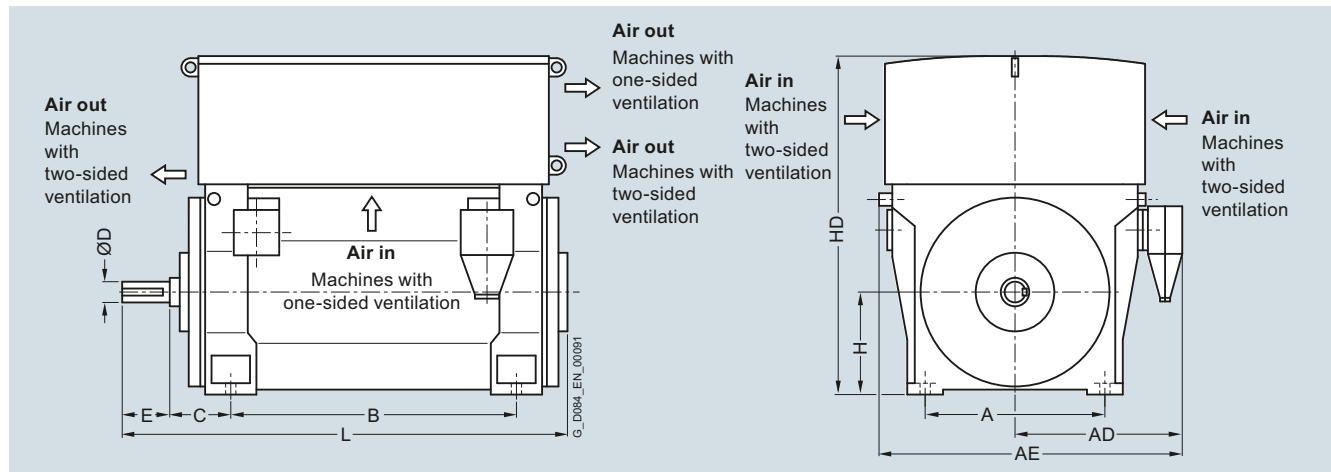


| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |                        |         |
|--|--------------|------------|----------|----------|---------|---------|---------|---------|---------|------------------------|---------|
|  |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>2)</sup><br>mm | L<br>mm |
| <b>9 ... 11 kV, IM B3 type of construction, anti-friction bearings – 1RA4, 1RA6 series</b> |              |            |          |          |         |         |         |         |         |                        |         |
| <b>2-pole</b>  |              |            |          |          |         |         |         |         |         |                        |         |
| 1RA6 450-2HJ.0 <sup>1)</sup>   | 3700         | 850        | 1070     | 1840     | 1180    | 280     | 95      | 130     | 450     | 1628                   | 1875    |
| 1RA6 452-2HJ.0 <sup>1)</sup>   | 3900         | 850        | 1070     | 1840     | 1180    | 280     | 95      | 130     | 450     | 1628                   | 1875    |
| 1RA6 454-2HJ.0 <sup>1)</sup>   | 4300         | 850        | 1070     | 1840     | 1400    | 280     | 95      | 130     | 450     | 1628                   | 2085    |
| 1RA6 456-2HJ.0 <sup>1)</sup>   | 4550         | 850        | 1070     | 1840     | 1400    | 280     | 95      | 130     | 450     | 1628                   | 2085    |
| 1RA6 500-2HJ.0 <sup>1)</sup>   | 5450         | 950        | 1270     | 1970     | 1320    | 315     | 110     | 165     | 500     | 1850                   | 2150    |
| 1RA6 502-2HJ.0 <sup>1)</sup>   | 5600         | 950        | 1270     | 1970     | 1320    | 315     | 110     | 165     | 500     | 1850                   | 2150    |
| <b>4-pole</b>  |              |            |          |          |         |         |         |         |         |                        |         |
| 1RA6 450-4HJ.0   | 4050         | 850        | 1070     | 1840     | 1180    | 250     | 130     | 200     | 450     | 1408                   | 1896    |
| 1RA6 452-4HJ.0   | 4250         | 850        | 1070     | 1840     | 1180    | 250     | 130     | 200     | 450     | 1408                   | 1896    |
| 1RA6 454-4HJ.0   | 4650         | 850        | 1070     | 1840     | 1400    | 250     | 130     | 200     | 450     | 1408                   | 2106    |
| 1RA6 456-4HJ.0   | 4950         | 850        | 1070     | 1840     | 1400    | 250     | 130     | 200     | 450     | 1408                   | 2106    |
| 1RA6 500-4HJ.0   | 5950         | 950        | 1270     | 1970     | 1320    | 280     | 150     | 200     | 500     | 1850                   | 2150    |
| 1RA6 502-4HJ.0   | 6150         | 950        | 1270     | 1970     | 1320    | 280     | 150     | 200     | 500     | 1850                   | 2150    |
| 1RA6 504-4HJ.0   | 6800         | 950        | 1270     | 1970     | 1500    | 280     | 150     | 200     | 500     | 1850                   | 2300    |
| 1RA6 506-4HJ.0   | 7150         | 950        | 1270     | 1970     | 1500    | 280     | 150     | 200     | 500     | 1850                   | 2300    |
| 1RA6 560-4HJ.0   | 7450         | 1060       | 1340     | 2110     | 1400    | 315     | 170     | 240     | 560     | 2100                   | 2300    |
| 1RA6 562-4HJ.0   | 7850         | 1060       | 1340     | 2110     | 1400    | 315     | 170     | 240     | 560     | 2100                   | 2300    |
| 1RA6 564-4HJ.0   | 8700         | 1060       | 1340     | 2110     | 1600    | 315     | 170     | 240     | 560     | 2100                   | 2550    |
| 1RA6 566-4HJ.0   | 9250         | 1060       | 1340     | 2110     | 1600    | 315     | 170     | 240     | 560     | 2100                   | 2550    |
| 1RA4 630-4HE.0 <sup>1)</sup>   | 9850         | 1320       | 1330     | 2200     | 1600    | 335     | 200     | 280     | 630     | 2400                   | 2500    |
| 1RA4 632-4HE.0 <sup>1)</sup>   | 10500        | 1320       | 1330     | 2210     | 1600    | 335     | 200     | 280     | 630     | 2400                   | 2500    |
| 1RA4 634-4HE.0 <sup>1)</sup>   | 11550        | 1320       | 1330     | 2210     | 1800    | 335     | 220     | 280     | 630     | 2400                   | 2740    |
| 1RA4 636-4HE.0 <sup>1)</sup>   | 12150        | 1320       | 1330     | 2210     | 1800    | 335     | 220     | 280     | 630     | 2400                   | 2740    |

<sup>1)</sup> Anti-friction bearings only for 50 Hz operation.

<sup>2)</sup> Dimension HD for 1RP6 on request.

## Dimension drawings (continued)

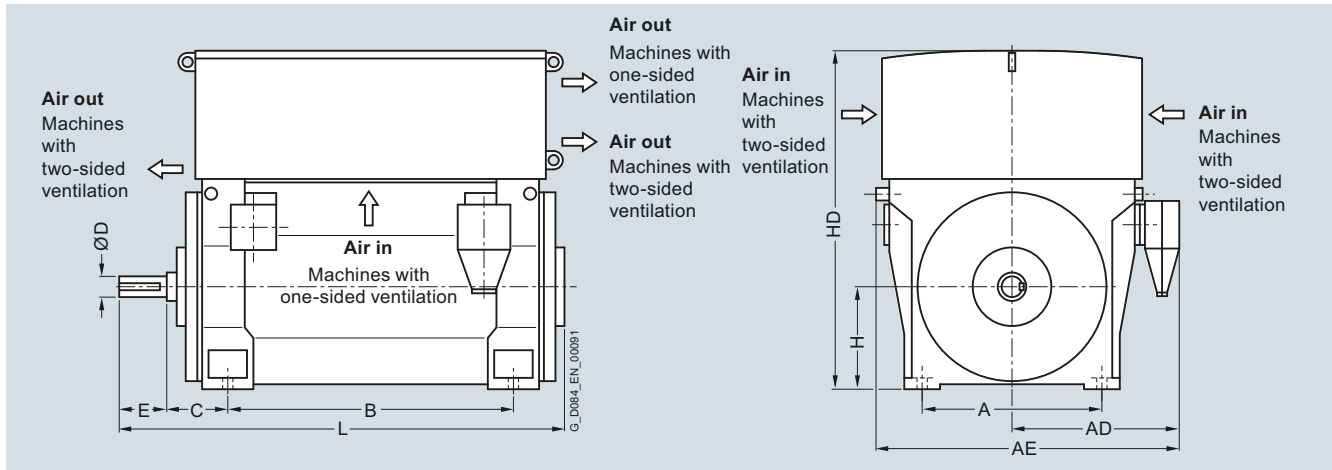

| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |                        |         |
|--|--------------|------------|----------|----------|---------|---------|---------|---------|---------|------------------------|---------|
|  |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>1)</sup><br>mm | L<br>mm |
| <b>9 ... 11 kV, IM B3 type of construction, anti-friction bearings – 1RA4, 1RA6 series</b> |              |            |          |          |         |         |         |         |         |                        |         |
| <b>6-pole</b>  |              |            |          |          |         |         |         |         |         |                        |         |
| 1RA6 450-6HJ.0   | 4150         | 850        | 1070     | 1840     | 1180    | 250     | 140     | 200     | 450     | 1408                   | 1896    |
| 1RA6 452-6HJ.0   | 4400         | 850        | 1070     | 1840     | 1180    | 250     | 140     | 200     | 450     | 1408                   | 1896    |
| 1RA6 454-6HJ.0   | 4750         | 850        | 1070     | 1840     | 1400    | 280     | 140     | 200     | 450     | 1408                   | 2136    |
| 1RA6 456-6HJ.0   | 5100         | 850        | 1070     | 1840     | 1400    | 280     | 140     | 200     | 450     | 1408                   | 2136    |
| 1RA6 500-6HJ.0   | 6050         | 950        | 1270     | 1970     | 1320    | 315     | 160     | 240     | 500     | 1610                   | 2150    |
| 1RA6 502-6HJ.0   | 6350         | 950        | 1270     | 1970     | 1320    | 315     | 160     | 240     | 500     | 1610                   | 2150    |
| 1RA6 504-6HJ.0   | 6900         | 950        | 1270     | 1970     | 1500    | 315     | 160     | 240     | 500     | 1610                   | 2360    |
| 1RA6 506-6HJ.0   | 7300         | 950        | 1270     | 1970     | 1500    | 315     | 160     | 240     | 500     | 1610                   | 2360    |
| 1RA6 560-6HJ.0   | 8200         | 1060       | 1340     | 2110     | 1400    | 315     | 180     | 240     | 560     | 1760                   | 2300    |
| 1RA6 562-6HJ.0   | 8600         | 1060       | 1340     | 2110     | 1400    | 315     | 180     | 240     | 560     | 1760                   | 2300    |
| 1RA6 564-6HJ.0   | 9450         | 1060       | 1340     | 2110     | 1600    | 315     | 180     | 240     | 560     | 1760                   | 2550    |
| 1RA6 566-6HJ.0   | 10000        | 1060       | 1340     | 2110     | 1600    | 315     | 180     | 240     | 560     | 1760                   | 2550    |
| 1RA4 630-6HE.0   | 10200        | 1320       | 1320     | 2200     | 1600    | 335     | 220     | 280     | 630     | 2400                   | 2500    |
| 1RA4 632-6HE.0   | 10750        | 1320       | 1320     | 2200     | 1600    | 335     | 220     | 280     | 630     | 2400                   | 2500    |
| 1RA4 634-6HE.0   | 11800        | 1320       | 1320     | 2200     | 1800    | 335     | 220     | 280     | 630     | 2400                   | 2740    |
| 1RA4 636-6HE.0   | 12550        | 1320       | 1330     | 2210     | 1800    | 335     | 220     | 280     | 630     | 2400                   | 2740    |
| <b>8-pole</b>  |              |            |          |          |         |         |         |         |         |                        |         |
| 1RA6 450-8HJ.0   | 4150         | 850        | 1070     | 1840     | 1180    | 250     | 140     | 200     | 450     | 1408                   | 1896    |
| 1RA6 452-8HJ.0   | 4450         | 850        | 1070     | 1840     | 1180    | 250     | 140     | 200     | 450     | 1408                   | 1896    |
| 1RA6 454-8HJ.0   | 4800         | 850        | 1070     | 1840     | 1400    | 280     | 140     | 200     | 450     | 1408                   | 2136    |
| 1RA6 456-8HJ.0   | 5150         | 850        | 1070     | 1840     | 1400    | 280     | 140     | 200     | 450     | 1408                   | 2136    |
| 1RA6 500-8HJ.0   | 6000         | 950        | 1270     | 1970     | 1320    | 315     | 160     | 240     | 500     | 1610                   | 2150    |
| 1RA6 502-8HJ.0   | 6300         | 950        | 1270     | 1970     | 1320    | 315     | 160     | 240     | 500     | 1610                   | 2150    |
| 1RA6 504-8HJ.0   | 6900         | 950        | 1270     | 1970     | 1500    | 315     | 160     | 240     | 500     | 1610                   | 2360    |
| 1RA6 506-8HJ.0   | 7250         | 950        | 1270     | 1970     | 1500    | 315     | 160     | 240     | 500     | 1610                   | 2360    |
| 1RA6 560-8HJ.0   | 8150         | 1060       | 1340     | 2110     | 1400    | 315     | 180     | 240     | 560     | 1760                   | 2300    |
| 1RA6 562-8HJ.0   | 8600         | 1060       | 1340     | 2110     | 1400    | 315     | 180     | 240     | 560     | 1760                   | 2300    |
| 1RA6 564-8HJ.0   | 9400         | 1060       | 1340     | 2110     | 1600    | 315     | 180     | 240     | 560     | 1760                   | 2550    |
| 1RA6 566-8HJ.0   | 9950         | 1060       | 1340     | 2110     | 1600    | 315     | 180     | 240     | 560     | 1760                   | 2550    |
| 1RA4 630-8HE.0   | 10050        | 1320       | 1320     | 2200     | 1600    | 335     | 220     | 280     | 630     | 2400                   | 2500    |
| 1RA4 632-8HE.0   | 10600        | 1320       | 1320     | 2200     | 1600    | 335     | 220     | 280     | 630     | 2400                   | 2500    |
| 1RA4 634-8HE.0   | 11600        | 1320       | 1320     | 2200     | 1800    | 335     | 220     | 280     | 630     | 2400                   | 2740    |
| 1RA4 636-8HE.0   | 12350        | 1320       | 1320     | 2200     | 1800    | 335     | 220     | 280     | 630     | 2400                   | 2740    |


<sup>1)</sup> Dimension HD for 1RP6 on request.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Dimension drawings (continued)

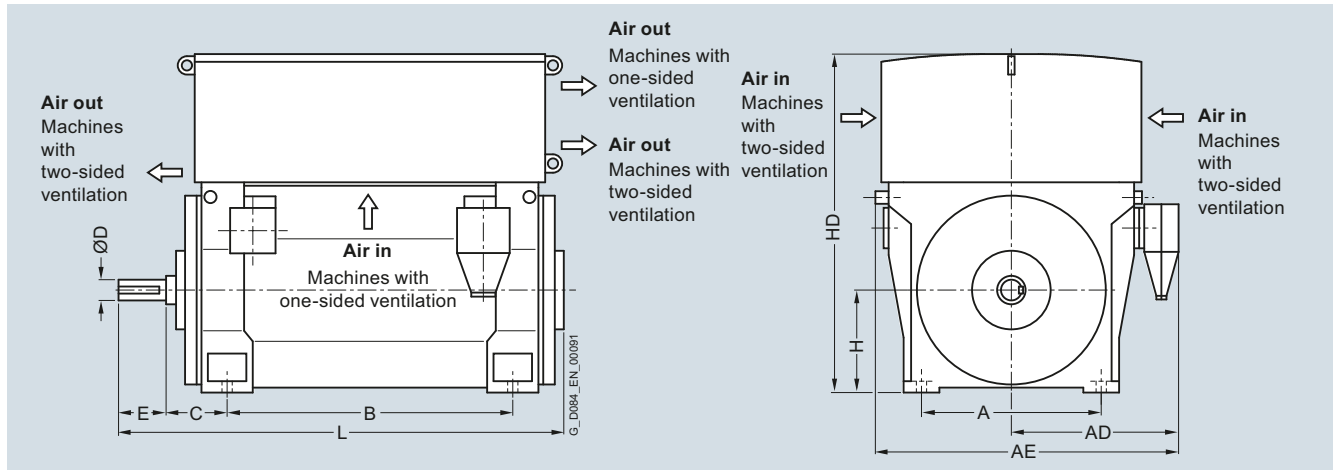

| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |                        |         |
|--|--------------|------------|----------|----------|---------|---------|---------|---------|---------|------------------------|---------|
|  |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>1)</sup><br>mm | L<br>mm |
| <b>9 ... 11 kV, IM B3 type of construction, anti-friction bearings – 1RA4 series</b> |              |            |          |          |         |         |         |         |         |                        |         |
| 10-pole  |              |            |          |          |         |         |         |         |         |                        |         |
| 1RA6 500-3HE.0   | 5250         | 950        | 1220     | 1980     | 1320    | 280     | 160     | 240     | 500     | 1520                   | 2270    |
| 1RA6 502-3HE.0   | 5600         | 950        | 1220     | 1980     | 1320    | 280     | 160     | 240     | 500     | 1520                   | 2270    |
| 1RA6 504-3HE.0   | 6150         | 950        | 1220     | 1980     | 1500    | 280     | 170     | 240     | 500     | 1520                   | 2480    |
| 1RA6 506-3HE.0   | 6500         | 950        | 1220     | 1980     | 1500    | 280     | 170     | 240     | 500     | 1520                   | 2480    |
| 1RA6 560-3HE.0   | 7350         | 1060       | 1210     | 2040     | 1400    | 315     | 180     | 240     | 560     | 1750                   | 2300    |
| 1RA6 562-3HE.0   | 7950         | 1060       | 1210     | 2040     | 1400    | 315     | 180     | 240     | 560     | 1750                   | 2300    |
| 1RA6 564-3HE.0   | 8750         | 1060       | 1210     | 2040     | 1600    | 315     | 190     | 280     | 560     | 1750                   | 2570    |
| 1RA6 566-3HE.0   | 9200         | 1060       | 1210     | 2040     | 1600    | 315     | 190     | 280     | 560     | 1750                   | 2570    |
| 1RA4 630-3HE.0   | 10000        | 1320       | 1320     | 2200     | 1600    | 335     | 220     | 280     | 630     | 2400                   | 2500    |
| 1RA4 632-3HE.0   | 10600        | 1320       | 1320     | 2200     | 1600    | 335     | 220     | 280     | 630     | 2400                   | 2500    |
| 1RA4 634-3HE.0   | 11550        | 1320       | 1320     | 2200     | 1800    | 335     | 220     | 280     | 630     | 2400                   | 2740    |
| 1RA4 636-3HE.0   | 12300        | 1320       | 1320     | 2200     | 1800    | 335     | 220     | 280     | 630     | 2400                   | 2740    |
| 12-pole  |              |            |          |          |         |         |         |         |         |                        |         |
| 1RA6 502-5HE.0   | 5650         | 950        | 1220     | 1980     | 1320    | 280     | 160     | 240     | 500     | 1520                   | 2270    |
| 1RA6 504-5HE.0   | 6100         | 950        | 1220     | 1980     | 1500    | 280     | 170     | 240     | 500     | 1520                   | 2480    |
| 1RA6 506-5HE.0   | 6500         | 950        | 1220     | 1980     | 1500    | 280     | 170     | 240     | 500     | 1520                   | 2480    |
| 1RA6 560-5HE.0   | 7100         | 1060       | 1210     | 2040     | 1400    | 315     | 180     | 240     | 560     | 1750                   | 2300    |
| 1RA6 562-5HE.0   | 7650         | 1060       | 1210     | 2040     | 1400    | 315     | 180     | 240     | 560     | 1750                   | 2300    |
| 1RA6 564-5HE.0   | 8450         | 1060       | 1210     | 2040     | 1600    | 315     | 190     | 280     | 560     | 1750                   | 2570    |
| 1RA6 566-5HE.0   | 8900         | 1060       | 1210     | 2040     | 1600    | 315     | 190     | 280     | 560     | 1750                   | 2570    |
| 1RA4 630-5HE.0   | 10050        | 1320       | 1320     | 2200     | 1600    | 335     | 220     | 280     | 630     | 2400                   | 2500    |
| 1RA4 632-5HE.0   | 10650        | 1320       | 1320     | 2200     | 1600    | 335     | 220     | 280     | 630     | 2400                   | 2500    |
| 1RA4 634-5HE.0   | 11650        | 1320       | 1320     | 2200     | 1800    | 335     | 220     | 280     | 630     | 2400                   | 2740    |
| 1RA4 636-5HE.0   | 12400        | 1320       | 1320     | 2200     | 1800    | 335     | 220     | 280     | 630     | 2400                   | 2740    |


#### Note:

Higher pole numbers are available on request.

<sup>1)</sup> Dimension HD for 1RP6 on request.



## Dimension drawings

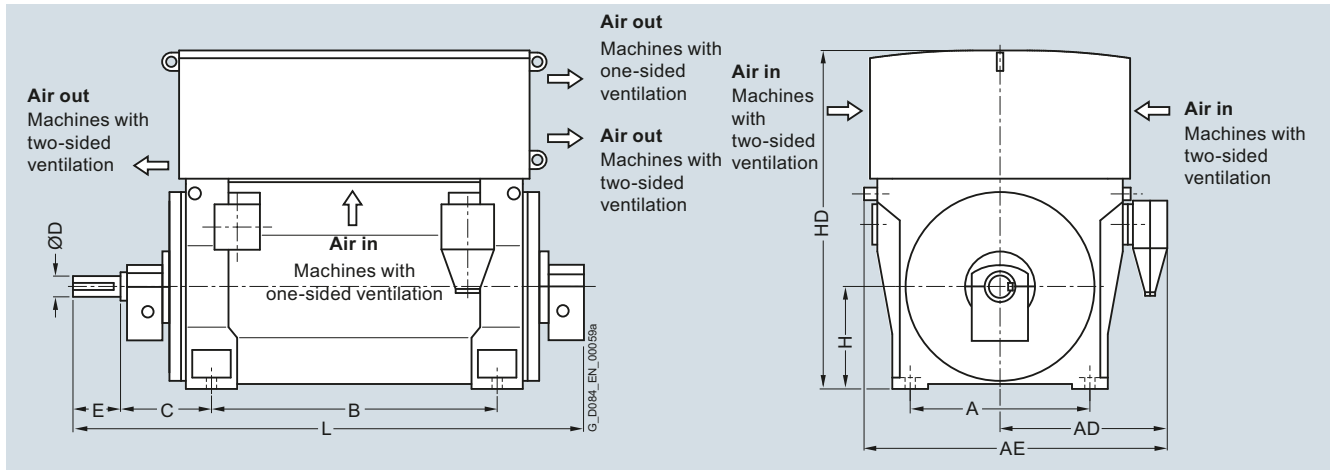

| Motor type   | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |                        |         |
|--|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|------------------------|---------|
|  |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>2)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, sleeve bearings – 1RA4, 1RA6 series</b> |              |            |                        |                        |         |         |         |         |         |                        |         |
| <b>2-pole</b>  |              |            |                        |                        |         |         |         |         |         |                        |         |
| 1RA6 450-2HJ.0-Z K96 <sup>3)</sup>   | 3750         | 850        | 930                    | 1620                   | 1180    | 425     | 95      | 130     | 450     | 1628                   | 2218    |
| 1RA6 452-2HJ.0-Z K96 <sup>3)</sup>   | 3950         | 850        | 930                    | 1620                   | 1180    | 425     | 95      | 130     | 450     | 1628                   | 2218    |
| 1RA6 454-2HJ.0-Z K96 <sup>3)</sup>   | 4300         | 850        | 930                    | 1620                   | 1400    | 425     | 95      | 130     | 450     | 1628                   | 2428    |
| 1RA6 456-2HJ.0-Z K96 <sup>3)</sup>   | 4550         | 850        | 930                    | 1620                   | 1400    | 425     | 95      | 130     | 450     | 1628                   | 2428    |
| 1RA6 500-2HJ.0-Z K96 <sup>3)</sup>   | 5500         | 950        | 1135                   | 1835                   | 1320    | 450     | 110     | 165     | 500     | 1850                   | 2500    |
| 1RA6 502-2HJ.0-Z K96 <sup>3)</sup>   | 5650         | 950        | 1135                   | 1835                   | 1320    | 450     | 110     | 165     | 500     | 1850                   | 2500    |
| 1RA6 504-2HJ.0   | 6450         | 950        | 1135                   | 1835                   | 1500    | 450     | 110     | 165     | 500     | 1850                   | 2650    |
| 1RA6 506-2HJ.0   | 6700         | 950        | 1135                   | 1835                   | 1500    | 450     | 110     | 165     | 500     | 1850                   | 2650    |
| 1RA6 560-2HJ.0   | 7450         | 1060       | 1205                   | 1975                   | 1400    | 600     | 130     | 200     | 560     | 2100                   | 2850    |
| 1RA6 562-2HJ.0   | 7850         | 1060       | 1205                   | 1975                   | 1400    | 600     | 130     | 200     | 560     | 2100                   | 2850    |
| 1RA6 564-2HJ.0   | 8750         | 1060       | 1205                   | 1975                   | 1600    | 600     | 130     | 200     | 560     | 2100                   | 3100    |
| 1RA6 566-2HJ.0   | 9200         | 1060       | 1205                   | 1975                   | 1600    | 600     | 130     | 200     | 560     | 2100                   | 3100    |
| 1RA4 630-2HE.0   | 9700         | 1320       | 1330                   | 2210                   | 1600    | 560     | 150     | 200     | 630     | 2400                   | 2820    |
| 1RA4 632-2HE.0   | 10350        | 1320       | 1330                   | 2210                   | 1600    | 560     | 150     | 200     | 630     | 2400                   | 2820    |
| 1RA4 634-2HE.0   | 11450        | 1320       | 1330                   | 2210                   | 1800    | 560     | 160     | 240     | 630     | 2400                   | 3100    |
| 1RA4 636-2HE.0   | 12250        | 1320       | 1330                   | 2210                   | 1800    | 560     | 160     | 240     | 630     | 2400                   | 3100    |
| <b>4-pole</b>  |              |            |                        |                        |         |         |         |         |         |                        |         |
| 1RA6 450-4HJ.0-Z K96   | 4100         | 850        | 930                    | 1620                   | 1180    | 500     | 130     | 200     | 450     | 1408                   | 2438    |
| 1RA6 452-4HJ.0-Z K96   | 4350         | 850        | 930                    | 1620                   | 1180    | 500     | 130     | 200     | 450     | 1408                   | 2438    |
| 1RA6 454-4HJ.0-Z K96   | 4750         | 850        | 930                    | 1620                   | 1400    | 500     | 130     | 200     | 450     | 1408                   | 2648    |
| 1RA6 456-4HJ.0-Z K96   | 5000         | 850        | 930                    | 1620                   | 1400    | 500     | 130     | 200     | 450     | 1408                   | 2648    |
| 1RA6 500-4HJ.0-Z K96   | 6250         | 950        | 1135                   | 1835                   | 1320    | 560     | 150     | 200     | 500     | 1850                   | 2700    |
| 1RA6 502-4HJ.0-Z K96   | 6500         | 950        | 1135                   | 1835                   | 1320    | 560     | 150     | 200     | 500     | 1850                   | 2700    |
| 1RA6 504-4HJ.0-Z K96   | 7150         | 950        | 1135                   | 1835                   | 1500    | 560     | 150     | 200     | 500     | 1850                   | 2880    |
| 1RA6 506-4HJ.0-Z K96   | 7450         | 950        | 1135                   | 1835                   | 1500    | 560     | 150     | 200     | 500     | 1850                   | 2880    |
| 1RA6 560-4HJ.0-Z K96   | 7650         | 1060       | 1205                   | 1975                   | 1400    | 600     | 170     | 240     | 560     | 2100                   | 2900    |
| 1RA6 562-4HJ.0-Z K96   | 8000         | 1060       | 1205                   | 1975                   | 1400    | 600     | 170     | 240     | 560     | 2100                   | 2900    |
| 1RA6 564-4HJ.0-Z K96   | 8900         | 1060       | 1205                   | 1975                   | 1600    | 600     | 170     | 240     | 560     | 2100                   | 3100    |
| 1RA6 566-4HJ.0-Z K96   | 9400         | 1060       | 1205                   | 1975                   | 1600    | 600     | 170     | 240     | 560     | 2100                   | 3100    |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> Dimension HD for 1RP6 on request.


<sup>3)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Dimension drawings (continued)

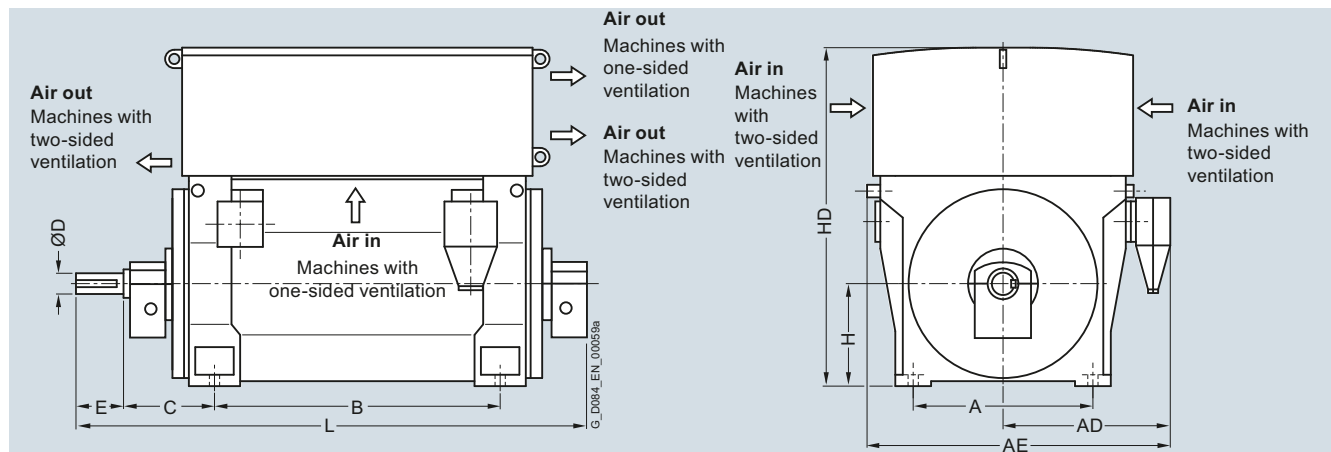


| Motor type  | Weight<br>kg | Dimensions |                  |                  |      |     |     |     |     |                  |      |
|---|--------------|------------|------------------|------------------|------|-----|-----|-----|-----|------------------|------|
|   |              | A          | AD <sup>1)</sup> | AE <sup>1)</sup> | B    | C   | D   | E   | H   | HD <sup>3)</sup> | L    |
| Up to 6.6 kV, IM B3 type of construction, sleeve bearings – 1RA4, 1RA6 series |              |            |                  |                  |      |     |     |     |     |                  |      |
| 4-pole  |              |            |                  |                  |      |     |     |     |     |                  |      |
| 1RA4 630-4HE.0-Z K96 <sup>2)</sup>  | 10250        | 1320       | 1330             | 2210             | 1600 | 600 | 200 | 280 | 630 | 2400             | 2970 |
| 1RA4 632-4HE.0-Z K96 <sup>2)</sup>  | 10950        | 1320       | 1330             | 2210             | 1600 | 600 | 200 | 280 | 630 | 2400             | 2970 |
| 1RA4 634-4HE.0-Z K96 <sup>2)</sup>  | 11950        | 1320       | 1330             | 2210             | 1800 | 600 | 220 | 280 | 630 | 2400             | 3210 |
| 1RA4 636-4HE.0-Z K96 <sup>2)</sup>  | 12500        | 1320       | 1330             | 2210             | 1800 | 600 | 220 | 280 | 630 | 2400             | 3210 |
| 6-pole  |              |            |                  |                  |      |     |     |     |     |                  |      |
| 1RA6 450-6HJ.0-Z K96  | 4200         | 850        | 930              | 1620             | 1180 | 500 | 140 | 200 | 450 | 1408             | 2438 |
| 1RA6 452-6HJ.0-Z K96  | 4500         | 850        | 930              | 1620             | 1180 | 500 | 140 | 200 | 450 | 1408             | 2438 |
| 1RA6 454-6HJ.0-Z K96  | 4850         | 850        | 930              | 1620             | 1400 | 500 | 140 | 200 | 450 | 1408             | 2648 |
| 1RA6 456-6HJ.0-Z K96  | 5200         | 850        | 930              | 1620             | 1400 | 500 | 140 | 200 | 450 | 1408             | 2648 |
| 1RA6 500-6HJ.0-Z K96  | 6250         | 950        | 1135             | 1835             | 1320 | 560 | 170 | 240 | 500 | 1610             | 2700 |
| 1RA6 502-6HJ.0-Z K96  | 6500         | 950        | 1135             | 1835             | 1320 | 560 | 170 | 240 | 500 | 1610             | 2700 |
| 1RA6 504-6HJ.0-Z K96  | 7100         | 950        | 1135             | 1835             | 1500 | 560 | 170 | 240 | 500 | 1610             | 2900 |
| 1RA6 506-6HJ.0-Z K96  | 7500         | 950        | 1135             | 1835             | 1500 | 560 | 170 | 240 | 500 | 1610             | 2900 |
| 1RA6 560-6HJ.0-Z K96  | 8450         | 1060       | 1205             | 1975             | 1400 | 600 | 170 | 240 | 560 | 1760             | 2950 |
| 1RA6 562-6HJ.0-Z K96  | 8850         | 1060       | 1205             | 1975             | 1400 | 600 | 170 | 240 | 560 | 1760             | 2950 |
| 1RA6 564-6HJ.0-Z K96  | 9700         | 1060       | 1205             | 1975             | 1600 | 600 | 170 | 240 | 560 | 1760             | 3150 |
| 1RA6 566-6HJ.0-Z K96  | 10250        | 1060       | 1205             | 1975             | 1600 | 600 | 170 | 240 | 560 | 1760             | 3150 |
| 1RA4 630-6HE.0-Z K96  | 10500        | 1320       | 1330             | 2210             | 1600 | 600 | 220 | 280 | 630 | 2400             | 2970 |
| 1RA4 632-6HE.0-Z K96  | 11050        | 1320       | 1330             | 2210             | 1600 | 600 | 220 | 280 | 630 | 2400             | 2970 |
| 1RA4 634-6HE.0-Z K96  | 12100        | 1320       | 1330             | 2210             | 1800 | 600 | 220 | 280 | 630 | 2400             | 3210 |
| 1RA4 636-6HE.0-Z K96  | 12850        | 1320       | 1330             | 2210             | 1800 | 600 | 220 | 280 | 630 | 2400             | 3210 |
| 8-pole  |              |            |                  |                  |      |     |     |     |     |                  |      |
| 1RA6 450-8HJ.0-Z K96  | 4250         | 850        | 930              | 1620             | 1180 | 500 | 140 | 200 | 450 | 1408             | 2438 |
| 1RA6 452-8HJ.0-Z K96  | 4550         | 850        | 930              | 1620             | 1180 | 500 | 140 | 200 | 450 | 1408             | 2438 |
| 1RA6 454-8HJ.0-Z K96  | 4900         | 850        | 930              | 1620             | 1400 | 500 | 140 | 200 | 450 | 1408             | 2648 |
| 1RA6 456-8HJ.0-Z K96  | 5250         | 850        | 930              | 1620             | 1400 | 500 | 140 | 200 | 450 | 1408             | 2648 |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.

<sup>3)</sup> Dimension HD for 1RP6 on request.

## Dimension drawings (continued)

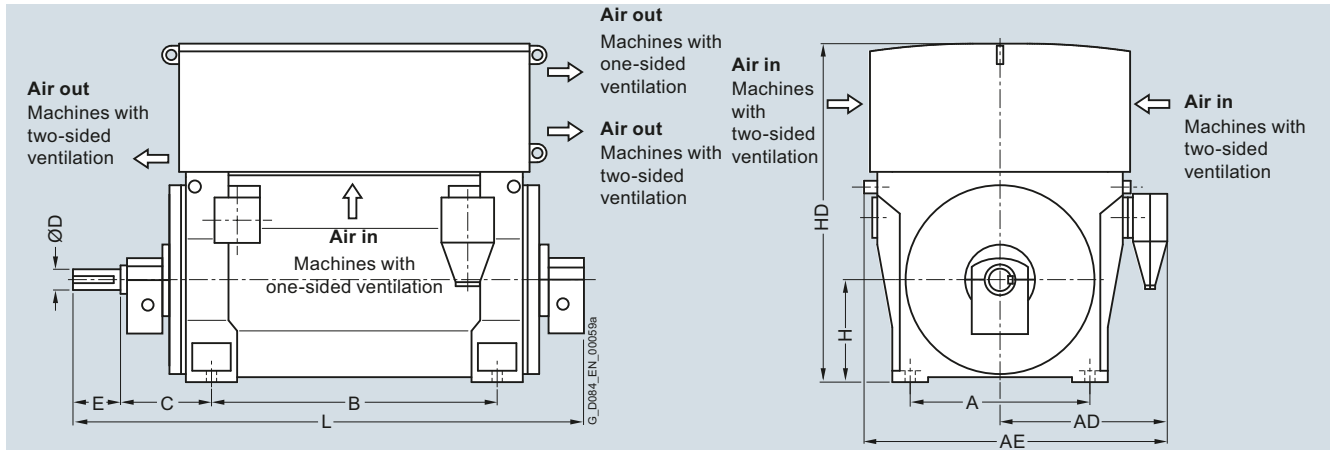

| Motor type  | Weight<br>kg | Dimensions |                  |                  |      |     |     |     |     |                  |      |
|---|--------------|------------|------------------|------------------|------|-----|-----|-----|-----|------------------|------|
|   |              | A          | AD <sup>1)</sup> | AE <sup>1)</sup> | B    | C   | D   | E   | H   | HD <sup>3)</sup> | L    |
| Up to 6.6 kV, IM B3 type of construction, sleeve bearings – 1RA4, 1RA6 series |              |            |                  |                  |      |     |     |     |     |                  |      |
| 8-pole  |              |            |                  |                  |      |     |     |     |     |                  |      |
| 1RA6 500-8HJ.0-Z K96  | 6200         | 950        | 1135             | 1835             | 1320 | 560 | 170 | 240 | 500 | 1610             | 2700 |
| 1RA6 502-8HJ.0-Z K96  | 6450         | 950        | 1135             | 1835             | 1320 | 560 | 170 | 240 | 500 | 1610             | 2700 |
| 1RA6 504-8HJ.0-Z K96  | 7100         | 950        | 1135             | 1835             | 1500 | 560 | 170 | 240 | 500 | 1610             | 2900 |
| 1RA6 506-8HJ.0-Z K96  | 7450         | 950        | 1135             | 1835             | 1500 | 560 | 170 | 240 | 500 | 1610             | 2900 |
| 1RA6 560-8HJ.0-Z K96  | 8400         | 1060       | 1205             | 1975             | 1400 | 600 | 170 | 240 | 560 | 1760             | 2950 |
| 1RA6 562-8HJ.0-Z K96  | 8800         | 1060       | 1205             | 1975             | 1400 | 600 | 170 | 240 | 560 | 1760             | 2950 |
| 1RA6 564-8HJ.0-Z K96  | 9650         | 1060       | 1205             | 1975             | 1600 | 600 | 170 | 240 | 560 | 1760             | 3150 |
| 1RA6 566-8HJ.0-Z K96  | 10150        | 1060       | 1205             | 1975             | 1600 | 600 | 170 | 240 | 560 | 1760             | 3150 |
| 1RA4 630-8HE.0-Z K96 <sup>2)</sup>  | 10400        | 1320       | 1330             | 2210             | 1600 | 600 | 220 | 280 | 630 | 2400             | 2970 |
| 1RA4 632-8HE.0-Z K96 <sup>2)</sup>  | 11050        | 1320       | 1330             | 2210             | 1600 | 600 | 220 | 280 | 630 | 2400             | 2970 |
| 1RA4 634-8HE.0-Z K96 <sup>2)</sup>  | 12000        | 1320       | 1330             | 2210             | 1800 | 600 | 220 | 280 | 630 | 2400             | 3210 |
| 1RA4 636-8HE.0-Z K96 <sup>2)</sup>  | 12700        | 1320       | 1330             | 2210             | 1800 | 600 | 220 | 280 | 630 | 2400             | 3210 |
| 10-pole   |              |            |                  |                  |      |     |     |     |     |                  |      |
| 1RA6 450-3HJ.0-Z K96  | 4250         | 850        | 930              | 1620             | 1180 | 500 | 140 | 200 | 450 | 1408             | 2438 |
| 1RA6 452-3HJ.0-Z K96  | 4550         | 850        | 930              | 1620             | 1180 | 500 | 140 | 200 | 450 | 1408             | 2438 |
| 1RA6 454-3HJ.0-Z K96  | 4900         | 850        | 930              | 1620             | 1400 | 500 | 140 | 200 | 450 | 1408             | 2648 |
| 1RA6 456-3HJ.0-Z K96  | 5250         | 850        | 930              | 1620             | 1400 | 500 | 140 | 200 | 450 | 1408             | 2648 |
| 1RA6 500-3HE.0-Z K96  | 5400         | 950        | 1000             | 1760             | 1320 | 500 | 160 | 240 | 500 | 1520             | 2620 |
| 1RA6 502-3HE.0-Z K96  | 5800         | 950        | 1000             | 1760             | 1320 | 500 | 160 | 240 | 500 | 1520             | 2620 |
| 1RA6 504-3HE.0-Z K96  | 6350         | 950        | 1000             | 1760             | 1500 | 500 | 170 | 240 | 500 | 1520             | 2830 |
| 1RA6 506-3HE.0-Z K96  | 6700         | 950        | 1000             | 1760             | 1500 | 500 | 170 | 240 | 500 | 1520             | 2830 |
| 1RA6 560-3HE.0-Z K96  | 7350         | 1060       | 1070             | 1900             | 1400 | 530 | 180 | 240 | 560 | 1750             | 2670 |
| 1RA6 562-3HE.0-Z K96  | 7900         | 1060       | 1070             | 1900             | 1400 | 530 | 180 | 240 | 560 | 1750             | 2670 |
| 1RA6 564-3HE.0-Z K96  | 8700         | 1060       | 1070             | 1900             | 1600 | 530 | 190 | 280 | 560 | 1750             | 2940 |
| 1RA6 566-3HE.0-Z K96  | 9200         | 1060       | 1070             | 1900             | 1600 | 530 | 190 | 280 | 560 | 1750             | 2940 |
| 1RA4 630-3HE.0-Z K96 <sup>2)</sup>  | 10350        | 1320       | 1330             | 2210             | 1600 | 600 | 220 | 280 | 630 | 2400             | 2970 |
| 1RA4 632-3HE.0-Z K96 <sup>2)</sup>  | 11000        | 1320       | 1330             | 2210             | 1600 | 600 | 220 | 280 | 630 | 2400             | 2970 |
| 1RA4 634-3HE.0-Z K96 <sup>2)</sup>  | 12050        | 1320       | 1330             | 2210             | 1800 | 600 | 220 | 280 | 630 | 2400             | 3210 |
| 1RA4 636-3HE.0-Z K96 <sup>2)</sup>  | 12750        | 1320       | 1330             | 2210             | 1800 | 600 | 220 | 280 | 630 | 2400             | 3210 |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.


<sup>3)</sup> Dimension HD for 1RP6 on request.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Dimension drawings (continued)

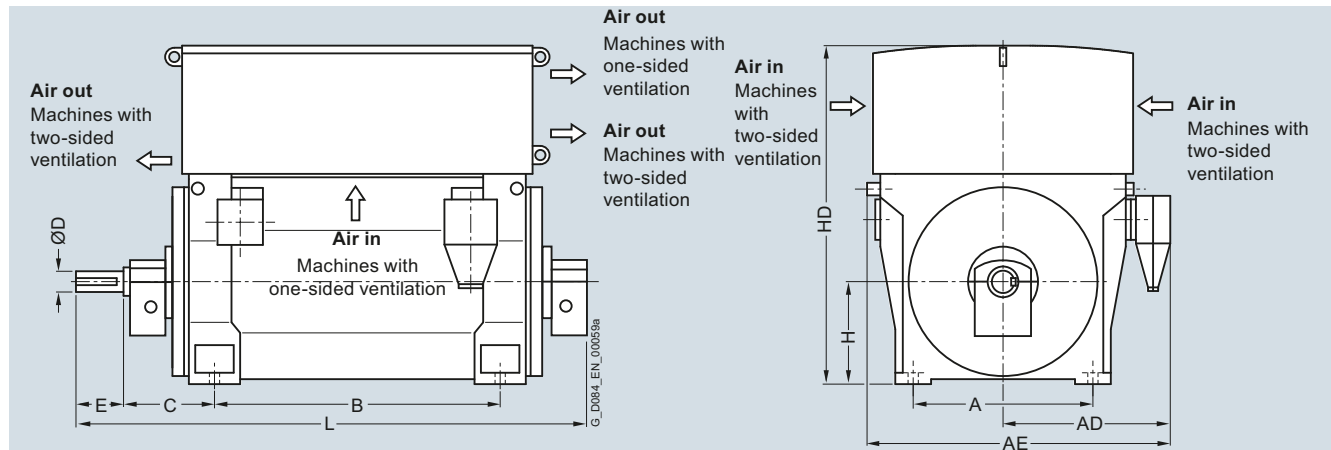

| Motor type | Weight<br>kg | Dimensions |                  |                  |   |   |   |   |   |                  |   |
|------------|--------------|------------|------------------|------------------|---|---|---|---|---|------------------|---|
|            |              | A          | AD <sup>1)</sup> | AE <sup>1)</sup> | B | C | D | E | H | HD <sup>3)</sup> | L |

#### Up to 6.6 kV, IM B3 type of construction, sleeve bearings – 1RA4, 1RA6 series

##### 12-pole

|                                    |       |      |      |      |      |     |     |     |     |      |      |
|------------------------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RA6 450-5HJ.0-Z K96               | 4250  | 850  | 930  | 1620 | 1180 | 500 | 140 | 200 | 450 | 1408 | 2438 |
| 1RA6 452-5HJ.0-Z K96               | 4550  | 850  | 930  | 1620 | 1180 | 500 | 140 | 200 | 450 | 1408 | 2438 |
| 1RA6 454-5HJ.0-Z K96               | 4900  | 850  | 930  | 1620 | 1400 | 500 | 140 | 200 | 450 | 1408 | 2648 |
| 1RA6 456-5HJ.0-Z K96               | 5250  | 850  | 930  | 1620 | 1400 | 500 | 140 | 200 | 450 | 1408 | 2648 |
| 1RA6 500-5HE.0-Z K96               | 5450  | 950  | 1000 | 1760 | 1320 | 500 | 160 | 240 | 500 | 1520 | 2620 |
| 1RA6 502-5HE.0-Z K96               | 5800  | 950  | 1000 | 1760 | 1320 | 500 | 160 | 240 | 500 | 1520 | 2620 |
| 1RA6 504-5HE.0-Z K96               | 6250  | 950  | 1000 | 1760 | 1500 | 500 | 170 | 240 | 500 | 1520 | 2830 |
| 1RA6 506-5HE.0-Z K96               | 6700  | 950  | 1000 | 1760 | 1500 | 500 | 170 | 240 | 500 | 1520 | 2830 |
| 1RA6 560-5HE.0-Z K96               | 7350  | 1060 | 1070 | 1900 | 1400 | 530 | 180 | 240 | 560 | 1750 | 2670 |
| 1RA6 562-5HE.0-Z K96               | 7950  | 1060 | 1070 | 1900 | 1400 | 530 | 180 | 240 | 560 | 1750 | 2670 |
| 1RA6 564-5HE.0-Z K96               | 8700  | 1060 | 1070 | 1900 | 1600 | 530 | 190 | 280 | 560 | 1750 | 2940 |
| 1RA6 566-5HE.0-Z K96               | 9150  | 1060 | 1070 | 1900 | 1600 | 530 | 190 | 280 | 560 | 1750 | 2940 |
| 1RA4 630-5HE.0-Z K96 <sup>2)</sup> | 10250 | 1320 | 1330 | 2210 | 1600 | 600 | 220 | 280 | 630 | 2400 | 2970 |
| 1RA4 632-5HE.0-Z K96 <sup>2)</sup> | 10850 | 1320 | 1330 | 2210 | 1600 | 600 | 220 | 280 | 630 | 2400 | 2970 |
| 1RA4 634-5HE.0-Z K96 <sup>2)</sup> | 11850 | 1320 | 1330 | 2210 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |
| 1RA4 636-5HE.0-Z K96 <sup>2)</sup> | 12700 | 1320 | 1330 | 2210 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |

#### Note:


Higher pole numbers are available on request.

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.

<sup>3)</sup> Dimension HD for 1RP6 on request.

## Dimension drawings

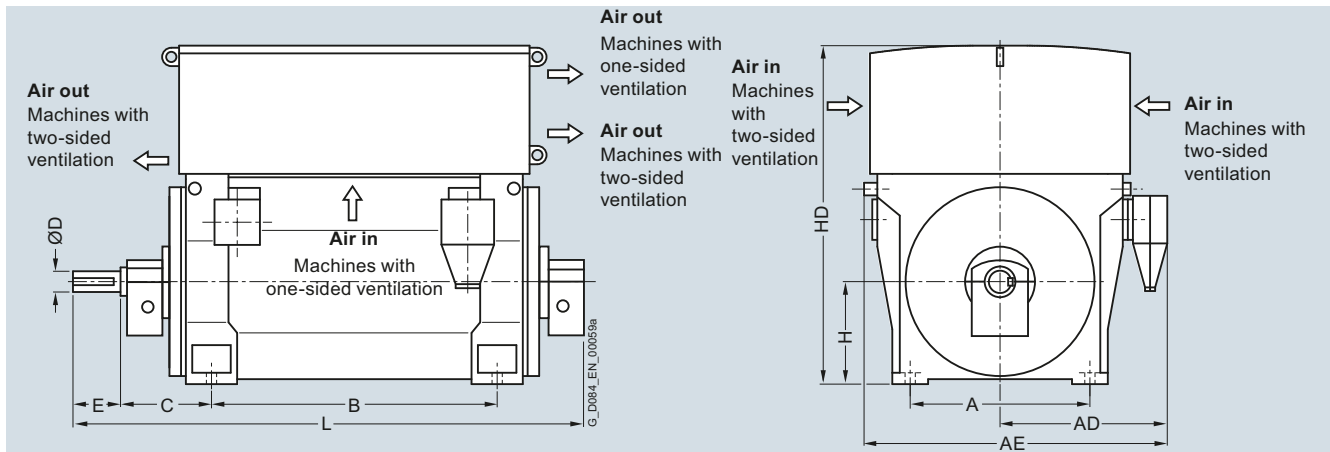

| Motor type | Weight<br>kg | Dimensions |    |    |   |   |   |   |   |                  |   |
|------------|--------------|------------|----|----|---|---|---|---|---|------------------|---|
|            |              | A          | AD | AE | B | C | D | E | H | HD <sup>1)</sup> | L |

## 9 ... 11 kV, IM B3 type of construction, sleeve bearings – 1RA4, 1RA6 series

## 2-pole

|                                    |       |      |      |      |      |     |     |     |     |      |      |
|------------------------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RA6 450-2HJ.0-Z K96 <sup>2)</sup> | 3750  | 850  | 1070 | 1840 | 1180 | 425 | 95  | 130 | 450 | 1628 | 2218 |
| 1RA6 452-2HJ.0-Z K96 <sup>2)</sup> | 3950  | 850  | 1070 | 1840 | 1180 | 425 | 95  | 130 | 450 | 1628 | 2218 |
| 1RA6 454-2HJ.0-Z K96 <sup>2)</sup> | 4300  | 850  | 1070 | 1840 | 1400 | 425 | 95  | 130 | 450 | 1628 | 2428 |
| 1RA6 456-2HJ.0-Z K96 <sup>2)</sup> | 4550  | 850  | 1070 | 1840 | 1400 | 425 | 95  | 130 | 450 | 1628 | 2428 |
| 1RA6 500-2HJ.0-Z K96 <sup>2)</sup> | 5500  | 950  | 1270 | 1970 | 1320 | 450 | 110 | 165 | 500 | 1850 | 2500 |
| 1RA6 502-2HJ.0-Z K96 <sup>2)</sup> | 5650  | 950  | 1270 | 1970 | 1320 | 450 | 110 | 165 | 500 | 1850 | 2500 |
| 1RA6 504-2HJ.0                     | 6450  | 950  | 1270 | 1970 | 1500 | 450 | 110 | 165 | 500 | 1850 | 2650 |
| 1RA6 506-2HJ.0                     | 6700  | 950  | 1270 | 1970 | 1500 | 450 | 110 | 165 | 500 | 1850 | 2650 |
| 1RA6 560-2HJ.0                     | 7450  | 1060 | 1340 | 2110 | 1400 | 600 | 130 | 200 | 560 | 2100 | 2850 |
| 1RA6 562-2HJ.0                     | 7850  | 1060 | 1340 | 2110 | 1400 | 600 | 130 | 200 | 560 | 2100 | 2850 |
| 1RA6 564-2HJ.0                     | 8750  | 1060 | 1340 | 2110 | 1600 | 600 | 130 | 200 | 560 | 2100 | 3100 |
| 1RA6 566-2HJ.0                     | 9200  | 1060 | 1340 | 2110 | 1600 | 600 | 130 | 200 | 560 | 2100 | 3100 |
| 1RA4 630-2HE.0                     | 9600  | 1320 | 1330 | 2200 | 1600 | 560 | 150 | 200 | 630 | 2400 | 2820 |
| 1RA4 632-2HE.0                     | 10250 | 1320 | 1330 | 2210 | 1600 | 560 | 150 | 200 | 630 | 2400 | 2820 |
| 1RA4 634-2HE.0                     | 11300 | 1320 | 1330 | 2210 | 1800 | 560 | 160 | 240 | 630 | 2400 | 3100 |
| 1RA4 636-2HE.0                     | 12150 | 1320 | 1330 | 2210 | 1800 | 560 | 160 | 240 | 630 | 2400 | 3100 |

## 4-pole

|                      |      |      |      |      |      |     |     |     |     |      |      |
|----------------------|------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RA6 450-4HJ.0-Z K96 | 4100 | 850  | 1070 | 1840 | 1180 | 500 | 130 | 200 | 450 | 1408 | 2438 |
| 1RA6 452-4HJ.0-Z K96 | 4350 | 850  | 1070 | 1840 | 1180 | 500 | 130 | 200 | 450 | 1408 | 2438 |
| 1RA6 454-4HJ.0-Z K96 | 4750 | 850  | 1070 | 1840 | 1400 | 500 | 130 | 200 | 450 | 1408 | 2645 |
| 1RA6 456-4HJ.0-Z K96 | 5000 | 850  | 1070 | 1840 | 1400 | 500 | 130 | 200 | 450 | 1408 | 2645 |
| 1RA6 500-4HJ.0-Z K96 | 6250 | 950  | 1270 | 1970 | 1320 | 560 | 150 | 200 | 500 | 1850 | 2700 |
| 1RA6 502-4HJ.0-Z K96 | 6500 | 950  | 1270 | 1970 | 1320 | 560 | 150 | 200 | 500 | 1850 | 2700 |
| 1RA6 504-4HJ.0-Z K96 | 7150 | 950  | 1270 | 1970 | 1500 | 560 | 150 | 200 | 500 | 1850 | 2880 |
| 1RA6 506-4HJ.0-Z K96 | 7450 | 950  | 1270 | 1970 | 1500 | 560 | 150 | 200 | 500 | 1850 | 2880 |
| 1RA6 560-4HJ.0-Z K96 | 7650 | 1060 | 1340 | 2110 | 1400 | 600 | 170 | 240 | 560 | 2100 | 2900 |
| 1RA6 562-4HJ.0-Z K96 | 8000 | 1060 | 1340 | 2110 | 1400 | 600 | 170 | 240 | 560 | 2100 | 2900 |
| 1RA6 564-4HJ.0-Z K96 | 8900 | 1060 | 1340 | 2110 | 1600 | 600 | 170 | 240 | 560 | 2100 | 3100 |
| 1RA6 566-4HJ.0-Z K96 | 9400 | 1060 | 1340 | 2110 | 1600 | 600 | 170 | 240 | 560 | 2100 | 3100 |

1) Dimension HD for 1RP6 on request.


2) For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Dimension drawings (continued)

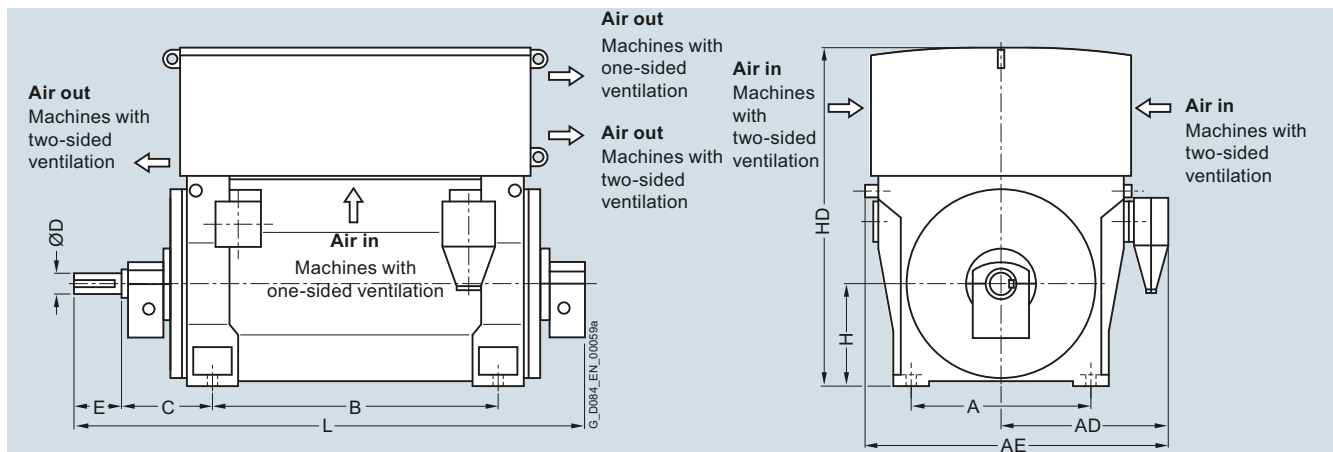

| Motor type | Weight<br>kg | Dimensions |    |    |   |   |   |   |   |                  |   |
|------------|--------------|------------|----|----|---|---|---|---|---|------------------|---|
|            |              | A          | AD | AE | B | C | D | E | H | HD <sup>2)</sup> | L |

#### 9 ... 11 kV, IM B3 type of construction, sleeve bearings – 1RA4, 1RA6 series

##### 4-pole

|                                    |       |      |      |      |      |     |     |     |     |      |      |
|------------------------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RA4 630-4HE.0-Z K96 <sup>1)</sup> | 10150 | 1320 | 1320 | 2200 | 1600 | 600 | 200 | 280 | 630 | 2400 | 2970 |
| 1RA4 632-4HE.0-Z K96 <sup>1)</sup> | 10800 | 1320 | 1330 | 2210 | 1600 | 600 | 200 | 280 | 630 | 2400 | 2970 |
| 1RA4 634-4HE.0-Z K96 <sup>1)</sup> | 11800 | 1320 | 1330 | 2210 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |
| 1RA4 636-4HE.0-Z K96 <sup>1)</sup> | 12400 | 1320 | 1330 | 2210 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |


##### 6-pole

|                      |       |      |      |      |      |     |     |     |     |      |      |
|----------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RA6 450-6HJ.0-Z K96 | 4200  | 850  | 1070 | 1840 | 1180 | 500 | 140 | 200 | 450 | 1408 | 2438 |
| 1RA6 452-6HJ.0-Z K96 | 4500  | 850  | 1070 | 1840 | 1180 | 500 | 140 | 200 | 450 | 1408 | 2438 |
| 1RA6 454-6HJ.0-Z K96 | 4850  | 850  | 1070 | 1840 | 1400 | 500 | 140 | 200 | 450 | 1408 | 2648 |
| 1RA6 456-6HJ.0-Z K96 | 5200  | 850  | 1070 | 1840 | 1400 | 500 | 140 | 200 | 450 | 1408 | 2648 |
| 1RA6 500-6HJ.0-Z K96 | 6250  | 950  | 1270 | 1970 | 1320 | 560 | 170 | 240 | 500 | 1610 | 2700 |
| 1RA6 502-6HJ.0-Z K96 | 6500  | 950  | 1270 | 1970 | 1320 | 560 | 170 | 240 | 500 | 1610 | 2700 |
| 1RA6 504-6HJ.0-Z K96 | 7100  | 950  | 1270 | 1970 | 1500 | 560 | 170 | 240 | 500 | 1610 | 2900 |
| 1RA6 506-6HJ.0-Z K96 | 7500  | 950  | 1270 | 1970 | 1500 | 560 | 170 | 240 | 500 | 1610 | 2900 |
| 1RA6 560-6HJ.0-Z K96 | 8450  | 1060 | 1340 | 2110 | 1400 | 600 | 170 | 240 | 560 | 1760 | 2950 |
| 1RA6 562-6HJ.0-Z K96 | 8850  | 1060 | 1340 | 2110 | 1400 | 600 | 170 | 240 | 560 | 1760 | 2950 |
| 1RA6 564-6HJ.0-Z K96 | 9700  | 1060 | 1340 | 2110 | 1600 | 600 | 170 | 240 | 560 | 1760 | 3150 |
| 1RA6 566-6HJ.0-Z K96 | 10250 | 1060 | 1340 | 2110 | 1600 | 600 | 170 | 240 | 560 | 1760 | 3150 |
| 1RA4 630-6HE.0-Z K96 | 10500 | 1320 | 1320 | 2200 | 1600 | 600 | 220 | 280 | 630 | 2400 | 2970 |
| 1RA4 632-6HE.0-Z K96 | 11050 | 1320 | 1320 | 2200 | 1600 | 600 | 220 | 280 | 630 | 2400 | 2970 |
| 1RA4 634-6HE.0-Z K96 | 12100 | 1320 | 1320 | 2200 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |
| 1RA4 636-6HE.0-Z K96 | 12850 | 1320 | 1330 | 2210 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |

<sup>1)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.

<sup>2)</sup> Dimension HD for 1RP6 on request.

## Dimension drawings (continued)

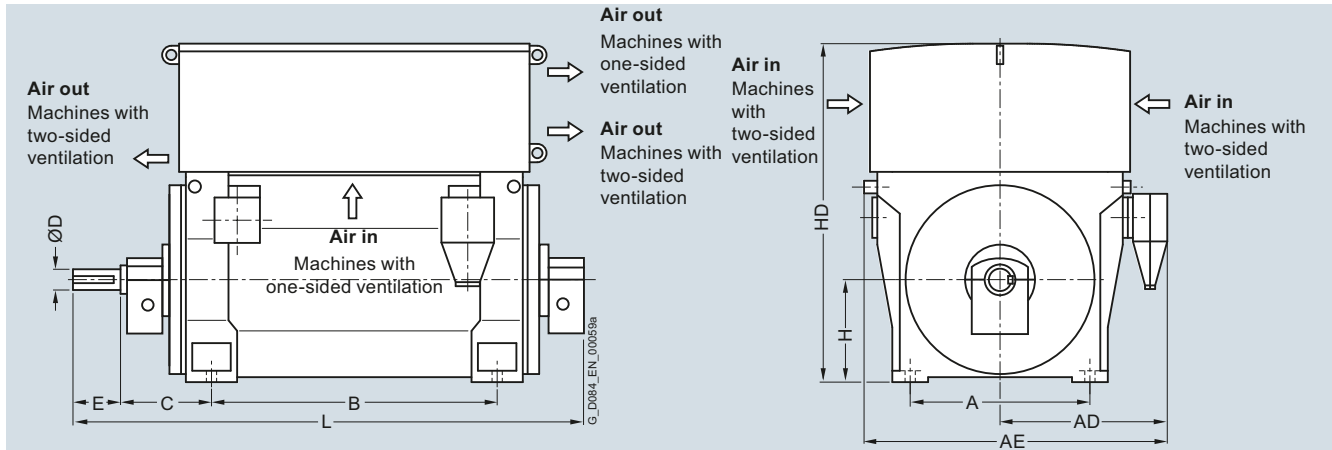

| Motor type   | Weight<br>kg | Dimensions |      |      |      |     |     |     |     |                  |      |
|--|--------------|------------|------|------|------|-----|-----|-----|-----|------------------|------|
|  |              | A          | AD   | AE   | B    | C   | D   | E   | H   | HD <sup>1)</sup> | L    |
| 9 ... 11 kV, IM B3 type of construction, sleeve bearings – 1RA4, 1RA6 series |              |            |      |      |      |     |     |     |     |                  |      |
| 8-pole   |              |            |      |      |      |     |     |     |     |                  |      |
| 1RA6 450-8HJ.0-Z K96   | 4250         | 850        | 1070 | 1840 | 1180 | 500 | 140 | 200 | 450 | 1408             | 2438 |
| 1RA6 452-8HJ.0-Z K96   | 4550         | 850        | 1070 | 1840 | 1180 | 500 | 140 | 200 | 450 | 1408             | 2438 |
| 1RA6 454-8HJ.0-Z K96   | 4900         | 850        | 1070 | 1840 | 1400 | 500 | 140 | 200 | 450 | 1408             | 2648 |
| 1RA6 456-8HJ.0-Z K96   | 5250         | 850        | 1070 | 1840 | 1400 | 500 | 140 | 200 | 450 | 1408             | 2648 |
| 1RA6 500-8HJ.0-Z K96   | 6200         | 950        | 1270 | 1970 | 1320 | 560 | 170 | 240 | 500 | 1610             | 2700 |
| 1RA6 502-8HJ.0-Z K96   | 6450         | 950        | 1270 | 1970 | 1320 | 560 | 170 | 240 | 500 | 1610             | 2700 |
| 1RA6 504-8HJ.0-Z K96   | 7100         | 950        | 1270 | 1970 | 1500 | 560 | 170 | 240 | 500 | 1610             | 2900 |
| 1RA6 506-8HJ.0-Z K96   | 7450         | 950        | 1270 | 1970 | 1500 | 560 | 170 | 240 | 500 | 1610             | 2900 |
| 1RA6 560-8HJ.0-Z K96   | 8400         | 1060       | 1340 | 2110 | 1400 | 600 | 170 | 240 | 560 | 1760             | 2950 |
| 1RA6 562-8HJ.0-Z K96   | 8800         | 1060       | 1340 | 2110 | 1400 | 600 | 170 | 240 | 560 | 1760             | 2950 |
| 1RA6 564-8HJ.0-Z K96   | 9650         | 1060       | 1340 | 2110 | 1600 | 600 | 170 | 240 | 560 | 1760             | 3150 |
| 1RA6 566-8HJ.0-Z K96   | 10150        | 1060       | 1340 | 2110 | 1600 | 600 | 170 | 240 | 560 | 1760             | 3150 |
| 1RA4 630-8HE.0-Z K96   | 10300        | 1320       | 1320 | 2200 | 1600 | 600 | 220 | 280 | 630 | 2400             | 2970 |
| 1RA4 632-8HE.0-Z K96   | 10900        | 1320       | 1320 | 2200 | 1600 | 600 | 220 | 280 | 630 | 2400             | 2970 |
| 1RA4 634-8HE.0-Z K96   | 11900        | 1320       | 1320 | 2200 | 1800 | 600 | 220 | 280 | 630 | 2400             | 3210 |
| 1RA4 636-8HE.0-Z K96   | 12600        | 1320       | 1320 | 2200 | 1800 | 600 | 220 | 280 | 630 | 2400             | 3210 |
| 10-pole  |              |            |      |      |      |     |     |     |     |                  |      |
| 1RA6 500-3HE.0-Z K96   | 5400         | 950        | 1150 | 1980 | 1320 | 500 | 160 | 240 | 500 | 1520             | 2430 |
| 1RA6 502-3HE.0-Z K96   | 5800         | 950        | 1150 | 1980 | 1320 | 500 | 160 | 240 | 500 | 1520             | 2430 |
| 1RA6 504-3HE.0-Z K96   | 6300         | 950        | 1150 | 1980 | 1500 | 500 | 170 | 240 | 500 | 1520             | 2680 |
| 1RA6 506-3HE.0-Z K96   | 6650         | 950        | 1150 | 1980 | 1500 | 500 | 170 | 240 | 500 | 1520             | 2680 |
| 1RA6 560-3HE.0-Z K96   | 7550         | 1060       | 1220 | 2040 | 1400 | 530 | 180 | 240 | 560 | 1750             | 2670 |
| 1RA6 562-3HE.0-Z K96   | 8150         | 1060       | 1220 | 2040 | 1400 | 530 | 180 | 240 | 560 | 1750             | 2670 |
| 1RA6 564-3HE.0-Z K96   | 8950         | 1060       | 1220 | 2040 | 1600 | 530 | 190 | 280 | 560 | 1750             | 2960 |
| 1RA6 566-3HE.0-Z K96   | 9400         | 1060       | 1220 | 2040 | 1600 | 530 | 190 | 280 | 560 | 1750             | 2960 |
| 1RA4 630-3HE.0-Z K96   | 10300        | 1320       | 1320 | 2200 | 1600 | 600 | 220 | 280 | 630 | 2400             | 2970 |
| 1RA4 632-3HE.0-Z K96   | 10900        | 1320       | 1320 | 2200 | 1600 | 600 | 220 | 280 | 630 | 2400             | 2970 |
| 1RA4 634-3HE.0-Z K96   | 11850        | 1320       | 1320 | 2200 | 1800 | 600 | 220 | 280 | 630 | 2400             | 3210 |
| 1RA4 636-3HE.0-Z K96   | 12550        | 1320       | 1320 | 2200 | 1800 | 600 | 220 | 280 | 630 | 2400             | 3210 |


1) Dimension HD for 1RP6 on request.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Dimension drawings (continued)

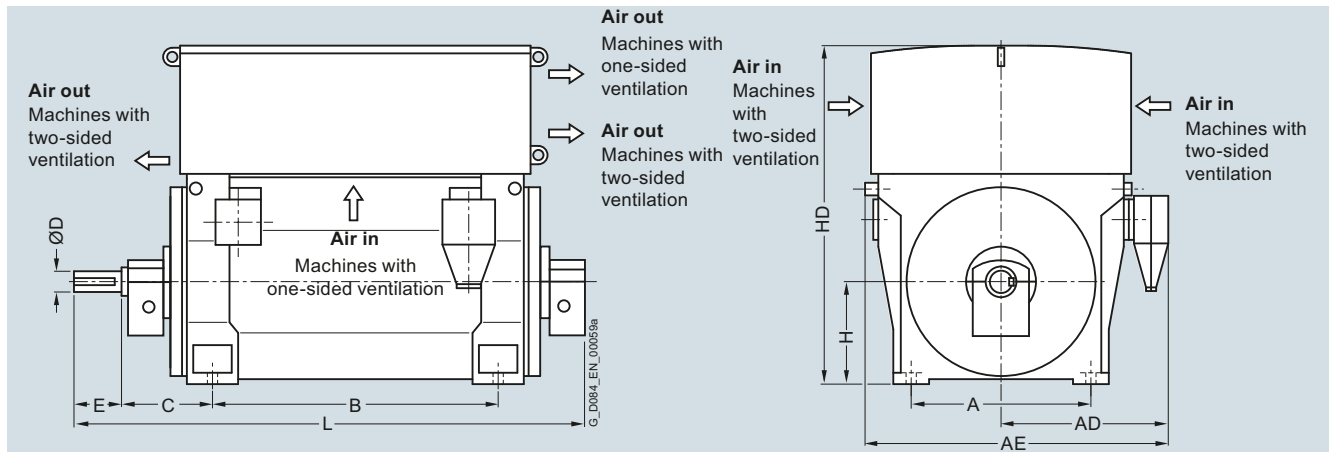

| Motor type | Weight<br>kg | Dimensions |    |    |   |   |   |   |   |                  |   |
|------------|--------------|------------|----|----|---|---|---|---|---|------------------|---|
|            |              | A          | AD | AE | B | C | D | E | H | HD <sup>1)</sup> | L |

#### 9 ... 11 kV, IM B3 type of construction, sleeve bearings – 1RA4 series

##### 12-pole

|                      |       |      |      |      |      |     |     |     |     |      |      |
|----------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RA6 502-5HE.0-Z K96 | 5800  | 950  | 1150 | 1980 | 1320 | 500 | 160 | 240 | 500 | 1520 | 2430 |
| 1RA6 504-5HE.0-Z K96 | 6250  | 950  | 1150 | 1980 | 1500 | 500 | 170 | 240 | 500 | 1520 | 2680 |
| 1RA6 506-5HE.0-Z K96 | 6650  | 950  | 1150 | 1980 | 1500 | 500 | 170 | 240 | 500 | 1520 | 2680 |
| 1RA6 560-5HE.0-Z K96 | 7350  | 1060 | 1220 | 2040 | 1400 | 530 | 180 | 240 | 560 | 1750 | 2670 |
| 1RA6 562-5HE.0-Z K96 | 7850  | 1060 | 1220 | 2040 | 1400 | 530 | 180 | 240 | 560 | 1750 | 2670 |
| 1RA6 564-5HE.0-Z K96 | 8650  | 1060 | 1220 | 2040 | 1600 | 530 | 190 | 280 | 560 | 1750 | 2960 |
| 1RA6 566-5HE.0-Z K96 | 9150  | 1060 | 1220 | 2040 | 1600 | 530 | 190 | 280 | 560 | 1750 | 2960 |
| 1RA4 630-5HE.0-Z K96 | 10300 | 1320 | 1320 | 2200 | 1600 | 600 | 220 | 280 | 630 | 2400 | 2970 |
| 1RA4 632-5HE.0-Z K96 | 10950 | 1320 | 1320 | 2200 | 1600 | 600 | 220 | 280 | 630 | 2400 | 2970 |
| 1RA4 634-5HE.0-Z K96 | 11950 | 1320 | 1320 | 2200 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |
| 1RA4 636-5HE.0-Z K96 | 12650 | 1320 | 1320 | 2200 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |


#### Note:

Higher pole numbers are available on request.

<sup>1)</sup> Dimension HD for 1RP6 on request.



## Dimension drawings

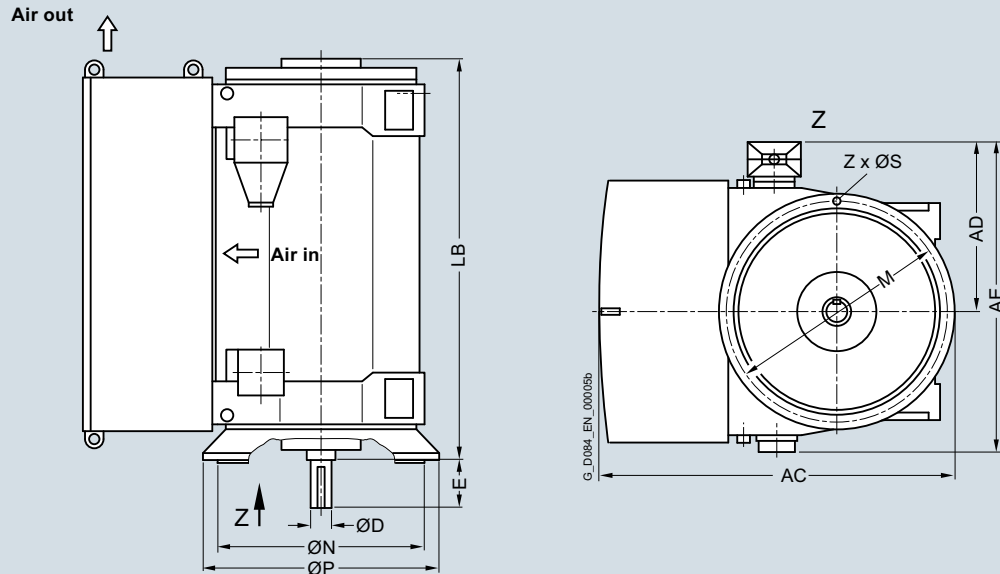

| Motor type | Weight<br>kg | Dimensions             |                        |                        |         |         |          |         |         |         |         |               |
|------------|--------------|------------------------|------------------------|------------------------|---------|---------|----------|---------|---------|---------|---------|---------------|
|            |              | AC <sup>3)</sup><br>mm | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |

## Up to 6.6 kV, IM V1 type of construction, anti-friction bearings – 1RA4, 1RA6 series

| 4-pole                       |       |      |      |      |     |     |      |      |      |      |    |    |
|------------------------------|-------|------|------|------|-----|-----|------|------|------|------|----|----|
| 1RA6 450-4HJ.8               | 4250  | 1533 | 930  | 1620 | 130 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 452-4HJ.8               | 4450  | 1533 | 930  | 1620 | 130 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 454-4HJ.8               | 4850  | 1533 | 930  | 1620 | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 456-4HJ.8               | 5150  | 1533 | 930  | 1620 | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 500-4HE.8               | 5250  | 1640 | 1000 | 1810 | 150 | 200 | 1910 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 502-4HE.8               | 5450  | 1640 | 1000 | 1810 | 150 | 200 | 1910 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 504-4HE.8               | 6150  | 1640 | 1000 | 1810 | 160 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 506-4HE.8               | 6550  | 1640 | 1000 | 1810 | 160 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 560-4HE.8               | 7250  | 1890 | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 562-4HE.8 <sup>2)</sup> | 7700  | 1890 | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 564-4HE.8 <sup>2)</sup> | 8600  | 1890 | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 566-4HE.8 <sup>2)</sup> | 9050  | 1890 | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA4 630-4HE.8 <sup>2)</sup> | 11600 | 2430 | 1330 | 2300 | 200 | 280 | 2470 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 632-4HE.8 <sup>2)</sup> | 12300 | 2430 | 1330 | 2300 | 200 | 280 | 2470 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 634-4HE.8 <sup>2)</sup> | 13350 | 2430 | 1330 | 2300 | 220 | 280 | 2710 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 636-4HE.8 <sup>2)</sup> | 13900 | 2430 | 1330 | 2300 | 220 | 280 | 2710 | 2000 | 1800 | 1900 | 33 | 16 |
| 6-pole                       |       |      |      |      |     |     |      |      |      |      |    |    |
| 1RA6 450-6HJ.8               | 4350  | 1533 | 930  | 1620 | 130 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 452-6HJ.8               | 4600  | 1533 | 930  | 1620 | 130 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 454-6HJ.8               | 4950  | 1533 | 930  | 1620 | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 456-6HJ.8               | 5300  | 1533 | 930  | 1620 | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 500-6HE.8               | 5400  | 1640 | 1000 | 1810 | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 502-6HE.8               | 5750  | 1640 | 1000 | 1810 | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 16 |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> Vertical type of construction, only in the 50 Hz version.


<sup>3)</sup> Dimension AC for 1RP6 on request.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Dimension drawings (continued)

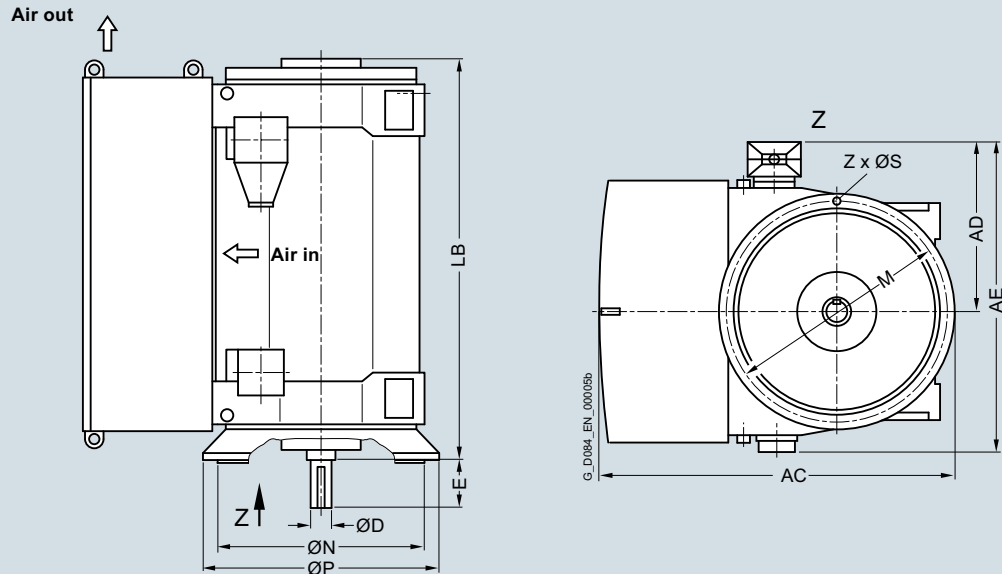

| Motor type | Weight<br>kg | Dimensions             |                        |                        |         |         |          |         |         |         |         |               |
|------------|--------------|------------------------|------------------------|------------------------|---------|---------|----------|---------|---------|---------|---------|---------------|
|            |              | AC <sup>2)</sup><br>mm | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |


#### Up to 6.6 kV, IM V1 type of construction, anti-friction bearings – 1RA4, 1RA6 series

| 6-pole         |       |      |      |      |     |     |      |      |      |      |    |    |
|----------------|-------|------|------|------|-----|-----|------|------|------|------|----|----|
| 1RA6 504-6HE.8 | 6300  | 1640 | 1000 | 1810 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 506-6HE.8 | 6700  | 1640 | 1000 | 1810 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 560-6HE.8 | 7400  | 1890 | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 562-6HE.8 | 8000  | 1890 | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 564-6HE.8 | 8800  | 1890 | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 566-6HE.8 | 9300  | 1890 | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA4 630-6HE.8 | 11900 | 2430 | 1330 | 2300 | 220 | 280 | 2470 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 632-6HE.8 | 12450 | 2430 | 1330 | 2300 | 220 | 280 | 2470 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 634-6HE.8 | 13450 | 2430 | 1330 | 2300 | 220 | 280 | 2710 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 636-6HE.8 | 14200 | 2430 | 1330 | 2300 | 220 | 280 | 2710 | 2000 | 1800 | 1900 | 33 | 16 |
| 8-pole         |       |      |      |      |     |     |      |      |      |      |    |    |
| 1RA6 450-8HJ.8 | 4350  | 1533 | 930  | 1620 | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 452-8HJ.8 | 4650  | 1533 | 930  | 1620 | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 454-8HJ.8 | 5000  | 1533 | 930  | 1620 | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 456-8HJ.8 | 5350  | 1533 | 930  | 1620 | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 500-8HE.8 | 5450  | 1640 | 1000 | 1810 | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 502-8HE.8 | 5800  | 1640 | 1000 | 1810 | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 504-8HE.8 | 6300  | 1640 | 1000 | 1810 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 506-8HE.8 | 6700  | 1640 | 1000 | 1810 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 560-8HE.8 | 7350  | 1890 | 1070 | 1960 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 562-8HE.8 | 7900  | 1890 | 1070 | 1960 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 564-8HE.8 | 8700  | 1890 | 1070 | 1960 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 566-8HE.8 | 9200  | 1890 | 1070 | 1960 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> Dimension AC for 1RP6 on request.

## Dimension drawings (continued)

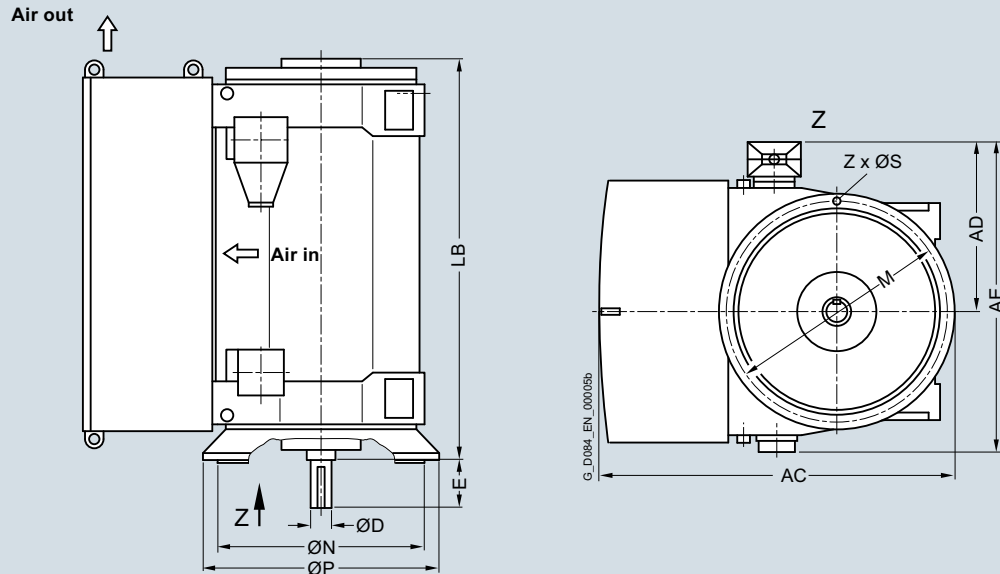

| Motor type | Weight<br>kg | Dimensions             |                        |                        |         |         |          |         |         |         |         |               |
|------------|--------------|------------------------|------------------------|------------------------|---------|---------|----------|---------|---------|---------|---------|---------------|
|            |              | AC <sup>3)</sup><br>mm | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |

## Up to 6.6 kV, IM V1 type of construction, anti-friction bearings – 1RA4, 1RA6 series

| 8-pole                       |       |      |      |      |     |     |      |      |      |      |    |    |
|------------------------------|-------|------|------|------|-----|-----|------|------|------|------|----|----|
| 1RA4 630-8HE.8 <sup>2)</sup> | 11800 | 2430 | 1330 | 2300 | 220 | 280 | 2470 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 632-8HE.8 <sup>2)</sup> | 12450 | 2430 | 1330 | 2300 | 220 | 280 | 2470 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 634-8HE.8 <sup>2)</sup> | 13350 | 2430 | 1330 | 2300 | 220 | 280 | 2710 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 636-8HE.8 <sup>2)</sup> | 14100 | 2430 | 1330 | 2300 | 220 | 280 | 2710 | 2000 | 1800 | 1900 | 33 | 16 |
| 10-pole                      |       |      |      |      |     |     |      |      |      |      |    |    |
| 1RA6 450-3HJ.8               | 4350  | 1533 | 930  | 1620 | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 452-3HJ.8               | 4650  | 1533 | 930  | 1620 | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 454-3HJ.8               | 5000  | 1533 | 930  | 1620 | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 456-3HJ.8               | 5350  | 1533 | 930  | 1620 | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 500-3HE.8               | 5350  | 1640 | 1000 | 1810 | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 502-3HE.8               | 5750  | 1640 | 1000 | 1810 | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 504-3HE.8               | 6300  | 1640 | 1000 | 1810 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 506-3HE.8               | 6650  | 1640 | 1000 | 1810 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 560-3HE.8               | 7300  | 1890 | 1070 | 1960 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 562-3HE.8               | 7900  | 1890 | 1070 | 1960 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 564-3HE.8               | 8700  | 1890 | 1070 | 1960 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 566-3HE.8               | 9150  | 1890 | 1070 | 1960 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA4 630-3HE.8 <sup>2)</sup> | 11700 | 2430 | 1330 | 2300 | 220 | 280 | 2470 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 632-3HE.8 <sup>2)</sup> | 12400 | 2430 | 1330 | 2300 | 220 | 280 | 2470 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 634-3HE.8 <sup>2)</sup> | 13400 | 2430 | 1330 | 2300 | 220 | 280 | 2710 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 636-3HE.8 <sup>2)</sup> | 14100 | 2430 | 1330 | 2300 | 220 | 280 | 2710 | 2000 | 1800 | 1900 | 33 | 16 |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> Vertical type of construction, only in the 50 Hz version.


<sup>3)</sup> Dimension AC for 1RP6 on request.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Dimension drawings (continued)

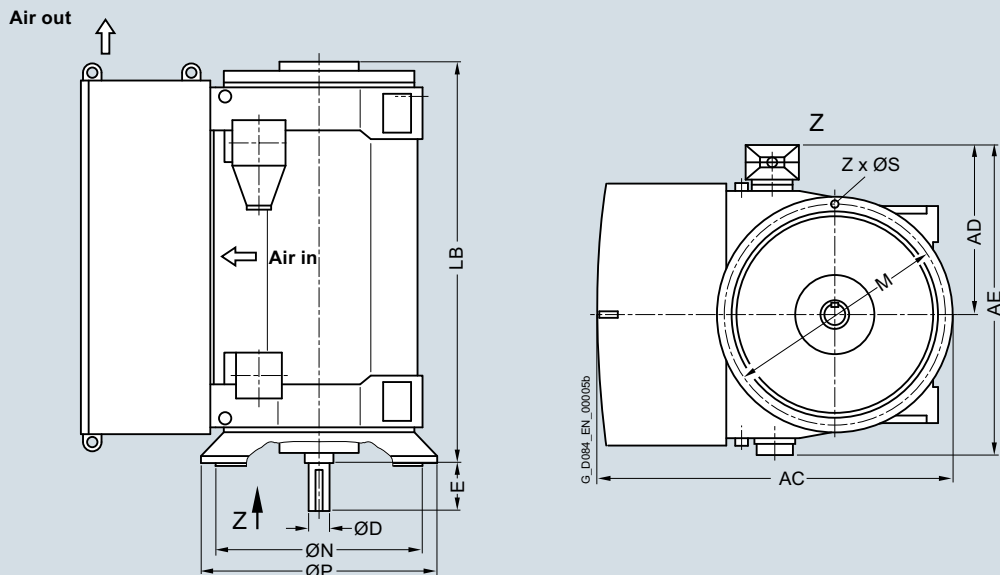

| Motor type | Weight<br>kg | Dimensions             |                        |                        |         |         |          |         |         |         |         |               |
|------------|--------------|------------------------|------------------------|------------------------|---------|---------|----------|---------|---------|---------|---------|---------------|
|            |              | AC <sup>3)</sup><br>mm | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |

#### Up to 6.6 kV, IM V1 type of construction, anti-friction bearings – 1RA4, 1RA6 series

##### 12-pole

|                              |       |      |      |      |     |     |      |      |      |      |    |    |
|------------------------------|-------|------|------|------|-----|-----|------|------|------|------|----|----|
| 1RA6 450-5HJ.8               | 4350  | 1533 | 930  | 1620 | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 452-5HJ.8               | 4650  | 1533 | 930  | 1620 | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 454-5HJ.8               | 5000  | 1533 | 930  | 1620 | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 456-5HJ.8               | 5350  | 1533 | 930  | 1620 | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 500-5HE.8               | 5400  | 1640 | 1000 | 1810 | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 502-5HE.8               | 5750  | 1640 | 1000 | 1810 | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 504-5HE.8               | 6250  | 1640 | 1000 | 1810 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 506-5HE.8               | 6650  | 1640 | 1000 | 1810 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 560-5HE.8               | 7350  | 1890 | 1070 | 1960 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 562-5HE.8               | 7900  | 1890 | 1070 | 1960 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 564-5HE.8               | 8650  | 1890 | 1070 | 1960 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 566-5HE.8               | 9150  | 1890 | 1070 | 1960 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA4 630-5HE.8 <sup>2)</sup> | 11600 | 2430 | 1180 | 2150 | 220 | 280 | 2470 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 632-5HE.8 <sup>2)</sup> | 12250 | 2430 | 1180 | 2150 | 220 | 280 | 2470 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 634-5HE.8 <sup>2)</sup> | 13250 | 2430 | 1180 | 2150 | 220 | 280 | 2710 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 636-5HE.8 <sup>2)</sup> | 14050 | 2430 | 1180 | 2150 | 220 | 280 | 2710 | 2000 | 1800 | 1900 | 33 | 16 |

#### Note:


Higher pole numbers are available on request.

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> Vertical type of construction, only in the 50 Hz version.

<sup>3)</sup> Dimension AC for 1RP6 on request.

## Dimension drawings

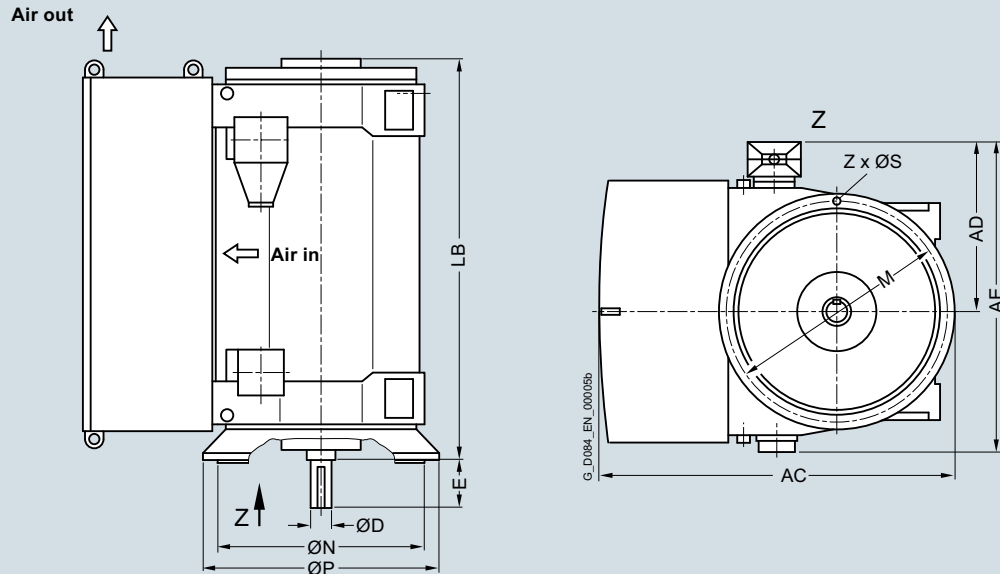

| Motor type | Weight<br>kg | Dimensions             |          |          |         |         |          |         |         |         |         |               |
|------------|--------------|------------------------|----------|----------|---------|---------|----------|---------|---------|---------|---------|---------------|
|            |              | AC <sup>1)</sup><br>mm | AD<br>mm | AE<br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |

## 9 ... 11 kV, IM V1 type of construction, anti-friction bearings – 1RA4, 1RA6 series

## 4-pole

|                |       |      |      |      |     |     |      |      |      |      |    |    |
|----------------|-------|------|------|------|-----|-----|------|------|------|------|----|----|
| 1RA6 450-4HJ.8 | 4250  | 1533 | 1070 | 1840 | 130 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 452-4HJ.8 | 4450  | 1533 | 1070 | 1840 | 130 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 454-4HJ.8 | 4850  | 1533 | 1070 | 1840 | 130 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 456-4HJ.8 | 5150  | 1533 | 1070 | 1840 | 130 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 500-4HE.8 | 5250  | 1640 | 1140 | 1950 | 150 | 200 | 1910 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 502-4HE.8 | 5450  | 1640 | 1140 | 1950 | 150 | 200 | 1910 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 504-4HE.8 | 6100  | 1640 | 1140 | 1950 | 160 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 506-4HE.8 | 6450  | 1640 | 1140 | 1950 | 160 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 560-4HE.8 | 7150  | 1890 | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 562-4HE.8 | 7600  | 1890 | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 564-4HE.8 | 8450  | 1890 | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 566-4HE.8 | 8900  | 1890 | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA4 630-4HE.8 | 11500 | 2430 | 1320 | 2290 | 200 | 280 | 2470 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 632-4HE.8 | 12150 | 2430 | 1330 | 2300 | 200 | 280 | 2470 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 634-4HE.8 | 13200 | 2430 | 1330 | 2300 | 220 | 280 | 2710 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 636-4HE.8 | 13800 | 2430 | 1330 | 2300 | 220 | 280 | 2710 | 2000 | 1800 | 1900 | 33 | 16 |

## 6-pole

|                |      |      |      |      |     |     |      |      |      |      |    |    |
|----------------|------|------|------|------|-----|-----|------|------|------|------|----|----|
| 1RA6 450-6HJ.8 | 4350 | 1533 | 1070 | 1840 | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 452-6HJ.8 | 4600 | 1533 | 1070 | 1840 | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 454-6HJ.8 | 4950 | 1533 | 1070 | 1840 | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 456-6HJ.8 | 5300 | 1533 | 1070 | 1840 | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 500-6HE.8 | 5400 | 1640 | 1140 | 1950 | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 502-6HE.8 | 5800 | 1640 | 1140 | 1950 | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 504-6HE.8 | 6250 | 1640 | 1140 | 1950 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 506-6HE.8 | 6650 | 1640 | 1140 | 1950 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 16 |


1) Dimension AC for 1RP6 on request.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Dimension drawings (continued)

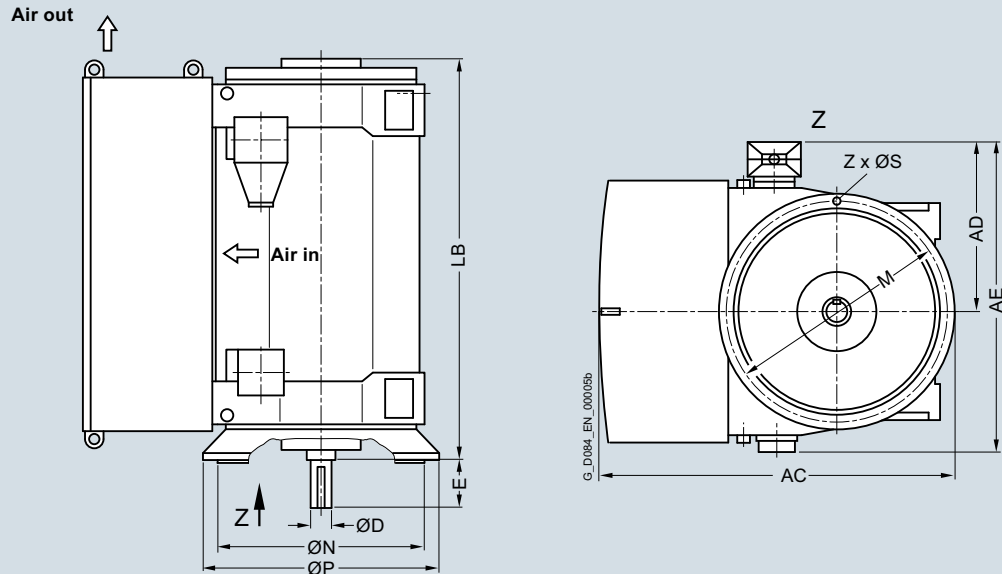

| Motor type | Weight<br>kg | Dimensions             |          |          |         |         |          |         |         |         |         |               |
|------------|--------------|------------------------|----------|----------|---------|---------|----------|---------|---------|---------|---------|---------------|
|            |              | AC <sup>1)</sup><br>mm | AD<br>mm | AE<br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |

#### 9 ... 11 kV, IM V1 type of construction, anti-friction bearings – 1RA4, 1RA6 series

##### 6-pole


|                |       |      |      |      |     |     |      |      |      |      |    |    |
|----------------|-------|------|------|------|-----|-----|------|------|------|------|----|----|
| 1RA6 560-6HE.8 | 7400  | 1890 | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 562-6HE.8 | 7850  | 1890 | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 564-6HE.8 | 8700  | 1890 | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 566-6HE.8 | 9150  | 1890 | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA4 630-6HE.8 | 11850 | 2430 | 1320 | 2290 | 220 | 280 | 2470 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 632-6HE.8 | 12400 | 2430 | 1320 | 2290 | 220 | 280 | 2470 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 634-6HE.8 | 13450 | 2430 | 1320 | 2290 | 220 | 280 | 2710 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 636-6HE.8 | 14200 | 2430 | 1330 | 2300 | 220 | 280 | 2710 | 2000 | 1800 | 1900 | 33 | 16 |

##### 8-pole

|                |       |      |      |      |     |     |      |      |      |      |    |    |
|----------------|-------|------|------|------|-----|-----|------|------|------|------|----|----|
| 1RA6 450-8HJ.8 | 4350  | 1533 | 1070 | 1840 | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 452-8HJ.8 | 4650  | 1533 | 1070 | 1840 | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 454-8HJ.8 | 5000  | 1533 | 1070 | 1840 | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 456-8HJ.8 | 5350  | 1533 | 1070 | 1840 | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6 500-8HE.8 | 5400  | 1640 | 1140 | 1950 | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 502-8HE.8 | 5800  | 1640 | 1140 | 1950 | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 504-8HE.8 | 6300  | 1640 | 1140 | 1950 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 506-8HE.8 | 6650  | 1640 | 1140 | 1950 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 560-8HE.8 | 7350  | 1890 | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 562-8HE.8 | 7900  | 1890 | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 564-8HE.8 | 8700  | 1890 | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 566-8HE.8 | 9100  | 1890 | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA4 630-8HE.8 | 11700 | 2430 | 1320 | 2290 | 220 | 280 | 2470 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 632-8HE.8 | 12250 | 2430 | 1320 | 2290 | 220 | 280 | 2470 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 634-8HE.8 | 13250 | 2430 | 1320 | 2290 | 220 | 280 | 2710 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 636-8HE.8 | 14000 | 2430 | 1320 | 2290 | 220 | 280 | 2710 | 2000 | 1800 | 1900 | 33 | 16 |

<sup>1)</sup> Dimension AC for 1RP6 on request.

## Dimension drawings (continued)

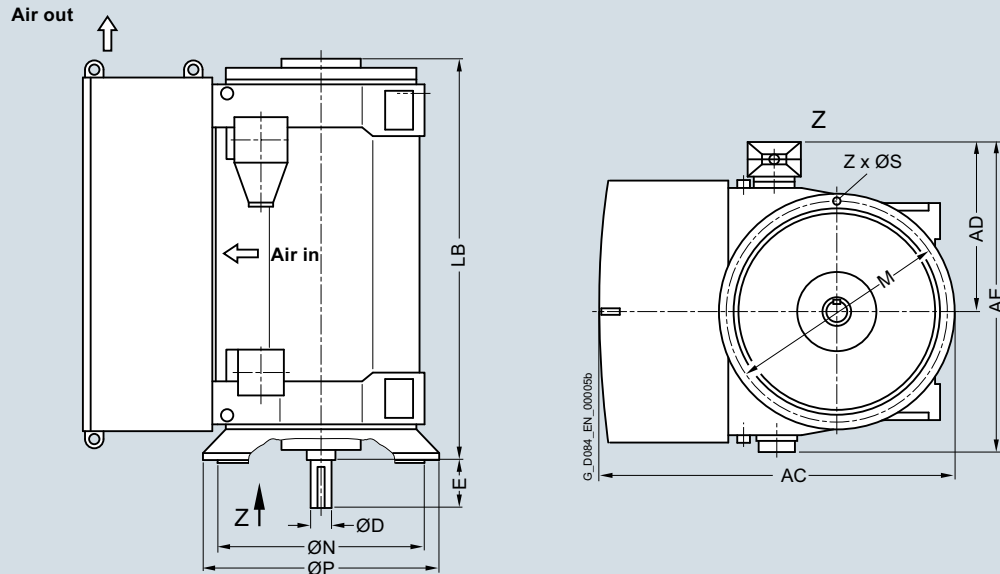

| Motor type | Weight<br>kg | Dimensions             |          |          |         |         |          |         |         |         |         |               |
|------------|--------------|------------------------|----------|----------|---------|---------|----------|---------|---------|---------|---------|---------------|
|            |              | AC <sup>1)</sup><br>mm | AD<br>mm | AE<br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |

## 9 ... 11 kV, IM V1 type of construction, anti-friction bearings – 1RA4 series

| 10-pole        |       |      |      |      |     |     |      |      |      |      |    |    |
|----------------|-------|------|------|------|-----|-----|------|------|------|------|----|----|
| 1RA6 500-3HE.8 | 5350  | 1640 | 1140 | 1950 | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 502-3HE.8 | 5750  | 1640 | 1140 | 1950 | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 504-3HE.8 | 6250  | 1640 | 1140 | 1950 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 506-3HE.8 | 6600  | 1640 | 1140 | 1950 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 560-3HE.8 | 7450  | 1890 | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 562-3HE.8 | 8000  | 1890 | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 564-3HE.8 | 8750  | 1890 | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 566-3HE.8 | 9250  | 1890 | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA4 630-3HE.8 | 11650 | 2430 | 1320 | 2290 | 220 | 280 | 2470 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 632-3HE.8 | 12250 | 2430 | 1320 | 2290 | 220 | 280 | 2470 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 634-3HE.8 | 13200 | 2430 | 1320 | 2290 | 220 | 280 | 2710 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 636-3HE.8 | 13950 | 2430 | 1320 | 2290 | 220 | 280 | 2710 | 2000 | 1800 | 1900 | 33 | 16 |
| 12-pole        |       |      |      |      |     |     |      |      |      |      |    |    |
| 1RA6 502-5HE.8 | 5750  | 1640 | 1140 | 1950 | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 504-5HE.8 | 6200  | 1640 | 1140 | 1950 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 506-5HE.8 | 6600  | 1640 | 1140 | 1950 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 16 |
| 1RA6 560-5HE.8 | 7300  | 1890 | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 562-5HE.8 | 7850  | 1890 | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 564-5HE.8 | 8650  | 1890 | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6 566-5HE.8 | 9100  | 1890 | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA4 630-5HE.8 | 11700 | 2430 | 1320 | 2290 | 220 | 280 | 2470 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 632-5HE.8 | 12300 | 2430 | 1320 | 2290 | 220 | 280 | 2470 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 634-5HE.8 | 13300 | 2430 | 1320 | 2290 | 220 | 280 | 2710 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4 636-5HE.8 | 14050 | 2430 | 1320 | 2290 | 220 | 280 | 2710 | 2000 | 1800 | 1900 | 33 | 16 |

## Note:

Higher pole numbers are available on request.


1) Dimension AC for 1RP6 on request.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Dimension drawings

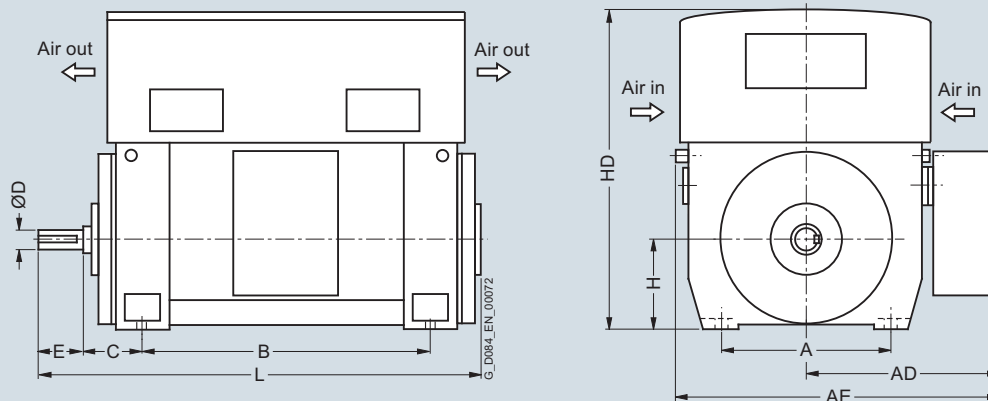

| Motor type | Weight<br>kg | Dimensions |    |    |   |   |   |   |   |    |   |
|------------|--------------|------------|----|----|---|---|---|---|---|----|---|
|            |              | A          | AD | AE | B | C | D | E | H | HD | L |

#### Up to 6.6 kV, NEMA version, IM B3 type of construction, anti-friction bearings, X ventilation – 1RP6 series

4-pole

|                              |       |      |      |      |      |     |     |     |     |      |      |
|------------------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RP6 710-4HJ.0 <sup>1)</sup> | 18100 | 1500 | 1500 | 2530 | 2000 | 355 | 220 | 280 | 710 | 3030 | 2980 |
| 1RP6 712-4HJ.0 <sup>1)</sup> | 18900 | 1500 | 1500 | 2530 | 2000 | 355 | 220 | 280 | 710 | 3030 | 2980 |
| 1RP6 714-4HJ.0 <sup>1)</sup> | 20300 | 1500 | 1500 | 2530 | 2240 | 355 | 220 | 280 | 710 | 3030 | 3220 |
| 1RP6 716-4HJ.0 <sup>1)</sup> | 21300 | 1500 | 1500 | 2530 | 2240 | 355 | 220 | 280 | 710 | 3030 | 3220 |

| Motor type | Weight<br>kg | Dimensions |    |    |   |   |   |   |   |    |   |
|------------|--------------|------------|----|----|---|---|---|---|---|----|---|
|            |              | A          | AD | AE | B | C | D | E | H | HD | L |

#### 9 ... 11 kV, NEMA version, IM B3 type of construction, anti-friction bearings, X ventilation – 1RP6 series


4-pole

|                              |       |      |      |      |      |     |     |     |     |      |      |
|------------------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RP6 710-4HJ.0 <sup>1)</sup> | 17800 | 1500 | 1500 | 2530 | 2000 | 355 | 220 | 280 | 710 | 3030 | 2980 |
| 1RP6 712-4HJ.0 <sup>1)</sup> | 18600 | 1500 | 1500 | 2530 | 2000 | 355 | 220 | 280 | 710 | 3030 | 2980 |
| 1RP6 714-4HJ.0 <sup>1)</sup> | 20100 | 1500 | 1500 | 2530 | 2240 | 355 | 220 | 280 | 710 | 3030 | 3220 |
| 1RP6 716-4HJ.0 <sup>1)</sup> | 21000 | 1500 | 1500 | 2530 | 2240 | 355 | 220 | 280 | 710 | 3030 | 3220 |

<sup>1)</sup> Anti-friction bearings only for 50 Hz operation.



## Dimension drawings

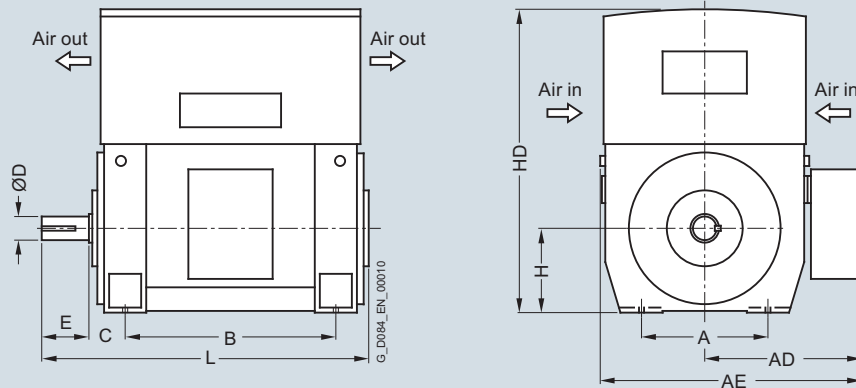

| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|--|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, NEMA version, IM B3 type of construction, anti-friction bearings, Z ventilation – 1RP6 series</b> |              |            |          |          |         |         |         |         |         |          |         |
| 6-pole   |              |            |          |          |         |         |         |         |         |          |         |
| 1RP6 710-6HJ.0   | 17200        | 1500       | 1500     | 2530     | 2000    | 355     | 240     | 330     | 710     | 3040     | 3030    |
| 1RP6 712-6HJ.0   | 17900        | 1500       | 1500     | 2530     | 2000    | 355     | 240     | 330     | 710     | 3040     | 3030    |
| 1RP6 714-6HJ.0   | 19600        | 1500       | 1500     | 2530     | 2240    | 355     | 240     | 330     | 710     | 3040     | 3270    |
| 1RP6 716-6HJ.0   | 20800        | 1500       | 1500     | 2530     | 2240    | 355     | 240     | 330     | 710     | 3040     | 3270    |
| 8-pole   |              |            |          |          |         |         |         |         |         |          |         |
| 1RP6 710-8HJ.0   | 17000        | 1500       | 1500     | 2530     | 2000    | 355     | 240     | 330     | 710     | 3040     | 3030    |
| 1RP6 712-8HJ.0   | 17800        | 1500       | 1500     | 2530     | 2000    | 355     | 240     | 330     | 710     | 3040     | 3030    |
| 1RP6 714-8HJ.0   | 19400        | 1500       | 1500     | 2530     | 2240    | 355     | 240     | 330     | 710     | 3040     | 3270    |
| 1RP6 716-8HJ.0   | 20500        | 1500       | 1500     | 2530     | 2240    | 355     | 240     | 330     | 710     | 3040     | 3270    |
| 10-pole  |              |            |          |          |         |         |         |         |         |          |         |
| 1RP6 710-3HJ.0   | 16800        | 1500       | 1500     | 2530     | 2000    | 355     | 240     | 330     | 710     | 3040     | 3030    |
| 1RP6 712-3HJ.0   | 17600        | 1500       | 1500     | 2530     | 2000    | 355     | 240     | 330     | 710     | 3040     | 3030    |
| 1RP6 714-3HJ.0   | 19300        | 1500       | 1500     | 2530     | 2240    | 355     | 240     | 330     | 710     | 3040     | 3270    |
| 1RP6 716-3HJ.0   | 20400        | 1500       | 1500     | 2530     | 2240    | 355     | 240     | 330     | 710     | 3040     | 3270    |

Note:


Higher pole numbers are available on request.

## Motors for line operation

Air-cooled motors

H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

### Dimension drawings

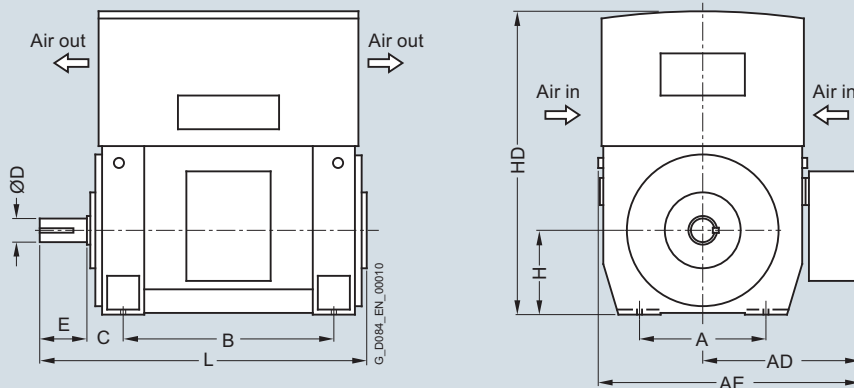

| Motor type | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|------------|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|            |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |

#### 9 ... 11 kV, NEMA version, IM B3 type of construction, anti-friction bearings, Z ventilation – 1RP6 series

##### 6-pole

|                |       |      |      |      |      |     |     |     |     |      |      |
|----------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RP6 710-6HJ.0 | 17000 | 1500 | 1500 | 2530 | 2000 | 355 | 240 | 330 | 710 | 3040 | 3030 |
| 1RP6 712-6HJ.0 | 17700 | 1500 | 1500 | 2530 | 2000 | 355 | 240 | 330 | 710 | 3040 | 3030 |
| 1RP6 714-6HJ.0 | 19500 | 1500 | 1500 | 2530 | 2240 | 355 | 240 | 330 | 710 | 3040 | 3270 |
| 1RP6 716-6HJ.0 | 20500 | 1500 | 1500 | 2530 | 2240 | 355 | 240 | 330 | 710 | 3040 | 3270 |

##### 8-pole

|                |       |      |      |      |      |     |     |     |     |      |      |
|----------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RP6 710-8HJ.0 | 16900 | 1500 | 1500 | 2530 | 2000 | 355 | 240 | 330 | 710 | 3040 | 3030 |
| 1RP6 712-8HJ.0 | 17600 | 1500 | 1500 | 2530 | 2000 | 355 | 240 | 330 | 710 | 3040 | 3030 |
| 1RP6 714-8HJ.0 | 19300 | 1500 | 1500 | 2530 | 2240 | 355 | 240 | 330 | 710 | 3040 | 3270 |
| 1RP6 716-8HJ.0 | 20300 | 1500 | 1500 | 2530 | 2240 | 355 | 240 | 330 | 710 | 3040 | 3270 |


##### 10-pole

|                |       |      |      |      |      |     |     |     |     |      |      |
|----------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RP6 710-3HJ.0 | 16800 | 1500 | 1500 | 2530 | 2000 | 355 | 240 | 330 | 710 | 3040 | 3030 |
| 1RP6 712-3HJ.0 | 17500 | 1500 | 1500 | 2530 | 2000 | 355 | 240 | 330 | 710 | 3040 | 3030 |
| 1RP6 714-3HJ.0 | 19200 | 1500 | 1500 | 2530 | 2240 | 355 | 240 | 330 | 710 | 3040 | 3270 |
| 1RP6 716-3HJ.0 | 20300 | 1500 | 1500 | 2530 | 2240 | 355 | 240 | 330 | 710 | 3040 | 3270 |

#### Note:

Higher pole numbers are available on request.

## Dimension drawings

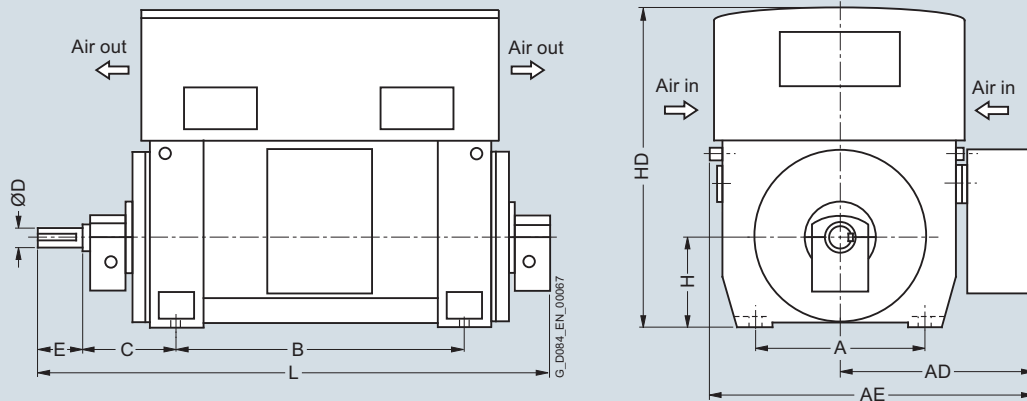

| Motor type | Weight<br>kg | Dimensions |    |    |   |   |   |   |   |    |   |
|------------|--------------|------------|----|----|---|---|---|---|---|----|---|
|            |              | A          | AD | AE | B | C | D | E | H | HD | L |

## Up to 6.6 kV, NEMA version, IM B3 type of construction, sleeve bearings, X ventilation – 1RP6 series

| 2-pole                             |       |      |      |      |      |     |     |     |     |      |      |
|------------------------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RP6 710-2HJ.0                     | 16300 | 1500 | 1500 | 2530 | 2000 | 600 | 180 | 240 | 710 | 3030 | 3370 |
| 1RP6 712-2HJ.0                     | 17100 | 1500 | 1500 | 2530 | 2000 | 600 | 180 | 240 | 710 | 3030 | 3370 |
| 1RP6 714-2HJ.0                     | 18400 | 1500 | 1500 | 2530 | 2240 | 600 | 180 | 240 | 710 | 3030 | 3610 |
| 1RP6 716-2HJ.0                     | 19400 | 1500 | 1500 | 2530 | 2240 | 600 | 180 | 240 | 710 | 3030 | 3610 |
| 4-pole                             |       |      |      |      |      |     |     |     |     |      |      |
| 1RP6 710-4HJ.0-Z K96 <sup>1)</sup> | 18100 | 1500 | 1500 | 2530 | 2000 | 530 | 220 | 280 | 710 | 3030 | 3260 |
| 1RP6 712-4HJ.0-Z K96 <sup>1)</sup> | 18900 | 1500 | 1500 | 2530 | 2000 | 530 | 220 | 280 | 710 | 3030 | 3260 |
| 1RP6 714-4HJ.0-Z K96 <sup>1)</sup> | 20300 | 1500 | 1500 | 2530 | 2240 | 530 | 220 | 280 | 710 | 3030 | 3500 |
| 1RP6 716-4HJ.0-Z K96 <sup>1)</sup> | 21300 | 1500 | 1500 | 2530 | 2240 | 530 | 220 | 280 | 710 | 3030 | 3500 |

| Motor type | Weight<br>kg | Dimensions |    |    |   |   |   |   |   |    |   |
|------------|--------------|------------|----|----|---|---|---|---|---|----|---|
|            |              | A          | AD | AE | B | C | D | E | H | HD | L |

## 9 ... 11 kV, NEMA version, IM B3 type of construction, sleeve bearings, X ventilation – 1RP6 series

| 2-pole                             |       |      |      |      |      |     |     |     |     |      |      |
|------------------------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RP6 710-2HJ.0                     | 16200 | 1500 | 1500 | 2530 | 2000 | 600 | 180 | 240 | 710 | 3030 | 3370 |
| 1RP6 712-2HJ.0                     | 17000 | 1500 | 1500 | 2530 | 2000 | 600 | 180 | 240 | 710 | 3030 | 3370 |
| 1RP6 714-2HJ.0                     | 18200 | 1500 | 1500 | 2530 | 2240 | 600 | 180 | 240 | 710 | 3030 | 3610 |
| 1RP6 716-2HJ.0                     | 19200 | 1500 | 1500 | 2530 | 2240 | 600 | 180 | 240 | 710 | 3030 | 3610 |
| 4-pole                             |       |      |      |      |      |     |     |     |     |      |      |
| 1RP6 710-4HJ.0-Z K96 <sup>1)</sup> | 17800 | 1500 | 1500 | 2530 | 2000 | 530 | 220 | 280 | 710 | 3030 | 3260 |
| 1RP6 712-4HJ.0-Z K96 <sup>1)</sup> | 18600 | 1500 | 1500 | 2530 | 2000 | 530 | 220 | 280 | 710 | 3030 | 3260 |
| 1RP6 714-4HJ.0-Z K96 <sup>1)</sup> | 20100 | 1500 | 1500 | 2530 | 2240 | 530 | 220 | 280 | 710 | 3030 | 3500 |
| 1RP6 716-4HJ.0-Z K96 <sup>1)</sup> | 21000 | 1500 | 1500 | 2530 | 2240 | 530 | 220 | 280 | 710 | 3030 | 3500 |


<sup>1)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Dimension drawings

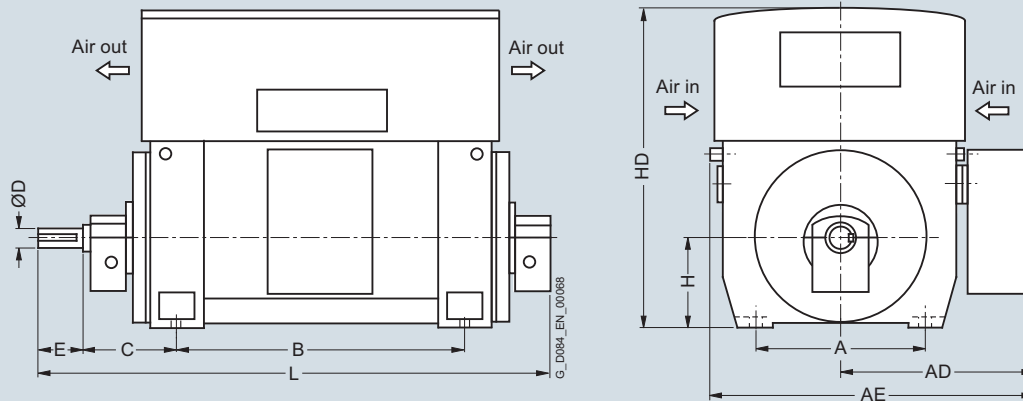


| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|---|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|   |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, NEMA version, IM B3 type of construction, sleeve bearings, Z ventilation – 1RP6 series</b> |              |            |          |          |         |         |         |         |         |          |         |
| <b>6-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RP6 710-6HJ.0-Z K96  | 18200        | 1500       | 1500     | 2530     | 2000    | 670     | 240     | 330     | 710     | 3040     | 3600    |
| 1RP6 712-6HJ.0-Z K96  | 18900        | 1500       | 1500     | 2530     | 2000    | 670     | 240     | 330     | 710     | 3040     | 3600    |
| 1RP6 714-6HJ.0-Z K96  | 20700        | 1500       | 1500     | 2530     | 2240    | 670     | 240     | 330     | 710     | 3040     | 3840    |
| 1RP6 716-6HJ.0-Z K96  | 21800        | 1500       | 1500     | 2530     | 2240    | 670     | 240     | 330     | 710     | 3040     | 3840    |
| <b>8-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RP6 710-8HJ.0-Z K96  | 18000        | 1500       | 1500     | 2530     | 2000    | 670     | 240     | 330     | 710     | 3040     | 3600    |
| 1RP6 712-8HJ.0-Z K96  | 18800        | 1500       | 1500     | 2530     | 2000    | 670     | 240     | 330     | 710     | 3040     | 3600    |
| 1RP6 714-8HJ.0-Z K96  | 20500        | 1500       | 1500     | 2530     | 2240    | 670     | 240     | 330     | 710     | 3040     | 3840    |
| 1RP6 716-8HJ.0-Z K96  | 21600        | 1500       | 1500     | 2530     | 2240    | 670     | 240     | 330     | 710     | 3040     | 3840    |
| <b>10-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RP6 710-3HJ.0-Z K96  | 17800        | 1500       | 1500     | 2530     | 2000    | 670     | 240     | 330     | 710     | 3040     | 3600    |
| 1RP6 712-3HJ.0-Z K96  | 18700        | 1500       | 1500     | 2530     | 2000    | 670     | 240     | 330     | 710     | 3040     | 3600    |
| 1RP6 714-3HJ.0-Z K96  | 20300        | 1500       | 1500     | 2530     | 2240    | 670     | 240     | 330     | 710     | 3040     | 3840    |
| 1RP6 716-3HJ.0-Z K96  | 21500        | 1500       | 1500     | 2530     | 2240    | 670     | 240     | 330     | 710     | 3040     | 3840    |

#### Note:

Higher pole numbers are available on request.

## Dimension drawings

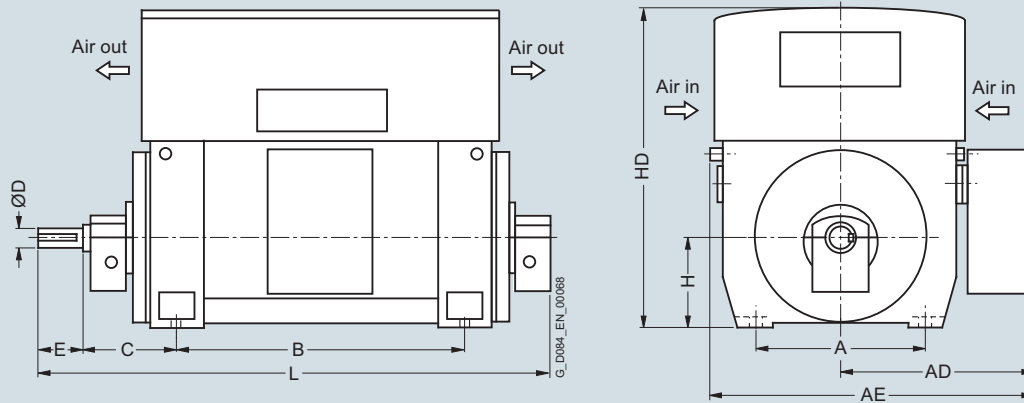

| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|--|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>9 ... 11 kV, NEMA version, IM B3 type of construction, sleeve bearings, Z ventilation – 1RP6 series</b> |              |            |          |          |         |         |         |         |         |          |         |
| 6-pole   |              |            |          |          |         |         |         |         |         |          |         |
| 1RP6 710-6HJ.0-Z K96   | 18000        | 1500       | 1500     | 2530     | 2000    | 670     | 240     | 330     | 710     | 3040     | 3600    |
| 1RP6 712-6HJ.0-Z K96   | 18800        | 1500       | 1500     | 2530     | 2000    | 670     | 240     | 330     | 710     | 3040     | 3600    |
| 1RP6 714-6HJ.0-Z K96   | 20500        | 1500       | 1500     | 2530     | 2240    | 670     | 240     | 330     | 710     | 3040     | 3840    |
| 1RP6 716-6HJ.0-Z K96   | 21600        | 1500       | 1500     | 2530     | 2240    | 670     | 240     | 330     | 710     | 3040     | 3840    |
| 8-pole   |              |            |          |          |         |         |         |         |         |          |         |
| 1RP6 710-8HJ.0-Z K96   | 17900        | 1500       | 1500     | 2530     | 2000    | 670     | 240     | 330     | 710     | 3040     | 3600    |
| 1RP6 712-8HJ.0-Z K96   | 18700        | 1500       | 1500     | 2530     | 2000    | 670     | 240     | 330     | 710     | 3040     | 3600    |
| 1RP6 714-8HJ.0-Z K96   | 20300        | 1500       | 1500     | 2530     | 2240    | 670     | 240     | 330     | 710     | 3040     | 3840    |
| 1RP6 716-8HJ.0-Z K96   | 21400        | 1500       | 1500     | 2530     | 2240    | 670     | 240     | 330     | 710     | 3040     | 3840    |
| 10-pole  |              |            |          |          |         |         |         |         |         |          |         |
| 1RP6 710-3HJ.0-Z K96   | 17800        | 1500       | 1500     | 2530     | 2000    | 670     | 240     | 330     | 710     | 3040     | 3600    |
| 1RP6 712-3HJ.0-Z K96   | 18600        | 1500       | 1500     | 2530     | 2000    | 670     | 240     | 330     | 710     | 3040     | 3600    |
| 1RP6 714-3HJ.0-Z K96   | 20200        | 1500       | 1500     | 2530     | 2240    | 670     | 240     | 330     | 710     | 3040     | 3840    |
| 1RP6 716-3HJ.0-Z K96   | 21300        | 1500       | 1500     | 2530     | 2240    | 670     | 240     | 330     | 710     | 3040     | 3840    |

Note:


Higher pole numbers are available on request.

## Motors for line operation

Air-cooled motors

### H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Dimension drawings

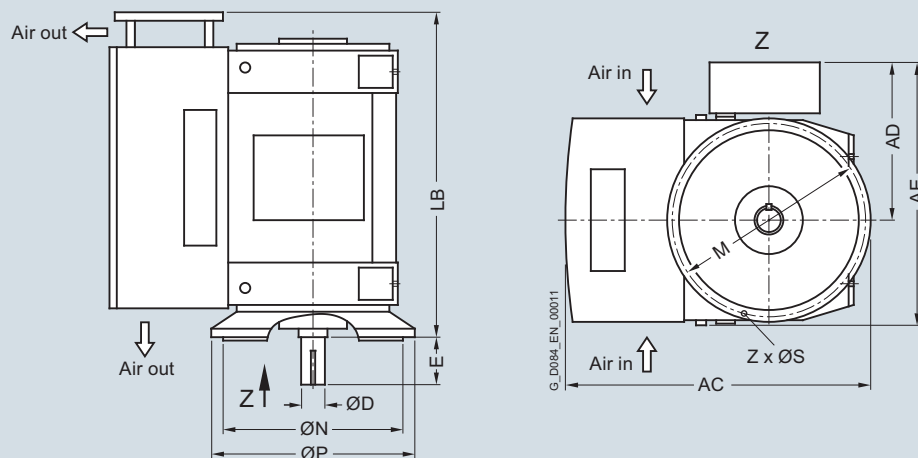

| Motor type | Weight<br>kg | Dimensions |          |          |         |         |          |         |         |         |         |               |
|------------|--------------|------------|----------|----------|---------|---------|----------|---------|---------|---------|---------|---------------|
|            |              | AC<br>mm   | AD<br>mm | AE<br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |

#### Up to 6.6 kV, NEMA version, IM V1 type of construction, anti-friction bearings, Z ventilation – 1RP6 series

##### 6-pole

|                |       |      |      |      |     |     |      |      |      |      |    |    |
|----------------|-------|------|------|------|-----|-----|------|------|------|------|----|----|
| 1RP6 710-6HE.4 | 18400 | 3330 | 1500 | 2530 | 240 | 330 | 3065 | 2000 | 1800 | 1900 | 33 | 24 |
| 1RP6 712-6HE.4 | 19100 | 3330 | 1500 | 2530 | 240 | 330 | 3065 | 2000 | 1800 | 1900 | 33 | 24 |
| 1RP6 714-6HE.4 | 20800 | 3330 | 1500 | 2530 | 240 | 330 | 3305 | 2000 | 1800 | 1900 | 33 | 24 |
| 1RP6 716-6HE.4 | 22000 | 3330 | 1500 | 2530 | 240 | 330 | 3305 | 2000 | 1800 | 1900 | 33 | 24 |

##### 8-pole

|                |       |      |      |      |     |     |      |      |      |      |    |    |
|----------------|-------|------|------|------|-----|-----|------|------|------|------|----|----|
| 1RP6 710-8HE.4 | 18200 | 3330 | 1500 | 2530 | 240 | 330 | 3065 | 2000 | 1800 | 1900 | 33 | 24 |
| 1RP6 712-8HE.4 | 19000 | 3330 | 1500 | 2530 | 240 | 330 | 3065 | 2000 | 1800 | 1900 | 33 | 24 |
| 1RP6 714-8HE.4 | 20600 | 3330 | 1500 | 2530 | 240 | 330 | 3305 | 2000 | 1800 | 1900 | 33 | 24 |
| 1RP6 716-8HE.4 | 21800 | 3330 | 1500 | 2530 | 240 | 330 | 3305 | 2000 | 1800 | 1900 | 33 | 24 |


##### 10-pole

|                |       |      |      |      |     |     |      |      |      |      |    |    |
|----------------|-------|------|------|------|-----|-----|------|------|------|------|----|----|
| 1RP6 710-3HE.4 | 18000 | 3330 | 1500 | 2530 | 240 | 330 | 3065 | 2000 | 1800 | 1900 | 33 | 24 |
| 1RP6 712-3HE.4 | 18900 | 3330 | 1500 | 2530 | 240 | 330 | 3065 | 2000 | 1800 | 1900 | 33 | 24 |
| 1RP6 714-3HE.4 | 20500 | 3330 | 1500 | 2530 | 240 | 330 | 3305 | 2000 | 1800 | 1900 | 33 | 24 |
| 1RP6 716-3HE.4 | 21600 | 3330 | 1500 | 2530 | 240 | 330 | 3305 | 2000 | 1800 | 1900 | 33 | 24 |

#### Note:

Higher pole numbers are available on request.

## Dimension drawings

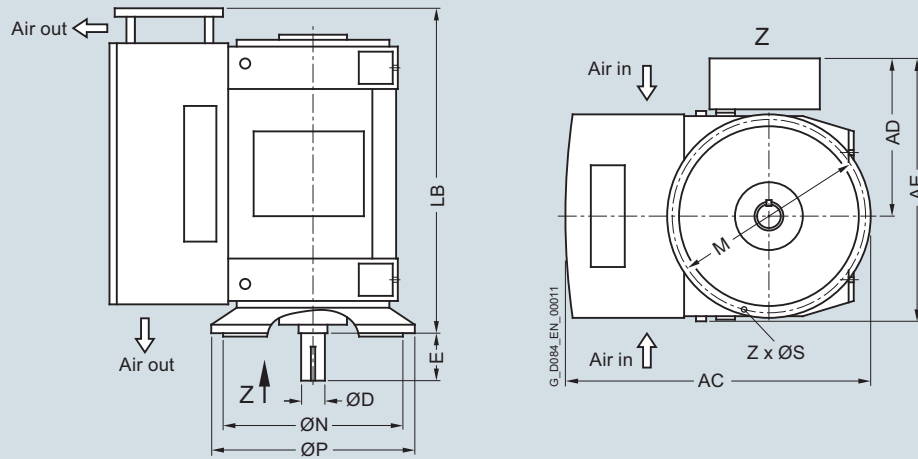

| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |          |         |         |         |         |               |
|---|--------------|------------|----------|----------|---------|---------|----------|---------|---------|---------|---------|---------------|
|   |              | AC<br>mm   | AD<br>mm | AE<br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |
| <b>9 ... 11 kV, NEMA version, IM V1 type of construction, anti-friction bearings, Z ventilation – 1RP6 series</b> |              |            |          |          |         |         |          |         |         |         |         |               |
| <b>6-pole</b>   |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RP6 710-6HE.4  | 18200        | 3330       | 1500     | 2530     | 240     | 330     | 3065     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RP6 712-6HE.4  | 19000        | 3330       | 1500     | 2530     | 240     | 330     | 3065     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RP6 714-6HE.4  | 20700        | 3330       | 1500     | 2530     | 240     | 330     | 3305     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RP6 716-6HE.4  | 21800        | 3330       | 1500     | 2530     | 240     | 330     | 3305     | 2000    | 1800    | 1900    | 33      | 24            |
| <b>8-pole</b>   |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RP6 710-8HE.4  | 18100        | 3330       | 1500     | 2530     | 240     | 330     | 3065     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RP6 712-8HE.4  | 18900        | 3330       | 1500     | 2530     | 240     | 330     | 3065     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RP6 714-8HE.4  | 20500        | 3330       | 1500     | 2530     | 240     | 330     | 3305     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RP6 716-8HE.4  | 21600        | 3330       | 1500     | 2530     | 240     | 330     | 3305     | 2000    | 1800    | 1900    | 33      | 24            |
| <b>10-pole</b>  |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RP6 710-3HE.4  | 18000        | 3330       | 1500     | 2530     | 240     | 330     | 3065     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RP6 712-3HE.4  | 18800        | 3330       | 1500     | 2530     | 240     | 330     | 3065     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RP6 714-3HE.4  | 20400        | 3330       | 1500     | 2530     | 240     | 330     | 3305     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RP6 716-3HE.4  | 21500        | 3330       | 1500     | 2530     | 240     | 330     | 3305     | 2000    | 1800    | 1900    | 33      | 24            |

Note:


Higher pole numbers are available on request.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Dimension drawings

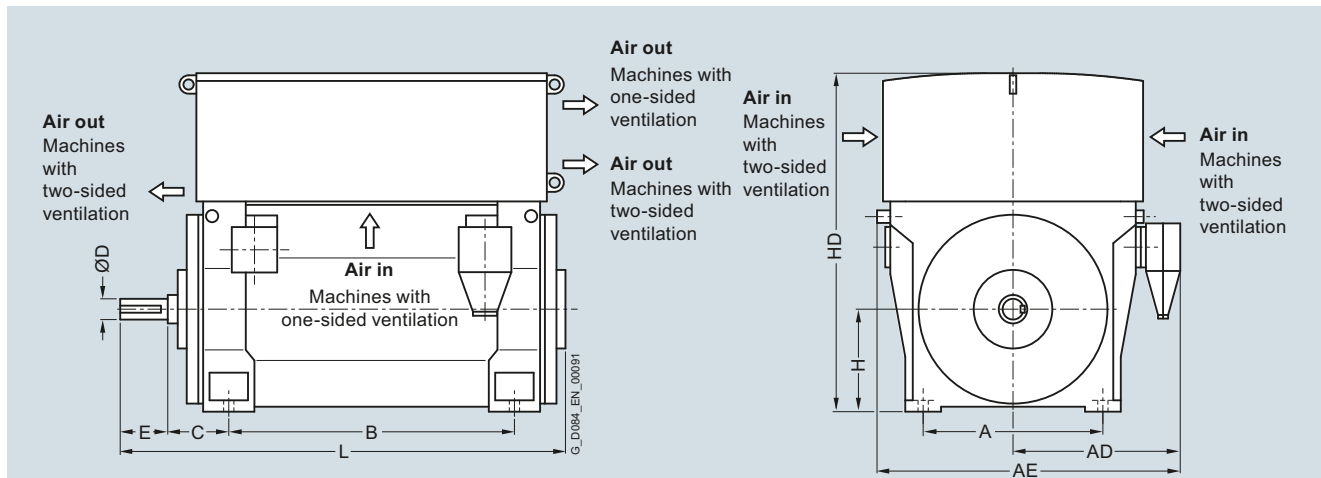

| Motor type | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|------------|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|            |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |

#### Up to 6.6 kV, IM B3 type of construction, anti-friction bearings – 1RA7 series

##### 4-pole

|            |       |      |      |      |      |     |     |     |     |       |      |
|------------|-------|------|------|------|------|-----|-----|-----|-----|-------|------|
| 1RA7 710-4 | 15700 | 1500 | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | O. R. | 3070 |
| 1RA7 712-4 | 16300 | 1500 | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | O. R. | 3070 |
| 1RA7 714-4 | 17700 | 1500 | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | O. R. | 3310 |
| 1RA7 716-4 | 18900 | 1500 | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | O. R. | 3310 |

##### 6-pole

|            |       |      |      |      |      |     |     |     |     |       |      |
|------------|-------|------|------|------|------|-----|-----|-----|-----|-------|------|
| 1RA7 710-6 | 16000 | 1500 | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | O. R. | 3070 |
| 1RA7 712-6 | 17000 | 1500 | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | O. R. | 3070 |
| 1RA7 714-6 | 18500 | 1500 | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | O. R. | 3310 |
| 1RA7 716-6 | 19600 | 1500 | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | O. R. | 3310 |

##### 8-pole

|            |       |      |      |      |      |     |     |     |     |       |      |
|------------|-------|------|------|------|------|-----|-----|-----|-----|-------|------|
| 1RA7 710-8 | 15600 | 1500 | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | O. R. | 3070 |
| 1RA7 712-8 | 16500 | 1500 | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | O. R. | 3070 |
| 1RA7 714-8 | 18000 | 1500 | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | O. R. | 3310 |
| 1RA7 716-8 | 19000 | 1500 | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | O. R. | 3310 |

##### 10-pole


|            |       |      |      |      |      |     |     |     |     |       |      |
|------------|-------|------|------|------|------|-----|-----|-----|-----|-------|------|
| 1RA7 710-3 | 15600 | 1500 | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | O. R. | 3070 |
| 1RA7 712-3 | 16500 | 1500 | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | O. R. | 3070 |
| 1RA7 714-3 | 18000 | 1500 | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | O. R. | 3310 |
| 1RA7 716-3 | 19000 | 1500 | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | O. R. | 3310 |

#### Note:

Higher pole numbers are available on request.



## Dimension drawings

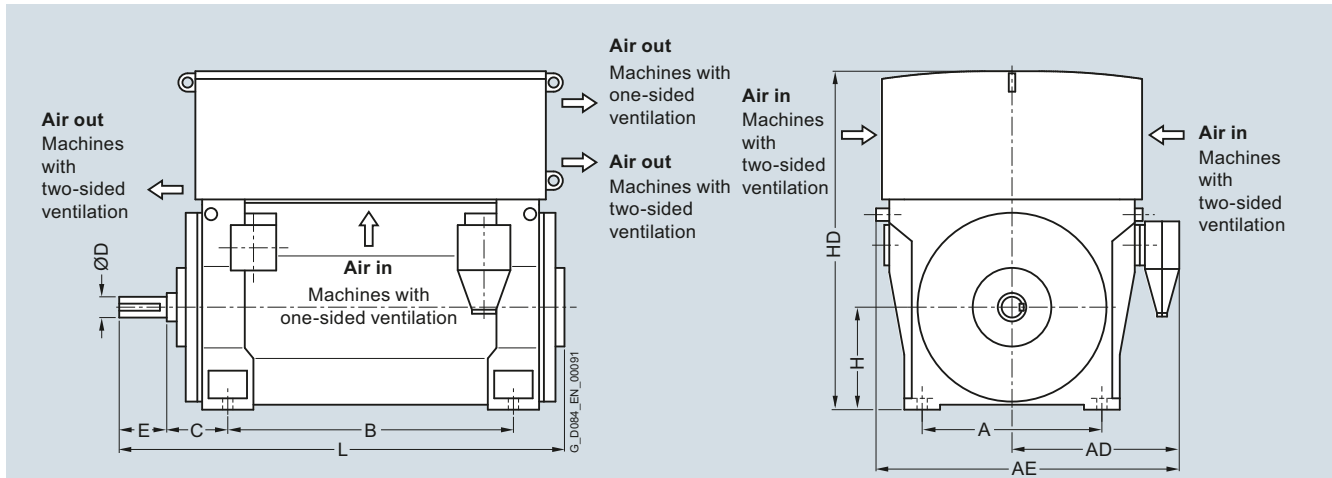

| Motor type | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|------------|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|            |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |

## 9 ... 11 kV, IM B3 type of construction, anti-friction bearings – 1RA7 series

## 4-pole

|            |       |      |      |      |      |     |     |     |     |       |      |
|------------|-------|------|------|------|------|-----|-----|-----|-----|-------|------|
| 1RA7 710-4 | 16200 | 1500 | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | O. R. | 3070 |
| 1RA7 712-4 | 16900 | 1500 | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | O. R. | 3070 |
| 1RA7 714-4 | 18200 | 1500 | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | O. R. | 3310 |
| 1RA7 716-4 | 19400 | 1500 | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | O. R. | 3310 |

## 6-pole

|            |       |      |      |      |      |     |     |     |     |       |      |
|------------|-------|------|------|------|------|-----|-----|-----|-----|-------|------|
| 1RA7 710-6 | 16600 | 1500 | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | O. R. | 3070 |
| 1RA7 712-6 | 17600 | 1500 | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | O. R. | 3070 |
| 1RA7 714-6 | 19100 | 1500 | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | O. R. | 3310 |
| 1RA7 716-6 | 20200 | 1500 | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | O. R. | 3310 |

## 8-pole

|            |       |      |      |      |      |     |     |     |     |       |      |
|------------|-------|------|------|------|------|-----|-----|-----|-----|-------|------|
| 1RA7 710-8 | 16200 | 1500 | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | O. R. | 3070 |
| 1RA7 712-8 | 17100 | 1500 | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | O. R. | 3070 |
| 1RA7 714-8 | 18600 | 1500 | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | O. R. | 3310 |
| 1RA7 716-8 | 19600 | 1500 | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | O. R. | 3310 |

## 10-pole

|            |       |      |      |      |      |     |     |     |     |       |      |
|------------|-------|------|------|------|------|-----|-----|-----|-----|-------|------|
| 1RA7 710-3 | 16300 | 1500 | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | O. R. | 3070 |
| 1RA7 712-3 | 17200 | 1500 | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | O. R. | 3070 |
| 1RA7 714-3 | 18700 | 1500 | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | O. R. | 3310 |
| 1RA7 716-3 | 19600 | 1500 | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | O. R. | 3310 |

## Note:


Higher pole numbers are available on request.

## Motors for line operation

### Air-cooled motors

#### H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Dimension drawings

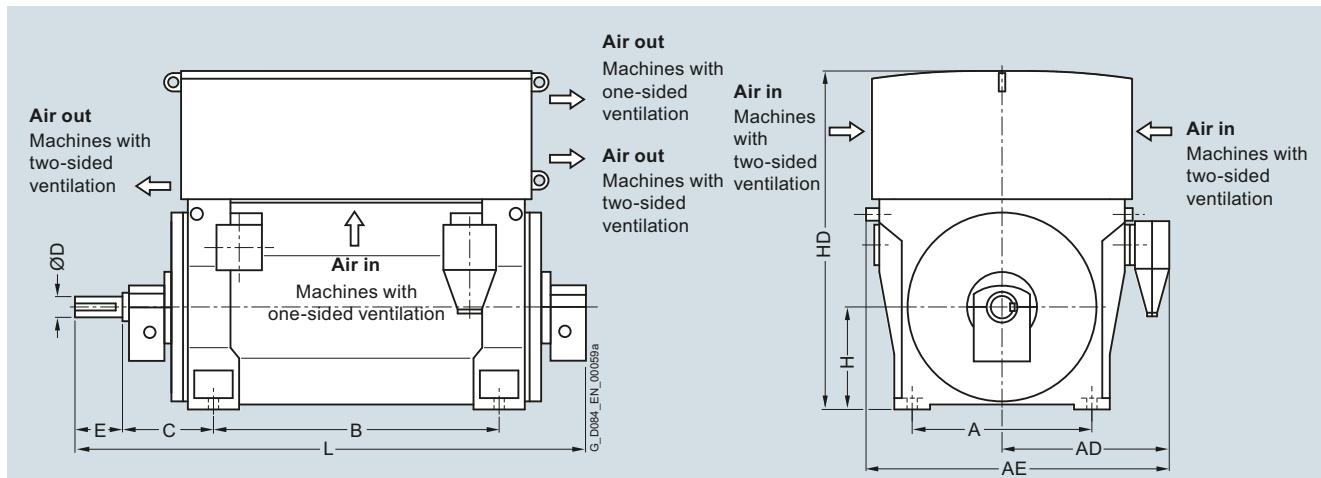

| Motor type | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|------------|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|            |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |

#### Up to 6.6 kV, IM B3 type of construction, sleeve bearings – 1RA7 series

##### 2-pole

|            |       |      |      |      |      |     |     |     |     |       |      |
|------------|-------|------|------|------|------|-----|-----|-----|-----|-------|------|
| 1RA7 710-2 | 14900 | 1500 | 1800 | 2900 | 2000 | 560 | 200 | 280 | 710 | O. R. | 3320 |
| 1RA7 712-2 | 15500 | 1500 | 1800 | 2900 | 2000 | 560 | 200 | 280 | 710 | O. R. | 3320 |
| 1RA7 714-2 | 16700 | 1500 | 1800 | 2900 | 2240 | 560 | 200 | 280 | 710 | O. R. | 3560 |
| 1RA7 716-2 | 17500 | 1500 | 1800 | 2900 | 2240 | 560 | 200 | 280 | 710 | O. R. | 3560 |

##### 4-pole

|            |       |      |      |      |      |     |     |     |     |       |      |
|------------|-------|------|------|------|------|-----|-----|-----|-----|-------|------|
| 1RA7 710-4 | 16100 | 1500 | 1800 | 2900 | 2000 | 710 | 220 | 350 | 710 | O. R. | 3650 |
| 1RA7 712-4 | 16700 | 1500 | 1800 | 2900 | 2000 | 710 | 220 | 350 | 710 | O. R. | 3650 |
| 1RA7 714-4 | 18000 | 1500 | 1800 | 2900 | 2240 | 710 | 220 | 350 | 710 | O. R. | 3890 |
| 1RA7 716-4 | 19300 | 1500 | 1800 | 2900 | 2240 | 710 | 220 | 350 | 710 | O. R. | 3890 |

##### 6-pole

|            |       |      |      |      |      |     |     |     |     |       |      |
|------------|-------|------|------|------|------|-----|-----|-----|-----|-------|------|
| 1RA7 710-6 | 16100 | 1500 | 1800 | 2900 | 2000 | 670 | 220 | 350 | 710 | O. R. | 3570 |
| 1RA7 712-6 | 17100 | 1500 | 1800 | 2900 | 2000 | 670 | 220 | 350 | 710 | O. R. | 3570 |
| 1RA7 714-6 | 18600 | 1500 | 1800 | 2900 | 2240 | 670 | 220 | 350 | 710 | O. R. | 3810 |
| 1RA7 716-6 | 19700 | 1500 | 1800 | 2900 | 2240 | 670 | 220 | 350 | 710 | O. R. | 3810 |

##### 8-pole

|            |       |      |      |      |      |     |     |     |     |       |      |
|------------|-------|------|------|------|------|-----|-----|-----|-----|-------|------|
| 1RA7 710-8 | 15700 | 1500 | 1800 | 2900 | 2000 | 670 | 220 | 350 | 710 | O. R. | 3570 |
| 1RA7 712-8 | 16600 | 1500 | 1800 | 2900 | 2000 | 670 | 220 | 350 | 710 | O. R. | 3570 |
| 1RA7 714-8 | 18000 | 1500 | 1800 | 2900 | 2240 | 670 | 220 | 350 | 710 | O. R. | 3810 |
| 1RA7 716-8 | 19000 | 1500 | 1800 | 2900 | 2240 | 670 | 220 | 350 | 710 | O. R. | 3810 |


##### 10-pole

|            |       |      |      |      |      |     |     |     |     |       |      |
|------------|-------|------|------|------|------|-----|-----|-----|-----|-------|------|
| 1RA7 710-3 | 15600 | 1500 | 1800 | 2900 | 2000 | 670 | 220 | 350 | 710 | O. R. | 3570 |
| 1RA7 712-3 | 16600 | 1500 | 1800 | 2900 | 2000 | 670 | 220 | 350 | 710 | O. R. | 3570 |
| 1RA7 714-3 | 18100 | 1500 | 1800 | 2900 | 2240 | 670 | 220 | 350 | 710 | O. R. | 3810 |
| 1RA7 716-3 | 19000 | 1500 | 1800 | 2900 | 2240 | 670 | 220 | 350 | 710 | O. R. | 3810 |

#### Note:

Higher pole numbers are available on request.

## Dimension drawings

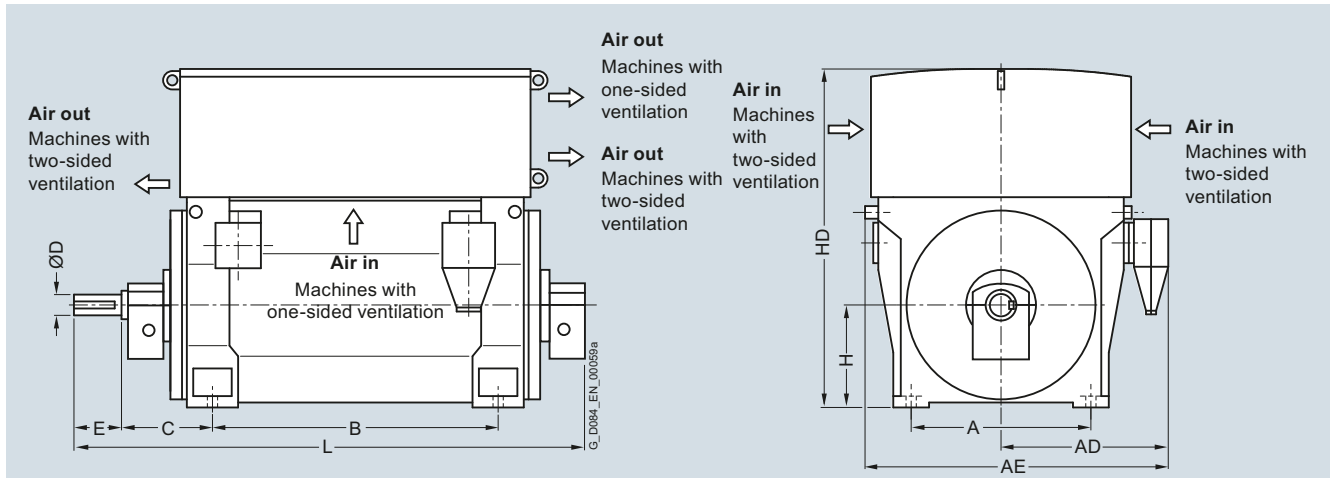

| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|---|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|   |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>9 ... 11 kV, IM B3 type of construction, sleeve bearings – 1RA7 series</b> |              |            |          |          |         |         |         |         |         |          |         |
| 2-pole  |              |            |          |          |         |         |         |         |         |          |         |
| 1RA7 710-2  | 15300        | 1500       | 1800     | 2900     | 2000    | 560     | 200     | 280     | 710     | O. R.    | 3320    |
| 1RA7 712-2  | 16000        | 1500       | 1800     | 2900     | 2000    | 560     | 200     | 280     | 710     | O. R.    | 3320    |
| 1RA7 714-2  | 17200        | 1500       | 1800     | 2900     | 2240    | 560     | 200     | 280     | 710     | O. R.    | 3560    |
| 1RA7 716-2  | 17900        | 1500       | 1800     | 2900     | 2240    | 560     | 200     | 280     | 710     | O. R.    | 3560    |
| 4-pole  |              |            |          |          |         |         |         |         |         |          |         |
| 1RA7 710-4  | 16600        | 1500       | 1800     | 2900     | 2000    | 710     | 220     | 350     | 710     | O. R.    | 3650    |
| 1RA7 712-4  | 17300        | 1500       | 1800     | 2900     | 2000    | 710     | 220     | 350     | 710     | O. R.    | 3650    |
| 1RA7 714-4  | 18600        | 1500       | 1800     | 2900     | 2240    | 710     | 220     | 350     | 710     | O. R.    | 3890    |
| 1RA7 716-4  | 19800        | 1500       | 1800     | 2900     | 2240    | 710     | 220     | 350     | 710     | O. R.    | 3890    |
| 6-pole  |              |            |          |          |         |         |         |         |         |          |         |
| 1RA7 710-6  | 16500        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | O. R.    | 3570    |
| 1RA7 712-6  | 17600        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | O. R.    | 3570    |
| 1RA7 714-6  | 19100        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | O. R.    | 3810    |
| 1RA7 716-6  | 20200        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | O. R.    | 3810    |
| 8-pole  |              |            |          |          |         |         |         |         |         |          |         |
| 1RA7 710-8  | 16200        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | O. R.    | 3570    |
| 1RA7 712-8  | 17100        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | O. R.    | 3570    |
| 1RA7 714-8  | 18600        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | O. R.    | 3810    |
| 1RA7 716-8  | 19600        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | O. R.    | 3810    |
| 10-pole   |              |            |          |          |         |         |         |         |         |          |         |
| 1RA7 710-3  | 16300        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | O. R.    | 3570    |
| 1RA7 712-3  | 17300        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | O. R.    | 3570    |
| 1RA7 714-3  | 18700        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | O. R.    | 3810    |
| 1RA7 716-3  | 19600        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | O. R.    | 3810    |

Note:


Higher pole numbers are available on request.

## Motors for line operation

Air-cooled motors

### H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Dimension drawings

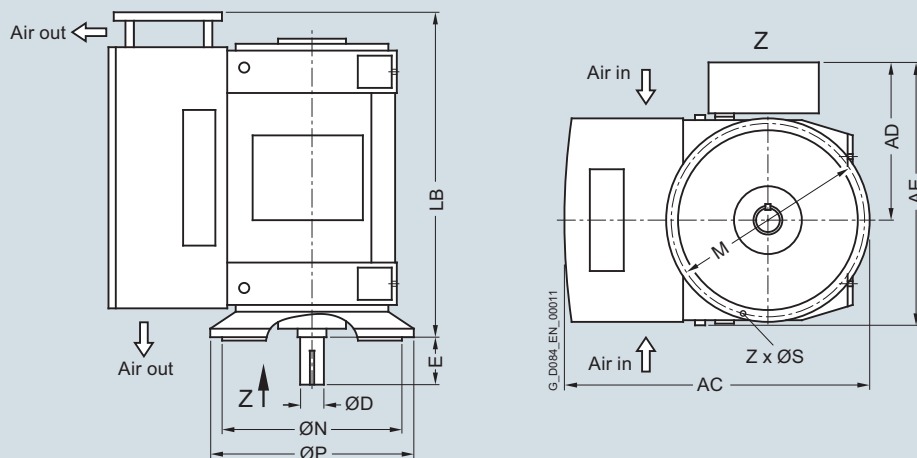

| Motor type | Weight<br>kg | Dimensions |          |          |         |         |          |         |         |         |         |               |
|------------|--------------|------------|----------|----------|---------|---------|----------|---------|---------|---------|---------|---------------|
|            |              | AC<br>mm   | AD<br>mm | AE<br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |

#### Up to 6.6 kV, IM V1 type of construction, anti-friction bearings, Z ventilation – 1RA7 series

##### 6-pole

|            |       |       |      |      |     |     |      |      |      |      |    |    |
|------------|-------|-------|------|------|-----|-----|------|------|------|------|----|----|
| 1RA7 710-6 | 16700 | O. R. | 1800 | 2900 | 220 | 350 | 3140 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RA7 712-6 | 17700 | O. R. | 1800 | 2900 | 220 | 350 | 3140 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RA7 714-6 | 19200 | O. R. | 1800 | 2900 | 220 | 350 | 3380 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RA7 716-6 | 20300 | O. R. | 1800 | 2900 | 220 | 350 | 3380 | 2000 | 1800 | 1900 | 35 | 24 |

##### 8-pole

|            |       |       |      |      |     |     |      |      |      |      |    |    |
|------------|-------|-------|------|------|-----|-----|------|------|------|------|----|----|
| 1RA7 710-8 | 16600 | O. R. | 1800 | 2900 | 220 | 350 | 3140 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RA7 712-8 | 17600 | O. R. | 1800 | 2900 | 220 | 350 | 3140 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RA7 714-8 | 19100 | O. R. | 1800 | 2900 | 220 | 350 | 3380 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RA7 716-8 | 20100 | O. R. | 1800 | 2900 | 220 | 350 | 3380 | 2000 | 1800 | 1900 | 35 | 24 |


##### 10-pole

|            |       |       |      |      |     |     |      |      |      |      |    |    |
|------------|-------|-------|------|------|-----|-----|------|------|------|------|----|----|
| 1RA7 710-3 | 16400 | O. R. | 1800 | 2900 | 220 | 350 | 3140 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RA7 712-3 | 17300 | O. R. | 1800 | 2900 | 220 | 350 | 3140 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RA7 714-3 | 18900 | O. R. | 1800 | 2900 | 220 | 350 | 3380 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RA7 716-3 | 19800 | O. R. | 1800 | 2900 | 220 | 350 | 3380 | 2000 | 1800 | 1900 | 35 | 24 |

#### Note:

Higher pole numbers are available on request.

## Dimension drawings

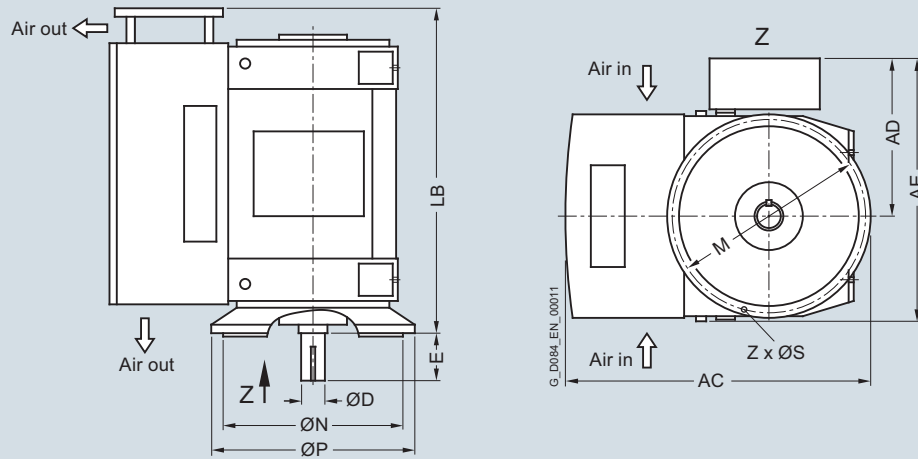

| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |          |         |         |         |         |               |
|---|--------------|------------|----------|----------|---------|---------|----------|---------|---------|---------|---------|---------------|
|   |              | AC<br>mm   | AD<br>mm | AE<br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |
| <b>9 ... 11 kV, IM V1 type of construction, anti-friction bearings, Z ventilation – 1RA7 series</b> |              |            |          |          |         |         |          |         |         |         |         |               |
| 6-pole  |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RA7 710-6  | 17000        | O. R.      | 1800     | 2900     | 220     | 350     | 3140     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RA7 712-6  | 18100        | O. R.      | 1800     | 2900     | 220     | 350     | 3140     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RA7 714-6  | 19600        | O. R.      | 1800     | 2900     | 220     | 350     | 3380     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RA7 716-6  | 20700        | O. R.      | 1800     | 2900     | 220     | 350     | 3380     | 2000    | 1800    | 1900    | 35      | 24            |
| 8-pole  |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RA7 710-8  | 16200        | O. R.      | 1800     | 2900     | 220     | 350     | 3140     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RA7 712-8  | 17200        | O. R.      | 1800     | 2900     | 220     | 350     | 3140     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RA7 714-8  | 18600        | O. R.      | 1800     | 2900     | 220     | 350     | 3380     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RA7 716-8  | 19600        | O. R.      | 1800     | 2900     | 220     | 350     | 3380     | 2000    | 1800    | 1900    | 35      | 24            |
| 10-pole   |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RA7 710-3  | 16400        | O. R.      | 1800     | 2900     | 220     | 350     | 3140     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RA7 712-3  | 17400        | O. R.      | 1800     | 2900     | 220     | 350     | 3140     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RA7 714-3  | 18800        | O. R.      | 1800     | 2900     | 220     | 350     | 3380     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RA7 716-3  | 19700        | O. R.      | 1800     | 2900     | 220     | 350     | 3380     | 2000    | 1800    | 1900    | 35      | 24            |

Note:

Higher pole numbers are available on request.

## Motors for line operation

Water-cooled motors

### H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Overview



#### Technical data

##### Overview of technical data

##### H-compact PLUS 1RN4/1RN6, SIMOTICS HV M 1RN7

|   |  |
|---|--|
| Rated voltage                                 | 3.3 ... 13.8 kV                                |
| Rated frequency                               | 50/60 Hz                                       |
| Motor type                                    | Induction motor with squirrel-cage rotor       |
| Type of construction                          | IM B3, IM V1                                   |
| Degree of protection                          | IP55   |
| Cooling method                                | IC81W  |
| Stator winding insulation                     | Thermal class 155 (F), utilized to 130 (B)     |
| Shaft height                                  | 450 ... 710 mm                                 |
| Bearings                                      | Anti-friction bearings, sleeve bearings        |
| Cage material                                 | Copper   |
| Standards                                     | IEC, EN, NEMA                                  |
| Frame design for shaft heights 450 ... 560 mm | Housing: Cast iron<br>Cooling enclosure: Steel |
| Frame design for shaft heights 630 ... 710 mm | Housing: Steel<br>Cooling enclosure: Steel     |

#### Technical data (continued)

##### Power ranges for IEC motors for line operation

1RN4, 1SL4 (Ex ec), 1SQ4 (Ex pxb) series

1RN6, 1SL6 (Ex ec), 1SQ6 (Ex pxb) series


1RN7 series

Insulation system, thermal class 155 (F), utilized to 130 (B).


Coolant temperature up to 25 °C, installation altitude up to 1000 m.

3.3 to 6.6 kV; 50 Hz

4.0 to 6.6 kV; 60 Hz

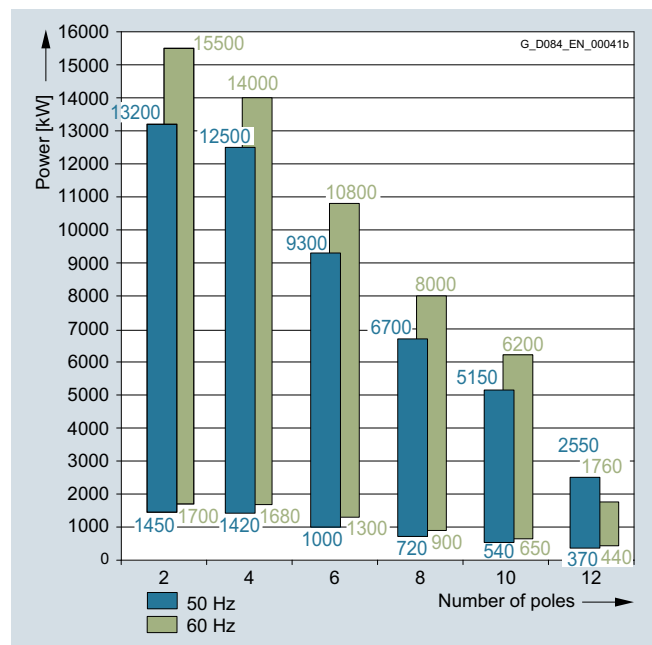

9 to 11 kV; 50 Hz

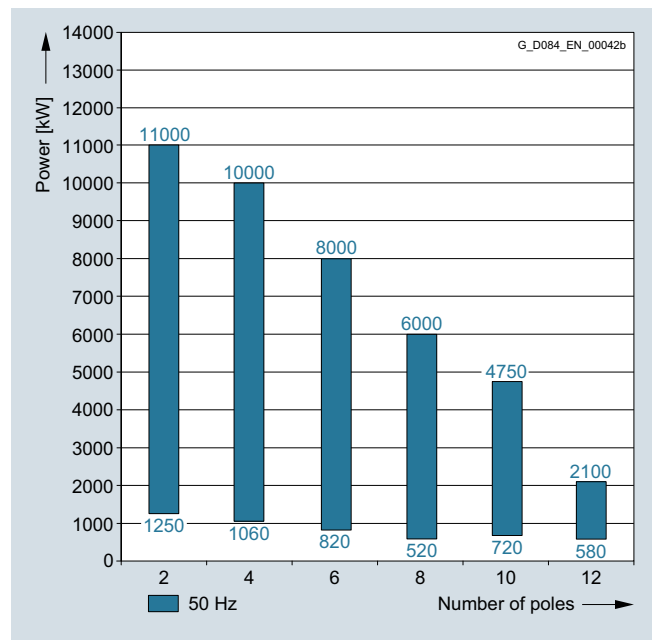


### Technical data (continued)


#### Power ranges for NEMA motors for line operation

Insulation system, thermal class 155 (F), utilized to 130 (B)

4 to 6.6 kV; 60 Hz

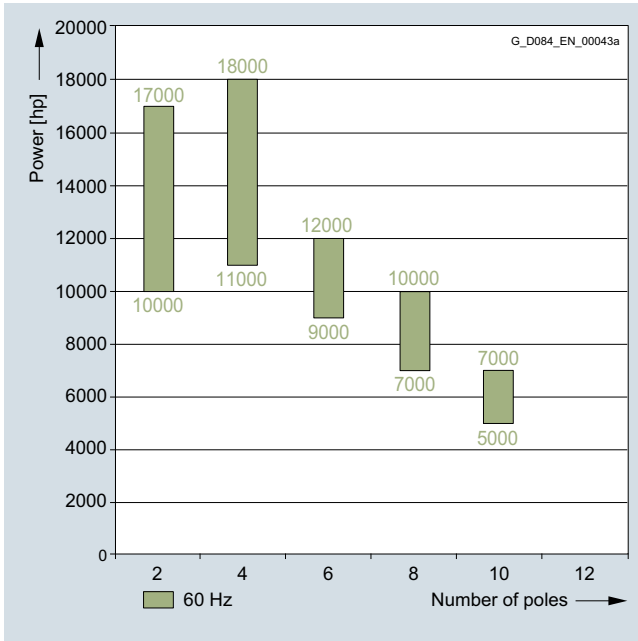

12.5 to 13.8 kV; 60 Hz

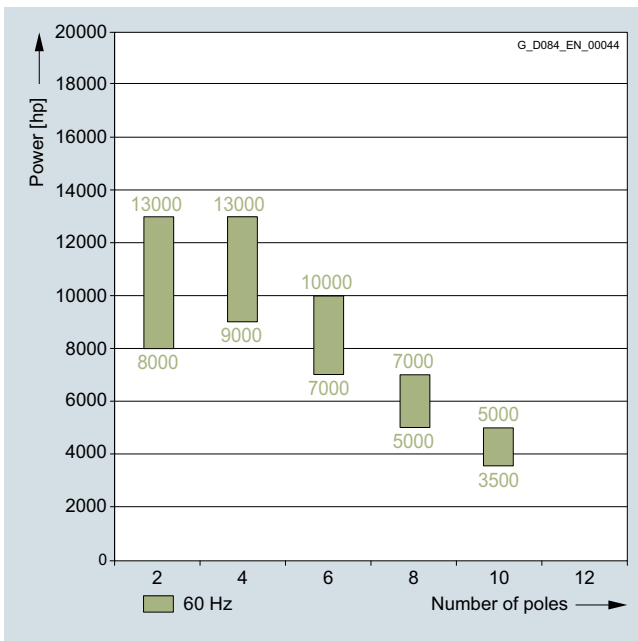

## Motors for line operation

Water-cooled motors

### H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Selection and ordering data

##### IEC version

The following data also apply to explosion-protected motors 1SL4/1SL6 (Ex ec) and 1SQ4/1SQ6 (Ex pxb).

| Rated power<br>IEC<br>kW     | High voltage motor<br>H-compact PLUS<br>Article No. | Speed<br>rpm | Rated current            |               | Efficiency    |                        | Power factor           |                           | Torque<br>Nm | Break-down torque<br>$T_B/T_{rated}$ | Locked-rotor torque<br>$T_{LR}/T_{rated}$ | Locked-rotor current<br>$I_{LR}/I_{rated}$ | Moment of inertia                                |  |
|------------------------------|---|--------------|--------------------------|---------------|---------------|------------------------|------------------------|---------------------------|--------------|--------------------------------------|---|--|--|--|
|                              |   |              | $I_{rated}$ at 6 kV<br>A | 4/4 load<br>% | 3/4 load<br>% | 4/4 load<br>cos $\phi$ | 3/4 load<br>cos $\phi$ | Motor<br>kgm <sup>2</sup> |              |                                      |   |  | External, max. <sup>1)</sup><br>kgm <sup>2</sup> |  |
| <b>3.3 ... 6.6 kV, 50 Hz</b> |   |              |                          |               |               |                        |                        |                           |              |                                      |   |  |  |  |
| <b>2-pole</b>                |   |              |                          |               |               |                        |                        |                           |              |                                      |   |  |  |  |
| 1450                         | <b>1RN6 450-2HJ</b>                                 | 2970         | 166                      | 95.6          | 96.0          | 0.88                   | 0.87                   | 4662                      | 2.00         | 0.60                                 | 4.35                                      | 12   | 64   |  |
| 1700                         | <b>1RN6 452-2HJ</b>                                 | 2971         | 192                      | 95.9          | 96.3          | 0.89                   | 0.89                   | 5464                      | 2.05         | 0.60                                 | 4.50                                      | 14   | 70   |  |
| 1900                         | <b>1RN6 454-2HJ</b>                                 | 2974         | 210                      | 96.2          | 96.5          | 0.90                   | 0.89                   | 6100                      | 2.30         | 0.70                                 | 5.15                                      | 15   | 74   |  |
| 2120                         | <b>1RN6 456-2HJ</b>                                 | 2978         | 235                      | 96.5          | 96.6          | 0.90                   | 0.89                   | 6798                      | 2.45         | 0.70                                 | 5.50                                      | 17   | 81   |  |
| 2500                         | <b>1RN6 500-2HJ</b>                                 | 2972         | 280                      | 96.4          | 96.8          | 0.89                   | 0.88                   | 8032                      | 1.95         | 0.55                                 | 4.30                                      | 19   | 83   |  |
| 2680                         | <b>1RN6 502-2HJ</b>                                 | 2974         | 300                      | 96.3          | 96.7          | 0.90                   | 0.89                   | 8605                      | 2.05         | 0.50                                 | 4.45                                      | 21   | 93   |  |
| 3150                         | <b>1RN6 504-2HJ</b>                                 | 2978         | 345                      | 96.8          | 97.1          | 0.91                   | 0.90                   | 10100                     | 2.30         | 0.55                                 | 5.20                                      | 25   | 103  |  |
| 3400                         | <b>1RN6 506-2HJ</b>                                 | 2975         | 370                      | 96.8          | 97.2          | 0.91                   | 0.91                   | 10913                     | 2.15         | 0.55                                 | 4.85                                      | 26   | 115  |  |
| 4000                         | <b>1RN6 560-2HJ</b>                                 | 2974         | 450                      | 96.5          | 96.8          | 0.89                   | 0.90                   | 12843                     | 1.95         | 0.50                                 | 4.05                                      | 39   | 160  |  |
| 4600                         | <b>1RN6 562-2HJ</b>                                 | 2977         | 520                      | 96.7          | 97.0          | 0.89                   | 0.90                   | 14755                     | 2.00         | 0.50                                 | 4.30                                      | 44   | 180  |  |
| 5140                         | <b>1RN6 564-2HJ</b>                                 | 2978         | 560                      | 97.0          | 97.2          | 0.91                   | 0.91                   | 16481                     | 2.25         | 0.60                                 | 4.75                                      | 49   | 200  |  |
| 5660                         | <b>1RN6 566-2HJ</b>                                 | 2980         | 620                      | 97.1          | 97.3          | 0.91                   | 0.91                   | 18137                     | 2.40         | 0.60                                 | 5.25                                      | 55   | 220  |  |
| 4900                         | <b>1RN4 630-2HE</b>                                 | 2982         | 550                      | 96.9          | 97.1          | 0.88                   | 0.88                   | 15692                     | 2.10         | 0.31                                 | 4.00                                      | 75   | 110  |  |
| 5700                         | <b>1RN4 632-2HE</b>                                 | 2983         | 630                      | 97.3          | 97.3          | 0.89                   | 0.89                   | 18248                     | 2.20         | 0.34                                 | 4.30                                      | 85   | 150  |  |
| 6500                         | <b>1RN4 634-2HE</b>                                 | 2985         | 710                      | 97.5          | 97.6          | 0.90                   | 0.89                   | 20796                     | 2.50         | 0.41                                 | 5.00                                      | 90   | 190  |  |
| 7500                         | <b>1RN4 636-2HE</b>                                 | 2986         | 820                      | 97.7          | 97.8          | 0.90                   | 0.89                   | 23987                     | 2.60         | 0.46                                 | 5.40                                      | 100  | 240  |  |
| <b>4-pole</b>                |   |              |                          |               |               |                        |                        |                           |              |                                      |   |  |  |  |
| 1420                         | <b>1RN6 450-4HJ</b>                                 | 1482         | 160                      | 95.6          | 96.1          | 0.89                   | 0.88                   | 9149                      | 2.35         | 0.65                                 | 4.65                                      | 21   | 340  |  |
| 1560                         | <b>1RN6 452-4HJ</b>                                 | 1483         | 176                      | 95.9          | 96.3          | 0.89                   | 0.88                   | 10045                     | 2.45         | 0.65                                 | 4.95                                      | 24   | 385  |  |
| 1730                         | <b>1RN6 454-4HJ</b>                                 | 1484         | 194                      | 96.0          | 96.4          | 0.89                   | 0.88                   | 11132                     | 2.50         | 0.65                                 | 5.05                                      | 27   | 440  |  |
| 1950                         | <b>1RN6 456-4HJ</b>                                 | 1486         | 220                      | 96.2          | 96.5          | 0.89                   | 0.87                   | 12531                     | 2.60         | 0.65                                 | 5.25                                      | 30   | 500  |  |
| 2240 <sup>2)</sup>           | <b>1RN6 500-4HJ</b>                                 | 1485         | 250                      | 96.2          | 96.9          | 0.89                   | 0.88                   | 14404                     | 2.30         | 0.65                                 | 4.70                                      | 45   | 410  |  |
| 2500 <sup>2)</sup>           | <b>1RN6 502-4HJ</b>                                 | 1485         | 280                      | 96.3          | 96.9          | 0.89                   | 0.88                   | 16076                     | 2.35         | 0.65                                 | 4.90                                      | 48   | 460  |  |
| 2800 <sup>2)</sup>           | <b>1RN6 504-4HJ</b>                                 | 1486         | 315                      | 96.4          | 97.0          | 0.89                   | 0.88                   | 17993                     | 2.30         | 0.60                                 | 4.80                                      | 55   | 510  |  |
| 3080 <sup>2)</sup>           | <b>1RN6 506-4HJ</b>                                 | 1485         | 345                      | 96.4          | 97.1          | 0.89                   | 0.87                   | 19805                     | 2.45         | 0.65                                 | 5.15                                      | 60   | 560  |  |
| 3800 <sup>2)</sup>           | <b>1RN6 560-4HJ</b>                                 | 1489         | 420                      | 96.9          | 97.3          | 0.90                   | 0.90                   | 24370                     | 2.10         | 0.65                                 | 4.95                                      | 86   | 730  |  |
| 4300 <sup>2)</sup>           | <b>1RN6 562-4HJ</b>                                 | 1489         | 470                      | 97.1          | 97.5          | 0.91                   | 0.91                   | 27576                     | 2.05         | 0.65                                 | 4.85                                      | 97   | 800  |  |
| 4800 <sup>2)</sup>           | <b>1RN6 564-4HJ</b>                                 | 1490         | 520                      | 97.2          | 97.6          | 0.91                   | 0.91                   | 30762                     | 2.10         | 0.60                                 | 5.00                                      | 107  | 880  |  |
| 5260 <sup>2)</sup>           | <b>1RN6 566-4HJ</b>                                 | 1490         | 580                      | 97.3          | 97.6          | 0.90                   | 0.90                   | 33710                     | 2.10         | 0.60                                 | 5.15                                      | 117  | 970  |  |
| 5300                         | <b>1RN4 630-4HE</b>                                 | 1489         | 590                      | 97.1          | 97.3          | 0.89                   | 0.89                   | 33993                     | 2.00         | 0.54                                 | 4.60                                      | 150  | 780  |  |
| 6000                         | <b>1RN4 632-4HE</b>                                 | 1490         | 670                      | 97.3          | 97.4          | 0.89                   | 0.89                   | 38456                     | 2.15         | 0.60                                 | 4.90                                      | 165  | 1050   |  |
| 6600                         | <b>1RN4 634-4HE</b>                                 | 1490         | 720                      | 97.4          | 97.6          | 0.90                   | 0.90                   | 42302                     | 2.20         | 0.63                                 | 5.10                                      | 180  | 1200   |  |
| 7100                         | <b>1RN4 636-4HE</b>                                 | 1491         | 780                      | 97.6          | 97.6          | 0.90                   | 0.89                   | 45476                     | 2.40         | 0.70                                 | 5.50                                      | 195  | 1100   |  |

##### Voltage code:

3.3 kV, 50 Hz  
6 kV, 50 Hz  
6.6 kV, 50 Hz  
Other voltage

0  
6  
7  
9

##### Type of construction:

IM B3  
IM V1 (without canopy)

0  
8

##### Note:

Efficiencies according to IEC 60034-2-1:2007; stray load losses determined by statistical evaluation of measurements. NEMA version on request.

Electrical data is also valid for operation with SINAMICS PERFECT HARMONY drives. For ordering, please note the 10th and 11th position of the article number code.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

<sup>2)</sup> Data of vertical motors (IM V1) on request.



## Selection and ordering data (continued)

| Rated power<br>IEC           | High voltage motor<br>H-compact PLUS<br>Article No. | Speed<br>rpm | Rated current            |               | Efficiency    |                           | Power factor              |                           | Torque<br>Nm | Break-down torque<br>$T_B/T_{rated}$ | Locked-rotor torque<br>$T_{LR}/T_{rated}$ | Locked-rotor current<br>$I_{LR}/I_{rated}$ | Moment of inertia                                |  |
|------------------------------|---|--------------|--------------------------|---------------|---------------|---------------------------|---------------------------|---------------------------|--------------|--------------------------------------|---|--|--|--|
|                              |   |              | $I_{rated}$ at 6 kV<br>A | 4/4 load<br>% | 3/4 load<br>% | 4/4 load<br>cos $\varphi$ | 3/4 load<br>cos $\varphi$ | Motor<br>kgm <sup>2</sup> |              |                                      |   |  | External, max. <sup>1)</sup><br>kgm <sup>2</sup> |  |
| <b>3.3 ... 6.6 kV, 50 Hz</b> |   |              |                          |               |               |                           |                           |                           |              |                                      |   |  |  |  |
| 6-pole                       |   |              |                          |               |               |                           |                           |                           |              |                                      |   |  |  |  |
| 1000                         | 1RN6 450-6HJ  | 988          | 118                      | 95.5          | 96.1          | 0.85                      | 0.84                      | 9665                      | 2.25         | 0.95                                 | 4.65                                      | 28   | 660  |  |
| 1120                         | 1RN6 452-6HJ  | 989          | 132                      | 95.7          | 96.2          | 0.85                      | 0.84                      | 10814                     | 2.35         | 0.85                                 | 4.80                                      | 32   | 770  |  |
| 1250                         | 1RN6 454-6HJ  | 989          | 148                      | 95.8          | 96.3          | 0.85                      | 0.84                      | 12069                     | 2.40         | 0.95                                 | 4.95                                      | 35   | 870  |  |
| 1400                         | 1RN6 456-6HJ  | 990          | 164                      | 96.1          | 96.5          | 0.85                      | 0.84                      | 13504                     | 2.45         | 0.90                                 | 5.05                                      | 41   | 1040   |  |
| 1850                         | 1RN6 500-6HJ  | 988          | 215                      | 95.8          | 96.5          | 0.86                      | 0.85                      | 17880                     | 2.05         | 0.65                                 | 4.35                                      | 56   | 1280   |  |
| 2090                         | 1RN6 502-6HJ  | 988          | 245                      | 95.9          | 96.6          | 0.86                      | 0.85                      | 20200                     | 2.00         | 0.65                                 | 4.15                                      | 61   | 1420   |  |
| 2300                         | 1RN6 504-6HJ  | 989          | 270                      | 96.0          | 96.7          | 0.86                      | 0.85                      | 22207                     | 2.20         | 0.70                                 | 4.60                                      | 68   | 1560   |  |
| 2500                         | 1RN6 506-6HJ  | 989          | 285                      | 96.2          | 96.8          | 0.87                      | 0.86                      | 24138                     | 2.20         | 0.75                                 | 4.65                                      | 76   | 1760   |  |
| 2900                         | 1RN6 560-6HJ  | 990          | 330                      | 96.4          | 96.9          | 0.87                      | 0.87                      | 27972                     | 1.95         | 0.70                                 | 4.40                                      | 107  | 1640   |  |
| 3250                         | 1RN6 562-6HJ  | 990          | 370                      | 96.6          | 97.1          | 0.88                      | 0.88                      | 31348                     | 1.95         | 0.70                                 | 4.40                                      | 118  | 1820   |  |
| 3640                         | 1RN6 564-6HJ  | 990          | 410                      | 96.6          | 97.1          | 0.88                      | 0.88                      | 35110                     | 1.90         | 0.70                                 | 4.25                                      | 131  | 2000   |  |
| 3930                         | 1RN6 566-6HJ  | 990          | 440                      | 96.8          | 97.2          | 0.88                      | 0.88                      | 37907                     | 1.95         | 0.70                                 | 4.45                                      | 145  | 2250   |  |
| 4200                         | 1RN4 630-6HE  | 992          | 490                      | 96.8          | 97.2          | 0.85                      | 0.84                      | 40433                     | 2.00         | 0.57                                 | 4.50                                      | 190  | 2000   |  |
| 4700                         | 1RN4 632-6HE  | 993          | 540                      | 97.0          | 97.3          | 0.86                      | 0.85                      | 45201                     | 2.10         | 0.62                                 | 4.80                                      | 210  | 2100   |  |
| 5100                         | 1RN4 634-6HE  | 993          | 590                      | 97.2          | 97.4          | 0.86                      | 0.84                      | 49048                     | 2.25         | 0.69                                 | 5.20                                      | 230  | 2800   |  |
| 5600                         | 1RN4 636-6HE  | 994          | 640                      | 97.3          | 97.4          | 0.86                      | 0.84                      | 53803                     | 2.30         | 0.70                                 | 5.30                                      | 255  | 3300   |  |
| 8-pole                       |   |              |                          |               |               |                           |                           |                           |              |                                      |   |  |  |  |
| 720                          | 1RN6 450-8HJ  | 741          | 88                       | 95.0          | 95.7          | 0.83                      | 0.82                      | 9278                      | 2.10         | 0.75                                 | 4.30                                      | 35   | 730  |  |
| 780                          | 1RN6 452-8HJ  | 742          | 95                       | 95.2          | 95.9          | 0.83                      | 0.82                      | 10038                     | 2.15         | 0.75                                 | 4.40                                      | 39   | 890  |  |
| 900                          | 1RN6 454-8HJ  | 743          | 110                      | 95.6          | 96.0          | 0.82                      | 0.79                      | 11567                     | 2.55         | 0.85                                 | 5.20                                      | 44   | 1040   |  |
| 1030                         | 1RN6 456-8HJ  | 743          | 124                      | 95.6          | 96.2          | 0.83                      | 0.81                      | 13237                     | 2.40         | 0.80                                 | 4.90                                      | 51   | 1300   |  |
| 1320                         | 1RN6 500-8HJ  | 742          | 160                      | 95.6          | 96.2          | 0.83                      | 0.81                      | 16987                     | 2.15         | 0.55                                 | 4.55                                      | 68   | 1420   |  |
| 1480                         | 1RN6 502-8HJ  | 743          | 178                      | 95.6          | 96.3          | 0.84                      | 0.81                      | 19021                     | 2.15         | 0.60                                 | 4.50                                      | 75   | 1560   |  |
| 1680                         | 1RN6 504-8HJ  | 743          | 200                      | 95.9          | 96.4          | 0.84                      | 0.81                      | 21591                     | 2.25         | 0.60                                 | 4.60                                      | 84   | 1740   |  |
| 1850                         | 1RN6 506-8HJ  | 743          | 220                      | 96.0          | 96.5          | 0.84                      | 0.82                      | 23776                     | 2.25         | 0.65                                 | 4.75                                      | 93   | 1920   |  |
| 2120                         | 1RN6 560-8HJ  | 743          | 250                      | 96.3          | 96.9          | 0.85                      | 0.83                      | 27246                     | 2.10         | 0.65                                 | 4.50                                      | 127  | 2700   |  |
| 2400                         | 1RN6 562-8HJ  | 743          | 280                      | 96.4          | 97.0          | 0.85                      | 0.84                      | 30845                     | 2.05         | 0.65                                 | 4.50                                      | 140  | 2950   |  |
| 2640                         | 1RN6 564-8HJ  | 743          | 310                      | 96.5          | 97.1          | 0.85                      | 0.83                      | 33930                     | 2.10         | 0.65                                 | 4.75                                      | 155  | 3300   |  |
| 2850                         | 1RN6 566-8HJ  | 744          | 330                      | 96.6          | 97.2          | 0.85                      | 0.83                      | 36579                     | 2.15         | 0.60                                 | 4.75                                      | 171  | 3650   |  |
| 3200                         | 1RN4 630-8HE  | 743          | 375                      | 96.5          | 96.7          | 0.85                      | 0.83                      | 41131                     | 1.90         | 0.60                                 | 4.30                                      | 255  | 3100   |  |
| 3500                         | 1RN4 632-8HE  | 743          | 410                      | 96.7          | 96.8          | 0.85                      | 0.82                      | 44987                     | 2.10         | 0.67                                 | 4.60                                      | 280  | 3400   |  |
| 3750                         | 1RN4 634-8HE  | 743          | 440                      | 96.7          | 96.9          | 0.85                      | 0.84                      | 48200                     | 2.00         | 0.65                                 | 4.60                                      | 310  | 3600   |  |
| 4100                         | 1RN4 636-8HE  | 744          | 485                      | 96.9          | 96.9          | 0.84                      | 0.81                      | 52628                     | 2.30         | 0.76                                 | 5.30                                      | 340  | 3800   |  |

## Voltage code:

3.3 kV, 50 Hz  
6 kV, 50 Hz  
6.6 kV, 50 Hz  
Other voltage

0  
6  
7  
9

## Type of construction:

IM B3  
IM V1 (without canopy)

0  
8

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Electrical data is also valid for operation with SINAMICS PERFECT HARMONY drives.  
For ordering, please note the 10th and 11th position of the article number code.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

## Motors for line operation

## Water-cooled motors

## H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

## Selection and ordering data (continued)

| Rated power<br>IEC           | High voltage motor<br>H-compact PLUS | Speed | Rated current                    |             | Efficiency  |               | Power factor  |                                       | Torque | Break-down torque | Locked-rotor torque | Locked-rotor current | Moment of inertia                      |  |
|------------------------------|--------------------------------------|-------|----------------------------------|-------------|-------------|---------------|---------------|---------------------------------------|--------|-------------------|---------------------|----------------------|--|--|
|                              |                                      |       | $I_{\text{rated}}$<br>at<br>6 kV | 4/4<br>load | 3/4<br>load | 4/4<br>load   | 3/4<br>load   | $T_{\text{B}}/$<br>$T_{\text{rated}}$ |        |                   |                     |                      | $T_{\text{LR}}/$<br>$T_{\text{rated}}$ | $I_{\text{LR}}/$<br>$I_{\text{rated}}$ |
| kW                           | Article No.                          | rpm   | A                                | %           | %           | cos $\varphi$ | cos $\varphi$ | Nm                                    | [-]    | [-]               | [-]                 | kgm <sup>2</sup>     | kgm <sup>2</sup>                       |  |
| <b>3.3 ... 6.6 kV, 50 Hz</b> |                                      |       |                                  |             |             |               |               |                                       |        |                   |                     |                      |  |  |
| <b>10-pole</b>               |                                      |       |                                  |             |             |               |               |                                       |        |                   |                     |                      |  |  |
| 540                          | <b>1RN6 450-3HJ</b>                  | 590   | 70                               | 93.4        | 93.7        | 0.80          | 0.76          | 8741                                  | 2.00   | 0.80              | 4.60                | 37                   | 1150                                   |  |
| 600                          | <b>1RN6 452-3HJ</b>                  | 590   | 76                               | 93.7        | 93.9        | 0.81          | 0.76          | 9712                                  | 2.00   | 0.80              | 4.70                | 41                   | 1350                                   |  |
| 670                          | <b>1RN6 454-3HJ</b>                  | 591   | 86                               | 93.9        | 94.1        | 0.80          | 0.75          | 10827                                 | 2.10   | 0.82              | 4.90                | 46                   | 1450                                   |  |
| 760                          | <b>1RN6 456-3HJ</b>                  | 591   | 97                               | 94.1        | 94.2        | 0.80          | 0.75          | 12281                                 | 2.20   | 0.90              | 5.20                | 52                   | 1800                                   |  |
| 900                          | <b>1RN6 500-3HE</b>                  | 591   | 112                              | 94.4        | 94.7        | 0.82          | 0.80          | 14543                                 | 1.90   | 0.68              | 4.30                | 70                   | 1400                                   |  |
| 1000                         | <b>1RN6 502-3HE</b>                  | 592   | 122                              | 95.7        | 94.9        | 0.83          | 0.80          | 16132                                 | 1.90   | 0.70              | 4.50                | 80                   | 1700                                   |  |
| 1100                         | <b>1RN6 504-3HE</b>                  | 592   | 134                              | 94.8        | 95.0        | 0.83          | 0.80          | 17745                                 | 1.90   | 0.72              | 4.60                | 88                   | 2200                                   |  |
| 1250                         | <b>1RN6 506-3HE</b>                  | 592   | 152                              | 95.0        | 95.1        | 0.83          | 0.80          | 20165                                 | 1.90   | 0.75              | 4.70                | 99                   | 2600                                   |  |
| 1480                         | <b>1RN6 560-3HE</b>                  | 593   | 184                              | 95.1        | 95.4        | 0.81          | 0.77          | 23835                                 | 2.00   | 0.70              | 4.50                | 123                  | 2700                                   |  |
| 1700                         | <b>1RN6 562-3HE</b>                  | 593   | 210                              | 95.4        | 95.7        | 0.82          | 0.78          | 27378                                 | 2.00   | 0.70              | 4.50                | 141                  | 4100                                   |  |
| 1880                         | <b>1RN6 564-3HE</b>                  | 593   | 230                              | 95.6        | 95.7        | 0.82          | 0.78          | 30277                                 | 2.00   | 0.72              | 4.70                | 158                  | 4400                                   |  |
| 2050                         | <b>1RN6 566-3HE</b>                  | 593   | 255                              | 95.7        | 95.8        | 0.81          | 0.76          | 33014                                 | 2.10   | 0.78              | 5.00                | 173                  | 5200                                   |  |
| 2400                         | <b>1RN4 630-3HE</b>                  | 592   | 285                              | 95.8        | 96.4        | 0.84          | 0.83          | 38716                                 | 1.80   | 0.62              | 4.00                | 250                  | 4700                                   |  |
| 2650                         | <b>1RN4 632-3HE</b>                  | 592   | 315                              | 96.0        | 96.5        | 0.84          | 0.83          | 42749                                 | 1.80   | 0.65              | 4.20                | 280                  | 5300                                   |  |
| 2900                         | <b>1RN4 634-3HE</b>                  | 593   | 345                              | 96.2        | 96.6        | 0.84          | 0.82          | 46703                                 | 2.00   | 0.70              | 4.50                | 305                  | 6300                                   |  |
| 3150                         | <b>1RN4 636-3HE</b>                  | 593   | 375                              | 96.4        | 96.7        | 0.84          | 0.82          | 50729                                 | 2.00   | 0.73              | 4.60                | 335                  | 7500                                   |  |
| <b>12-pole</b>               |                                      |       |                                  |             |             |               |               |                                       |        |                   |                     |                      |  |  |
| 370                          | <b>1RN6 450-5HJ</b>                  | 491   | 53                               | 92.4        | 92.7        | 0.73          | 0.68          | 7197                                  | 1.80   | 0.60              | 4.00                | 37                   | 1100                                   |  |
| 425                          | <b>1RN6 452-5HJ</b>                  | 492   | 60                               | 92.8        | 93.0        | 0.73          | 0.67          | 8249                                  | 1.80   | 0.63              | 4.20                | 41                   | 1400                                   |  |
| 475                          | <b>1RN6 454-5HJ</b>                  | 491   | 66                               | 93.1        | 93.3        | 0.74          | 0.69          | 9239                                  | 1.80   | 0.60              | 4.00                | 46                   | 1600                                   |  |
| 540                          | <b>1RN6 456-5HJ</b>                  | 492   | 77                               | 93.5        | 93.5        | 0.72          | 0.65          | 10482                                 | 2.00   | 0.68              | 4.40                | 52                   | 2000                                   |  |
| 680                          | <b>1RN6 500-5HE</b>                  | 491   | 94                               | 93.9        | 94.0        | 0.74          | 0.69          | 13226                                 | 1.90   | 0.62              | 4.10                | 70                   | 2350                                   |  |
| 760                          | <b>1RN6 502-5HE</b>                  | 491   | 102                              | 94.1        | 94.2        | 0.76          | 0.71          | 14782                                 | 1.80   | 0.60              | 4.00                | 79                   | 2600                                   |  |
| 840                          | <b>1RN6 504-5HE</b>                  | 491   | 112                              | 94.3        | 94.4        | 0.76          | 0.71          | 16338                                 | 1.90   | 0.62              | 4.10                | 87                   | 3100                                   |  |
| 930                          | <b>1RN6 506-5HE</b>                  | 492   | 128                              | 94.5        | 94.6        | 0.74          | 0.69          | 18052                                 | 1.90   | 0.62              | 4.30                | 98                   | 3700                                   |  |
| 1100                         | <b>1RN6 560-5HE</b>                  | 493   | 150                              | 94.5        | 94.8        | 0.75          | 0.71          | 21308                                 | 1.80   | 0.57              | 3.90                | 123                  | 3600                                   |  |
| 1230                         | <b>1RN6 562-5HE</b>                  | 493   | 168                              | 94.9        | 95.0        | 0.74          | 0.68          | 23827                                 | 1.80   | 0.60              | 4.00                | 141                  | 4100                                   |  |
| 1350                         | <b>1RN6 564-5HE</b>                  | 494   | 184                              | 95.0        | 95.1        | 0.74          | 0.68          | 26098                                 | 2.00   | 0.63              | 4.30                | 158                  | 4700                                   |  |
| 1470                         | <b>1RN6 566-5HE</b>                  | 494   | 198                              | 95.1        | 95.2        | 0.75          | 0.69          | 28418                                 | 2.00   | 0.65              | 4.30                | 173                  | 5200                                   |  |
| 1900                         | <b>1RN4 630-5HE</b>                  | 493   | 245                              | 95.4        | 95.8        | 0.79          | 0.76          | 36805                                 | 1.90   | 0.70              | 4.30                | 250                  | 5500                                   |  |
| 2150                         | <b>1RN4 632-5HE</b>                  | 493   | 270                              | 95.6        | 96.0        | 0.80          | 0.76          | 41648                                 | 1.90   | 0.71              | 4.30                | 275                  | 7000                                   |  |
| 2350                         | <b>1RN4 634-5HE</b>                  | 493   | 295                              | 95.8        | 96.3        | 0.80          | 0.77          | 45522                                 | 1.90   | 0.72              | 4.40                | 305                  | 8300                                   |  |
| 2550                         | <b>1RN4 636-5HE</b>                  | 493   | 320                              | 95.9        | 96.4        | 0.80          | 0.77          | 49397                                 | 2.00   | 0.74              | 4.50                | 335                  | 9800                                   |  |

## Voltage code:

3.3 kV, 50 Hz  
6 kV, 50 Hz  
6.6 kV, 50 Hz  
Other voltage

0  
6  
7  
9

## Type of construction:

IM B3  
IM V1 (without canopy)

0  
8

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Higher pole numbers are available on request.

Electrical data is also valid for operation with SINAMICS PERFECT HARMONY drives.  
For ordering, please note the 10th and 11th position of the article number code.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

## Selection and ordering data

The following data also apply to explosion-protected motors 1SL7 (Ex ec) and 1SQ7 (Ex pxb).

| Rated power<br><br>IEC<br><br>kW | High voltage motor<br>SIMOTICS HV M (modular)<br><br>Article No. | Speed<br><br>rpm | Rated current<br><br>$I_{rated}$<br>at<br>6 kV<br><br>A | Efficiency    |               | Power factor               |                            | Torque<br><br>Nm | Break-down torque<br><br>$T_B/T_{rated}$<br><br>[-] | Locked-rotor torque<br><br>$T_{LR}/T_{rated}$<br><br>[-] | Locked-rotor current<br><br>$I_{LR}/I_{rated}$<br><br>[-] | Moment of inertia         |  |
|----------------------------------|--|------------------|---|---------------|---------------|----------------------------|----------------------------|------------------|---|--|---|---------------------------|--|
|                                  |  |                  |   | 4/4 load<br>% | 3/4 load<br>% | 4/4 load<br>$\cos \varphi$ | 3/4 load<br>$\cos \varphi$ |                  |   |  |   | Motor<br>kgm <sup>2</sup> | External, max. <sup>1)</sup><br>kgm <sup>2</sup> |
| <b>3.3 ... 6.6 kV, 50 Hz</b>     |  |                  |   |               |               |                            |                            |                  |   |  |   |                           |  |
| 2-pole                           |  |                  |   |               |               |                            |                            |                  |   |  |   |                           |  |
| 9500                             | <b>1RN7710-2NA60-0CJ0</b>  | 2985             | 1040  | 97.4          | 97.4          | 0.91                       | 0.91                       | 30391            | 2.00  | 0.60   | 4.50  | 149                       | 216  |
| 10600                            | <b>1RN7712-2NA60-0CJ0</b>  | 2985             | 1140  | 97.5          | 97.5          | 0.91                       | 0.91                       | 33910            | 2.10  | 0.60   | 4.70  | 160                       | 207  |
| 11800                            | <b>1RN7714-2NA60-0CJ0</b>  | 2986             | 1260  | 97.6          | 97.6          | 0.92                       | 0.92                       | 37736            | 2.25  | 0.65   | 5.00  | 176                       | 207  |
| 13200                            | <b>1RN7716-2NA60-0CJ0</b>  | 2986             | 1400  | 97.8          | 97.7          | 0.93                       | 0.92                       | 42213            | 2.30  | 0.75   | 5.30  | 189                       | 197  |
| 4-pole                           |  |                  |   |               |               |                            |                            |                  |   |  |   |                           |  |
| 9000                             | <b>1RN7710-4NA60-0CJ0</b>  | 1492             | 980   | 97.6          | 97.7          | 0.91                       | 0.91                       | 57602            | 2.35  | 0.65   | 4.90  | 262                       | 753  |
| 10000                            | <b>1RN7712-4NA60-0CJ0</b>  | 1492             | 1080  | 97.6          | 97.7          | 0.91                       | 0.91                       | 64003            | 2.35  | 0.70   | 5.00  | 288                       | 804  |
| 11200                            | <b>1RN7714-4NA60-0CJ0</b>  | 1492             | 1200  | 97.7          | 97.8          | 0.92                       | 0.92                       | 71683            | 2.40  | 0.70   | 5.10  | 323                       | 917  |
| 12500                            | <b>1RN7716-4NA60-0CJ0</b>  | 1492             | 1340  | 97.8          | 97.9          | 0.92                       | 0.91                       | 80004            | 2.45  | 0.65   | 5.20  | 362                       | 1063   |
| 6-pole                           |  |                  |   |               |               |                            |                            |                  |   |  |   |                           |  |
| 6700                             | <b>1RN7710-6NA60-0CJ0</b>  | 993              | 770   | 97.2          | 97.4          | 0.86                       | 0.86                       | 64431            | 2.15  | 0.65   | 4.50  | 352                       | 2121   |
| 7500                             | <b>1RN7712-6NA60-0CJ0</b>  | 994              | 860   | 97.3          | 97.4          | 0.86                       | 0.85                       | 72052            | 2.20  | 0.65   | 4.60  | 398                       | 2500   |
| 8300                             | <b>1RN7714-6NA60-0CJ0</b>  | 994              | 950   | 97.4          | 97.5          | 0.86                       | 0.85                       | 79737            | 2.25  | 0.65   | 4.70  | 450                       | 3024   |
| 9300                             | <b>1RN7716-6NA60-0CJ0</b>  | 994              | 1060  | 97.5          | 97.6          | 0.86                       | 0.86                       | 89344            | 2.25  | 0.65   | 4.70  | 498                       | 3260   |
| 8-pole                           |  |                  |   |               |               |                            |                            |                  |   |  |   |                           |  |
| 5000                             | <b>1RN7710-8NA60-0CJ0</b>  | 744              | 580   | 96.8          | 97.1          | 0.85                       | 0.84                       | 64175            | 2.10  | 0.55   | 4.30  | 434                       | 5604   |
| 5600                             | <b>1RN7712-8NA60-0CJ0</b>  | 745              | 650   | 97.0          | 97.2          | 0.86                       | 0.84                       | 71779            | 2.25  | 0.70   | 4.60  | 494                       | 7372   |
| 6100                             | <b>1RN7714-8NA60-0CJ0</b>  | 745              | 700   | 97.1          | 97.3          | 0.86                       | 0.84                       | 78188            | 2.30  | 0.70   | 4.70  | 558                       | 7899   |
| 6700                             | <b>1RN7716-8NA60-0CJ0</b>  | 745              | 780   | 97.2          | 97.4          | 0.85                       | 0.84                       | 85879            | 2.35  | 0.65   | 4.80  | 617                       | 9308   |
| 10-pole                          |  |                  |   |               |               |                            |                            |                  |   |  |   |                           |  |
| 3750                             | <b>1RN7710-3NA60-0CJ0</b>  | 595              | 440   | 96.6          | 96.8          | 0.85                       | 0.82                       | 60184            | 2.50  | 0.60   | 4.40  | 432                       | 11689  |
| 4200                             | <b>1RN7712-3NA60-0CJ0</b>  | 595              | 490   | 96.7          | 96.9          | 0.85                       | 0.82                       | 67406            | 2.55  | 0.60   | 4.60  | 491                       | 13437  |
| 4700                             | <b>1RN7714-3NA60-0CJ0</b>  | 595              | 540   | 96.8          | 97.1          | 0.86                       | 0.84                       | 75431            | 2.50  | 0.65   | 4.50  | 558                       | 15129  |
| 5150                             | <b>1RN7716-3NA60-0CJ0</b>  | 594              | 590   | 96.9          | 97.2          | 0.86                       | 0.85                       | 82792            | 2.45  | 0.65   | 4.50  | 618                       | 15557  |

## Type of construction:

|  |          |
|--|----------|
| IM B3 (IM 1001)                          | <b>0</b> |
| IM V1, without protective hood (IM 3011) | <b>8</b> |

## Housing and bearing version

|   |          |
|---|----------|
| Steel fabricated housing/<br>anti-friction bearings | <b>G</b> |
| Steel fabricated housing/<br>sleeve bearing         | <b>J</b> |

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Higher pole numbers are available on request.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on [Page 2/2](#).

## Motors for line operation

## Water-cooled motors

## H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

## Selection and ordering data

| Rated power<br><br>IEC<br><br>kW | High voltage motor<br>H-compact PLUS<br><br>Article No. | Speed<br><br>rpm | Rated current             |               | Efficiency    |                           | Power factor              |                           | Torque<br><br>Nm | Break-down torque<br><br>$T_B/T_{rated}$<br>[-] | Locked-rotor torque<br><br>$T_{LR}/T_{rated}$<br>[-] | Locked-rotor current<br><br>$I_{LR}/I_{rated}$<br>[-] | Moment of inertia                                |  |
|----------------------------------|---|------------------|---------------------------|---------------|---------------|---------------------------|---------------------------|---------------------------|------------------|---|--|---|--|--|
|                                  |   |                  | $I_{rated}$ at 10 kV<br>A | 4/4 load<br>% | 3/4 load<br>% | 4/4 load<br>cos $\varphi$ | 3/4 load<br>cos $\varphi$ | Motor<br>kgm <sup>2</sup> |                  |   |  |   | External, max. <sup>1)</sup><br>kgm <sup>2</sup> |  |
| <b>9 ... 11 kV, 50 Hz</b>        |   |                  |                           |               |               |                           |                           |                           |                  |   |  |   |  |  |
| <b>2-pole</b>                    |   |                  |                           |               |               |                           |                           |                           |                  |   |  |   |  |  |
| 1250                             | <b>1RN6 450-2HJ</b> ■ 0                                 | 2974             | 86                        | 95.5          | 95.8          | 0.88                      | 0.88                      | 4013                      | 2.15             | 0.70  | 4.80   | 12  | 31   |  |
| 1400                             | <b>1RN6 452-2HJ</b> ■ 0                                 | 2977             | 94                        | 95.8          | 96.1          | 0.90                      | 0.89                      | 4490                      | 2.40             | 0.75  | 5.40   | 14  | 33   |  |
| 1550                             | <b>1RN6 454-2HJ</b> ■ 0                                 | 2979             | 104                       | 95.9          | 96.2          | 0.89                      | 0.89                      | 4968                      | 2.40             | 0.70  | 5.50   | 15  | 36   |  |
| 1750                             | <b>1RN6 456-2HJ</b> ■ 0                                 | 2980             | 116                       | 96.2          | 96.5          | 0.90                      | 0.90                      | 5607                      | 2.45             | 0.70  | 5.50   | 17  | 39   |  |
| 2180                             | <b>1RN6 500-2HJ</b> ■ 0                                 | 2977             | 146                       | 96.1          | 96.6          | 0.90                      | 0.89                      | 6992                      | 2.15             | 0.55  | 4.80   | 19  | 37   |  |
| 2420                             | <b>1RN6 502-2HJ</b> ■ 0                                 | 2976             | 162                       | 96.3          | 96.7          | 0.90                      | 0.90                      | 7765                      | 2.10             | 0.65  | 4.60   | 21  | 41   |  |
| 2660                             | <b>1RN6 504-2HJ</b> ■ 0                                 | 2978             | 174                       | 96.5          | 97.0          | 0.91                      | 0.91                      | 8529                      | 2.25             | 0.55  | 4.90   | 25  | 45   |  |
| 2900                             | <b>1RN6 506-2HJ</b> ■ 0                                 | 2976             | 190                       | 96.6          | 97.1          | 0.91                      | 0.91                      | 9305                      | 2.10             | 0.70  | 4.90   | 26  | 51   |  |
| 3550                             | <b>1RN6 560-2HJ</b> ■ 0                                 | 2978             | 240                       | 96.5          | 96.8          | 0.89                      | 0.90                      | 11383                     | 2.00             | 0.50  | 4.05   | 39  | 115  |  |
| 4050                             | <b>1RN6 562-2HJ</b> ■ 0                                 | 2982             | 270                       | 96.7          | 96.8          | 0.90                      | 0.90                      | 12969                     | 2.30             | 0.60  | 4.95   | 44  | 130  |  |
| 4630                             | <b>1RN6 564-2HJ</b> ■ 0                                 | 2981             | 305                       | 96.9          | 97.1          | 0.91                      | 0.91                      | 14831                     | 2.25             | 0.60  | 4.80   | 49  | 145  |  |
| 5290                             | <b>1RN6 566-2HJ</b> ■ 0                                 | 2984             | 345                       | 97.1          | 97.1          | 0.91                      | 0.91                      | 16928                     | 2.50             | 0.60  | 5.40   | 54  | 160  |  |
| 4300                             | <b>1RN4 630-2HE</b> ■ 0                                 | 2984             | 290                       | 96.8          | 96.9          | 0.89                      | 0.88                      | 13762                     | 2.30             | 0.34  | 4.50   | 75  | 75   |  |
| 5000                             | <b>1RN4 632-2HE</b> ■ 0                                 | 2985             | 330                       | 97.3          | 97.3          | 0.90                      | 0.89                      | 15997                     | 2.50             | 0.39  | 4.90   | 85  | 100  |  |
| 5700                             | <b>1RN4 634-2HE</b> ■ 0                                 | 2986             | 375                       | 97.4          | 97.4          | 0.90                      | 0.89                      | 18230                     | 2.60             | 0.42  | 5.20   | 90  | 110  |  |
| 6700                             | <b>1RN4 636-2HE</b> ■ 0                                 | 2987             | 440                       | 97.6          | 97.7          | 0.90                      | 0.89                      | 21421                     | 2.60             | 0.45  | 5.50   | 100   | 160  |  |
| <b>4-pole</b>                    |   |                  |                           |               |               |                           |                           |                           |                  |   |  |   |  |  |
| 1060                             | <b>1RN6 450-4HJ</b> ■ ■                                 | 1485             | 72                        | 95.4          | 95.9          | 0.89                      | 0.89                      | 6816                      | 2.50             | 0.70  | 5.15   | 21  | 170  |  |
| 1210                             | <b>1RN6 452-4HJ</b> ■ ■                                 | 1484             | 82                        | 95.5          | 96.1          | 0.89                      | 0.89                      | 7786                      | 2.45             | 0.65  | 5.00   | 24  | 194  |  |
| 1360                             | <b>1RN6 454-4HJ</b> ■ ■                                 | 1486             | 91                        | 95.8          | 96.2          | 0.90                      | 0.89                      | 8739                      | 2.55             | 0.65  | 5.30   | 27  | 225  |  |
| 1560                             | <b>1RN6 456-4HJ</b> ■ ■                                 | 1487             | 104                       | 96.0          | 96.4          | 0.90                      | 0.88                      | 10018                     | 2.60             | 0.65  | 5.35   | 30  | 260  |  |
| 1980 <sup>2)</sup>               | <b>1RN6 500-4HJ</b> ■ 0                                 | 1486             | 134                       | 95.9          | 96.7          | 0.89                      | 0.88                      | 12723                     | 2.45             | 0.75  | 5.15   | 45  | 200  |  |
| 2180 <sup>2)</sup>               | <b>1RN6 502-4HJ</b> ■ 0                                 | 1486             | 148                       | 96.0          | 96.8          | 0.89                      | 0.88                      | 14009                     | 2.40             | 0.70  | 5.20   | 48  | 220  |  |
| 2420 <sup>2)</sup>               | <b>1RN6 504-4HJ</b> ■ 0                                 | 1488             | 164                       | 96.2          | 96.9          | 0.89                      | 0.88                      | 15530                     | 2.50             | 0.65  | 5.20   | 55  | 250  |  |
| 2610 <sup>2)</sup>               | <b>1RN6 506-4HJ</b> ■ 0                                 | 1488             | 176                       | 96.3          | 97.0          | 0.89                      | 0.88                      | 16749                     | 2.55             | 0.70  | 5.40   | 60  | 280  |  |
| 3250 <sup>2)</sup>               | <b>1RA6 560-4HJ</b> ■ 0                                 | 1490             | 215                       | 96.8          | 97.2          | 0.91                      | 0.91                      | 20829                     | 2.15             | 0.60  | 5.00   | 86  | 420  |  |
| 3600 <sup>2)</sup>               | <b>1RA6 562-4HJ</b> ■ 0                                 | 1491             | 235                       | 96.9          | 97.3          | 0.91                      | 0.91                      | 23056                     | 2.15             | 0.65  | 5.05   | 97  | 460  |  |
| 4100 <sup>2)</sup>               | <b>1RA6 564-4HJ</b> ■ 0                                 | 1491             | 270                       | 97.1          | 97.4          | 0.91                      | 0.90                      | 26258                     | 2.15             | 0.55  | 5.10   | 107   | 510  |  |
| 4450 <sup>2)</sup>               | <b>1RA6 566-4HJ</b> ■ 0                                 | 1492             | 290                       | 97.2          | 97.5          | 0.91                      | 0.90                      | 28481                     | 2.25             | 0.55  | 5.20   | 116   | 560  |  |
| 4500                             | <b>1RN4 630-4HE</b> ■ ■                                 | 1490             | 300                       | 96.9          | 97.1          | 0.89                      | 0.89                      | 28842                     | 2.10             | 0.57  | 4.90   | 150   | 550  |  |
| 5000                             | <b>1RN4 632-4HE</b> ■ ■                                 | 1490             | 330                       | 97.1          | 97.2          | 0.90                      | 0.90                      | 32047                     | 2.15             | 0.59  | 5.00   | 165   | 650  |  |
| 5600                             | <b>1RN4 634-4HE</b> ■ ■                                 | 1490             | 370                       | 97.3          | 97.4          | 0.90                      | 0.90                      | 35893                     | 2.20             | 0.63  | 5.30   | 180   | 750  |  |
| 6200                             | <b>1RN4 636-4HE</b> ■ ■                                 | 1491             | 410                       | 97.4          | 97.5          | 0.90                      | 0.90                      | 39712                     | 2.40             | 0.68  | 5.50   | 195   | 780  |  |

## Voltage code:

10 kV, 50 Hz  
Other voltage8  
9

## Type of construction:

IM B3  
IM V1 (without canopy)0  
8

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

1) Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

2) Data of vertical motors (IM V1) on request.

## Selection and ordering data (continued)

| Rated power<br>IEC        | High voltage motor<br>H-compact PLUS<br>Article No. | Speed<br>rpm | Rated current                   |                  | Efficiency       |                              | Power factor                 |                           | Torque<br>Nm | Break-down<br>torque<br>$T_B/T_{rated}$ | Locked-<br>rotor<br>torque<br>$T_{LR}/T_{rated}$ | Locked-<br>rotor<br>current<br>$I_{LR}/I_{rated}$ | Moment of inertia                                   |  |
|---------------------------|---|--------------|---------------------------------|------------------|------------------|------------------------------|------------------------------|---------------------------|--------------|---|--|---|---|--|
|                           |   |              | $I_{rated}$<br>at<br>10 kV<br>A | 4/4<br>load<br>% | 3/4<br>load<br>% | 4/4<br>load<br>cos $\varphi$ | 3/4<br>load<br>cos $\varphi$ | Motor<br>kgm <sup>2</sup> |              |   |  |   | External,<br>max. <sup>1)</sup><br>kgm <sup>2</sup> |  |
| <b>9 ... 11 kV, 50 Hz</b> |   |              |                                 |                  |                  |                              |                              |                           |              |   |  |   |   |  |
| 6-pole                    |   |              |                                 |                  |                  |                              |                              |                           |              |   |  |   |   |  |
| 820                       | <b>1RN6 450-6HJ</b>                                 | 990          | 59                              | 95.2             | 95.7             | 0.85                         | 0.83                         | 7909                      | 2.45         | 0.90                                    | 5.15   | 28  | 340   |  |
| 920                       | <b>1RN6 452-6HJ</b>                                 | 990          | 65                              | 95.2             | 95.8             | 0.86                         | 0.85                         | 8874                      | 2.40         | 0.95                                    | 5.10   | 32  | 400   |  |
| 1000                      | <b>1RN6 454-6HJ</b>                                 | 990          | 70                              | 95.4             | 96.0             | 0.86                         | 0.85                         | 9645                      | 2.40         | 0.95                                    | 5.10   | 35  | 460   |  |
| 1150                      | <b>1RN6 456-6HJ</b>                                 | 991          | 81                              | 95.8             | 96.3             | 0.86                         | 0.84                         | 11081                     | 2.45         | 0.85                                    | 5.15   | 41  | 560   |  |
| 1450                      | <b>1RN6 500-6HJ</b>                                 | 990          | 102                             | 95.5             | 96.3             | 0.86                         | 0.86                         | 13986                     | 2.15         | 0.70                                    | 4.55   | 56  | 830   |  |
| 1650                      | <b>1RN6 502-6HJ</b>                                 | 989          | 114                             | 95.6             | 96.4             | 0.87                         | 0.86                         | 15931                     | 2.10         | 0.70                                    | 4.50   | 61  | 910   |  |
| 1850                      | <b>1RN6 504-6HJ</b>                                 | 989          | 128                             | 95.7             | 96.5             | 0.87                         | 0.87                         | 17862                     | 2.10         | 0.70                                    | 4.65   | 68  | 1020  |  |
| 2020                      | <b>1RN6 506-6HJ</b>                                 | 990          | 140                             | 95.9             | 96.6             | 0.87                         | 0.86                         | 19484                     | 2.20         | 0.70                                    | 4.65   | 76  | 1140  |  |
| 2500                      | <b>1RN6 560-6HJ</b>                                 | 991          | 170                             | 96.2             | 96.7             | 0.88                         | 0.87                         | 24090                     | 2.05         | 0.70                                    | 4.85   | 107   | 1060  |  |
| 2800                      | <b>1RN6 562-6HJ</b>                                 | 992          | 190                             | 96.5             | 96.9             | 0.88                         | 0.87                         | 26953                     | 2.15         | 0.70                                    | 5.00   | 118   | 1160  |  |
| 3150                      | <b>1RN6 564-6HJ</b>                                 | 992          | 215                             | 96.6             | 97.0             | 0.88                         | 0.88                         | 30322                     | 2.10         | 0.70                                    | 4.75   | 131   | 1280  |  |
| 3430                      | <b>1RN6 566-6HJ</b>                                 | 992          | 230                             | 96.7             | 97.1             | 0.89                         | 0.88                         | 33018                     | 2.25         | 0.80                                    | 5.10   | 145   | 1420  |  |
| 3600                      | <b>1RN4 630-6HE</b>                                 | 993          | 250                             | 96.7             | 96.9             | 0.86                         | 0.84                         | 34622                     | 2.20         | 0.63                                    | 5.00   | 190   | 1200  |  |
| 4000                      | <b>1RN4 632-6HE</b>                                 | 993          | 275                             | 96.8             | 97.0             | 0.87                         | 0.09                         | 38469                     | 2.10         | 0.64                                    | 5.00   | 210   | 1500  |  |
| 4400                      | <b>1RN4 634-6HE</b>                                 | 993          | 300                             | 97.0             | 97.1             | 0.87                         | 0.86                         | 42316                     | 2.20         | 0.66                                    | 5.20   | 230   | 1750  |  |
| 4800                      | <b>1RN4 636-6HE</b>                                 | 994          | 330                             | 97.1             | 97.2             | 0.87                         | 0.86                         | 46117                     | 2.30         | 0.71                                    | 5.50   | 255   | 2000  |  |
| 8-pole                    |   |              |                                 |                  |                  |                              |                              |                           |              |   |  |   |   |  |
| 520                       | <b>1RN6 450-8HJ</b>                                 | 743          | 38.5                            | 94.4             | 95.0             | 0.83                         | 0.81                         | 6683                      | 2.35         | 0.80                                    | 4.95   | 35  | 215   |  |
| 560                       | <b>1RN6 452-8HJ</b>                                 | 743          | 41                              | 94.4             | 95.2             | 0.84                         | 0.83                         | 7197                      | 2.25         | 0.75                                    | 4.80   | 39  | 290   |  |
| 590                       | <b>1RN6 454-8HJ</b>                                 | 743          | 43                              | 94.3             | 95.1             | 0.84                         | 0.83                         | 7582                      | 2.20         | 0.70                                    | 4.70   | 44  | 365   |  |
| 750                       | <b>1RN6 456-8HJ</b>                                 | 744          | 54                              | 95.0             | 95.6             | 0.84                         | 0.82                         | 9626                      | 2.45         | 0.80                                    | 5.15   | 51  | 485   |  |
| 1060                      | <b>1RN6 500-8HJ</b>                                 | 743          | 77                              | 95.1             | 95.8             | 0.84                         | 0.82                         | 13623                     | 2.20         | 0.60                                    | 4.75   | 68  | 830   |  |
| 1180                      | <b>1RN6 502-8HJ</b>                                 | 744          | 85                              | 95.5             | 96.1             | 0.84                         | 0.81                         | 15145                     | 2.35         | 0.65                                    | 4.95   | 75  | 910   |  |
| 1320                      | <b>1RN6 504-8HJ</b>                                 | 744          | 95                              | 95.6             | 96.2             | 0.84                         | 0.82                         | 16942                     | 2.35         | 0.65                                    | 5.00   | 84  | 1020  |  |
| 1490                      | <b>1RN6 506-8HJ</b>                                 | 744          | 108                             | 95.7             | 96.3             | 0.84                         | 0.82                         | 19124                     | 2.25         | 0.60                                    | 4.90   | 93  | 1120  |  |
| 1800                      | <b>1RN6 560-8HJ</b>                                 | 743          | 128                             | 95.9             | 96.6             | 0.85                         | 0.84                         | 23134                     | 2.00         | 0.60                                    | 4.50   | 127   | 1540  |  |
| 1980                      | <b>1RN6 562-8HJ</b>                                 | 744          | 140                             | 96.0             | 96.7             | 0.85                         | 0.84                         | 25413                     | 2.10         | 0.65                                    | 4.75   | 140   | 1700  |  |
| 2200                      | <b>1RN6 564-8HJ</b>                                 | 744          | 154                             | 96.2             | 96.8             | 0.86                         | 0.84                         | 28237                     | 2.10         | 0.60                                    | 4.75   | 155   | 1880  |  |
| 2380                      | <b>1RN6 566-8HJ</b>                                 | 744          | 166                             | 96.3             | 96.9             | 0.86                         | 0.84                         | 30547                     | 2.15         | 0.65                                    | 5.00   | 172   | 2100  |  |
| 2600                      | <b>1RN4 630-8HE</b>                                 | 744          | 186                             | 96.3             | 96.4             | 0.84                         | 0.81                         | 33374                     | 2.40         | 0.75                                    | 5.20   | 255   | 1800  |  |
| 2900                      | <b>1RN4 632-8HE</b>                                 | 744          | 205                             | 96.4             | 96.5             | 0.84                         | 0.81                         | 37224                     | 2.30         | 0.75                                    | 5.20   | 280   | 2000  |  |
| 3200                      | <b>1RN4 634-8HE</b>                                 | 744          | 225                             | 96.6             | 96.7             | 0.85                         | 0.82                         | 41075                     | 2.30         | 0.74                                    | 5.10   | 310   | 2200  |  |
| 3500                      | <b>1RN4 636-8HE</b>                                 | 744          | 245                             | 96.7             | 96.8             | 0.86                         | 0.83                         | 44926                     | 2.30         | 0.75                                    | 5.20   | 340   | 2600  |  |

## Voltage code:

10 kV, 50 Hz  
Other voltage8  
9

## Type of construction:

IM B3  
IM V1 (without canopy)0  
8

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

1) Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

## Motors for line operation

## Water-cooled motors

## H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

## Selection and ordering data (continued)

| Rated power<br>IEC<br>kW  | High voltage motor<br>H-compact PLUS<br>Article No. | Speed<br>rpm | Rated current                   |                  | Efficiency       |                              | Power factor                 |                           | Torque<br>Nm | Break-down<br>torque<br>$T_B/T_{rated}$<br>[-] | Locked-<br>rotor<br>torque<br>$T_{LR}/T_{rated}$<br>[-] | Locked-<br>rotor<br>current<br>$I_{LR}/I_{rated}$<br>[-] | Moment of inertia                                   |  |
|---------------------------|---|--------------|---------------------------------|------------------|------------------|------------------------------|------------------------------|---------------------------|--------------|--|---|--|---|--|
|                           |   |              | $I_{rated}$<br>at<br>10 kV<br>A | 4/4<br>load<br>% | 3/4<br>load<br>% | 4/4<br>load<br>cos $\varphi$ | 3/4<br>load<br>cos $\varphi$ | Motor<br>kgm <sup>2</sup> |              |  |   |  | External,<br>max. <sup>1)</sup><br>kgm <sup>2</sup> |  |
| <b>9 ... 11 kV, 50 Hz</b> |   |              |                                 |                  |                  |                              |                              |                           |              |  |   |  |   |  |
| 10-pole                   |   |              |                                 |                  |                  |                              |                              |                           |              |  |   |  |   |  |
| 720                       | <b>1RN6 500-3HE</b>                                 | 593          | 55                              | 93.8             | 93.9             | 0.80                         | 0.76                         | 11595                     | 2.20         | 0.82   | 5.20  | 70   | 900   |  |
| 830                       | <b>1RN6 502-3HE</b>                                 | 594          | 64                              | 94.2             | 94.2             | 0.79                         | 0.74                         | 13344                     | 2.20         | 0.82   | 5.30  | 80   | 1100  |  |
| 920                       | <b>1RN6 504-3HE</b>                                 | 594          | 71                              | 94.3             | 94.3             | 0.79                         | 0.74                         | 14791                     | 2.20         | 0.82   | 5.30  | 88   | 1200  |  |
| 1020                      | <b>1RN6 506-3HE</b>                                 | 594          | 79                              | 94.5             | 94.5             | 0.79                         | 0.75                         | 16399                     | 2.20         | 0.80   | 5.30  | 99   | 1400  |  |
| 1250                      | <b>1RN6 560-3HE</b>                                 | 593          | 94                              | 94.8             | 94.9             | 0.81                         | 0.77                         | 20131                     | 2.10         | 0.72   | 4.70  | 123  | 1650  |  |
| 1420                      | <b>1RN6 562-3HE</b>                                 | 593          | 106                             | 94.9             | 95.2             | 0.82                         | 0.78                         | 22868                     | 2.00         | 0.70   | 4.70  | 141  | 2050  |  |
| 1570                      | <b>1RN6 564-3HE</b>                                 | 593          | 116                             | 95.1             | 95.4             | 0.82                         | 0.78                         | 25284                     | 2.00         | 0.72   | 5.00  | 158  | 2500  |  |
| 1700                      | <b>1RN6 566-3HE</b>                                 | 595          | 128                             | 95.3             | 95.4             | 0.80                         | 0.75                         | 27286                     | 2.40         | 0.85   | 5.50  | 173  | 2700  |  |
| 2100                      | <b>1RN4 630-3HE</b>                                 | 593          | 152                             | 95.8             | 96.1             | 0.83                         | 0.80                         | 33820                     | 2.10         | 0.73   | 4.70  | 250  | 2500  |  |
| 2350                      | <b>1RN4 632-3HE</b>                                 | 594          | 172                             | 96.0             | 96.2             | 0.82                         | 0.78                         | 37782                     | 2.30         | 0.82   | 5.10  | 280  | 2900  |  |
| 2550                      | <b>1RN4 634-3HE</b>                                 | 594          | 184                             | 96.0             | 96.3             | 0.83                         | 0.79                         | 40997                     | 2.30         | 0.80   | 5.10  | 305  | 3000  |  |
| 2750                      | <b>1RN4 636-3HE</b>                                 | 594          | 196                             | 96.2             | 96.5             | 0.84                         | 0.80                         | 44213                     | 2.30         | 0.83   | 5.20  | 335  | 3500  |  |
| 12-pole                   |   |              |                                 |                  |                  |                              |                              |                           |              |  |   |  |   |  |
| 580                       | <b>1RN6 502-5HE</b>                                 | 493          | 48.0                            | 93.3             | 93.3             | 0.74                         | 0.68                         | 11235                     | 2.00         | 0.70   | 4.70  | 79   | 1350  |  |
| 640                       | <b>1RN6 504-5HE</b>                                 | 493          | 53                              | 93.5             | 93.6             | 0.74                         | 0.68                         | 12398                     | 2.00         | 0.70   | 4.80  | 87   | 1500  |  |
| 700                       | <b>1RN6 506-5HE</b>                                 | 493          | 58                              | 93.6             | 93.7             | 0.75                         | 0.69                         | 13560                     | 2.10         | 0.70   | 4.80  | 98   | 1600  |  |
| 850                       | <b>1RN6 560-5HE</b>                                 | 494          | 69                              | 93.8             | 94.1             | 0.76                         | 0.71                         | 16432                     | 1.85         | 0.60   | 4.20  | 123  | 1750  |  |
| 1000                      | <b>1RN6 562-5HE</b>                                 | 494          | 82                              | 94.4             | 94.6             | 0.75                         | 0.69                         | 19332                     | 1.95         | 0.65   | 4.50  | 141  | 2200  |  |
| 1100                      | <b>1RN6 564-5HE</b>                                 | 494          | 88                              | 94.5             | 94.7             | 0.76                         | 0.71                         | 21265                     | 1.95         | 0.63   | 4.40  | 158  | 2500  |  |
| 1200                      | <b>1RN6 566-5HE</b>                                 | 494          | 96                              | 94.8             | 94.8             | 0.76                         | 0.71                         | 23198                     | 1.95         | 0.63   | 4.40  | 173  | 2900  |  |
| 1650                      | <b>1RN4 630-5HE</b>                                 | 494          | 126                             | 95.1             | 95.5             | 0.79                         | 0.74                         | 31898                     | 2.10         | 0.75   | 4.60  | 250  | 3000  |  |
| 1800                      | <b>1RN4 632-5HE</b>                                 | 494          | 142                             | 95.4             | 95.7             | 0.77                         | 0.71                         | 34798                     | 2.40         | 0.88   | 5.20  | 275  | 3500  |  |
| 1950                      | <b>1RN4 634-5HE</b>                                 | 494          | 152                             | 95.5             | 95.7             | 0.78                         | 0.73                         | 37697                     | 2.30         | 0.85   | 5.10  | 305  | 3400  |  |
| 2100                      | <b>1RN4 636-5HE</b>                                 | 495          | 162                             | 95.7             | 95.9             | 0.78                         | 0.73                         | 40515                     | 2.35         | 0.88   | 5.30  | 335  | 4000  |  |

## Voltage code:

10 kV, 50 Hz  
Other voltage8  
9

## Type of construction:

IM B3  
IM V1 (without canopy)0  
8

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Higher pole numbers are available on request.

1) Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

## Selection and ordering data

| Rated power<br><br>IEC<br><br>kW | High voltage motor<br>SIMOTICS HV M (modular)<br><br>Article No. | Speed<br><br>rpm | Rated current             |               | Efficiency    |                           | Power factor              |                           | Torque<br><br>Nm | Break-down torque<br><br>$T_B/T_{rated}$<br>[-] | Locked-rotor torque<br><br>$T_{LR}/T_{rated}$<br>[-] | Locked-rotor current<br><br>$I_{LR}/I_{rated}$<br>[-] | Moment of inertia                                |  |
|----------------------------------|--|------------------|---------------------------|---------------|---------------|---------------------------|---------------------------|---------------------------|------------------|---|--|---|--|--|
|                                  |  |                  | $I_{rated}$ at 10 kV<br>A | 4/4 load<br>% | 3/4 load<br>% | 4/4 load<br>cos $\varphi$ | 3/4 load<br>cos $\varphi$ | Motor<br>kgm <sup>2</sup> |                  |   |  |   | External, max. <sup>1)</sup><br>kgm <sup>2</sup> |  |
| <b>9 ... 11 kV, 50 Hz</b>        |  |                  |                           |               |               |                           |                           |                           |                  |   |  |   |  |  |
| 2-pole                           |  |                  |                           |               |               |                           |                           |                           |                  |   |  |   |  |  |
| 8300                             | <b>1RN7710-2NA80-0CJ0</b>  | 2986             | 540                       | 97.3          | 97.2          | 0.91                      | 0.91                      | 26543                     | 2.15             | 0.60  | 4.80   | 149   | 272  |  |
| 9200                             | <b>1RN7712-2NA80-0CJ0</b>  | 2986             | 590                       | 97.4          | 97.4          | 0.92                      | 0.91                      | 29421                     | 2.20             | 0.65  | 5.00   | 160   | 273  |  |
| 10000                            | <b>1RN7714-2NA80-0CJ0</b>  | 2988             | 640                       | 97.6          | 97.5          | 0.92                      | 0.92                      | 31958                     | 2.30             | 0.70  | 5.50   | 174   | 309  |  |
| 11000                            | <b>1RN7716-2NA80-0CJ0</b>  | 2988             | 700                       | 97.6          | 97.6          | 0.93                      | 0.92                      | 35154                     | 2.40             | 0.65  | 5.40   | 190   | 303  |  |
| 4-pole                           |  |                  |                           |               |               |                           |                           |                           |                  |   |  |   |  |  |
| 7100                             | <b>1RN7710-4NA80-0C 0</b>  | 1493             | 460                       | 97.4          | 97.5          | 0.91                      | 0.91                      | 45411                     | 2.45             | 0.60  | 5.30   | 262   | 1077   |  |
| 8000                             | <b>1RN7712-4NA80-0C 0</b>  | 1493             | 520                       | 97.5          | 97.6          | 0.91                      | 0.91                      | 51168                     | 2.45             | 0.65  | 5.30   | 288   | 1140   |  |
| 9000                             | <b>1RN7714-4NA80-0C 0</b>  | 1493             | 580                       | 97.6          | 97.7          | 0.92                      | 0.92                      | 57564                     | 2.45             | 0.65  | 5.30   | 322   | 1317   |  |
| 10000                            | <b>1RN7716-4NA80-0C 0</b>  | 1493             | 640                       | 97.7          | 97.8          | 0.92                      | 0.92                      | 63960                     | 2.50             | 0.65  | 5.30   | 362   | 1506   |  |
| 6-pole                           |  |                  |                           |               |               |                           |                           |                           |                  |   |  |   |  |  |
| 5600                             | <b>1RN7710-6NA8 -0C 0</b>  | 995              | 385                       | 97.1          | 97.2          | 0.86                      | 0.84                      | 53744                     | 2.45             | 0.75  | 5.20   | 350   | 2627   |  |
| 6300                             | <b>1RN7712-6NA8 -0C 0</b>  | 995              | 435                       | 97.3          | 97.3          | 0.86                      | 0.85                      | 60462                     | 2.45             | 0.75  | 5.20   | 397   | 3212   |  |
| 7100                             | <b>1RN7714-6NA8 -0C 0</b>  | 995              | 490                       | 97.3          | 97.3          | 0.86                      | 0.84                      | 68140                     | 2.50             | 0.70  | 5.20   | 448   | 3232   |  |
| 8000                             | <b>1RN7716-6NA8 -0C 0</b>  | 995              | 550                       | 97.4          | 97.4          | 0.87                      | 0.85                      | 76778                     | 2.45             | 0.70  | 5.20   | 497   | 3931   |  |
| 8-pole                           |  |                  |                           |               |               |                           |                           |                           |                  |   |  |   |  |  |
| 4250                             | <b>1RN7710-8NA8 -0C 0</b>  | 745              | 300                       | 96.6          | 96.9          | 0.85                      | 0.83                      | 54475                     | 2.35             | 0.60  | 4.90   | 434   | 4820   |  |
| 4750                             | <b>1RN7712-8NA8 -0C 0</b>  | 746              | 335                       | 96.8          | 97.0          | 0.85                      | 0.83                      | 60803                     | 2.35             | 0.60  | 4.80   | 492   | 5704   |  |
| 5300                             | <b>1RN7714-8NA8 -0C 0</b>  | 746              | 365                       | 96.9          | 97.1          | 0.86                      | 0.84                      | 67843                     | 2.45             | 0.70  | 5.00   | 559   | 6953   |  |
| 6000                             | <b>1RN7716-8NA8 -0C 0</b>  | 746              | 420                       | 97.0          | 97.2          | 0.85                      | 0.83                      | 76803                     | 2.50             | 0.65  | 5.10   | 616   | 6922   |  |
| 10-pole                          |  |                  |                           |               |               |                           |                           |                           |                  |   |  |   |  |  |
| 3500                             | <b>1RN7710-3NA8 -0C 0</b>  | 595              | 245                       | 96.5          | 96.7          | 0.85                      | 0.82                      | 56172                     | 2.65             | 0.65  | 4.70   | 433   | 11504  |  |
| 3900                             | <b>1RN7712-3NA8 -0C 0</b>  | 595              | 275                       | 96.7          | 96.9          | 0.85                      | 0.83                      | 62592                     | 2.60             | 0.65  | 4.70   | 493   | 12639  |  |
| 4300                             | <b>1RN7714-3NA8 -0C 0</b>  | 595              | 300                       | 96.8          | 97.0          | 0.85                      | 0.83                      | 69011                     | 2.60             | 0.65  | 4.70   | 557   | 13791  |  |
| 4750                             | <b>1RN7716-3NA8 -0C 0</b>  | 595              | 335                       | 96.7          | 97.0          | 0.85                      | 0.83                      | 76233                     | 2.65             | 0.65  | 4.70   | 615   | 10027  |  |

## Type of construction:

|  |          |
|--|----------|
| IM B3 (IM 1001)                          | <b>0</b> |
| IM V1, without protective hood (IM 3011) | <b>8</b> |

## Housing and bearing version

|   |          |
|---|----------|
| Steel fabricated housing/<br>anti-friction bearings | <b>G</b> |
| Steel fabricated housing/<br>sleeve bearing         | <b>J</b> |

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Higher pole numbers are available on request.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

## Motors for line operation

## Water-cooled motors

## H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

## Selection and ordering data

The following data also apply to explosion-protected motors 1SL4/1SL6 (Ex ec) and 1SQ4/1SQ6 (Ex pxb).

| Rated power<br>IEC<br>kW   | High voltage motor<br>H-compact PLUS<br>Article No. | Speed<br>rpm | Rated current<br>$I_{rated}$<br>at<br>6.6 kV<br>A | Efficiency    |               | Power factor           |                        | Torque<br>Nm | Break-down torque<br>$T_B/T_{rated}$<br>[-] | Locked-rotor torque<br>$T_{LR}/T_{rated}$<br>[-] | Locked-rotor current<br>$I_{LR}/I_{rated}$<br>[-] | Moment of inertia         |  |
|----------------------------|---|--------------|---|---------------|---------------|------------------------|------------------------|--------------|---|--|---|---------------------------|--|
|                            |   |              |   | 4/4 load<br>% | 3/4 load<br>% | 4/4 load<br>cos $\phi$ | 3/4 load<br>cos $\phi$ |              |   |  |   | Motor<br>kgm <sup>2</sup> | External, max. <sup>1)</sup><br>kgm <sup>2</sup> |
| <b>4 ... 6.6 kV, 60 Hz</b> |   |              |   |               |               |                        |                        |              |   |  |   |                           |  |
| <b>2-pole</b>              |   |              |   |               |               |                        |                        |              |   |  |   |                           |  |
| 1700                       | <b>1RN6 450-2HJ 0</b>                               | 3573         | 174   | 95.9          | 96.1          | 0.89                   | 0.89                   | 4543         | 2.05  | 0.60   | 4.60  | 13                        | 34   |
| 2000                       | <b>1RN6 452-2HJ 0</b>                               | 3573         | 200   | 96.1          | 96.4          | 0.90                   | 0.90                   | 5345         | 2.10  | 0.65   | 4.75  | 15                        | 40   |
| 2240                       | <b>1RN6 454-2HJ 0</b>                               | 3576         | 225   | 96.3          | 96.4          | 0.90                   | 0.89                   | 5981         | 2.25  | 0.65   | 5.10  | 16                        | 45   |
| 2500                       | <b>1RN6 456-2HJ 0</b>                               | 3580         | 250   | 96.5          | 96.6          | 0.90                   | 0.89                   | 6668         | 2.40  | 0.60   | 5.50  | 18                        | 52   |
| 3000                       | <b>1RN6 500-2HJ 0</b>                               | 3574         | 305   | 96.5          | 96.8          | 0.89                   | 0.89                   | 8015         | 1.95  | 0.45   | 4.15  | 20                        | 64   |
| 3300                       | <b>1RN6 502-2HJ 0</b>                               | 3575         | 330   | 96.6          | 96.9          | 0.90                   | 0.89                   | 8814         | 1.95  | 0.45   | 4.35  | 22                        | 72   |
| 3880                       | <b>1RN6 504-2HJ 0</b>                               | 3579         | 385   | 96.9          | 97.1          | 0.91                   | 0.90                   | 10352        | 2.30  | 0.55   | 5.05  | 26                        | 80   |
| 4250                       | <b>1RN6 506-2HJ 0</b>                               | 3578         | 420   | 97.1          | 97.3          | 0.91                   | 0.91                   | 11342        | 2.20  | 0.65   | 4.95  | 27                        | 88   |
| 4750                       | <b>1RN6 560-2HJ 0</b>                               | 3576         | 480   | 96.6          | 96.8          | 0.89                   | 0.90                   | 12684        | 1.90  | 0.50   | 4.15  | 39                        | 145  |
| 5400                       | <b>1RN6 562-2HJ 0</b>                               | 3578         | 540   | 96.8          | 96.9          | 0.90                   | 0.91                   | 14412        | 2.15  | 0.55   | 4.45  | 44                        | 160  |
| 6100                       | <b>1RN6 564-2HJ 0</b>                               | 3578         | 600   | 97.0          | 97.1          | 0.91                   | 0.91                   | 16280        | 2.15  | 0.55   | 4.70  | 49                        | 180  |
| 6900                       | <b>1RN6 566-2HJ 0</b>                               | 3581         | 680   | 97.2          | 97.2          | 0.91                   | 0.91                   | 18399        | 2.35  | 0.60   | 5.15  | 55                        | 200  |
| 5700                       | <b>1RN4 630-2HE 0</b>                               | 3583         | 580   | 97.0          | 96.9          | 0.88                   | 0.87                   | 15193        | 2.10  | 0.30   | 4.20  | 75                        | 95   |
| 6500                       | <b>1RN4 632-2HE 0</b>                               | 3584         | 660   | 97.2          | 97.2          | 0.89                   | 0.89                   | 17320        | 2.30  | 0.34   | 4.60  | 85                        | 140  |
| 7500                       | <b>1RN4 634-2HE 0</b>                               | 3585         | 750   | 97.5          | 97.5          | 0.90                   | 0.89                   | 19979        | 2.60  | 0.41   | 5.30  | 90                        | 150  |
| 8200                       | <b>1RN4 636-2HE 0</b>                               | 3585         | 820   | 97.6          | 97.6          | 0.90                   | 0.90                   | 21844        | 2.60  | 0.42   | 5.40  | 100                       | 110  |
| <b>4-pole</b>              |   |              |   |               |               |                        |                        |              |   |  |   |                           |  |
| 1680                       | <b>1RN6 450-4HJ 0</b>                               | 1782         | 172   | 95.9          | 96.1          | 0.89                   | 0.88                   | 9002         | 2.40  | 0.65   | 4.90  | 21                        | 178  |
| 1820                       | <b>1RN6 452-4HJ 0</b>                               | 1784         | 186   | 96.0          | 96.2          | 0.89                   | 0.88                   | 9741         | 2.55  | 0.65   | 5.15  | 23                        | 225  |
| 2120                       | <b>1RN6 454-4HJ 0</b>                               | 1784         | 215   | 96.2          | 96.5          | 0.89                   | 0.89                   | 11347        | 2.55  | 0.65   | 5.20  | 27                        | 285  |
| 2400                       | <b>1RN6 456-4HJ 0</b>                               | 1785         | 245   | 96.4          | 96.6          | 0.89                   | 0.87                   | 12839        | 2.60  | 0.65   | 5.30  | 30                        | 355  |
| 2700 <sup>2)</sup>         | <b>1RN6 500-4HJ 0</b>                               | 1785         | 275   | 96.4          | 97.0          | 0.89                   | 0.88                   | 14444        | 2.40  | 0.70   | 5.00  | 45                        | 250  |
| 3000 <sup>2)</sup>         | <b>1RN6 502-4HJ 0</b>                               | 1786         | 305   | 96.5          | 97.0          | 0.89                   | 0.88                   | 16040        | 2.45  | 0.70   | 5.15  | 48                        | 280  |
| 3400 <sup>2)</sup>         | <b>1RN6 504-4HJ 0</b>                               | 1786         | 345   | 96.5          | 97.1          | 0.89                   | 0.88                   | 18178        | 2.35  | 0.65   | 4.95  | 55                        | 310  |
| 3820 <sup>2)</sup>         | <b>1RN6 506-4HJ 0</b>                               | 1786         | 390   | 96.7          | 97.2          | 0.89                   | 0.88                   | 20424        | 2.35  | 0.65   | 5.00  | 60                        | 350  |
| 4500 <sup>2)</sup>         | <b>1RN6 560-4HJ 0</b>                               | 1790         | 450   | 97.2          | 97.4          | 0.91                   | 0.90                   | 24006        | 2.20  | 0.65   | 5.10  | 86                        | 550  |
| 5000 <sup>2)</sup>         | <b>1RN6 562-4HJ 0</b>                               | 1790         | 490   | 97.3          | 97.5          | 0.91                   | 0.91                   | 26674        | 2.20  | 0.60   | 5.10  | 97                        | 610  |
| 5600 <sup>2)</sup>         | <b>1RN6 564-4HJ 0</b>                               | 1791         | 550   | 97.4          | 97.6          | 0.91                   | 0.90                   | 29858        | 2.20  | 0.55   | 5.15  | 107                       | 670  |
| 6150 <sup>2)</sup>         | <b>1RN6 566-4HJ 0</b>                               | 1790         | 610   | 97.4          | 97.6          | 0.91                   | 0.91                   | 32809        | 2.10  | 0.55   | 4.95  | 117                       | 740  |
| 6500                       | <b>1RN4 630-4HE 0</b>                               | 1789         | 660   | 97.2          | 97.3          | 0.88                   | 0.88                   | 34698        | 2.10  | 0.52   | 4.80  | 150                       | 600  |
| 7300                       | <b>1RN4 632-4HE 0</b>                               | 1789         | 740   | 97.3          | 97.5          | 0.89                   | 0.89                   | 38969        | 2.10  | 0.54   | 4.80  | 165                       | 650  |
| 8000                       | <b>1RN4 634-4HE 0</b>                               | 1790         | 810   | 97.5          | 97.6          | 0.89                   | 0.89                   | 42682        | 2.20  | 0.59   | 5.20  | 180                       | 680  |
| 8600                       | <b>1RN4 636-4HE 0</b>                               | 1791         | 870   | 97.7          | 97.7          | 0.89                   | 0.88                   | 45857        | 2.40  | 0.61   | 5.50  | 195                       | 800  |

## Voltage code:

4 kV, 60 Hz  
6.6 kV, 60 Hz  
Other voltage

4  
1  
9

## Type of construction:

IM B3  
IM V1 (without canopy)

0  
8

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Electrical data is also valid for operation with SINAMICS PERFECT HARMONY drives.  
For ordering, please note the 10th and 11th position of the article number code.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

<sup>2)</sup> Data of vertical motors (IM V1) on request.



## Selection and ordering data (continued)

| Rated power<br>IEC<br>kW   | High voltage motor<br>H-compact PLUS<br>Article No. | Speed<br>rpm | Rated<br>current<br>A | Efficiency       |                  | Power factor                 |                              | Torque<br>Nm | Break-<br>down<br>torque<br>$T_B/T_{rated}$ | Locked-<br>rotor<br>torque<br>$T_{LR}/T_{rated}$ | Locked-<br>rotor<br>current<br>$I_{LR}/I_{rated}$ | Moment of<br>inertia      |   |
|----------------------------|---|--------------|-----------------------|------------------|------------------|------------------------------|------------------------------|--------------|---|--|---|---------------------------|---|
|                            |   |              |                       | 4/4<br>load<br>% | 3/4<br>load<br>% | 4/4<br>load<br>cos $\varphi$ | 3/4<br>load<br>cos $\varphi$ |              |   |  |   | Motor<br>kgm <sup>2</sup> | External,<br>max. <sup>1)</sup><br>kgm <sup>2</sup> |
| <b>4 ... 6.6 kV, 60 Hz</b> |   |              |                       |                  |                  |                              |                              |              |   |  |   |                           |   |
| <b>6-pole</b>              |   |              |                       |                  |                  |                              |                              |              |   |  |   |                           |   |
| 1300                       | <b>1RN6 450-6HJ</b>                                 | 1186         | 140                   | 95.8             | 96.3             | 0.85                         | 0.84                         | 10467        | 2.10  | 0.80   | 4.35  | 28                        | 550   |
| 1450                       | <b>1RN6 452-6HJ</b>                                 | 1187         | 156                   | 96.0             | 96.4             | 0.85                         | 0.84                         | 11665        | 2.15  | 0.75   | 4.50  | 32                        | 610   |
| 1600                       | <b>1RN6 454-6HJ</b>                                 | 1188         | 172                   | 96.1             | 96.5             | 0.85                         | 0.85                         | 12861        | 2.30  | 0.85   | 4.75  | 35                        | 660   |
| 1730                       | <b>1RN6 456-6HJ</b>                                 | 1189         | 182                   | 96.4             | 96.7             | 0.86                         | 0.85                         | 13894        | 2.45  | 0.95   | 5.10  | 41                        | 730   |
| 2240                       | <b>1RN6 500-6HJ</b>                                 | 1188         | 240                   | 96.2             | 96.8             | 0.85                         | 0.85                         | 18005        | 2.05  | 0.65   | 4.35  | 56                        | 970   |
| 2500                       | <b>1RN6 502-6HJ</b>                                 | 1188         | 265                   | 96.3             | 96.9             | 0.86                         | 0.85                         | 20095        | 2.05  | 0.65   | 4.45  | 61                        | 1060  |
| 2800                       | <b>1RN6 504-6HJ</b>                                 | 1188         | 295                   | 96.4             | 97.0             | 0.86                         | 0.85                         | 22506        | 2.05  | 0.60   | 4.55  | 68                        | 1200  |
| 3100                       | <b>1RN6 506-6HJ</b>                                 | 1189         | 325                   | 96.5             | 97.1             | 0.87                         | 0.86                         | 24897        | 2.10  | 0.70   | 4.45  | 76                        | 1320  |
| 3500                       | <b>1RN6 560-6HJ</b>                                 | 1190         | 360                   | 96.9             | 97.2             | 0.88                         | 0.87                         | 28086        | 1.95  | 0.65   | 4.50  | 107                       | 1380  |
| 4000                       | <b>1RN6 562-6HJ</b>                                 | 1190         | 420                   | 96.9             | 97.3             | 0.87                         | 0.87                         | 32098        | 1.95  | 0.65   | 4.40  | 118                       | 1520  |
| 4500                       | <b>1RN6 564-6HJ</b>                                 | 1191         | 470                   | 97.0             | 97.4             | 0.87                         | 0.87                         | 36080        | 2.00  | 0.65   | 4.65  | 131                       | 1680  |
| 4950                       | <b>1RN6 566-6HJ</b>                                 | 1191         | 510                   | 97.2             | 97.5             | 0.88                         | 0.88                         | 39688        | 2.05  | 0.70   | 4.65  | 145                       | 1860  |
| 5100                       | <b>1RN4 630-6HE</b>                                 | 1192         | 530                   | 97.1             | 97.2             | 0.86                         | 0.85                         | 40860        | 1.90  | 0.51   | 4.30  | 190                       | 1700  |
| 5700                       | <b>1RN4 632-6HE</b>                                 | 1193         | 600                   | 97.2             | 97.2             | 0.85                         | 0.84                         | 45629        | 2.00  | 0.56   | 4.70  | 210                       | 2100  |
| 6200                       | <b>1RN4 634-6HE</b>                                 | 1193         | 650                   | 97.3             | 97.3             | 0.86                         | 0.85                         | 49631        | 2.10  | 0.61   | 4.90  | 230                       | 2000  |
| 6700                       | <b>1RN4 636-6HE</b>                                 | 1193         | 700                   | 97.4             | 97.4             | 0.86                         | 0.84                         | 53634        | 2.30  | 0.64   | 5.20  | 255                       | 2600  |
| <b>8-pole</b>              |   |              |                       |                  |                  |                              |                              |              |   |  |   |                           |   |
| 900                        | <b>1RN6 450-8HJ</b>                                 | 890          | 100                   | 95.3             | 95.9             | 0.83                         | 0.82                         | 9656         | 1.90  | 0.55   | 3.90  | 35                        | 475   |
| 1000                       | <b>1RN6 452-8HJ</b>                                 | 892          | 110                   | 95.5             | 96.0             | 0.83                         | 0.81                         | 10705        | 2.20  | 0.65   | 4.50  | 39                        | 570   |
| 1120                       | <b>1RN6 454-8HJ</b>                                 | 891          | 124                   | 95.7             | 96.2             | 0.83                         | 0.82                         | 12003        | 2.10  | 0.65   | 4.35  | 44                        | 670   |
| 1220                       | <b>1RN6 456-8HJ</b>                                 | 892          | 132                   | 95.9             | 96.3             | 0.84                         | 0.82                         | 13060        | 2.30  | 0.70   | 4.80  | 51                        | 820   |
| 1600                       | <b>1RN6 500-8HJ</b>                                 | 893          | 178                   | 96.0             | 96.4             | 0.82                         | 0.79                         | 17109        | 2.20  | 0.55   | 4.80  | 68                        | 1080  |
| 1800                       | <b>1RN6 502-8HJ</b>                                 | 892          | 196                   | 96.1             | 96.6             | 0.84                         | 0.82                         | 19269        | 2.10  | 0.55   | 4.40  | 75                        | 1200  |
| 2000                       | <b>1RN6 504-8HJ</b>                                 | 892          | 215                   | 96.2             | 96.7             | 0.84                         | 0.82                         | 21410        | 2.10  | 0.55   | 4.40  | 84                        | 1340  |
| 2200                       | <b>1RN6 506-8HJ</b>                                 | 893          | 240                   | 96.3             | 96.7             | 0.84                         | 0.82                         | 23525        | 2.15  | 0.60   | 4.75  | 93                        | 1480  |
| 2500                       | <b>1RN6 560-8HJ</b>                                 | 893          | 270                   | 96.7             | 97.2             | 0.84                         | 0.83                         | 26733        | 2.00  | 0.50   | 4.60  | 127                       | 1960  |
| 2800                       | <b>1RN6 562-8HJ</b>                                 | 893          | 300                   | 96.8             | 97.3             | 0.85                         | 0.83                         | 29941        | 2.10  | 0.55   | 4.60  | 140                       | 2150  |
| 3150                       | <b>1RN6 564-8HJ</b>                                 | 893          | 330                   | 96.8             | 97.3             | 0.85                         | 0.84                         | 33684        | 2.10  | 0.55   | 4.65  | 155                       | 2400  |
| 3400                       | <b>1RN6 566-8HJ</b>                                 | 893          | 360                   | 96.8             | 97.3             | 0.85                         | 0.84                         | 36357        | 1.95  | 0.55   | 4.65  | 171                       | 2650  |

## Voltage code:

4 kV, 60 Hz  
6.6 kV, 60 Hz  
Other voltage4  
1  
9

## Type of construction:

IM B3  
IM V1 (without canopy)0  
8

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.Electrical data is also valid for operation with SINAMICS PERFECT HARMONY drives.  
For ordering, please note the 10th and 11th position of the article number code.

1) Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

## Motors for line operation

## Water-cooled motors

## H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

## Selection and ordering data (continued)

| Rated power<br>IEC<br>kW   | High voltage motor<br>H-compact PLUS<br>Article No. | Speed<br>rpm | Rated current                    |                  | Efficiency       |                              | Power factor                 |                           | Torque<br>Nm | Break-down<br>torque<br>$T_B/T_{rated}$<br>[-] | Locked-<br>rotor<br>torque<br>$T_{LR}/T_{rated}$<br>[-] | Locked-<br>rotor<br>current<br>$I_{LR}/I_{rated}$<br>[-] | Moment of<br>inertia                                |  |
|----------------------------|---|--------------|----------------------------------|------------------|------------------|------------------------------|------------------------------|---------------------------|--------------|--|---|--|---|--|
|                            |   |              | $I_{rated}$<br>at<br>6.6 kV<br>A | 4/4<br>load<br>% | 3/4<br>load<br>% | 4/4<br>load<br>cos $\varphi$ | 3/4<br>load<br>cos $\varphi$ | Motor<br>kgm <sup>2</sup> |              |  |   |  | External,<br>max. <sup>1)</sup><br>kgm <sup>2</sup> |  |
| <b>4 ... 6.6 kV, 60 Hz</b> |   |              |                                  |                  |                  |                              |                              |                           |              |  |   |  |   |  |
| 10-pole                    |   |              |                                  |                  |                  |                              |                              |                           |              |  |   |  |   |  |
| 650                        | <b>1RN6 450-3HJ</b>                                 | 710          | 74                               | 93.7             | 94.0             | 0.82                         | 0.78                         | 8743                      | 1.90         | 0.72   | 4.50  | 37   | 650   |  |
| 720                        | <b>1RN6 452-3HJ</b>                                 | 710          | 83                               | 94.1             | 94.3             | 0.81                         | 0.77                         | 9685                      | 2.00         | 0.75   | 4.70  | 41   | 850   |  |
| 800                        | <b>1RN6 454-3HJ</b>                                 | 711          | 92                               | 94.3             | 94.4             | 0.81                         | 0.76                         | 10745                     | 2.10         | 0.80   | 4.90  | 46   | 900   |  |
| 910                        | <b>1RN6 456-3HJ</b>                                 | 711          | 104                              | 94.5             | 94.6             | 0.81                         | 0.77                         | 12223                     | 2.10         | 0.80   | 5.00  | 52   | 1100  |  |
| 1080                       | <b>1RN6 500-3HE</b>                                 | 711          | 122                              | 94.8             | 95.0             | 0.82                         | 0.80                         | 14506                     | 1.80         | 0.65   | 4.40  | 70   | 1200  |  |
| 1200                       | <b>1RN6 502-3HE</b>                                 | 712          | 134                              | 95.2             | 95.2             | 0.82                         | 0.80                         | 16096                     | 1.90         | 0.68   | 4.70  | 80   | 1500  |  |
| 1320                       | <b>1RN6 504-3HE</b>                                 | 712          | 146                              | 95.1             | 95.2             | 0.83                         | 0.80                         | 17705                     | 1.90         | 0.70   | 4.70  | 88   | 1450  |  |
| 1500                       | <b>1RN6 506-3HE</b>                                 | 712          | 166                              | 95.4             | 95.5             | 0.83                         | 0.79                         | 20119                     | 2.00         | 0.72   | 4.90  | 99   | 1900  |  |
| 1780                       | <b>1RN6 560-3HE</b>                                 | 713          | 205                              | 95.5             | 95.6             | 0.80                         | 0.76                         | 23842                     | 2.00         | 0.70   | 4.60  | 123  | 2100  |  |
| 2040                       | <b>1RN6 562-3HE</b>                                 | 713          | 235                              | 95.8             | 95.8             | 0.80                         | 0.76                         | 27324                     | 2.00         | 0.70   | 4.80  | 141  | 2600  |  |
| 2200                       | <b>1RN6 564-3HE</b>                                 | 713          | 245                              | 95.9             | 95.8             | 0.82                         | 0.79                         | 29467                     | 2.00         | 0.68   | 4.60  | 158  | 2800  |  |
| 2400                       | <b>1RN6 566-3HE</b>                                 | 713          | 270                              | 96.0             | 96.0             | 0.81                         | 0.77                         | 32146                     | 2.10         | 0.75   | 5.00  | 173  | 3300  |  |
| 12-pole                    |   |              |                                  |                  |                  |                              |                              |                           |              |  |   |  |   |  |
| 440                        | <b>1RN6 450-5HJ</b>                                 | 591          | 56                               | 92.9             | 93.1             | 0.74                         | 0.71                         | 7110                      | 1.80         | 0.56   | 4.00  | 37   | 630   |  |
| 510                        | <b>1RN6 452-5HJ</b>                                 | 591          | 65                               | 93.3             | 93.3             | 0.73                         | 0.68                         | 8241                      | 1.80         | 0.60   | 4.20  | 41   | 850   |  |
| 570                        | <b>1RN6 454-5HJ</b>                                 | 592          | 73                               | 93.9             | 93.9             | 0.73                         | 0.68                         | 9195                      | 1.80         | 0.60   | 4.20  | 46   | 1150  |  |
| 650                        | <b>1RN6 456-5HJ</b>                                 | 592          | 82                               | 94.0             | 93.9             | 0.74                         | 0.68                         | 10486                     | 1.90         | 0.60   | 4.30  | 52   | 1300  |  |
| 820                        | <b>1RN6 500-5HE</b>                                 | 592          | 102                              | 94.4             | 94.3             | 0.74                         | 0.68                         | 13228                     | 2.00         | 0.62   | 4.50  | 70   | 1650  |  |
| 920                        | <b>1RN6 502-5HE</b>                                 | 592          | 114                              | 94.6             | 94.6             | 0.75                         | 0.70                         | 14841                     | 1.90         | 0.62   | 4.40  | 79   | 2000  |  |
| 1020                       | <b>1RN6 504-5HE</b>                                 | 592          | 128                              | 94.8             | 94.7             | 0.74                         | 0.68                         | 16454                     | 2.00         | 0.65   | 4.70  | 87   | 2400  |  |
| 1120                       | <b>1RN6 506-5HE</b>                                 | 592          | 136                              | 94.8             | 94.8             | 0.76                         | 0.71                         | 18068                     | 1.90         | 0.60   | 4.40  | 98   | 2200  |  |
| 1300                       | <b>1RN6 560-5HE</b>                                 | 593          | 160                              | 95.0             | 95.1             | 0.75                         | 0.70                         | 20936                     | 1.80         | 0.53   | 3.90  | 123  | 2050  |  |
| 1470                       | <b>1RN6 562-5HE</b>                                 | 593          | 182                              | 95.2             | 95.3             | 0.74                         | 0.69                         | 23674                     | 1.80         | 0.55   | 4.00  | 141  | 2500  |  |
| 1620                       | <b>1RN6 564-5HE</b>                                 | 594          | 205                              | 95.4             | 95.4             | 0.73                         | 0.67                         | 26045                     | 2.00         | 0.63   | 4.30  | 158  | 3500  |  |
| 1760                       | <b>1RN6 566-5HE</b>                                 | 594          | 220                              | 95.5             | 95.5             | 0.73                         | 0.68                         | 28296                     | 2.00         | 0.63   | 4.40  | 173  | 3900  |  |

## Voltage code:

4 kV, 60 Hz  
6.6 kV, 60 Hz  
Other voltage

4  
1  
9

## Type of construction:

IM B3  
IM V1 (without canopy)

0  
8

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Higher pole numbers are available on request.

Electrical data is also valid for operation with SINAMICS PERFECT HARMONY drives.  
For ordering, please note the 10th and 11th position of the article number code.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

## Selection and ordering data

The following data also apply to explosion-protected motors 1SL7 (Ex ec) and 1SQ7 (Ex pxb).

| Rated power<br><br>IEC<br><br>kW | High voltage motor<br>SIMOTICS HV M (modular)<br><br>Article No. | Speed<br><br>rpm | Rated current<br><br>I <sub>rated</sub><br>at<br>6.6 kV<br><br>A | Efficiency    |               | Power factor      |                   | Torque<br><br>Nm | Break-down torque<br><br>T <sub>B</sub> /<br>T <sub>rated</sub><br><br>[-] | Locked-rotor torque<br><br>T <sub>LR</sub> /<br>T <sub>rated</sub><br><br>[-] | Locked-rotor current<br><br>I <sub>LR</sub> /<br>I <sub>rated</sub><br><br>[-] | Moment of inertia         |  |
|----------------------------------|--|------------------|--|---------------|---------------|-------------------|-------------------|------------------|--|---|--|---------------------------|--|
|                                  |  |                  |  | 4/4 load<br>% | 3/4 load<br>% | 4/4 load<br>cos φ | 3/4 load<br>cos φ |                  |  |   |  | Motor<br>kgm <sup>2</sup> | External, max. <sup>1)</sup><br>kgm <sup>2</sup> |
| <b>4 ... 6.6 kV, 60 Hz</b>       |  |                  |  |               |               |                   |                   |                  |  |   |  |                           |  |
| <b>2-pole</b>                    |  |                  |  |               |               |                   |                   |                  |  |   |  |                           |  |
| 11200                            | <b>1RN7710-2NA10-0CJ0</b>  | 3585             | 1100   | 97.3          | 97.1          | 0.91              | 0.91              | 29833            | 2.05   | 0.60  | 4.70   | 148                       | 102  |
| 12500                            | <b>1RN7712-2NA10-0CJ0</b>  | 3585             | 1220   | 97.4          | 97.3          | 0.92              | 0.91              | 33296            | 2.05   | 0.60  | 4.70   | 159                       | 91   |
| 14000                            | <b>1RN7714-2NA10-0CJ0</b>  | 3586             | 1340   | 97.6          | 97.4          | 0.93              | 0.92              | 37281            | 2.30   | 0.75  | 5.30   | 174                       | 84   |
| 15500                            | <b>1RN7716-2NA10-0CJ0</b>  | 3586             | 1500   | 97.6          | 97.5          | 0.93              | 0.92              | 41275            | 2.30   | 0.70  | 5.40   | 188                       | 72   |
| <b>4-pole</b>                    |  |                  |  |               |               |                   |                   |                  |  |   |  |                           |  |
| 10000                            | <b>1RN7710-4NA10-0CJ0</b>  | 1793             | 980  | 97.6          | 97.5          | 0.91              | 0.90              | 53258            | 2.55   | 0.65  | 5.50   | 262                       | 462  |
| 11200                            | <b>1RN7712-4NA10-0CJ0</b>  | 1792             | 1100   | 97.7          | 97.6          | 0.91              | 0.91              | 59683            | 2.50   | 0.65  | 5.40   | 288                       | 491  |
| 12500                            | <b>1RN7714-4NA10-0CJ0</b>  | 1793             | 1220   | 97.7          | 97.7          | 0.91              | 0.91              | 66573            | 2.50   | 0.65  | 5.40   | 321                       | 585  |
| 14000                            | <b>1RN7716-4NA10-0CJ0</b>  | 1793             | 1360   | 97.8          | 97.8          | 0.92              | 0.92              | 74562            | 2.50   | 0.60  | 5.40   | 363                       | 649  |
| <b>6-pole</b>                    |  |                  |  |               |               |                   |                   |                  |  |   |  |                           |  |
| 7800                             | <b>1RN7710-6NA1 -0C 0</b>  | 1194             | 820  | 97.3          | 97.2          | 0.86              | 0.84              | 62382            | 2.30   | 0.70  | 4.90   | 351                       | 1276   |
| 8700                             | <b>1RN7712-6NA1 -0C 0</b>  | 1194             | 900  | 97.5          | 97.4          | 0.87              | 0.86              | 69580            | 2.30   | 0.65  | 4.90   | 399                       | 1491   |
| 9700                             | <b>1RN7714-6NA1 -0C 0</b>  | 1194             | 1000   | 97.5          | 97.5          | 0.87              | 0.86              | 77578            | 2.35   | 0.70  | 5.00   | 451                       | 1813   |
| 10800                            | <b>1RN7716-6NA1 -0C 0</b>  | 1194             | 1120   | 97.6          | 97.5          | 0.87              | 0.86              | 86375            | 2.30   | 0.65  | 4.90   | 498                       | 1886   |
| <b>8-pole</b>                    |  |                  |  |               |               |                   |                   |                  |  |   |  |                           |  |
| 5600                             | <b>1RN7710-8NA1 -0C 0</b>  | 895              | 590  | 97.0          | 97.1          | 0.85              | 0.84              | 59749            | 2.25   | 0.65  | 4.70   | 434                       | 4686   |
| 6300                             | <b>1RN7712-8NA1 -0C 0</b>  | 895              | 670  | 97.1          | 97.2          | 0.85              | 0.84              | 67218            | 2.20   | 0.60  | 4.60   | 493                       | 5419   |
| 7100                             | <b>1RN7714-8NA1 -0C 0</b>  | 895              | 740  | 97.2          | 97.3          | 0.86              | 0.85              | 75754            | 2.35   | 0.70  | 4.90   | 559                       | 6194   |
| 8000                             | <b>1RN7716-8NA1 -0C 0</b>  | 895              | 850  | 97.3          | 97.4          | 0.85              | 0.84              | 85356            | 2.30   | 0.55  | 4.70   | 616                       | 6874   |
| <b>10-pole</b>                   |  |                  |  |               |               |                   |                   |                  |  |   |  |                           |  |
| 4500                             | <b>1RN7710-3NA1 -0C 0</b>  | 715              | 485  | 96.7          | 96.8          | 0.84              | 0.81              | 60100            | 2.70   | 0.65  | 4.80   | 433                       | 7417   |
| 5000                             | <b>1RN7712-3NA1 -0C 0</b>  | 715              | 530  | 96.9          | 97.0          | 0.85              | 0.82              | 66778            | 2.65   | 0.60  | 4.80   | 493                       | 8467   |
| 5600                             | <b>1RN7714-3NA1 -0C 0</b>  | 715              | 590  | 96.9          | 97.0          | 0.85              | 0.82              | 74791            | 2.75   | 0.70  | 4.90   | 557                       | 9936   |
| 6200                             | <b>1RN7716-3NA1 -0C 0</b>  | 715              | 660  | 97.0          | 97.1          | 0.85              | 0.83              | 82805            | 2.75   | 0.70  | 5.00   | 618                       | 10760  |

## Type of construction:

|  |          |
|--|----------|
| IM B3 (IM 1001)                          | <b>0</b> |
| IM V1, without protective hood (IM 3011) | <b>8</b> |

## Housing and bearing version

|   |          |
|---|----------|
| Steel fabricated housing/<br>anti-friction bearings | <b>G</b> |
| Steel fabricated housing/<br>sleeve bearing         | <b>J</b> |

## Note:

Efficiencies according to IEC 60034-2-1:2007;  
stray load losses determined by statistical evaluation of measurements.  
NEMA version on request.

Higher pole numbers are available on request.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on [Page 2/2](#).

## Motors for line operation

### Water-cooled motors

#### H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Selection and ordering data

##### NEMA version

| Rated power<br><br>NEMA<br><br>hp | High voltage motor<br>H-compact PLUS<br><br>Article No. | Speed<br><br>rpm | Rated current              |               | Efficiency    |                           | Power factor              |                           | Torque<br><br>Nm | Break-down torque<br><br>$T_B/T_{rated}$<br>[-] | Locked-rotor torque<br><br>$T_{LR}/T_{rated}$<br>[-] | Locked-rotor current<br><br>$I_{LR}/I_{rated}$<br>[-] | Moment of inertia                                |  |
|-----------------------------------|---|------------------|----------------------------|---------------|---------------|---------------------------|---------------------------|---------------------------|------------------|---|--|---|--|--|
|                                   |   |                  | $I_{rated}$ at 6.6 kV<br>A | 4/4 load<br>% | 3/4 load<br>% | 4/4 load<br>cos $\varphi$ | 3/4 load<br>cos $\varphi$ | Motor<br>kgm <sup>2</sup> |                  |   |  |   | External, max. <sup>1)</sup><br>kgm <sup>2</sup> |  |
| <b>4 ... 6.6 kV, 60 Hz</b>        |   |                  |                            |               |               |                           |                           |                           |                  |   |  |   |  |  |
| <b>2-pole</b>                     |   |                  |                            |               |               |                           |                           |                           |                  |   |  |   |  |  |
| 10000                             | <b>1RN6 710-2BM</b> 0                                   | 3586             | 747                        | 96.4          | 96.2          | 0.90                      | 0.89                      | 19861                     | 2.20             | 0.60  | 5.20   | 132   | 56   |  |
| 11000                             | <b>1RN6 712-2BM</b> 0                                   | 3588             | 828                        | 96.5          | 96.2          | 0.89                      | 0.88                      | 21837                     | 2.50             | 0.60  | 5.80   | 147   | 55   |  |
| 12000                             | <b>1RN6 712-2BN</b> 0                                   | 3587             | 898                        | 96.6          | 96.4          | 0.90                      | 0.89                      | 23827                     | 2.30             | 0.60  | 5.40   | 147   | 54   |  |
| 13000                             | <b>1RN6 714-2BM</b> 0                                   | 3587             | 956                        | 96.6          | 96.4          | 0.92                      | 0.91                      | 25814                     | 2.50             | 0.64  | 6.00   | 162   | 54   |  |
| 14000                             | <b>1RN6 714-2BN</b> 0                                   | 3587             | 1036                       | 96.7          | 96.5          | 0.91                      | 0.90                      | 27801                     | 2.40             | 0.60  | 5.70   | 162   | 53   |  |
| 16000                             | <b>1RN6 716-2BM</b> 0                                   | 3586             | 1166                       | 96.8          | 96.7          | 0.92                      | 0.92                      | 31777                     | 2.40             | 0.62  | 5.80   | 179   | 51   |  |
| 17000                             | <b>1RN6 716-2BN</b> 0                                   | 3587             | 1251                       | 96.9          | 96.8          | 0.91                      | 0.90                      | 33759                     | 2.40             | 0.60  | 5.80   | 179   | 49   |  |
| <b>4-pole</b>                     |   |                  |                            |               |               |                           |                           |                           |                  |   |  |   |  |  |
| 11000                             | <b>1RN6 710-4BJ</b> 0                                   | 1793             | 815                        | 97.4          | 97.6          | 0.90                      | 0.89                      | 43695                     | 2.30             | 0.60  | 5.90   | 273   | 603  |  |
| 12000                             | <b>1RN6 712-4BJ</b> 0                                   | 1793             | 880                        | 97.5          | 97.6          | 0.91                      | 0.90                      | 47668                     | 2.20             | 0.60  | 5.90   | 300   | 637  |  |
| 13000                             | <b>1RN6 712-4BK</b> 0                                   | 1793             | 962                        | 97.5          | 97.6          | 0.90                      | 0.89                      | 51635                     | 2.30             | 0.60  | 5.90   | 300   | 620  |  |
| 14000                             | <b>1RN6 714-4BJ</b> 0                                   | 1793             | 1021                       | 97.4          | 97.6          | 0.91                      | 0.91                      | 55625                     | 2.20             | 0.60  | 5.80   | 337   | 651  |  |
| 15000                             | <b>1RN6 714-4BK</b> 0                                   | 1793             | 1104                       | 97.5          | 97.7          | 0.91                      | 0.89                      | 59583                     | 2.30             | 0.60  | 6.00   | 337   | 665  |  |
| 16000                             | <b>1RN6 716-4BJ</b> 0                                   | 1793             | 1161                       | 97.5          | 97.7          | 0.92                      | 0.91                      | 63575                     | 2.20             | 0.61  | 5.80   | 369   | 678  |  |
| 17000                             | <b>1RN6 716-4BK</b> 0                                   | 1792             | 1238                       | 97.5          | 97.7          | 0.92                      | 0.91                      | 67557                     | 2.10             | 0.60  | 5.60   | 369   | 691  |  |
| 18000                             | <b>1RN6 716-4BL</b> 0                                   | 1793             | 1324                       | 97.6          | 97.7          | 0.91                      | 0.90                      | 71504                     | 2.20             | 0.61  | 5.90   | 369   | 702  |  |
| <b>6-pole</b>                     |   |                  |                            |               |               |                           |                           |                           |                  |   |  |   |  |  |
| 9000                              | <b>1RN6 710-6BJ</b> 0                                   | 1194             | 702                        | 97.1          | 97.3          | 0.86                      | 0.84                      | 53690                     | 2.10             | 0.71  | 5.50   | 330   | 1954   |  |
| 10000                             | <b>1RN6 712-6BJ</b> 0                                   | 1194             | 781                        | 97.2          | 97.4          | 0.86                      | 0.83                      | 59647                     | 2.20             | 0.71  | 5.60   | 367   | 2043   |  |
| 11000                             | <b>1RN6 714-6BJ</b> 0                                   | 1194             | 846                        | 97.3          | 97.4          | 0.87                      | 0.85                      | 65612                     | 2.20             | 0.75  | 5.70   | 419   | 2113   |  |
| 12000                             | <b>1RN6 716-6BJ</b> 0                                   | 1194             | 915                        | 97.2          | 97.3          | 0.88                      | 0.86                      | 71577                     | 2.20             | 0.77  | 5.70   | 468   | 2168   |  |
| <b>8-pole</b>                     |   |                  |                            |               |               |                           |                           |                           |                  |   |  |   |  |  |
| 7000                              | <b>1RN6 710-8BJ</b> 0                                   | 895              | 566                        | 96.9          | 97.1          | 0.83                      | 0.80                      | 55695                     | 2.10             | 0.79  | 5.50   | 415   | 3817   |  |
| 8000                              | <b>1RN6 712-8BJ</b> 0                                   | 895              | 646                        | 97.0          | 97.1          | 0.83                      | 0.81                      | 63651                     | 2.00             | 0.80  | 5.50   | 465   | 4154   |  |
| 9000                              | <b>1RN6 714-8BJ</b> 0                                   | 895              | 721                        | 97.1          | 97.2          | 0.84                      | 0.81                      | 71587                     | 2.10             | 0.83  | 5.70   | 531   | 4458   |  |
| 10000                             | <b>1RN6 716-8BJ</b> 0                                   | 896              | 810                        | 97.1          | 97.2          | 0.83                      | 0.80                      | 79506                     | 2.20             | 0.87  | 6.00   | 597   | 4732   |  |
| <b>10-pole</b>                    |   |                  |                            |               |               |                           |                           |                           |                  |   |  |   |  |  |
| 5000                              | <b>1RN6 710-3BJ</b> 0                                   | 716              | 427                        | 96.6          | 96.7          | 0.79                      | 0.75                      | 49758                     | 2.20             | 0.73  | 5.30   | 415   | 5006   |  |
| 5500                              | <b>1RN6 712-3BJ</b> 0                                   | 716              | 464                        | 96.7          | 96.9          | 0.80                      | 0.76                      | 54720                     | 2.20             | 0.72  | 5.30   | 465   | 5428   |  |
| 6000                              | <b>1RN6 714-3BJ</b> 0                                   | 716              | 502                        | 96.8          | 96.9          | 0.80                      | 0.77                      | 59682                     | 2.20             | 0.74  | 5.50   | 531   | 6221   |  |
| 7000                              | <b>1RN6 716-3BJ</b> 0                                   | 716              | 584                        | 96.9          | 97.0          | 0.80                      | 0.77                      | 69631                     | 2.20             | 0.77  | 5.60   | 598   | 6955   |  |

##### Voltage code:

4 kV, 60 Hz  
4.16 kV, 60 Hz  
6.6 kV, 60 Hz  
Other voltage

4  
3  
1  
9

##### Type of construction:

IM B3  
IM V1 (without canopy)

0  
8

##### Note:

Higher pole numbers are available on request.

<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on [Page 2/2](#).

## Selection and ordering data

## NEMA version

| Rated power                    | High voltage motor<br>H-compact PLUS | Speed | Rated current          |          | Efficiency |            | Power factor |                 | Torque | Break-down torque | Locked-rotor torque | Locked-rotor current | Moment of inertia  |                    |
|--------------------------------|--------------------------------------|-------|------------------------|----------|------------|------------|--------------|-----------------|--------|-------------------|---------------------|----------------------|--------------------|--------------------|
| NEMA                           |                                      |       | $I_{rated}$ at 13.2 kV | 4/4 load | 3/4 load   | 4/4 load   | 3/4 load     | $T_B/T_{rated}$ |        |                   |                     |                      | $T_{LR}/T_{rated}$ | $I_{LR}/I_{rated}$ |
| hp                             | Article No.                          | rpm   | A                      | %        | %          | cos $\phi$ | cos $\phi$   | Nm              | [-]    | [-]               | [-]                 | kgm <sup>2</sup>     | kgm <sup>2</sup>   |                    |
| <b>12.5 ... 13.8 kV, 60 Hz</b> |                                      |       |                        |          |            |            |              |                 |        |                   |                     |                      |                    |                    |
| 2-pole                         |                                      |       |                        |          |            |            |              |                 |        |                   |                     |                      |                    |                    |
| 8000                           | <b>1RN6 710-2BM 0</b>                | 3588  | 301                    | 96.0     | 95.6       | 0.90       | 0.89         | 15881           | 2.50   | 0.60              | 5.60                | 132                  | 52                 |                    |
| 9000                           | <b>1RN6 712-2BM 0</b>                | 3588  | 334                    | 96.0     | 95.6       | 0.91       | 0.90         | 17864           | 2.60   | 0.60              | 6.00                | 147                  | 51                 |                    |
| 10000                          | <b>1RN6 712-2BN 0</b>                | 3588  | 375                    | 96.2     | 95.9       | 0.90       | 0.89         | 19849           | 2.60   | 0.60              | 6.00                | 147                  | 49                 |                    |
| 11000                          | <b>1RN6 714-2BM 0</b>                | 3588  | 407                    | 96.2     | 95.9       | 0.91       | 0.90         | 21837           | 2.50   | 0.60              | 6.00                | 162                  | 48                 |                    |
| 12000                          | <b>1RN6 716-2BM 0</b>                | 3587  | 437                    | 96.3     | 96.0       | 0.93       | 0.92         | 23827           | 2.40   | 0.60              | 5.80                | 179                  | 47                 |                    |
| 13000                          | <b>1RN6 716-2BN 0</b>                | 3588  | 478                    | 96.4     | 96.2       | 0.92       | 0.91         | 25806           | 2.50   | 0.60              | 6.00                | 179                  | 45                 |                    |
| 4-pole                         |                                      |       |                        |          |            |            |              |                 |        |                   |                     |                      |                    |                    |
| 9000                           | <b>1RN6 710-4BJ 0</b>                | 1794  | 337                    | 97.1     | 97.2       | 0.89       | 0.88         | 35727           | 2.40   | 0.60              | 6.20                | 273                  | 553                |                    |
| 10000                          | <b>1RN6 712-4BJ 0</b>                | 1794  | 368                    | 97.1     | 97.3       | 0.91       | 0.90         | 39708           | 2.30   | 0.60              | 6.20                | 300                  | 555                |                    |
| 11000                          | <b>1RN6 714-4BJ 0</b>                | 1794  | 403                    | 97.2     | 97.3       | 0.91       | 0.90         | 43682           | 2.30   | 0.60              | 6.20                | 337                  | 603                |                    |
| 12000                          | <b>1RN6 716-4BJ 0</b>                | 1793  | 436                    | 97.2     | 97.3       | 0.92       | 0.92         | 47662           | 2.30   | 0.63              | 6.20                | 369                  | 620                |                    |
| 13000                          | <b>1RN6 716-4BK 0</b>                | 1794  | 475                    | 97.2     | 97.4       | 0.91       | 0.91         | 51625           | 2.30   | 0.60              | 6.10                | 369                  | 637                |                    |
| 6-pole                         |                                      |       |                        |          |            |            |              |                 |        |                   |                     |                      |                    |                    |
| 7000                           | <b>1RN6 710-6BJ 0</b>                | 1195  | 278                    | 96.9     | 97.0       | 0.85       | 0.82         | 41723           | 2.40   | 0.72              | 6.00                | 330                  | 1722               |                    |
| 8000                           | <b>1RN6 712-6BJ 0</b>                | 1195  | 315                    | 97.0     | 97.1       | 0.85       | 0.82         | 47688           | 2.40   | 0.73              | 6.00                | 367                  | 1849               |                    |
| 9000                           | <b>1RN6 714-6BJ 0</b>                | 1195  | 350                    | 97.0     | 97.1       | 0.86       | 0.84         | 53642           | 2.30   | 0.73              | 6.00                | 419                  | 1954               |                    |
| 10000                          | <b>1RN6 716-6BJ 0</b>                | 1195  | 388                    | 97.1     | 97.2       | 0.86       | 0.84         | 59600           | 2.30   | 0.72              | 6.00                | 468                  | 2042               |                    |
| 8-pole                         |                                      |       |                        |          |            |            |              |                 |        |                   |                     |                      |                    |                    |
| 5000                           | <b>1RN6 710-8BJ 0</b>                | 896   | 201                    | 96.5     | 96.6       | 0.84       | 0.81         | 39760           | 2.20   | 0.79              | 5.90                | 415                  | 3024               |                    |
| 5500                           | <b>1RN6 712-8BJ 0</b>                | 896   | 220                    | 96.6     | 96.7       | 0.84       | 0.81         | 43721           | 2.20   | 0.80              | 6.00                | 465                  | 3235               |                    |
| 6000                           | <b>1RN6 714-8BJ 0</b>                | 896   | 239                    | 96.6     | 96.7       | 0.84       | 0.82         | 47691           | 2.30   | 0.80              | 6.00                | 531                  | 3438               |                    |
| 7000                           | <b>1RN6 716-8BJ 0</b>                | 896   | 279                    | 96.7     | 96.8       | 0.85       | 0.82         | 55642           | 2.20   | 0.79              | 6.00                | 597                  | 3817               |                    |
| 10-pole                        |                                      |       |                        |          |            |            |              |                 |        |                   |                     |                      |                    |                    |
| 3500                           | <b>1RN6 710-3BJ 0</b>                | 717   | 151                    | 96.2     | 96.2       | 0.79       | 0.74         | 34788           | 2.50   | 0.78              | 6.00                | 415                  | 4104               |                    |
| 4000                           | <b>1RN6 712-3BJ 0</b>                | 717   | 172                    | 96.3     | 96.3       | 0.79       | 0.74         | 39757           | 2.50   | 0.78              | 6.00                | 465                  | 4564               |                    |
| 4500                           | <b>1RN6 714-3BJ 0</b>                | 717   | 188                    | 96.4     | 96.5       | 0.81       | 0.77         | 44739           | 2.40   | 0.79              | 6.00                | 531                  | 5006               |                    |
| 5000                           | <b>1RN6 716-3BJ 0</b>                | 717   | 207                    | 96.5     | 96.6       | 0.82       | 0.78         | 49713           | 2.40   | 0.78              | 6.00                | 598                  | 5428               |                    |

## Voltage code:

|                |   |
|----------------|---|
| 13.2 kV, 60 Hz | 2 |
| Other voltage  | 9 |

## Note:

Higher pole numbers are available on request.

## Type of construction:

|                        |   |
|------------------------|---|
| IM B3                  | 0 |
| IM V1 (without canopy) | 8 |


<sup>1)</sup> Max. permissible external moment of inertia for three starts from cold or two starts from warm under the conditions described on Page 2/2.

## Motors for line operation

### Water-cooled motors

#### H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Dimension drawings

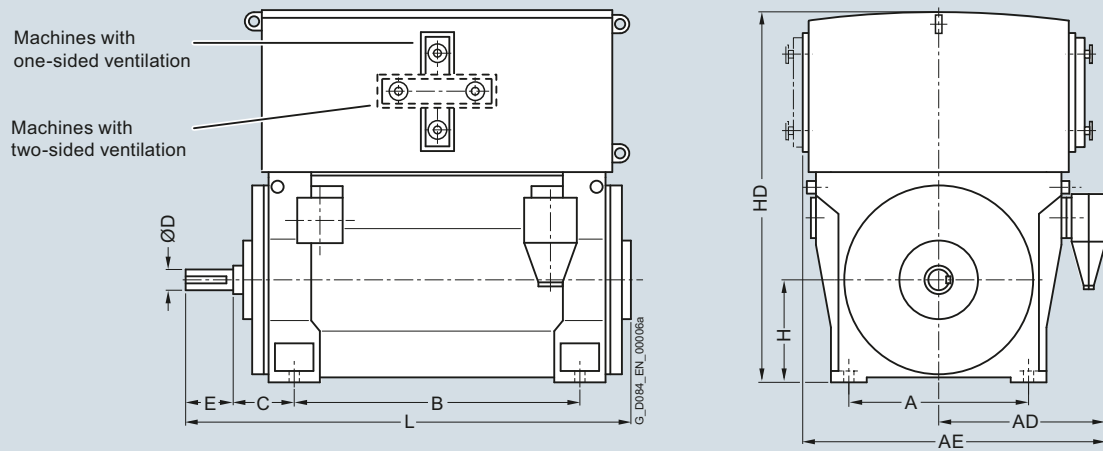


| Motor type   | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |         |
|--|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, anti-friction bearings – series 1RN4, 1RN6<sup>2)</sup></b> |              |            |                        |                        |         |         |         |         |         |          |         |
| <b>2-pole</b>  |              |            |                        |                        |         |         |         |         |         |          |         |
| 1RN6 450-2HJ.0 <sup>3)</sup>   | 4050         | 850        | 930                    | 1620                   | 1180    | 280     | 95      | 130     | 450     | 1725     | 1843    |
| 1RN6 452-2HJ.0 <sup>3)</sup>   | 4250         | 850        | 930                    | 1620                   | 1180    | 280     | 95      | 130     | 450     | 1725     | 1843    |
| 1RN6 454-2HJ.0 <sup>3)</sup>   | 4550         | 850        | 930                    | 1620                   | 1400    | 280     | 95      | 130     | 450     | 1725     | 2053    |
| 1RN6 456-2HJ.0 <sup>3)</sup>   | 4850         | 850        | 930                    | 1620                   | 1400    | 280     | 95      | 130     | 450     | 1725     | 2053    |
| 1RN6 500-2HJ.0 <sup>3)</sup>   | 5850         | 950        | 1135                   | 1835                   | 1320    | 315     | 110     | 165     | 500     | 1980     | 2150    |
| 1RN6 502-2HJ.0 <sup>3)</sup>   | 6000         | 950        | 1135                   | 1835                   | 1320    | 315     | 110     | 165     | 500     | 1980     | 2150    |
| <b>4-pole</b>  |              |            |                        |                        |         |         |         |         |         |          |         |
| 1RN6 450-4HJ.0   | 4350         | 850        | 930                    | 1620                   | 1180    | 250     | 130     | 200     | 450     | 1715     | 1896    |
| 1RN6 452-4HJ.0   | 4250         | 850        | 930                    | 1620                   | 1180    | 250     | 130     | 200     | 450     | 1715     | 1896    |
| 1RN6 454-4HJ.0   | 4950         | 850        | 930                    | 1620                   | 1400    | 250     | 130     | 200     | 450     | 1715     | 2106    |
| 1RN6 456-4HJ.0   | 5250         | 850        | 930                    | 1620                   | 1400    | 250     | 130     | 200     | 450     | 1715     | 2106    |
| 1RN6 500-4HJ.0   | 6350         | 950        | 1135                   | 1835                   | 1320    | 280     | 150     | 200     | 500     | 1980     | 2150    |
| 1RN6 502-4HJ.0   | 6550         | 950        | 1135                   | 1835                   | 1320    | 280     | 150     | 200     | 500     | 1980     | 2150    |
| 1RN6 504-4HJ.0   | 7200         | 950        | 1135                   | 1835                   | 1500    | 280     | 150     | 200     | 500     | 1980     | 2300    |
| 1RN6 506-4HJ.0   | 7500         | 950        | 1135                   | 1835                   | 1500    | 280     | 150     | 200     | 500     | 1980     | 2300    |
| 1RN6 560-4HJ.0   | 7600         | 1060       | 1205                   | 1975                   | 1400    | 315     | 170     | 240     | 560     | 2150     | 2300    |
| 1RN6 562-4HJ.0   | 8000         | 1060       | 1205                   | 1975                   | 1400    | 315     | 170     | 240     | 560     | 2150     | 2300    |
| 1RN6 564-4HJ.0   | 8900         | 1060       | 1205                   | 1975                   | 1600    | 315     | 170     | 240     | 560     | 2150     | 2550    |
| 1RN6 566-4HJ.0   | 9400         | 1060       | 1205                   | 1975                   | 1600    | 315     | 170     | 240     | 560     | 2150     | 2550    |
| 1RN4 630-4HE.0 <sup>3)</sup>   | 10400        | 1320       | 1330                   | 2290                   | 1600    | 335     | 200     | 280     | 630     | 2400     | 2500    |
| 1RN4 632-4HE.0 <sup>3)</sup>   | 11100        | 1320       | 1330                   | 2290                   | 1600    | 335     | 200     | 280     | 630     | 2400     | 2500    |
| 1RN4 634-4HE.0 <sup>3)</sup>   | 12150        | 1320       | 1330                   | 2290                   | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |
| 1RN4 636-4HE.0 <sup>3)</sup>   | 12700        | 1320       | 1330                   | 2290                   | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> The dimensions are also valid for the 1SN4/1SN6 and 1SL4/1SL6 series.

<sup>3)</sup> Anti-friction bearings only for 50 Hz version.

## Dimension drawings (continued)

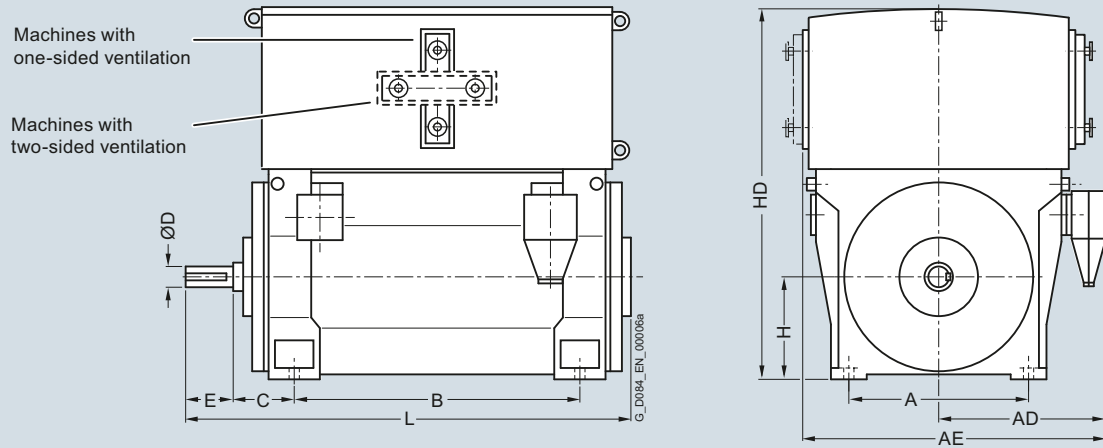

| Motor type   | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |         |
|--|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, anti-friction bearings – series 1RN4, 1RN6<sup>2)</sup></b> |              |            |                        |                        |         |         |         |         |         |          |         |
| <b>6-pole</b>  |              |            |                        |                        |         |         |         |         |         |          |         |
| 1RN6 450-6HJ.0   | 4450         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1715     | 1896    |
| 1RN6 452-6HJ.0   | 4750         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1715     | 1896    |
| 1RN6 454-6HJ.0   | 5100         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1715     | 2136    |
| 1RN6 456-6HJ.0   | 5450         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1715     | 2136    |
| 1RN6 500-6HJ.0   | 6400         | 950        | 1135                   | 1835                   | 1320    | 315     | 160     | 240     | 500     | 1960     | 2150    |
| 1RN6 502-6HJ.0   | 6650         | 950        | 1135                   | 1835                   | 1320    | 315     | 160     | 240     | 500     | 1960     | 2150    |
| 1RN6 504-6HJ.0   | 7250         | 950        | 1135                   | 1835                   | 1500    | 315     | 160     | 240     | 500     | 1960     | 2360    |
| 1RN6 506-6HJ.0   | 7650         | 950        | 1135                   | 1835                   | 1500    | 315     | 160     | 240     | 500     | 1960     | 2360    |
| 1RN6 560-6HJ.0   | 8600         | 1060       | 1205                   | 1975                   | 1400    | 315     | 180     | 240     | 560     | 2180     | 2300    |
| 1RN6 562-6HJ.0   | 9000         | 1060       | 1205                   | 1975                   | 1400    | 315     | 180     | 240     | 560     | 2180     | 2300    |
| 1RN6 564-6HJ.0   | 9850         | 1060       | 1205                   | 1975                   | 1600    | 315     | 180     | 240     | 560     | 2180     | 2550    |
| 1RN6 566-6HJ.0   | 10400        | 1060       | 1205                   | 1975                   | 1600    | 315     | 180     | 240     | 560     | 2180     | 2550    |
| 1RN4 630-6HE.0   | 10650        | 1320       | 1330                   | 2290                   | 1600    | 335     | 220     | 280     | 630     | 2400     | 2500    |
| 1RN4 632-6HE.0   | 11200        | 1320       | 1330                   | 2290                   | 1600    | 335     | 220     | 280     | 630     | 2400     | 2500    |
| 1RN4 634-6HE.0   | 12300        | 1320       | 1330                   | 2290                   | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |
| 1RN4 636-6HE.0   | 13000        | 1320       | 1330                   | 2290                   | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |
| <b>8-pole</b>  |              |            |                        |                        |         |         |         |         |         |          |         |
| 1RN6 450-8HJ.0   | 4450         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1715     | 1896    |
| 1RN6 452-8HJ.0   | 4750         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1715     | 1896    |
| 1RN6 454-8HJ.0   | 5150         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1715     | 2136    |
| 1RN6 456-8HJ.0   | 5450         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1715     | 2136    |
| 1RN6 500-8HJ.0   | 6350         | 950        | 1135                   | 1835                   | 1320    | 315     | 160     | 240     | 500     | 1960     | 2150    |
| 1RN6 502-8HJ.0   | 6600         | 950        | 1135                   | 1835                   | 1320    | 315     | 160     | 240     | 500     | 1960     | 2150    |
| 1RN6 504-8HJ.0   | 7250         | 950        | 1135                   | 1835                   | 1500    | 315     | 160     | 240     | 500     | 1960     | 2360    |
| 1RN6 506-8HJ.0   | 7600         | 950        | 1135                   | 1835                   | 1500    | 315     | 160     | 240     | 500     | 1960     | 2360    |
| 1RN6 560-8HJ.0   | 8550         | 1060       | 1205                   | 1975                   | 1400    | 315     | 180     | 240     | 560     | 2180     | 2300    |
| 1RN6 562-8HJ.0   | 9000         | 1060       | 1205                   | 1975                   | 1400    | 315     | 180     | 240     | 560     | 2180     | 2300    |
| 1RN6 564-8HJ.0   | 9800         | 1060       | 1205                   | 1975                   | 1600    | 315     | 180     | 240     | 560     | 2180     | 2550    |
| 1RN6 566-8HJ.0   | 10350        | 1060       | 1205                   | 1975                   | 1600    | 315     | 180     | 240     | 560     | 2180     | 2550    |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.


<sup>2)</sup> The dimensions are also valid for the 1SN4/1SN6 and 1SL4/1SL6 series.

## Motors for line operation

### Water-cooled motors

#### H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Dimension drawings (continued)

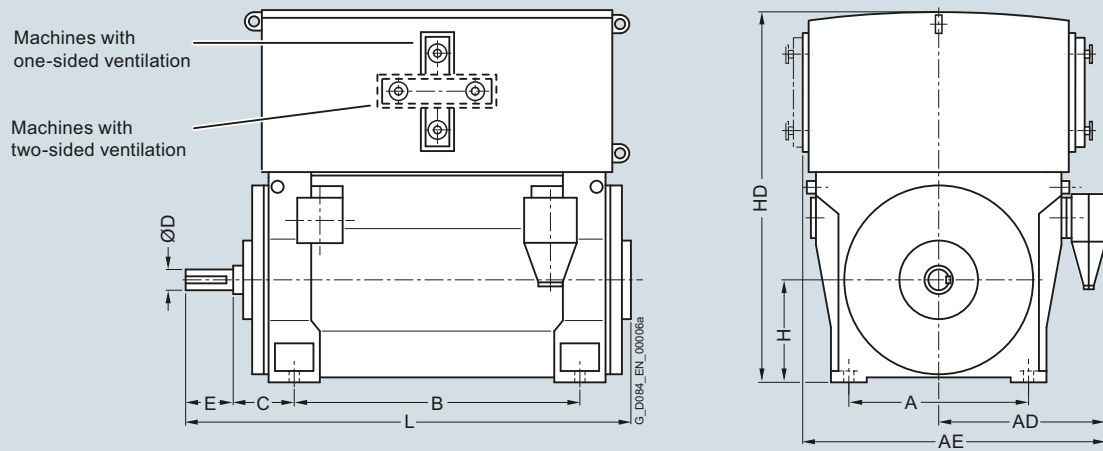

| Motor type   | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |         |
|--|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, anti-friction bearings – series 1RN4, 1RN6<sup>2)</sup></b> |              |            |                        |                        |         |         |         |         |         |          |         |
| 8-pole   |              |            |                        |                        |         |         |         |         |         |          |         |
| 1RN4 630-8HE.0 <sup>3)</sup>   | 10600        | 1320       | 1330                   | 2290                   | 1600    | 335     | 220     | 280     | 630     | 2400     | 2500    |
| 1RN4 632-8HE.0 <sup>3)</sup>   | 11200        | 1320       | 1330                   | 2290                   | 1600    | 335     | 220     | 280     | 630     | 2400     | 2500    |
| 1RN4 634-8HE.0 <sup>3)</sup>   | 12150        | 1320       | 1330                   | 2290                   | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |
| 1RN4 636-8HE.0 <sup>3)</sup>   | 12900        | 1320       | 1330                   | 2290                   | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |
| 10-pole  |              |            |                        |                        |         |         |         |         |         |          |         |
| 1RN6 450-3HJ.0   | 4450         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1715     | 1896    |
| 1RN6 452-3HJ.0   | 4750         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1715     | 1896    |
| 1RN6 454-3HJ.0   | 5150         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1715     | 2136    |
| 1RN6 456-3HJ.0   | 5450         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1715     | 2136    |
| 1RN6 500-3HE.0   | 5500         | 950        | 1000                   | 1790                   | 1320    | 280     | 160     | 240     | 500     | 1830     | 2270    |
| 1RN6 502-3HE.0   | 5850         | 950        | 1000                   | 1790                   | 1320    | 280     | 160     | 240     | 500     | 1830     | 2270    |
| 1RN6 504-3HE.0   | 6450         | 950        | 1000                   | 1790                   | 1500    | 280     | 170     | 240     | 500     | 1830     | 2480    |
| 1RN6 506-3HE.0   | 6800         | 950        | 1000                   | 1790                   | 1500    | 280     | 170     | 240     | 500     | 1830     | 2480    |
| 1RN6 560-3HE.0   | 7450         | 1060       | 1070                   | 1920                   | 1400    | 315     | 180     | 240     | 560     | 2040     | 2300    |
| 1RN6 562-3HE.0   | 8000         | 1060       | 1070                   | 1920                   | 1400    | 315     | 180     | 240     | 560     | 2040     | 2300    |
| 1RN6 564-3HE.0   | 8800         | 1060       | 1070                   | 1920                   | 1600    | 315     | 190     | 280     | 560     | 2040     | 2570    |
| 1RN6 566-3HE.0   | 9300         | 1060       | 1070                   | 1920                   | 1600    | 315     | 190     | 280     | 560     | 2040     | 2570    |
| 1RN4 630-3HE.0 <sup>3)</sup>   | 10500        | 1320       | 1180                   | 2290                   | 1600    | 335     | 220     | 280     | 630     | 2400     | 2500    |
| 1RN4 632-3HE.0 <sup>3)</sup>   | 11200        | 1320       | 1330                   | 2290                   | 1600    | 335     | 220     | 280     | 630     | 2400     | 2500    |
| 1RN4 634-3HE.0 <sup>3)</sup>   | 12200        | 1320       | 1330                   | 2290                   | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |
| 1RN4 636-3HE.0 <sup>3)</sup>   | 12900        | 1320       | 1330                   | 2290                   | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |


<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> The dimensions are also valid for the 1SN4/1SN6 and 1SL4/1SL6 series.

<sup>3)</sup> Anti-friction bearings only for 50 Hz version.



## Dimension drawings (continued)

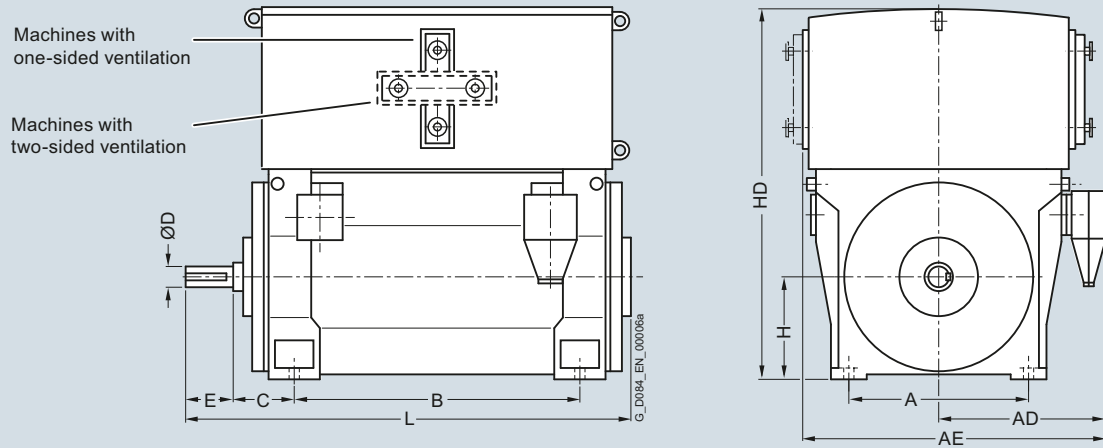

| Motor type   | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |         |
|--|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, anti-friction bearings – series 1RN4, 1RN6<sup>2)</sup></b> |              |            |                        |                        |         |         |         |         |         |          |         |
| 12-pole  |              |            |                        |                        |         |         |         |         |         |          |         |
| 1RN6 450-5HJ.0   | 4450         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1715     | 1896    |
| 1RN6 452-5HJ.0   | 4750         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1715     | 1896    |
| 1RN6 454-5HJ.0   | 5150         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1715     | 2136    |
| 1RN6 456-5HJ.0   | 5450         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1715     | 2136    |
| 1RN6 500-5HE.0   | 5550         | 950        | 1000                   | 1790                   | 1320    | 280     | 160     | 240     | 500     | 1830     | 2270    |
| 1RN6 502-5HE.0   | 5900         | 950        | 1000                   | 1790                   | 1320    | 280     | 160     | 240     | 500     | 1830     | 2270    |
| 1RN6 504-5HE.0   | 6350         | 950        | 1000                   | 1790                   | 1500    | 280     | 170     | 240     | 500     | 1830     | 2480    |
| 1RN6 506-5HE.0   | 6800         | 950        | 1000                   | 1790                   | 1500    | 280     | 170     | 240     | 500     | 1830     | 2480    |
| 1RN6 560-5HE.0   | 7450         | 1060       | 1070                   | 1920                   | 1400    | 315     | 180     | 240     | 560     | 2040     | 2300    |
| 1RN6 562-5HE.0   | 8000         | 1060       | 1070                   | 1920                   | 1400    | 315     | 180     | 240     | 560     | 2040     | 2300    |
| 1RN6 564-5HE.0   | 8800         | 1060       | 1070                   | 1920                   | 1600    | 315     | 190     | 280     | 560     | 2040     | 2570    |
| 1RN6 566-5HE.0   | 9250         | 1060       | 1070                   | 1920                   | 1600    | 315     | 190     | 280     | 560     | 2040     | 2570    |
| 1RN4 630-5HE.0 <sup>3)</sup>   | 10400        | 1320       | 1180                   | 2140                   | 1600    | 335     | 220     | 280     | 630     | 2400     | 2500    |
| 1RN4 632-5HE.0 <sup>3)</sup>   | 11000        | 1320       | 1180                   | 2140                   | 1600    | 335     | 220     | 280     | 630     | 2400     | 2500    |
| 1RN4 634-5HE.0 <sup>3)</sup>   | 12050        | 1320       | 1180                   | 2140                   | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |
| 1RN4 636-5HE.0 <sup>3)</sup>   | 12850        | 1320       | 1180                   | 2140                   | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |

Note: Higher pole numbers are available on request.

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> The dimensions are also valid for the 1SN4/1SN6 and 1SL4/1SL6 series.


<sup>3)</sup> Anti-friction bearings only for 50 Hz version.

## Motors for line operation

### Water-cooled motors

#### H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Dimension drawings

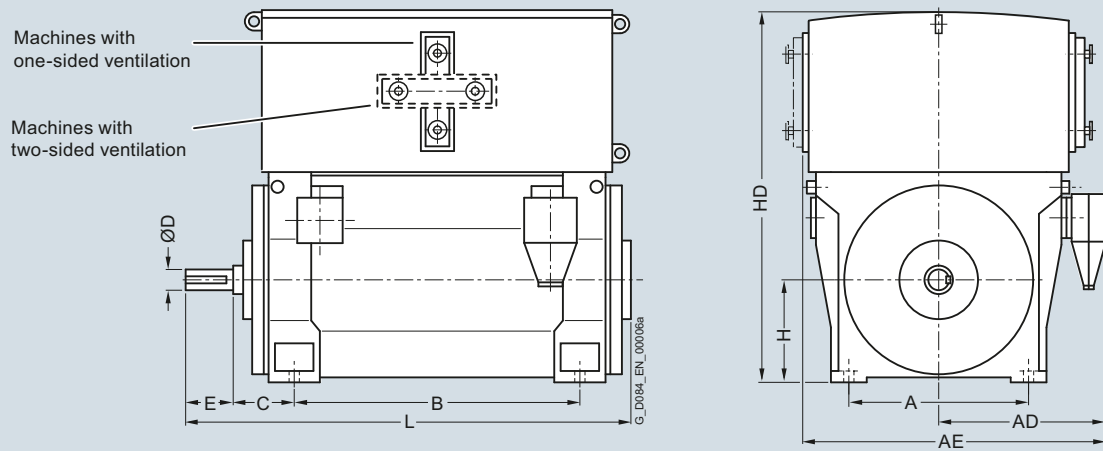


| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|---|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|   |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>9 ... 11 kV, IM B3 type of construction, anti-friction bearings – series 1RN4, 1RN6<sup>1)</sup></b> |              |            |          |          |         |         |         |         |         |          |         |
| <b>2-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN6 450-2HJ.0 <sup>2)</sup>  | 4050         | 850        | 1070     | 1840     | 1180    | 280     | 95      | 130     | 450     | 1725     | 1875    |
| 1RN6 452-2HJ.0 <sup>2)</sup>  | 4250         | 850        | 1070     | 1840     | 1180    | 280     | 95      | 130     | 450     | 1725     | 1875    |
| 1RN6 454-2HJ.0 <sup>2)</sup>  | 4550         | 850        | 1070     | 1840     | 1400    | 280     | 95      | 130     | 450     | 1725     | 2085    |
| 1RN6 456-2HJ.0 <sup>2)</sup>  | 4850         | 850        | 1070     | 1840     | 1400    | 280     | 95      | 130     | 450     | 1725     | 2085    |
| 1RN6 500-2HJ.0 <sup>2)</sup>  | 5850         | 950        | 1270     | 1970     | 1320    | 315     | 110     | 165     | 500     | 1980     | 2150    |
| 1RN6 502-2HJ.0 <sup>2)</sup>  | 6000         | 950        | 1270     | 1970     | 1320    | 315     | 110     | 165     | 500     | 1980     | 2150    |
| <b>4-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN6 450-4HJ.0  | 4350         | 850        | 1070     | 1840     | 1180    | 250     | 130     | 200     | 450     | 1715     | 1896    |
| 1RN6 452-4HJ.0  | 4250         | 850        | 1070     | 1840     | 1180    | 250     | 130     | 200     | 450     | 1715     | 1896    |
| 1RN6 454-4HJ.0  | 4950         | 850        | 1070     | 1840     | 1400    | 250     | 130     | 200     | 450     | 1715     | 2106    |
| 1RN6 456-4HJ.0  | 5250         | 850        | 1070     | 1840     | 1400    | 250     | 130     | 200     | 450     | 1715     | 2106    |
| 1RN6 500-4HJ.0  | 6350         | 950        | 1270     | 1970     | 1320    | 280     | 150     | 200     | 500     | 1980     | 2150    |
| 1RN6 502-4HJ.0  | 6550         | 950        | 1270     | 1970     | 1320    | 280     | 150     | 200     | 500     | 1980     | 2150    |
| 1RN6 504-4HJ.0  | 7200         | 950        | 1270     | 1970     | 1500    | 280     | 150     | 200     | 500     | 1980     | 2300    |
| 1RN6 506-4HJ.0  | 7500         | 950        | 1270     | 1970     | 1500    | 280     | 150     | 200     | 500     | 1980     | 2300    |
| 1RN6 560-4HJ.0  | 7600         | 1060       | 1340     | 2110     | 1400    | 315     | 170     | 240     | 560     | 2150     | 2300    |
| 1RN6 562-4HJ.0  | 8000         | 1060       | 1340     | 2110     | 1400    | 315     | 170     | 240     | 560     | 2150     | 2300    |
| 1RN6 564-4HJ.0  | 8900         | 1060       | 1340     | 2110     | 1600    | 315     | 170     | 240     | 560     | 2150     | 2550    |
| 1RN6 566-4HJ.0  | 9400         | 1060       | 1340     | 2110     | 1600    | 315     | 170     | 240     | 560     | 2150     | 2550    |
| 1RN4 630-4HE.0  | 10300        | 1320       | 1320     | 2280     | 1600    | 335     | 200     | 280     | 630     | 2400     | 2500    |
| 1RN4 632-4HE.0  | 10950        | 1320       | 1330     | 2290     | 1600    | 335     | 200     | 280     | 630     | 2400     | 2500    |
| 1RN4 634-4HE.0  | 12000        | 1320       | 1330     | 2290     | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |
| 1RN4 636-4HE.0  | 12600        | 1320       | 1330     | 2290     | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |
| <b>6-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN6 450-6HJ.0  | 4450         | 850        | 1070     | 1840     | 1180    | 250     | 140     | 200     | 450     | 1715     | 1896    |
| 1RN6 452-6HJ.0  | 4750         | 850        | 1070     | 1840     | 1180    | 250     | 140     | 200     | 450     | 1715     | 1896    |
| 1RN6 454-6HJ.0  | 5100         | 850        | 1070     | 1840     | 1400    | 280     | 140     | 200     | 450     | 1715     | 2136    |
| 1RN6 456-6HJ.0  | 5450         | 850        | 1070     | 1840     | 1400    | 280     | 140     | 200     | 450     | 1715     | 2136    |

<sup>1)</sup> The dimensions are also valid for the 1SN4/1SN6 and 1SL4/1SL6 series.

<sup>2)</sup> Anti-friction bearings only for 50 Hz version.

## Dimension drawings (continued)

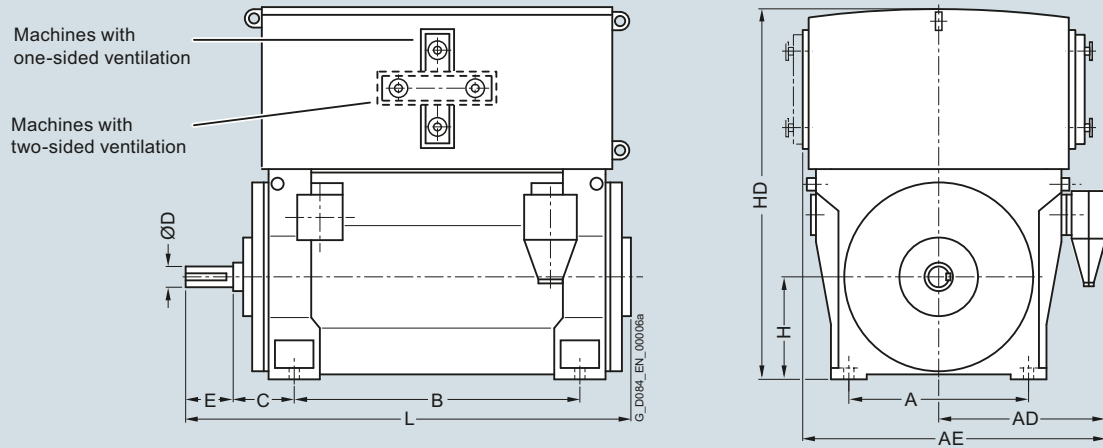

| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|---|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|   |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>9 ... 11 kV, IM B3 type of construction, anti-friction bearings – series 1RN4, 1RN6<sup>1)</sup></b> |              |            |          |          |         |         |         |         |         |          |         |
| 6-pole  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN6 500-6HJ.0  | 6400         | 950        | 1270     | 1970     | 1320    | 315     | 160     | 240     | 500     | 1960     | 2150    |
| 1RN6 502-6HJ.0  | 6650         | 950        | 1270     | 1970     | 1320    | 315     | 160     | 240     | 500     | 1960     | 2150    |
| 1RN6 504-6HJ.0  | 7250         | 950        | 1270     | 1970     | 1500    | 315     | 160     | 240     | 500     | 1960     | 2360    |
| 1RN6 506-6HJ.0  | 7650         | 950        | 1270     | 1970     | 1500    | 315     | 160     | 240     | 500     | 1960     | 2360    |
| 1RN6 560-6HJ.0  | 8600         | 1060       | 1340     | 2110     | 1400    | 315     | 180     | 240     | 560     | 2200     | 2300    |
| 1RN6 562-6HJ.0  | 9000         | 1060       | 1340     | 2110     | 1400    | 315     | 180     | 240     | 560     | 2200     | 2300    |
| 1RN6 564-6HJ.0  | 9850         | 1060       | 1340     | 2110     | 1600    | 315     | 180     | 240     | 560     | 2200     | 2550    |
| 1RN6 566-6HJ.0  | 10400        | 1060       | 1340     | 2110     | 1600    | 315     | 180     | 240     | 560     | 2200     | 2550    |
| 1RN4 630-6HE.0  | 10650        | 1320       | 1320     | 2280     | 1600    | 335     | 220     | 280     | 630     | 2400     | 2500    |
| 1RN4 632-6HE.0  | 11200        | 1320       | 1320     | 2280     | 1600    | 335     | 220     | 280     | 630     | 2400     | 2500    |
| 1RN4 634-6HE.0  | 12250        | 1320       | 1320     | 2280     | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |
| 1RN4 636-6HE.0  | 13000        | 1320       | 1330     | 2290     | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |
| 8-pole  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN6 450-8HJ.0  | 4450         | 850        | 1070     | 1840     | 1180    | 250     | 140     | 200     | 450     | 1715     | 1896    |
| 1RN6 452-8HJ.0  | 4750         | 850        | 1070     | 1840     | 1180    | 250     | 140     | 200     | 450     | 1715     | 1896    |
| 1RN6 454-8HJ.0  | 5150         | 850        | 1070     | 1840     | 1400    | 280     | 140     | 200     | 450     | 1715     | 2136    |
| 1RN6 456-8HJ.0  | 5450         | 850        | 1070     | 1840     | 1400    | 280     | 140     | 200     | 450     | 1715     | 2136    |
| 1RN6 500-8HJ.0  | 6350         | 950        | 1270     | 1970     | 1320    | 315     | 160     | 240     | 500     | 1960     | 2150    |
| 1RN6 502-8HJ.0  | 6600         | 950        | 1270     | 1970     | 1320    | 315     | 160     | 240     | 500     | 1960     | 2150    |
| 1RN6 504-8HJ.0  | 7250         | 950        | 1270     | 1970     | 1500    | 315     | 160     | 240     | 500     | 1960     | 2360    |
| 1RN6-506-8HJ.0  | 7600         | 950        | 1270     | 1970     | 1500    | 315     | 160     | 240     | 500     | 1960     | 2360    |
| 1RN6 560-8HJ.0  | 8550         | 1060       | 1340     | 2110     | 1400    | 315     | 180     | 240     | 560     | 2200     | 2300    |
| 1RN6 562-8HJ.0  | 9000         | 1060       | 1340     | 2110     | 1400    | 315     | 180     | 240     | 560     | 2200     | 2300    |
| 1RN6 564-8HJ.0  | 9800         | 1060       | 1340     | 2110     | 1600    | 315     | 180     | 240     | 560     | 2200     | 2550    |
| 1RN6-566-8HJ.0  | 10350        | 1060       | 1340     | 2110     | 1600    | 315     | 180     | 240     | 560     | 2200     | 2550    |
| 1RN4 630-8HE.0  | 10450        | 1320       | 1320     | 2280     | 1600    | 335     | 220     | 280     | 630     | 2400     | 2500    |
| 1RN4 632-8HE.0  | 11050        | 1320       | 1320     | 2280     | 1600    | 335     | 220     | 280     | 630     | 2400     | 2500    |
| 1RN4 634-8HE.0  | 12050        | 1320       | 1320     | 2280     | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |
| 1RN4 636-8HE.0  | 12800        | 1320       | 1320     | 2280     | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |


<sup>1)</sup> The dimensions are also valid for the 1SN4/1SN6 and 1SL4/1SL6 series.

## Motors for line operation

### Water-cooled motors

#### H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Dimension drawings (continued)

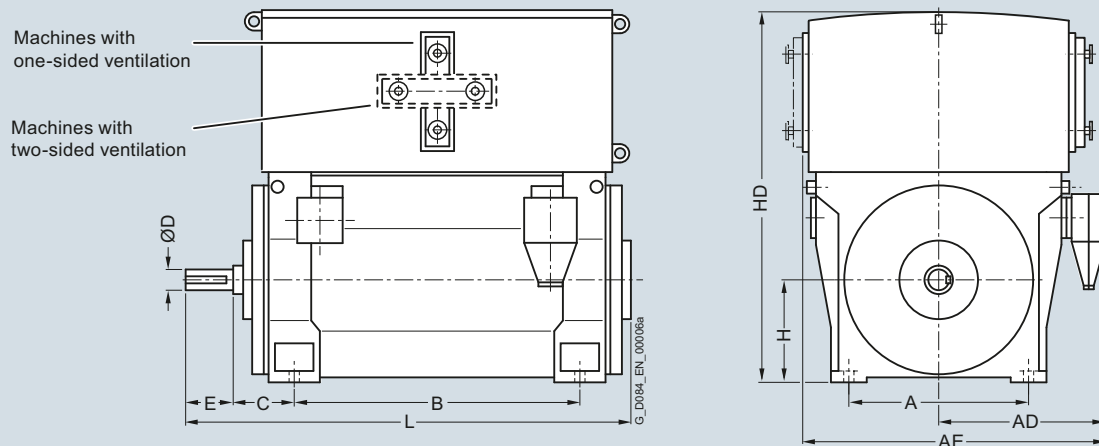


| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|---|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|   |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>9 ... 11 kV, IM B3 type of construction, anti-friction bearings – 1RN4 series<sup>1)</sup></b> |              |            |          |          |         |         |         |         |         |          |         |
| 10-pole   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN6 500-3HE.0  | 5500         | 950        | 1220     | 2010     | 1320    | 280     | 160     | 240     | 500     | 1830     | 2270    |
| 1RN6 502-3HE.0  | 5850         | 950        | 1220     | 2010     | 1320    | 280     | 160     | 240     | 500     | 1830     | 2270    |
| 1RN6 504-3HE.0  | 6400         | 950        | 1220     | 2010     | 1500    | 280     | 170     | 240     | 500     | 1830     | 2480    |
| 1RN6 506-3HE.0  | 6750         | 950        | 1220     | 2010     | 1500    | 280     | 170     | 240     | 500     | 1830     | 2480    |
| 1RN6 560-3HE.0  | 7850         | 1060       | 1210     | 2060     | 1400    | 315     | 180     | 240     | 560     | 2040     | 2300    |
| 1RN6 562-3HE.0  | 8350         | 1060       | 1210     | 2060     | 1400    | 315     | 180     | 240     | 560     | 2040     | 2300    |
| 1RN6 564-3HE.0  | 8950         | 1060       | 1210     | 2060     | 1600    | 315     | 190     | 280     | 560     | 2040     | 2570    |
| 1RN6 566-3HE.0  | 9350         | 1060       | 1210     | 2060     | 1600    | 315     | 190     | 280     | 560     | 2040     | 2570    |
| 1RN4 630-3HE.0  | 10450        | 1320       | 1320     | 2280     | 1600    | 335     | 220     | 280     | 630     | 2400     | 2500    |
| 1RN4 632-3HE.0  | 11050        | 1320       | 1320     | 2280     | 1600    | 335     | 220     | 280     | 630     | 2400     | 2500    |
| 1RN4 634-3HE.0  | 12000        | 1320       | 1320     | 2280     | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |
| 1RN4 636-3HE.0  | 12750        | 1320       | 1320     | 2280     | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |
| 12-pole   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN6 502-5HE.0  | 5900         | 950        | 1220     | 2010     | 1320    | 280     | 160     | 240     | 500     | 1830     | 2270    |
| 1RN6 504-5HE.0  | 6350         | 950        | 1220     | 2010     | 1500    | 280     | 170     | 240     | 500     | 1830     | 2480    |
| 1RN6 506-5HE.0  | 6750         | 950        | 1220     | 2010     | 1500    | 280     | 170     | 240     | 500     | 1830     | 2480    |
| 1RN6 560-5HE.0  | 7450         | 1060       | 1210     | 2060     | 1400    | 315     | 180     | 240     | 560     | 2040     | 2300    |
| 1RN6 562-5HE.0  | 7950         | 1060       | 1210     | 2060     | 1400    | 315     | 180     | 240     | 560     | 2040     | 2300    |
| 1RN6 564-5HE.0  | 8800         | 1060       | 1210     | 2060     | 1600    | 315     | 190     | 280     | 560     | 2040     | 2570    |
| 1RN6 566-5HE.0  | 9250         | 1060       | 1210     | 2060     | 1600    | 315     | 190     | 280     | 560     | 2040     | 2570    |
| 1RN4 630-5HE.0  | 10450        | 1320       | 1320     | 2280     | 1600    | 335     | 220     | 280     | 630     | 2400     | 2500    |
| 1RN4 632-5HE.0  | 11100        | 1320       | 1320     | 2280     | 1600    | 335     | 220     | 280     | 630     | 2400     | 2500    |
| 1RN4 634-5HE.0  | 12100        | 1320       | 1320     | 2280     | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |
| 1RN4 636-5HE.0  | 12850        | 1320       | 1320     | 2280     | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |

#### Note:

Higher pole numbers are available on request.

<sup>1)</sup> The dimensions are also valid for the 1SN4/1SN6 and 1SL4/1SL6 series.

## Dimension drawings

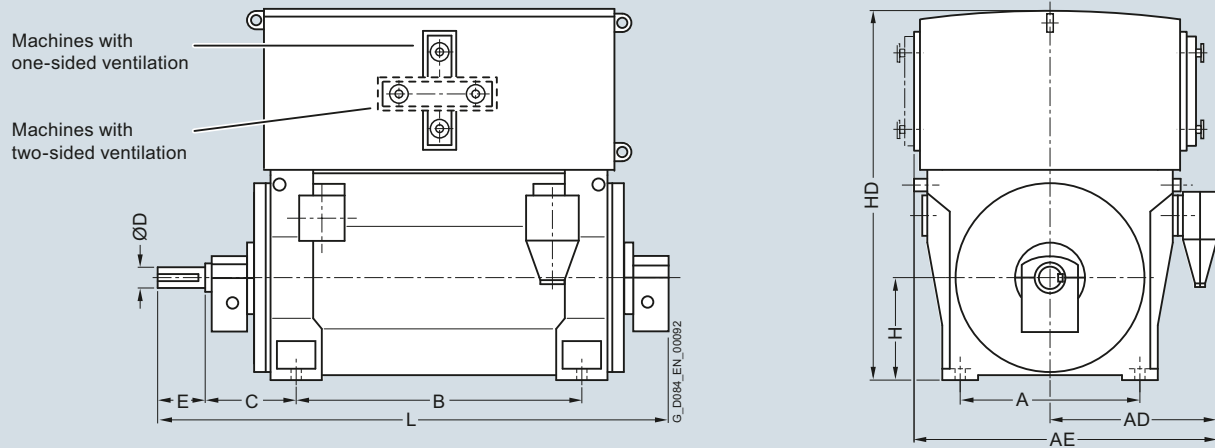

| Motor type | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |         |
|------------|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|---------|
|            |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |

Up to 6.6 kV, IM B3 type of construction, sleeve bearings – series 1RN4, 1RN6<sup>2)</sup>

## 2-pole

|                                    |       |      |      |      |      |     |     |     |     |      |      |
|------------------------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RN6 450-2HJ.0-Z K96 <sup>3)</sup> | 4050  | 850  | 930  | 1620 | 1180 | 425 | 95  | 130 | 450 | 1725 | 2218 |
| 1RN6 452-2HJ.0-Z K96 <sup>3)</sup> | 4300  | 850  | 930  | 1620 | 1180 | 425 | 95  | 130 | 450 | 1725 | 2218 |
| 1RN6 454-2HJ.0-Z K96 <sup>3)</sup> | 4600  | 850  | 930  | 1620 | 1400 | 425 | 95  | 130 | 450 | 1725 | 2428 |
| 1RN6 456-2HJ.0-Z K96 <sup>3)</sup> | 4900  | 850  | 930  | 1620 | 1400 | 425 | 95  | 130 | 450 | 1725 | 2428 |
| 1RN6 500-2HJ.0-Z K96 <sup>3)</sup> | 5900  | 950  | 1135 | 1835 | 1320 | 450 | 110 | 165 | 500 | 1980 | 2500 |
| 1RN6 502-2HJ.0-Z K96 <sup>3)</sup> | 6050  | 950  | 1135 | 1835 | 1320 | 450 | 110 | 165 | 500 | 1980 | 2500 |
| 1RN6 504-2HJ.0                     | 6850  | 950  | 1135 | 1835 | 1500 | 450 | 110 | 165 | 500 | 1980 | 2650 |
| 1RN6 506-2HJ.0                     | 7100  | 950  | 1135 | 1835 | 1500 | 450 | 110 | 165 | 500 | 1980 | 2650 |
| 1RN6 560-2HJ.0                     | 7600  | 1060 | 1205 | 1975 | 1400 | 600 | 130 | 200 | 560 | 2150 | 2850 |
| 1RN6 562-2HJ.0                     | 8000  | 1060 | 1205 | 1975 | 1400 | 600 | 130 | 200 | 560 | 2150 | 2850 |
| 1RN6 564-2HJ.0                     | 8900  | 1060 | 1205 | 1975 | 1600 | 600 | 130 | 200 | 560 | 2150 | 3100 |
| 1RN6 566-2HJ.0                     | 9350  | 1060 | 1205 | 1975 | 1600 | 600 | 130 | 200 | 560 | 2150 | 3100 |
| 1RN4 630-2HE.0                     | 10150 | 1320 | 1330 | 2290 | 1600 | 560 | 150 | 200 | 630 | 2400 | 2820 |
| 1RN4 632-2HE.0                     | 10800 | 1320 | 1330 | 2290 | 1600 | 560 | 150 | 200 | 630 | 2400 | 2820 |
| 1RN4 634-2HE.0                     | 11900 | 1320 | 1330 | 2290 | 1800 | 560 | 160 | 240 | 630 | 2400 | 3100 |
| 1RN4 636-2HE.0                     | 12750 | 1320 | 1330 | 2290 | 1800 | 560 | 160 | 240 | 630 | 2400 | 3100 |

## 4-pole

|                      |      |      |      |      |      |     |     |     |     |      |      |
|----------------------|------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RN6 450-4HJ.0-Z K96 | 4400 | 850  | 930  | 1620 | 1180 | 500 | 130 | 200 | 450 | 1715 | 2438 |
| 1RN6 452-4HJ.0-Z K96 | 4650 | 850  | 930  | 1620 | 1180 | 500 | 130 | 200 | 450 | 1715 | 2438 |
| 1RN6 454-4HJ.0-Z K96 | 5050 | 850  | 930  | 1620 | 1400 | 500 | 130 | 200 | 450 | 1715 | 2648 |
| 1RN6 456-4HJ.0-Z K96 | 5350 | 850  | 930  | 1620 | 1400 | 500 | 130 | 200 | 450 | 1715 | 2648 |
| 1RN6 500-4HJ.0-Z K96 | 6650 | 950  | 1135 | 1835 | 1320 | 560 | 150 | 200 | 500 | 1980 | 2700 |
| 1RN6 502-4HJ.0-Z K96 | 6850 | 950  | 1135 | 1835 | 1320 | 560 | 150 | 200 | 500 | 1980 | 2700 |
| 1RN6 504-4HJ.0-Z K96 | 7550 | 950  | 1135 | 1835 | 1500 | 560 | 150 | 200 | 500 | 1980 | 2880 |
| 1RN6 506-4HJ.0-Z K96 | 7850 | 950  | 1135 | 1835 | 1500 | 560 | 150 | 200 | 500 | 1980 | 2880 |
| 1RN6 560-4HJ.0-Z K96 | 7800 | 1060 | 1205 | 1975 | 1400 | 600 | 170 | 240 | 560 | 2150 | 2900 |
| 1RN6 562-4HJ.0-Z K96 | 8200 | 1060 | 1205 | 1975 | 1400 | 600 | 170 | 240 | 560 | 2150 | 2900 |
| 1RN6 564-4HJ.0-Z K96 | 9050 | 1060 | 1205 | 1975 | 1600 | 600 | 170 | 240 | 560 | 2150 | 3100 |
| 1RN6 566-4HJ.0-Z K96 | 9600 | 1060 | 1205 | 1975 | 1600 | 600 | 170 | 240 | 560 | 2150 | 3100 |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> The dimensions are also valid for the 1SN4/1SN6 and 1SL4/1SL6 series.


<sup>3)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.

## Motors for line operation

### Water-cooled motors

#### H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Dimension drawings (continued)

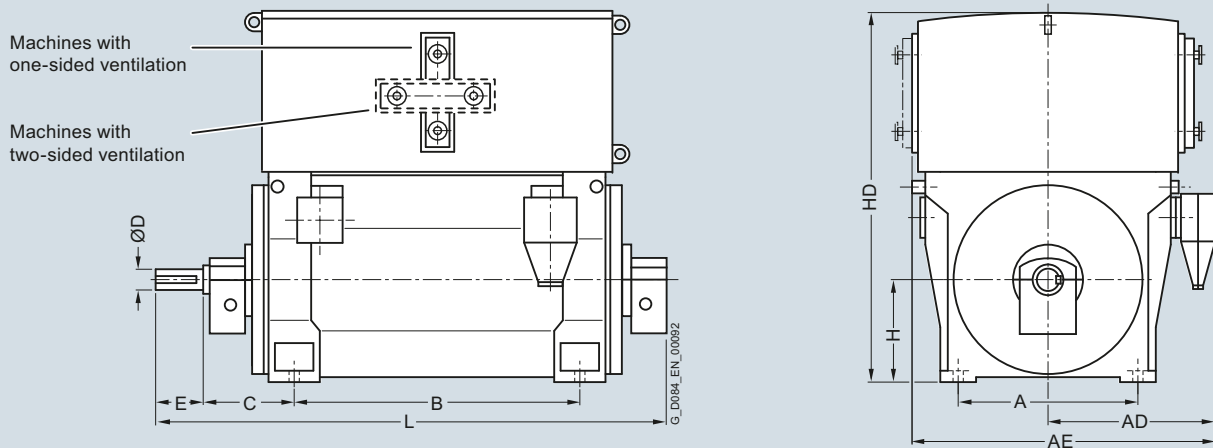

| Motor type | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |         |
|------------|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|---------|
|            |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |

#### Up to 6.6 kV, IM B3 type of construction, sleeve bearings – series 1RN4, 1RN6<sup>2)</sup>

##### 4-pole

|                                    |       |      |      |      |      |     |     |     |     |      |      |
|------------------------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RN4 630-4HE.0-Z K96 <sup>3)</sup> | 10650 | 1320 | 1330 | 2290 | 1600 | 600 | 200 | 280 | 630 | 2400 | 2970 |
| 1RN4 632-4HE.0-Z K96 <sup>3)</sup> | 11350 | 1320 | 1330 | 2290 | 1600 | 600 | 200 | 280 | 630 | 2400 | 2970 |
| 1RN4 634-4HE.0-Z K96 <sup>3)</sup> | 12400 | 1320 | 1330 | 2290 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |
| 1RN4 636-4HE.0-Z K96 <sup>3)</sup> | 13000 | 1320 | 1330 | 2290 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |

##### 6-pole

|                      |       |      |      |      |      |     |     |     |     |      |      |
|----------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RN6 450-6HJ.0-Z K96 | 4550  | 850  | 930  | 1620 | 1180 | 500 | 140 | 200 | 450 | 1715 | 2438 |
| 1RN6 452-6HJ.0-Z K96 | 4800  | 850  | 930  | 1620 | 1180 | 500 | 140 | 200 | 450 | 1715 | 2438 |
| 1RN6 454-6HJ.0-Z K96 | 5150  | 850  | 930  | 1620 | 1400 | 500 | 140 | 200 | 450 | 1715 | 2648 |
| 1RN6 456-6HJ.0-Z K96 | 5500  | 850  | 930  | 1620 | 1400 | 500 | 140 | 200 | 450 | 1715 | 2648 |
| 1RN6 500-6HJ.0-Z K96 | 6550  | 950  | 1135 | 1835 | 1320 | 560 | 170 | 240 | 500 | 1960 | 2700 |
| 1RN6 502-6HJ.0-Z K96 | 6850  | 950  | 1135 | 1835 | 1320 | 560 | 170 | 240 | 500 | 1960 | 2700 |
| 1RN6 504-6HJ.0-Z K96 | 7450  | 950  | 1135 | 1835 | 1500 | 560 | 170 | 240 | 500 | 1960 | 2900 |
| 1RN6 506-6HJ.0-Z K96 | 7850  | 950  | 1135 | 1835 | 1500 | 560 | 170 | 240 | 500 | 1960 | 2900 |
| 1RN6 560-6HJ.0-Z K96 | 8850  | 1060 | 1205 | 1975 | 1400 | 600 | 170 | 240 | 560 | 2200 | 2950 |
| 1RN6 562-6HJ.0-Z K96 | 9250  | 1060 | 1205 | 1975 | 1400 | 600 | 170 | 240 | 560 | 2200 | 2950 |
| 1RN6 564-6HJ.0-Z K96 | 10100 | 1060 | 1205 | 1975 | 1600 | 600 | 170 | 240 | 560 | 2200 | 3150 |
| 1RN6 566-6HJ.0-Z K96 | 10650 | 1060 | 1205 | 1975 | 1600 | 600 | 170 | 240 | 560 | 2200 | 3150 |
| 1RN4 630-6HE.0-Z K96 | 10950 | 1320 | 1330 | 2290 | 1600 | 600 | 220 | 280 | 630 | 2400 | 2970 |
| 1RN4 632-6HE.0-Z K96 | 11500 | 1320 | 1330 | 2290 | 1600 | 600 | 220 | 280 | 630 | 2400 | 2970 |
| 1RN4 634-6HE.0-Z K96 | 12550 | 1320 | 1330 | 2290 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |
| 1RN4 636-6HE.0-Z K96 | 13300 | 1320 | 1330 | 2290 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |

##### 8-pole


|                      |      |     |     |      |      |     |     |     |     |      |      |
|----------------------|------|-----|-----|------|------|-----|-----|-----|-----|------|------|
| 1RN6 450-8HJ.0-Z K96 | 4550 | 850 | 930 | 1620 | 1180 | 500 | 140 | 200 | 450 | 1715 | 2438 |
| 1RN6 452-8HJ.0-Z K96 | 4850 | 850 | 930 | 1620 | 1180 | 500 | 140 | 200 | 450 | 1715 | 2438 |
| 1RN6 454-8HJ.0-Z K96 | 5200 | 850 | 930 | 1620 | 1400 | 500 | 140 | 200 | 450 | 1715 | 2648 |
| 1RN6 456-8HJ.0-Z K96 | 5550 | 850 | 930 | 1620 | 1400 | 500 | 140 | 200 | 450 | 1715 | 2648 |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> The dimensions are also valid for the 1SN4/1SN6 and 1SL4/1SL6 series.

<sup>3)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.

## Dimension drawings (continued)

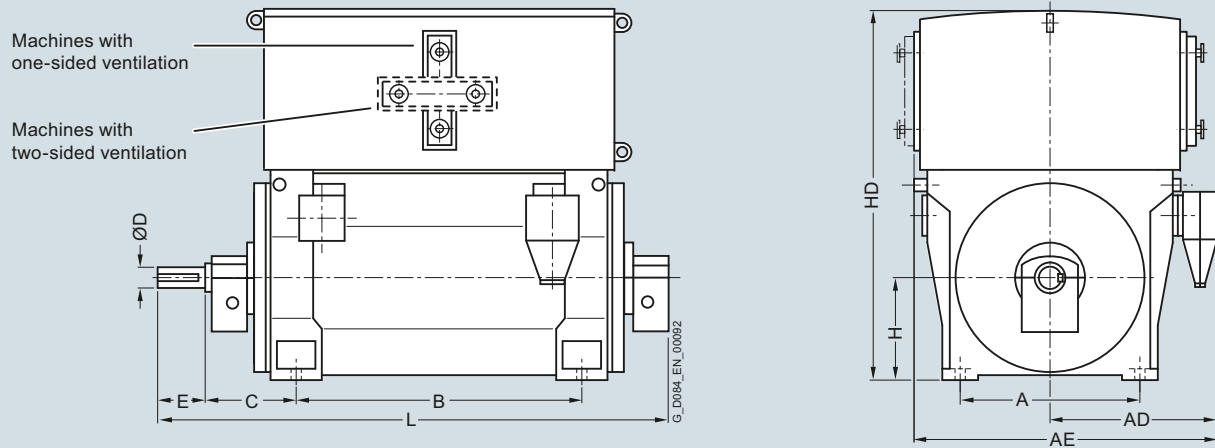

| Motor type | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |         |
|------------|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|---------|
|            |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |

Up to 6.6 kV, IM B3 type of construction, sleeve bearings – series 1RN4, 1RN6<sup>2)</sup>

## 8-pole

|                                    |       |      |      |      |      |     |     |     |     |      |      |
|------------------------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RN6 500-8HJ.0-Z K96               | 6500  | 950  | 1135 | 1835 | 1320 | 560 | 170 | 240 | 500 | 1960 | 2700 |
| 1RN6 502-8HJ.0-Z K96               | 6800  | 950  | 1135 | 1835 | 1320 | 560 | 170 | 240 | 500 | 1960 | 2700 |
| 1RN6 504-8HJ.0-Z K96               | 7400  | 950  | 1135 | 1835 | 1500 | 560 | 170 | 240 | 500 | 1960 | 2900 |
| 1RN6 506-8HJ.0-Z K96               | 7800  | 950  | 1135 | 1835 | 1500 | 560 | 170 | 240 | 500 | 1960 | 2900 |
| 1RN6 560-8HJ.0-Z K96               | 8800  | 1060 | 1205 | 1975 | 1400 | 600 | 170 | 240 | 560 | 2200 | 2950 |
| 1RN6 562-8HJ.0-Z K96               | 9250  | 1060 | 1205 | 1975 | 1400 | 600 | 170 | 240 | 560 | 2200 | 2950 |
| 1RN6 564-8HJ.0-Z K96               | 10050 | 1060 | 1205 | 1975 | 1600 | 600 | 170 | 240 | 560 | 2200 | 3150 |
| 1RN6 566-8HJ.0-Z K96               | 10600 | 1060 | 1205 | 1975 | 1600 | 600 | 170 | 240 | 560 | 2200 | 3150 |
| 1RN4 630-8HE.0-Z K96 <sup>3)</sup> | 10850 | 1320 | 1330 | 2290 | 1600 | 600 | 220 | 280 | 630 | 2400 | 2970 |
| 1RN4 632-8HE.0-Z K96 <sup>3)</sup> | 11500 | 1320 | 1330 | 2290 | 1600 | 600 | 220 | 280 | 630 | 2400 | 2970 |
| 1RN4 634-8HE.0-Z K96 <sup>3)</sup> | 12450 | 1320 | 1330 | 2290 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |
| 1RN4 636-8HE.0-Z K96 <sup>3)</sup> | 13150 | 1320 | 1330 | 2290 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |

## 10-pole

|                                    |       |      |      |      |      |     |     |     |     |      |      |
|------------------------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RN6 450-3HJ.0-Z K96               | 4550  | 850  | 930  | 1620 | 1180 | 500 | 140 | 200 | 450 | 1715 | 2438 |
| 1RN6 452-3HJ.0-Z K96               | 4850  | 850  | 930  | 1620 | 1180 | 500 | 140 | 200 | 450 | 1715 | 2438 |
| 1RN6 454-3HJ.0-Z K96               | 5200  | 850  | 930  | 1620 | 1400 | 500 | 140 | 200 | 450 | 1715 | 2648 |
| 1RN6 456-3HJ.0-Z K96               | 5550  | 850  | 930  | 1620 | 1400 | 500 | 140 | 200 | 450 | 1715 | 2648 |
| 1RN6 500-3HE.0-Z K96               | 5700  | 950  | 1000 | 1790 | 1320 | 500 | 160 | 240 | 500 | 1830 | 2620 |
| 1RN6 502-3HE.0-Z K96               | 6050  | 950  | 1000 | 1790 | 1320 | 500 | 160 | 240 | 500 | 1830 | 2620 |
| 1RN6 504-3HE.0-Z K96               | 6600  | 950  | 1000 | 1790 | 1500 | 500 | 170 | 240 | 500 | 1830 | 2830 |
| 1RN6 506-3HE.0-Z K96               | 6950  | 950  | 1000 | 1790 | 1500 | 500 | 170 | 240 | 500 | 1830 | 2830 |
| 1RN6 560-3HE.0-Z K96               | 7650  | 1060 | 1070 | 1920 | 1400 | 530 | 180 | 240 | 560 | 2040 | 2670 |
| 1RN6 562-3HE.0-Z K96               | 8200  | 1060 | 1070 | 1920 | 1400 | 530 | 180 | 240 | 560 | 2040 | 2670 |
| 1RN6 564-3HE.0-Z K96               | 9050  | 1060 | 1070 | 1920 | 1600 | 530 | 190 | 280 | 560 | 2040 | 2940 |
| 1RN6 566-3HE.0-Z K96               | 9500  | 1060 | 1070 | 1920 | 1600 | 530 | 190 | 280 | 560 | 2040 | 2940 |
| 1RN4 630-3HE.0-Z K96 <sup>3)</sup> | 10750 | 1320 | 1180 | 2140 | 1600 | 600 | 220 | 280 | 630 | 2400 | 2970 |
| 1RN4 632-3HE.0-Z K96 <sup>3)</sup> | 11450 | 1320 | 1330 | 2290 | 1600 | 600 | 220 | 280 | 630 | 2400 | 2970 |
| 1RN4 634-3HE.0-Z K96 <sup>3)</sup> | 12500 | 1320 | 1330 | 2290 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |
| 1RN4 636-3HE.0-Z K96 <sup>3)</sup> | 13200 | 1320 | 1330 | 2290 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> The dimensions are also valid for the 1SN4/1SN6 and 1SL4/1SL6 series.


<sup>3)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.

## Motors for line operation

### Water-cooled motors

#### H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Dimension drawings (continued)

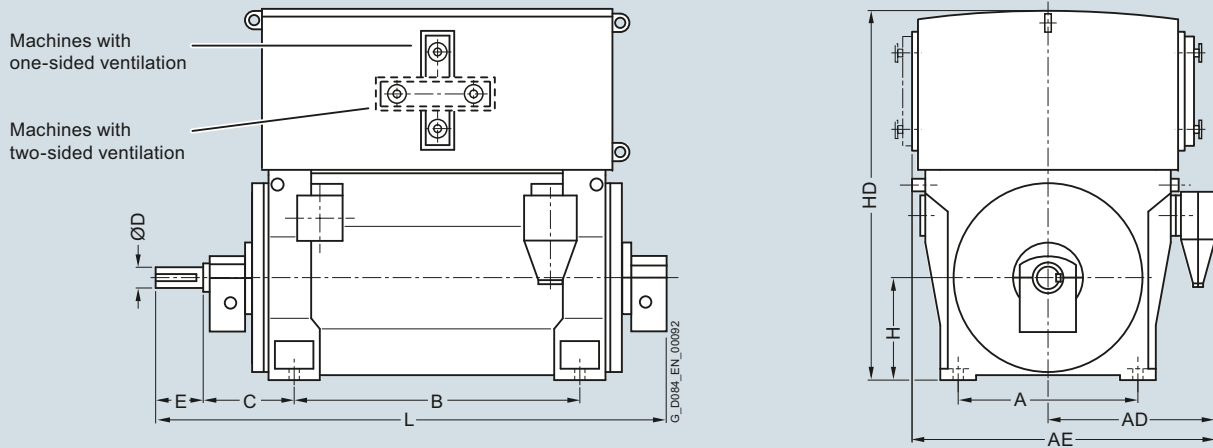

| Motor type | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |         |
|------------|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|---------|
|            |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |

#### Up to 6.6 kV, IM B3 type of construction, sleeve bearings – series 1RN4, 1RN6<sup>2)</sup>

##### 12-pole

|                                    |       |      |      |      |      |     |     |     |     |      |      |
|------------------------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RN6 450-5HJ.0-Z K96               | 4550  | 850  | 930  | 1620 | 1180 | 500 | 140 | 200 | 450 | 1715 | 2438 |
| 1RN6 452-5HJ.0-Z K96               | 4850  | 850  | 930  | 1620 | 1180 | 500 | 140 | 200 | 450 | 1715 | 2438 |
| 1RN6 454-5HJ.0-Z K96               | 5200  | 850  | 930  | 1620 | 1400 | 500 | 140 | 200 | 450 | 1715 | 2648 |
| 1RN6 456-5HJ.0-Z K96               | 5550  | 850  | 930  | 1620 | 1400 | 500 | 140 | 200 | 450 | 1715 | 2648 |
| 1RN6 500-5HE.0-Z K96               | 5700  | 950  | 1000 | 1790 | 1320 | 500 | 160 | 240 | 500 | 1830 | 2620 |
| 1RN6 502-5HE.0-Z K96               | 6050  | 950  | 1000 | 1790 | 1320 | 500 | 160 | 240 | 500 | 1830 | 2620 |
| 1RN6 504-5HE.0-Z K96               | 6550  | 950  | 1000 | 1790 | 1500 | 500 | 170 | 240 | 500 | 1830 | 2830 |
| 1RN6 506-5HE.0-Z K96               | 6950  | 950  | 1000 | 1790 | 1500 | 500 | 170 | 240 | 500 | 1830 | 2830 |
| 1RN6 560-5HE.0-Z K96               | 7650  | 1060 | 1070 | 1920 | 1400 | 530 | 180 | 240 | 560 | 2040 | 2670 |
| 1RN6 562-5HE.0-Z K96               | 8250  | 1060 | 1070 | 1920 | 1400 | 530 | 180 | 240 | 560 | 2040 | 2670 |
| 1RN6 564-5HE.0-Z K96               | 9000  | 1060 | 1070 | 1920 | 1600 | 530 | 190 | 280 | 560 | 2040 | 2940 |
| 1RN6 566-5HE.0-Z K96               | 9500  | 1060 | 1070 | 1920 | 1600 | 530 | 190 | 280 | 560 | 2040 | 2940 |
| 1RN4 630-5HE.0-Z K96 <sup>3)</sup> | 10650 | 1320 | 1180 | 2140 | 1600 | 600 | 220 | 280 | 630 | 2400 | 2970 |
| 1RN4 632-5HE.0-Z K96 <sup>3)</sup> | 11300 | 1320 | 1180 | 2140 | 1600 | 600 | 220 | 280 | 630 | 2400 | 2970 |
| 1RN4 634-5HE.0-Z K96 <sup>3)</sup> | 12300 | 1320 | 1180 | 2140 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |
| 1RN4 636-5HE.0-Z K96 <sup>3)</sup> | 13150 | 1320 | 1330 | 2290 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |

#### Note:

Higher pole numbers are available on request.


<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> The dimensions are also valid for the 1SN4/1SN6 and 1SL4/1SL6 series.

<sup>3)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.



## Dimension drawings

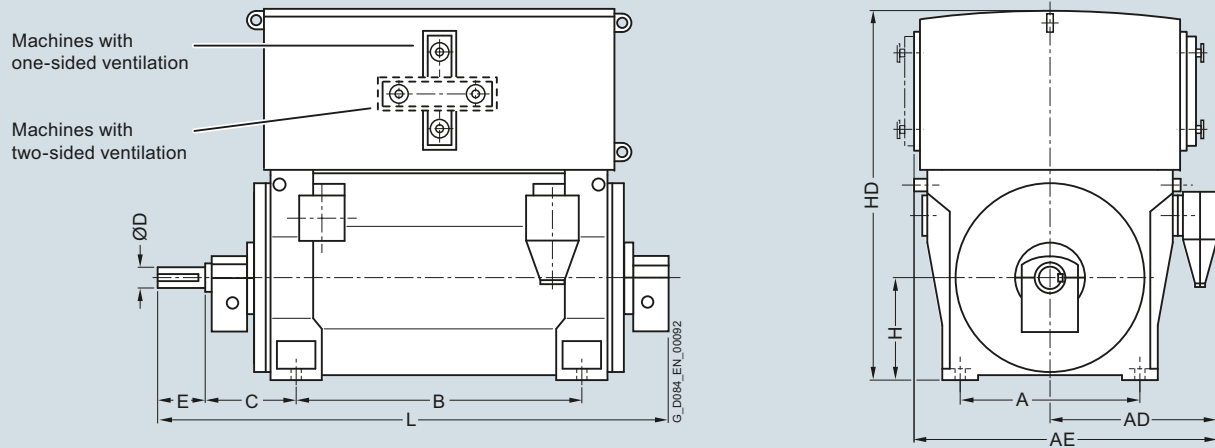

| Motor type | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|------------|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|            |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |

9 ... 11 kV, IM B3 type of construction, sleeve bearings – series 1RN4, 1RN6<sup>1)</sup>

## 2-pole

|                                    |       |      |      |      |      |     |     |     |     |      |      |
|------------------------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RN6 450-2HJ.0-Z K96 <sup>2)</sup> | 4050  | 850  | 1070 | 1840 | 1180 | 425 | 95  | 130 | 450 | 1725 | 2218 |
| 1RN6 452-2HJ.0-Z K96 <sup>2)</sup> | 4300  | 850  | 1070 | 1840 | 1180 | 425 | 95  | 130 | 450 | 1725 | 2218 |
| 1RN6 454-2HJ.0-Z K96 <sup>2)</sup> | 4600  | 850  | 1070 | 1840 | 1400 | 425 | 95  | 130 | 450 | 1725 | 2428 |
| 1RN6 456-2HJ.0-Z K96 <sup>2)</sup> | 4900  | 850  | 1070 | 1840 | 1400 | 425 | 95  | 130 | 450 | 1725 | 2428 |
| 1RN6 500-2HJ.0-Z K96 <sup>2)</sup> | 5900  | 950  | 1270 | 1970 | 1320 | 450 | 110 | 165 | 500 | 1980 | 2500 |
| 1RN6 502-2HJ.0-Z K96 <sup>2)</sup> | 6050  | 950  | 1270 | 1970 | 1320 | 450 | 110 | 165 | 500 | 1980 | 2500 |
| 1RN6 504-2HJ.0                     | 6850  | 950  | 1270 | 1970 | 1500 | 450 | 110 | 165 | 500 | 1980 | 2650 |
| 1RN6 506-2HJ.0                     | 7100  | 950  | 1270 | 1970 | 1500 | 450 | 110 | 165 | 500 | 1980 | 2650 |
| 1RN6 560-2HJ.0                     | 7600  | 1060 | 1340 | 2110 | 1400 | 600 | 130 | 200 | 560 | 2150 | 2850 |
| 1RN6 562-2HJ.0                     | 8000  | 1060 | 1340 | 2110 | 1400 | 600 | 130 | 200 | 560 | 2150 | 2850 |
| 1RN6 564-2HJ.0                     | 8900  | 1060 | 1340 | 2110 | 1600 | 600 | 130 | 200 | 560 | 2150 | 3100 |
| 1RN6 566-2HJ.0                     | 9350  | 1060 | 1340 | 2110 | 1600 | 600 | 130 | 200 | 560 | 2150 | 3100 |
| 1RN4 630-2HE.0                     | 10050 | 1320 | 1320 | 2280 | 1600 | 560 | 150 | 200 | 630 | 2400 | 2820 |
| 1RN4 632-2HE.0                     | 10700 | 1320 | 1330 | 2290 | 1600 | 560 | 150 | 200 | 630 | 2400 | 2820 |
| 1RN4 634-2HE.0                     | 11750 | 1320 | 1330 | 2290 | 1800 | 560 | 160 | 240 | 630 | 2400 | 3100 |
| 1RN4 636-2HE.0                     | 12600 | 1320 | 1330 | 2290 | 1800 | 560 | 160 | 240 | 630 | 2400 | 3100 |

## 4-pole

|                      |      |      |      |      |      |     |     |     |     |      |      |
|----------------------|------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RN6 450-4HJ.0-Z K96 | 4400 | 850  | 1070 | 1840 | 1180 | 500 | 130 | 200 | 450 | 1715 | 2438 |
| 1RN6 452-4HJ.0-Z K96 | 4650 | 850  | 1070 | 1840 | 1180 | 500 | 130 | 200 | 450 | 1715 | 2438 |
| 1RN6 454-4HJ.0-Z K96 | 5050 | 850  | 1070 | 1840 | 1400 | 500 | 130 | 200 | 450 | 1715 | 2645 |
| 1RN6 456-4HJ.0-Z K96 | 5350 | 850  | 1070 | 1840 | 1400 | 500 | 130 | 200 | 450 | 1715 | 2645 |
| 1RN6 500-4HJ.0-Z K96 | 6650 | 950  | 1270 | 1970 | 1320 | 560 | 150 | 200 | 500 | 1980 | 2700 |
| 1RN6 502-4HJ.0-Z K96 | 6850 | 950  | 1270 | 1970 | 1320 | 560 | 150 | 200 | 500 | 1980 | 2700 |
| 1RN6 504-4HJ.0-Z K96 | 7550 | 950  | 1270 | 1970 | 1500 | 560 | 150 | 200 | 500 | 1980 | 2880 |
| 1RN6 506-4HJ.0-Z K96 | 7850 | 950  | 1270 | 1970 | 1500 | 560 | 150 | 200 | 500 | 1980 | 2880 |
| 1RN6 560-4HJ.0-Z K96 | 7800 | 1060 | 1340 | 2110 | 1400 | 600 | 170 | 240 | 560 | 2150 | 2900 |
| 1RN6 562-4HJ.0-Z K96 | 8200 | 1060 | 1340 | 2110 | 1400 | 600 | 170 | 240 | 560 | 2150 | 2900 |
| 1RN6 564-4HJ.0-Z K96 | 9050 | 1060 | 1340 | 2110 | 1600 | 600 | 170 | 240 | 560 | 2150 | 3100 |
| 1RN6 566-4HJ.0-Z K96 | 9600 | 1060 | 1340 | 2110 | 1600 | 600 | 170 | 240 | 560 | 2150 | 3100 |

1) The dimensions are also valid for the 1SN4/1SN6 and 1SL4/1SL6 series.


2) For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.

## Motors for line operation

### Water-cooled motors

#### H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Dimension drawings (continued)

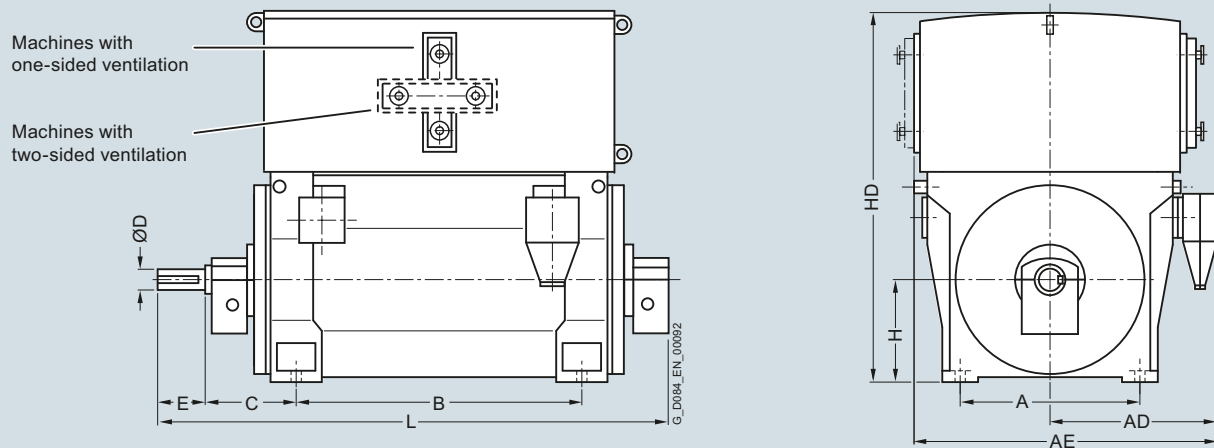

| Motor type | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|------------|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|            |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |

#### 9 ... 11 kV, IM B3 type of construction, sleeve bearings – series 1RN4, 1RN6<sup>1)</sup>

##### 4-pole

|                      |       |      |      |      |      |     |     |     |     |      |      |
|----------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RN4 630-4HE.0-Z K96 | 10550 | 1320 | 1320 | 2280 | 1600 | 600 | 200 | 280 | 630 | 2400 | 2970 |
| 1RN4 632-4HE.0-Z K96 | 11250 | 1320 | 1330 | 2290 | 1600 | 600 | 200 | 280 | 630 | 2400 | 2970 |
| 1RN4 634-4HE.0-Z K96 | 12250 | 1320 | 1330 | 2290 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |
| 1RN4 636-4HE.0-Z K96 | 12900 | 1320 | 1330 | 2290 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |

##### 6-pole


|                      |       |      |      |      |      |     |     |     |     |      |      |
|----------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RN6 450-6HJ.0-Z K96 | 4550  | 850  | 1070 | 1840 | 1180 | 500 | 140 | 200 | 450 | 1715 | 2438 |
| 1RN6 452-6HJ.0-Z K96 | 4800  | 850  | 1070 | 1840 | 1180 | 500 | 140 | 200 | 450 | 1715 | 2438 |
| 1RN6 454-6HJ.0-Z K96 | 5150  | 850  | 1070 | 1840 | 1400 | 500 | 140 | 200 | 450 | 1715 | 2648 |
| 1RN6 456-6HJ.0-Z K96 | 5500  | 850  | 1070 | 1840 | 1400 | 500 | 140 | 200 | 450 | 1715 | 2648 |
| 1RN6 500-6HJ.0-Z K96 | 6550  | 950  | 1270 | 1970 | 1320 | 560 | 170 | 240 | 500 | 1960 | 2700 |
| 1RN6 502-6HJ.0-Z K96 | 6850  | 950  | 1270 | 1970 | 1320 | 560 | 170 | 240 | 500 | 1960 | 2700 |
| 1RN6 504-6HJ.0-Z K96 | 7450  | 950  | 1270 | 1970 | 1500 | 560 | 170 | 240 | 500 | 1960 | 2900 |
| 1RN6 506-6HJ.0-Z K96 | 7850  | 950  | 1270 | 1970 | 1500 | 560 | 170 | 240 | 500 | 1960 | 2900 |
| 1RN6 560-6HJ.0-Z K96 | 8850  | 1060 | 1340 | 2110 | 1400 | 600 | 170 | 240 | 560 | 2200 | 2950 |
| 1RN6 562-6HJ.0-Z K96 | 9250  | 1060 | 1340 | 2110 | 1400 | 600 | 170 | 240 | 560 | 2200 | 2950 |
| 1RN6 564-6HJ.0-Z K96 | 10100 | 1060 | 1340 | 2110 | 1600 | 600 | 170 | 240 | 560 | 2200 | 3150 |
| 1RN6 566-6HJ.0-Z K96 | 10650 | 1060 | 1340 | 2110 | 1600 | 600 | 170 | 240 | 560 | 2200 | 3150 |
| 1RN4 630-6HE.0-Z K96 | 10900 | 1320 | 1320 | 2280 | 1600 | 600 | 220 | 280 | 630 | 2400 | 2970 |
| 1RN4 632-6HE.0-Z K96 | 11500 | 1320 | 1320 | 2280 | 1600 | 600 | 220 | 280 | 630 | 2400 | 2970 |
| 1RN4 634-6HE.0-Z K96 | 12550 | 1320 | 1320 | 2280 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |
| 1RN4 636-6HE.0-Z K96 | 13300 | 1320 | 1330 | 2290 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |

##### 8-pole

|                      |      |     |      |      |      |     |     |     |     |      |      |
|----------------------|------|-----|------|------|------|-----|-----|-----|-----|------|------|
| 1RN6 450-8HJ.0-Z K96 | 4550 | 850 | 1070 | 1840 | 1180 | 500 | 140 | 200 | 450 | 1715 | 2438 |
| 1RN6 452-8HJ.0-Z K96 | 4850 | 850 | 1070 | 1840 | 1180 | 500 | 140 | 200 | 450 | 1715 | 2438 |
| 1RN6 454-8HJ.0-Z K96 | 5200 | 850 | 1070 | 1840 | 1400 | 500 | 140 | 200 | 450 | 1715 | 2648 |
| 1RN6 456-8HJ.0-Z K96 | 5550 | 850 | 1070 | 1840 | 1400 | 500 | 140 | 200 | 450 | 1715 | 2648 |
| 1RN6 500-8HJ.0-Z K96 | 6500 | 950 | 1270 | 1970 | 1320 | 560 | 170 | 240 | 500 | 1960 | 2700 |
| 1RN6 502-8HJ.0-Z K96 | 6800 | 950 | 1270 | 1970 | 1320 | 560 | 170 | 240 | 500 | 1960 | 2700 |
| 1RN6 504-8HJ.0-Z K96 | 7400 | 950 | 1270 | 1970 | 1500 | 560 | 170 | 240 | 500 | 1960 | 2900 |
| 1RN6 506-8HJ.0-Z K96 | 7800 | 950 | 1270 | 1970 | 1500 | 560 | 170 | 240 | 500 | 1960 | 2900 |

<sup>1)</sup> The dimensions are also valid for the 1SN4/1SN6 and 1SL4/1SL6 series.

## Dimension drawings (continued)

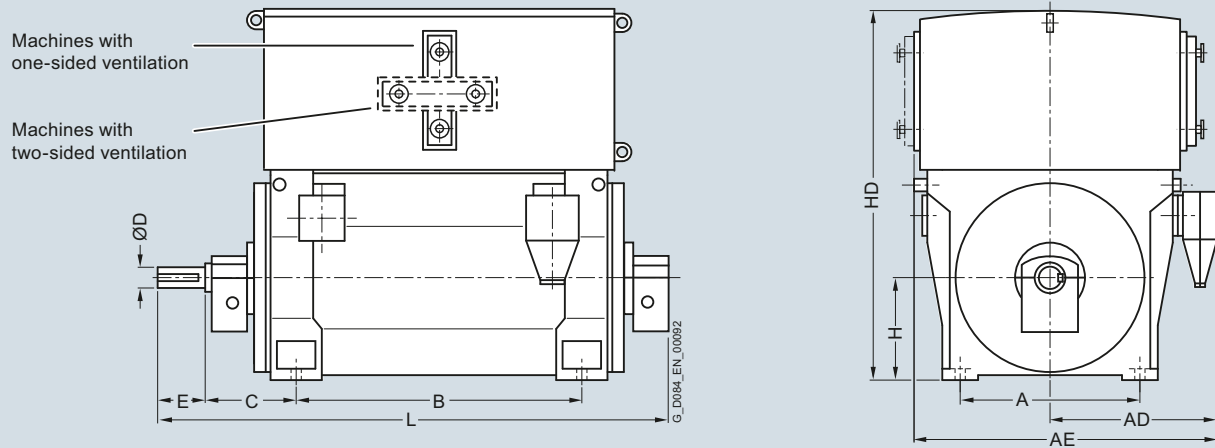

| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|--|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>9 ... 11 kV, IM B3 type of construction, sleeve bearings – 1RN4 series<sup>1)</sup></b> |              |            |          |          |         |         |         |         |         |          |         |
| <b>8-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN6 560-8HJ.0-Z K96   | 8800         | 1060       | 1340     | 2110     | 1400    | 600     | 170     | 240     | 560     | 2200     | 2950    |
| 1RN6 562-8HJ.0-Z K96   | 9250         | 1060       | 1340     | 2110     | 1400    | 600     | 170     | 240     | 560     | 2200     | 2950    |
| 1RN6 564-8HJ.0-Z K96   | 10050        | 1060       | 1340     | 2110     | 1600    | 600     | 170     | 240     | 560     | 2200     | 3150    |
| 1RN6 566-8HJ.0-Z K96   | 10600        | 1060       | 1340     | 2110     | 1600    | 600     | 170     | 240     | 560     | 2200     | 3150    |
| 1RN4 630-8HE.0-Z K96   | 10750        | 1320       | 1320     | 2280     | 1600    | 600     | 220     | 280     | 630     | 2400     | 2970    |
| 1RN4 632-8HE.0-Z K96   | 11350        | 1320       | 1320     | 2280     | 1600    | 600     | 220     | 280     | 630     | 2400     | 2970    |
| 1RN4 634-8HE.0-Z K96   | 12350        | 1320       | 1320     | 2280     | 1800    | 600     | 220     | 280     | 630     | 2400     | 3210    |
| 1RN4 636-8HE.0-Z K96   | 13050        | 1320       | 1320     | 2280     | 1800    | 600     | 220     | 280     | 630     | 2400     | 3210    |
| <b>10-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN6 500-3HE.0-Z K96   | 5700         | 950        | 1220     | 2010     | 1320    | 500     | 160     | 240     | 500     | 1830     | 2620    |
| 1RN6 502-3HE.0-Z K96   | 6050         | 950        | 1220     | 2010     | 1320    | 500     | 160     | 240     | 500     | 1830     | 2620    |
| 1RN6 504-3HE.0-Z K96   | 6550         | 950        | 1220     | 2010     | 1500    | 500     | 170     | 240     | 500     | 1830     | 2830    |
| 1RN6 506-3HE.0-Z K96   | 6900         | 950        | 1220     | 2010     | 1500    | 500     | 170     | 240     | 500     | 1830     | 2830    |
| 1RN6 560-3HE.0-Z K96   | 8050         | 1060       | 1210     | 2060     | 1400    | 530     | 180     | 240     | 560     | 2040     | 2670    |
| 1RN6 562-3HE.0-Z K96   | 8550         | 1060       | 1210     | 2060     | 1400    | 530     | 180     | 240     | 560     | 2040     | 2670    |
| 1RN6 564-3HE.0-Z K96   | 9150         | 1060       | 1210     | 2060     | 1600    | 530     | 190     | 280     | 560     | 2040     | 2940    |
| 1RN6 566-3HE.0-Z K96   | 9550         | 1060       | 1210     | 2060     | 1600    | 530     | 190     | 280     | 560     | 2040     | 2940    |
| 1RN4 630-3HE.0-Z K96   | 10700        | 1320       | 1320     | 2280     | 1600    | 600     | 220     | 280     | 630     | 2400     | 2970    |
| 1RN4 632-3HE.0-Z K96   | 11350        | 1320       | 1320     | 2280     | 1600    | 600     | 220     | 280     | 630     | 2400     | 2970    |
| 1RN4 634-3HE.0-Z K96   | 12300        | 1320       | 1320     | 2280     | 1800    | 600     | 220     | 280     | 630     | 2400     | 3210    |
| 1RN4 636-3HE.0-Z K96   | 13000        | 1320       | 1320     | 2280     | 1800    | 600     | 220     | 280     | 630     | 2400     | 3210    |
| <b>12-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN6 502-5HE.0-Z K96   | 6050         | 950        | 1220     | 2010     | 1320    | 500     | 160     | 240     | 500     | 1830     | 2620    |
| 1RN6 504-5HE.0-Z K96   | 6500         | 950        | 1220     | 2010     | 1500    | 500     | 170     | 240     | 500     | 1830     | 2830    |
| 1RN6 506-5HE.0-Z K96   | 6900         | 950        | 1220     | 2010     | 1500    | 500     | 170     | 240     | 500     | 1830     | 2830    |
| 1RN6 560-5HE.0-Z K96   | 7650         | 1060       | 1210     | 2060     | 1400    | 530     | 180     | 240     | 560     | 2040     | 2670    |
| 1RN6 562-5HE.0-Z K96   | 8200         | 1060       | 1210     | 2060     | 1400    | 530     | 180     | 240     | 560     | 2040     | 2670    |
| 1RN6 564-5HE.0-Z K96   | 9000         | 1060       | 1210     | 2060     | 1600    | 530     | 190     | 280     | 560     | 2040     | 2940    |
| 1RN6 566-5HE.0-Z K96   | 9450         | 1060       | 1210     | 2060     | 1600    | 530     | 190     | 280     | 560     | 2040     | 2940    |
| 1RN4 630-5HE.0-Z K96   | 10750        | 1320       | 1320     | 2280     | 1600    | 600     | 220     | 280     | 630     | 2400     | 2970    |
| 1RN4 632-5HE.0-Z K96   | 11350        | 1320       | 1320     | 2280     | 1600    | 600     | 220     | 280     | 630     | 2400     | 2970    |
| 1RN4 634-5HE.0-Z K96   | 12400        | 1320       | 1320     | 2280     | 1800    | 600     | 220     | 280     | 630     | 2400     | 3210    |
| 1RN4 636-5HE.0-Z K96   | 13100        | 1320       | 1320     | 2280     | 1800    | 600     | 220     | 280     | 630     | 2400     | 3210    |

Note: Higher pole numbers are available on request.


<sup>1)</sup> The dimensions are also valid for the 1SN4/1SN6, 1SL4/1SL6 and 1SQ4/1SQ6 series.

## Motors for line operation

Water-cooled motors

### H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Dimension drawings

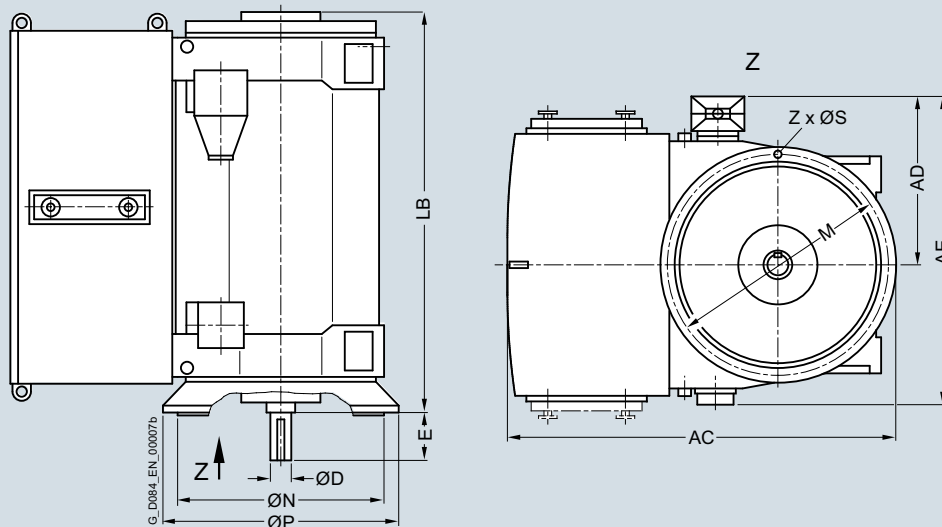


| Motor type   | Weight<br>kg | Dimensions |                  |                  |     |     |      |      |      |      |    |   |
|--|--------------|------------|------------------|------------------|-----|-----|------|------|------|------|----|---|
|  |              | AC         | AD <sup>1)</sup> | AE <sup>1)</sup> | D   | E   | LB   | P    | N    | M    | S  | Z |
| Up to 6.6 kV, IM V1 type of construction, anti-friction bearings – series 1RN4, 1RN6 <sup>2)</sup> |              |            |                  |                  |     |     |      |      |      |      |    |   |
| 4-pole   |              |            |                  |                  |     |     |      |      |      |      |    |   |
| 1RN6 450-4HJ.8   | 4550         | 1840       | 930              | 1620             | 130 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RN6 452-4HJ.8   | 4750         | 1840       | 930              | 1620             | 130 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RN6 454-4HJ.8   | 5150         | 1840       | 930              | 1620             | 130 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RN6 456-4HJ.8   | 5450         | 1840       | 930              | 1620             | 130 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RN6 500-4HE.8   | 5500         | 1960       | 1000             | 1810             | 150 | 200 | 1910 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 502-4HE.8   | 5700         | 1960       | 1000             | 1810             | 150 | 200 | 1910 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 504-4HE.8   | 6400         | 1960       | 1000             | 1810             | 160 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 506-4HE.8   | 6800         | 1960       | 1000             | 1810             | 160 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 560-4HE.8   | 7550         | 2180       | 1210             | 2100             | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN6 562-4HE.8   | 8000         | 2180       | 1210             | 2100             | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN6 564-4HE.8 <sup>3)</sup>   | 8900         | 2180       | 1210             | 2100             | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN6 566-4HE.8 <sup>3)</sup>   | 9350         | 2180       | 1210             | 2100             | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN4 630-4HE.8 <sup>3)</sup>   | 12050        | 2875       | 1330             | 2300             | 200 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 632-4HE.8 <sup>3)</sup>   | 12750        | 2875       | 1330             | 2300             | 200 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 634-4HE.8 <sup>3)</sup>   | 13800        | 2875       | 1330             | 2300             | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 636-4HE.8 <sup>3)</sup>   | 14350        | 2875       | 1330             | 2300             | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 8 |
| 6-pole   |              |            |                  |                  |     |     |      |      |      |      |    |   |
| 1RN6 450-6HJ.8   | 4650         | 1840       | 930              | 1620             | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RN6 452-6HJ.8   | 4950         | 1840       | 930              | 1620             | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RN6 454-6HJ.8   | 5300         | 1840       | 930              | 1620             | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RN6 456-6HJ.8   | 5650         | 1840       | 930              | 1620             | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RN6 500-6HE.8   | 5650         | 1960       | 1000             | 1810             | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 502-6HE.8   | 6050         | 1960       | 1000             | 1810             | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 8 |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> The dimensions are also valid for the 1SN4/1SN6 and 1SL4/1SL6 series.

<sup>3)</sup> Vertical type of construction, only in the 50 Hz version.

## Dimension drawings (continued)

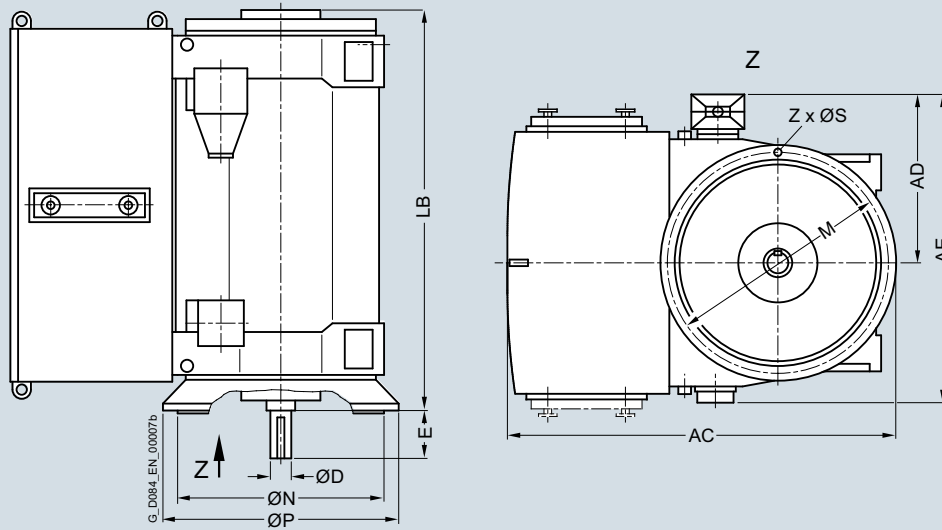

| Motor type   | Weight<br>kg | Dimensions |                  |                  |     |     |      |      |      |      |    |   |
|--|--------------|------------|------------------|------------------|-----|-----|------|------|------|------|----|---|
|  |              | AC         | AD <sup>1)</sup> | AE <sup>1)</sup> | D   | E   | LB   | P    | N    | M    | S  | Z |
| Up to 6.6 kV, IM V1 type of construction, anti-friction bearings – series 1RN4, 1RN6 <sup>2)</sup> |              |            |                  |                  |     |     |      |      |      |      |    |   |
| 6-pole   |              |            |                  |                  |     |     |      |      |      |      |    |   |
| 1RN6 504-6HE.8   | 6550         | 1960       | 1000             | 1810             | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 506-6HE.8   | 6950         | 1960       | 1000             | 1810             | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 560-6HE.8   | 7650         | 2180       | 1210             | 2100             | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN6 562-6HE.8   | 8250         | 2180       | 1210             | 2100             | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN6 564-6HE.8   | 9100         | 2180       | 1210             | 2100             | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN6 566-6HE.8   | 9550         | 2180       | 1210             | 2100             | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN4 630-6HE.8   | 12300        | 2875       | 1330             | 2300             | 220 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 632-6HE.8   | 12850        | 2875       | 1330             | 2300             | 220 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 634-6HE.8   | 13950        | 2875       | 1330             | 2300             | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 636-6HE.8   | 14650        | 2875       | 1330             | 2300             | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 8 |
| 8-pole   |              |            |                  |                  |     |     |      |      |      |      |    |   |
| 1RN6 450-8HJ.8   | 4650         | 1840       | 930              | 1620             | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RN6 452-8HJ.8   | 4950         | 1840       | 930              | 1620             | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RN6 454-8HJ.8   | 5350         | 1840       | 930              | 1620             | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RN6 456-8HJ.8   | 5650         | 1840       | 930              | 1620             | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RN6 500-8HE.8   | 5700         | 1960       | 1000             | 1810             | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 502-8HE.8   | 6050         | 1960       | 1000             | 1810             | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 504-8HE.8   | 6550         | 1960       | 1000             | 1810             | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 506-8HE.8   | 6950         | 1960       | 1000             | 1810             | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 560-8HE.8   | 7650         | 2180       | 1070             | 1960             | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN6 562-8HE.8   | 8150         | 2180       | 1070             | 1960             | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN6 564-8HE.8   | 9000         | 2180       | 1070             | 1960             | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN6 566-8HE.8   | 9450         | 2180       | 1070             | 1960             | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN4 630-8HE.8 <sup>3)</sup>   | 12250        | 2875       | 1330             | 2300             | 220 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 632-8HE.8 <sup>3)</sup>   | 12850        | 2875       | 1330             | 2300             | 220 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 634-8HE.8 <sup>3)</sup>   | 13800        | 2875       | 1330             | 2300             | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 636-8HE.8 <sup>3)</sup>   | 14550        | 2875       | 1330             | 2300             | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 8 |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> The dimensions are also valid for the 1SN4/1SN6 and 1SL4/1SL6 series.


<sup>3)</sup> Vertical type of construction, only in the 50 Hz version.

## Motors for line operation

### Water-cooled motors

#### H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Dimension drawings (continued)

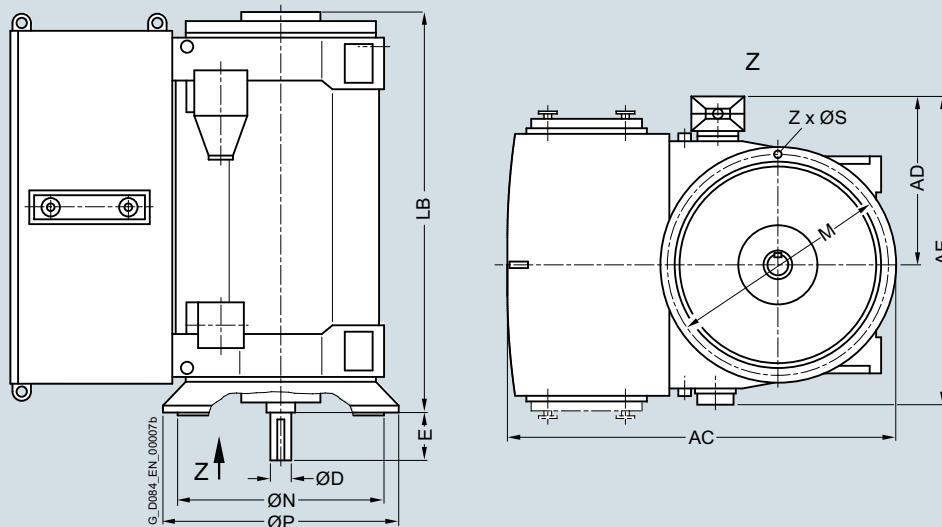


| Motor type   | Weight<br>kg | Dimensions |                  |                  |     |     |      |      |      |      |    |   |
|--|--------------|------------|------------------|------------------|-----|-----|------|------|------|------|----|---|
|  |              | AC         | AD <sup>1)</sup> | AE <sup>1)</sup> | D   | E   | LB   | P    | N    | M    | S  | Z |
| Up to 6.6 kV, IM V1 type of construction, anti-friction bearings – series 1RN4, 1RN6 <sup>2)</sup> |              |            |                  |                  |     |     |      |      |      |      |    |   |
| 10-pole  |              |            |                  |                  |     |     |      |      |      |      |    |   |
| 1RN6 450-3HJ.8   | 4650         | 1840       | 930              | 1620             | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RN6 452-3HJ.8   | 4950         | 1840       | 930              | 1620             | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RN6 454-3HJ.8   | 5350         | 1840       | 930              | 1620             | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RN6 456-3HJ.8   | 5650         | 1840       | 930              | 1620             | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RN6 500-3HE.8   | 5650         | 1960       | 1000             | 1810             | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 502-3HE.8   | 6000         | 1960       | 1000             | 1810             | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 504-3HE.8   | 6550         | 1960       | 1000             | 1810             | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 506-3HE.8   | 6900         | 1960       | 1000             | 1810             | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 560-3HE.8   | 7550         | 2180       | 1070             | 1960             | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN6 562-3HE.8   | 8150         | 2180       | 1070             | 1960             | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN6 564-3HE.8   | 8950         | 2180       | 1070             | 1960             | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN6 566-3HE.8   | 9400         | 2180       | 1070             | 1960             | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN4 630-3HE.8 <sup>3)</sup>   | 12150        | 2875       | 1180             | 2150             | 220 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 632-3HE.8 <sup>3)</sup>   | 12850        | 2875       | 1330             | 2300             | 220 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 634-3HE.8 <sup>3)</sup>   | 13850        | 2875       | 1330             | 2300             | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 636-3HE.8 <sup>3)</sup>   | 14550        | 2875       | 1330             | 2300             | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 8 |

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> The dimensions are also valid for the 1SN4/1SN6 and 1SL4/1SL6 series.

<sup>3)</sup> Vertical type of construction, only in the 50 Hz version.

## Dimension drawings (continued)

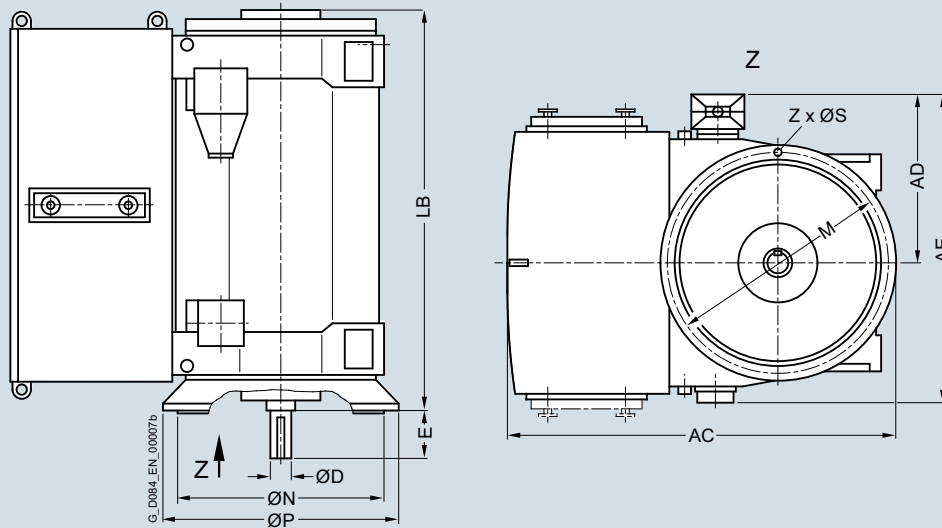

| Motor type   | Weight<br>kg | Dimensions |                  |                  |     |     |      |      |      |      |    |   |
|--|--------------|------------|------------------|------------------|-----|-----|------|------|------|------|----|---|
|  |              | AC         | AD <sup>1)</sup> | AE <sup>1)</sup> | D   | E   | LB   | P    | N    | M    | S  | Z |
| Up to 6.6 kV, IM V1 type of construction, anti-friction bearings – series 1RN4, 1RN6 <sup>2)</sup> |              |            |                  |                  |     |     |      |      |      |      |    |   |
| 12-pole  |              |            |                  |                  |     |     |      |      |      |      |    |   |
| 1RN6 450-5HJ.8   | 4650         | 1840       | 930              | 1620             | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RN6 452-5HJ.8   | 4950         | 1840       | 930              | 1620             | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RN6 454-5HJ.8   | 5350         | 1840       | 930              | 1620             | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RN6 456-5HJ.8   | 5650         | 1840       | 930              | 1620             | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RN6 500-5HE.8   | 5650         | 1960       | 1000             | 1810             | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 502-5HE.8   | 6000         | 1960       | 1000             | 1810             | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 504-5HE.8   | 6500         | 1960       | 1000             | 1810             | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 506-5HE.8   | 6950         | 1960       | 1000             | 1810             | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 560-5HE.8   | 7600         | 2180       | 1070             | 1960             | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN6 562-5HE.8   | 8150         | 2180       | 1070             | 1960             | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN6 564-5HE.8   | 8950         | 2180       | 1070             | 1960             | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN6 566-5HE.8   | 9400         | 2180       | 1070             | 1960             | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN4 630-5HE.8 <sup>3)</sup>   | 12050        | 2875       | 1180             | 2150             | 220 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 632-5HE.8 <sup>3)</sup>   | 12650        | 2875       | 1180             | 2150             | 220 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 634-5HE.8 <sup>3)</sup>   | 13700        | 2875       | 1180             | 2150             | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 636-5HE.8 <sup>3)</sup>   | 14500        | 2875       | 1330             | 2300             | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 8 |

Note:

Higher pole numbers are available on request.

<sup>1)</sup> The value applies for 6 kV. When a lower voltage is selected, the rated current increases. For rated currents above 315 A, the dimension increases by 140 mm.

<sup>2)</sup> The dimensions are also valid for the 1SN4/1SN6 and 1SL4/1SL6 series.


<sup>3)</sup> Vertical type of construction, only in the 50 Hz version.

## Motors for line operation

### Water-cooled motors

#### H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Dimension drawings

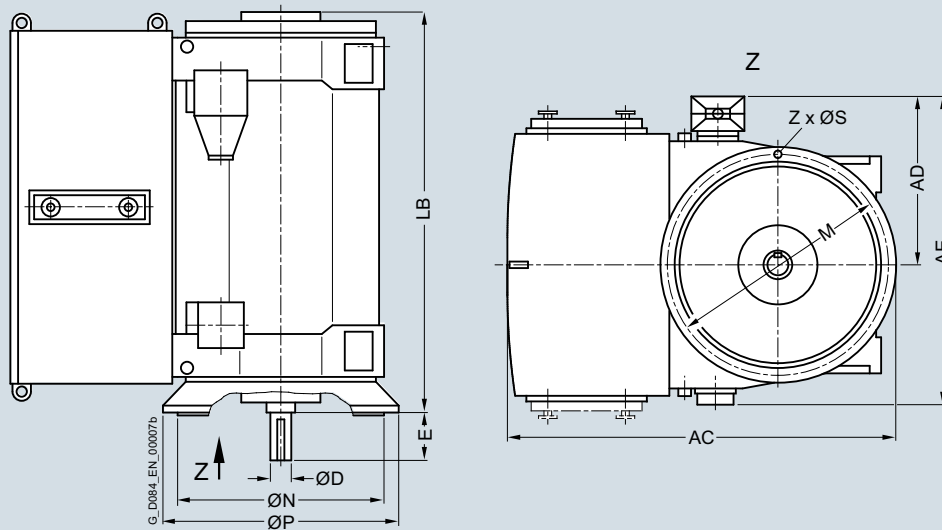


| Motor type  | Weight<br>kg | Dimensions |      |      |     |     |      |      |      |      |    |          |
|---|--------------|------------|------|------|-----|-----|------|------|------|------|----|----------|
|   |              | AC         | AD   | AE   | D   | E   | LB   | P    | N    | M    | S  | Z        |
|   |              | mm         | mm   | mm   | mm  | mm  | mm   | mm   | mm   | mm   | mm | Quantity |
| <b>9 ... 11 kV, IM V1 type of construction, anti-friction bearings – series 1RN4, 1RN6<sup>1)</sup></b> |              |            |      |      |     |     |      |      |      |      |    |          |
| <b>4-pole</b>   |              |            |      |      |     |     |      |      |      |      |    |          |
| 1RN6 450-4HJ.8  | 4550         | 1840       | 1070 | 1840 | 130 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8        |
| 1RN6 452-4HJ.8  | 4750         | 1840       | 1070 | 1840 | 130 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8        |
| 1RN6 454-4HJ.8  | 5150         | 1840       | 1070 | 1840 | 130 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8        |
| 1RN6 456-4HJ.8  | 5450         | 1840       | 1070 | 1840 | 130 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8        |
| 1RN6 500-4HE.8  | 5550         | 1960       | 1140 | 1950 | 150 | 200 | 1910 | 1250 | 1120 | 1180 | 26 | 8        |
| 1RN6 502-4HE.8  | 5700         | 1960       | 1140 | 1950 | 150 | 200 | 1910 | 1250 | 1120 | 1180 | 26 | 8        |
| 1RN6 504-4HE.8  | 6350         | 1960       | 1140 | 1950 | 160 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8        |
| 1RN6 506-4HE.8  | 6700         | 1960       | 1140 | 1950 | 160 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8        |
| 1RN6 560-4HE.8  | 7400         | 2180       | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 8        |
| 1RN6 562-4HE.8  | 7900         | 2180       | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 8        |
| 1RN6 564-4HE.8  | 8750         | 2180       | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 8        |
| 1RN6 566-4HE.8  | 9200         | 2180       | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 8        |
| 1RN4 630-4HE.8 <sup>2)</sup>  | 11950        | 2875       | 1320 | 2290 | 200 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 8        |
| 1RN4 632-4HE.8 <sup>2)</sup>  | 12600        | 2875       | 1330 | 2300 | 200 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 8        |
| 1RN4 634-4HE.8 <sup>2)</sup>  | 13650        | 2875       | 1330 | 2300 | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 8        |
| 1RN4 636-4HE.8 <sup>2)</sup>  | 14250        | 2875       | 1330 | 2300 | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 8        |
| <b>6-pole</b>   |              |            |      |      |     |     |      |      |      |      |    |          |
| 1RN6 450-6HJ.8  | 4650         | 1840       | 1070 | 1840 | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8        |
| 1RN6 452-6HJ.8  | 4950         | 1840       | 1070 | 1840 | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8        |
| 1RN6 454-6HJ.8  | 5300         | 1840       | 1070 | 1840 | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8        |
| 1RN6 456-6HJ.8  | 5650         | 1840       | 1070 | 1840 | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8        |
| 1RN6 500-6HE.8  | 5650         | 1960       | 1140 | 1950 | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 8        |
| 1RN6 502-6HE.8  | 6050         | 1960       | 1140 | 1950 | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 8        |
| 1RN6 504-6HE.8  | 6550         | 1960       | 1140 | 1950 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8        |
| 1RN6 506-6HE.8  | 6950         | 1960       | 1140 | 1950 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8        |
| 1RN6 560-6HE.8  | 7650         | 2180       | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 8        |
| 1RN6 562-6HE.8  | 8150         | 2180       | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 8        |
| 1RN6 564-6HE.8  | 8950         | 2180       | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 8        |
| 1RN6 566-6HE.8  | 9400         | 2180       | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 8        |

<sup>1)</sup> The dimensions are also valid for the 1SN4/1SN6 and 1SL4/1SL6 series.

<sup>2)</sup> Vertical type of construction, only in the 50 Hz version.



## Dimension drawings (continued)

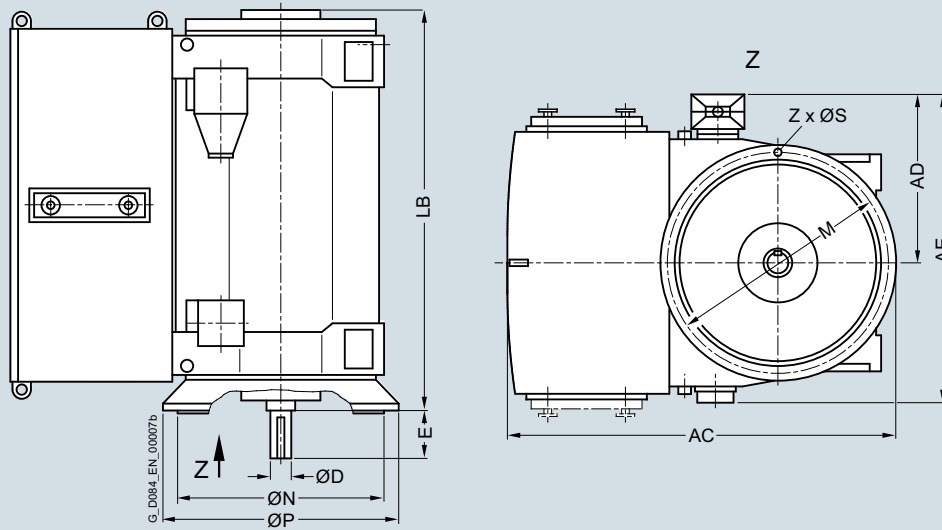

| Motor type  | Weight<br>kg | Dimensions |      |      |     |     |      |      |      |      |    |   |
|---|--------------|------------|------|------|-----|-----|------|------|------|------|----|---|
|   |              | AC         | AD   | AE   | D   | E   | LB   | P    | N    | M    | S  | Z |
| 9 ... 11 kV, IM V1 type of construction, anti-friction bearings – series 1RN4, 1RN6 <sup>1)</sup> |              |            |      |      |     |     |      |      |      |      |    |   |
| 6-pole  |              |            |      |      |     |     |      |      |      |      |    |   |
| 1RN4 630-6HE.8  | 12300        | 2875       | 1320 | 2290 | 220 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 632-6HE.8  | 12850        | 2875       | 1320 | 2290 | 220 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 634-6HE.8  | 13900        | 2875       | 1320 | 2290 | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 636-6HE.8  | 14650        | 2875       | 1330 | 2300 | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 8 |
| 8-pole  |              |            |      |      |     |     |      |      |      |      |    |   |
| 1RN6 450-8HJ.8  | 4650         | 1840       | 1070 | 1840 | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RN6 452-8HJ.8  | 4950         | 1840       | 1070 | 1840 | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RN6 454-8HJ.8  | 5350         | 1840       | 1070 | 1840 | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RN6 456-8HJ.8  | 5650         | 1840       | 1070 | 1840 | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8 |
| 1RN6 500-8HE.8  | 5700         | 1960       | 1140 | 1950 | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 502-8HE.8  | 6050         | 1960       | 1140 | 1950 | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 504-8HE.8  | 6550         | 1960       | 1140 | 1950 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 506-8HE.8  | 6950         | 1960       | 1140 | 1950 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 560-8HE.8  | 7600         | 2180       | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN6 562-8HE.8  | 8150         | 2180       | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN6 564-8HE.8  | 9000         | 2180       | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN6 566-8HE.8  | 9400         | 2180       | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN4 630-8HE.8  | 12100        | 2875       | 1320 | 2290 | 220 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 632-8HE.8  | 12700        | 2875       | 1320 | 2290 | 220 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 634-8HE.8  | 13700        | 2875       | 1320 | 2290 | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 636-8HE.8  | 14450        | 2875       | 1320 | 2290 | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 8 |


<sup>1)</sup> The dimensions are also valid for the 1SN4/1SN6 and 1SL4/1SL6 series.

## Motors for line operation

### Water-cooled motors

#### H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Dimension drawings (continued)

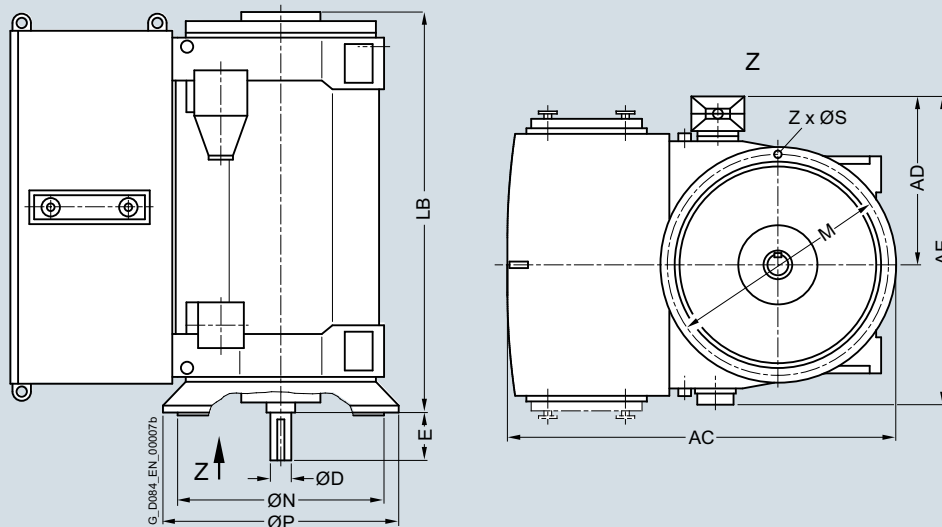


| Motor type  | Weight<br>kg | Dimensions |      |      |     |     |      |      |      |      |    |   |
|---|--------------|------------|------|------|-----|-----|------|------|------|------|----|---|
|   |              | AC         | AD   | AE   | D   | E   | LB   | P    | N    | M    | S  | Z |
| 9 ... 11 kV, IM V1 type of construction, anti-friction bearings – 1RN4 series <sup>1)</sup> |              |            |      |      |     |     |      |      |      |      |    |   |
| 10-pole   |              |            |      |      |     |     |      |      |      |      |    |   |
| 1RN6 500-3HE.8  | 5650         | 1960       | 1140 | 1950 | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 502-3HE.8  | 6000         | 1960       | 1140 | 1950 | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 504-3HE.8  | 6500         | 1960       | 1140 | 1950 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 506-3HE.8  | 6900         | 1960       | 1140 | 1950 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 560-3HE.8  | 7900         | 2180       | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN6 562-3HE.8  | 8550         | 2180       | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN6 564-3HE.8  | 9400         | 2180       | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN6 566-3HE.8  | 10000        | 2180       | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN4 630-3HE.8  | 12100        | 2875       | 1320 | 2290 | 220 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 632-3HE.8  | 12700        | 2875       | 1320 | 2290 | 220 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 634-3HE.8  | 13650        | 2875       | 1320 | 2290 | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 636-3HE.8  | 14400        | 2875       | 1320 | 2290 | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 8 |
| 12-pole   |              |            |      |      |     |     |      |      |      |      |    |   |
| 1RN6 502-5HE.8  | 6050         | 1960       | 1140 | 1950 | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 504-5HE.8  | 6450         | 1960       | 1140 | 1950 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 506-5HE.8  | 6900         | 1960       | 1140 | 1950 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8 |
| 1RN6 560-5HE.8  | 7550         | 2180       | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN6 562-5HE.8  | 8100         | 2180       | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN6 564-5HE.8  | 8900         | 2180       | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN6 566-5HE.8  | 9350         | 2180       | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 8 |
| 1RN4 630-5HE.8  | 12100        | 2875       | 1320 | 2290 | 220 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 632-5HE.8  | 12750        | 2875       | 1320 | 2290 | 220 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 634-5HE.8  | 13750        | 2875       | 1320 | 2290 | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 8 |
| 1RN4 636-5HE.8  | 14500        | 2875       | 1320 | 2290 | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 8 |

#### Note:

Higher pole numbers are available on request.

<sup>1)</sup> The dimensions are also valid for the 1SN4/1SN6 and 1SL4/1SL6 series.

## Dimension drawings

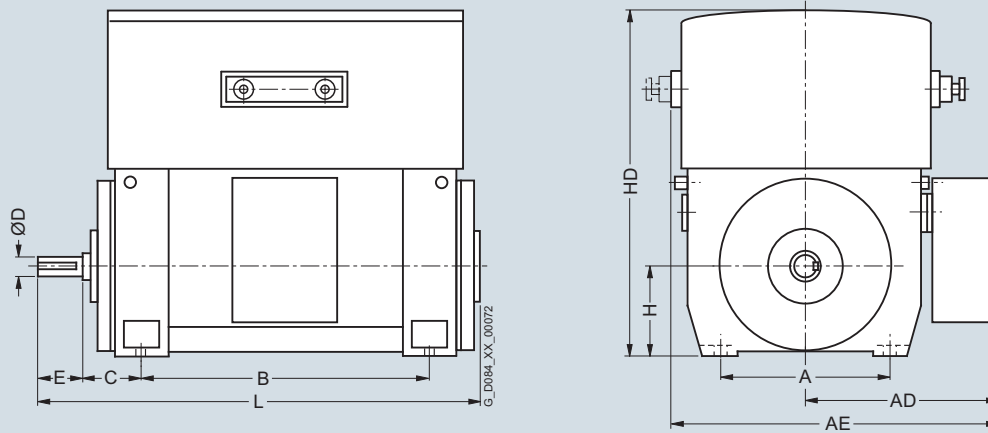

| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|--|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, NEMA version, IM B3 type of construction, anti-friction bearings, X ventilation – 1RN6 series</b> |              |            |          |          |         |         |         |         |         |          |         |
| 4-pole   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN6 710-4HJ.0 <sup>2)</sup>   | 17700        | 1500       | 1500     | 2560     | 2000    | 355     | 220     | 280     | 710     | 2510     | 2980    |
| 1RN6 712-4HJ.0 <sup>2)</sup>   | 18500        | 1500       | 1500     | 2560     | 2000    | 355     | 220     | 280     | 710     | 2510     | 2980    |
| 1RN6 714-4HJ.0 <sup>2)</sup>   | 19900        | 1500       | 1500     | 2560     | 2240    | 355     | 220     | 280     | 710     | 2510     | 3220    |
| 1RN6 716-4HJ.0 <sup>2)</sup>   | 20900        | 1500       | 1500     | 2560     | 2240    | 355     | 220     | 280     | 710     | 2510     | 3220    |
| <b>9 ... 11 kV, NEMA version, IM B3 type of construction, anti-friction bearings, X ventilation – 1RN6 series</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 4-pole   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN6 710-4HJ.0 <sup>2)</sup>   | 17400        | 1500       | 1500     | 2560     | 2000    | 355     | 220     | 280     | 710     | 2510     | 2980    |
| 1RN6 712-4HJ.0 <sup>2)</sup>   | 18200        | 1500       | 1500     | 2560     | 2000    | 355     | 220     | 280     | 710     | 2510     | 2980    |
| 1RN6 714-4HJ.0 <sup>2)</sup>   | 19700        | 1500       | 1500     | 2560     | 2240    | 355     | 220     | 280     | 710     | 2510     | 3220    |
| 1RN6 716-4HJ.0 <sup>2)</sup>   | 20600        | 1500       | 1500     | 2560     | 2240    | 355     | 220     | 280     | 710     | 2510     | 3220    |


1) Anti-friction bearings only for 50 Hz version.

## Motors for line operation

Water-cooled motors

H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

### Dimension drawings

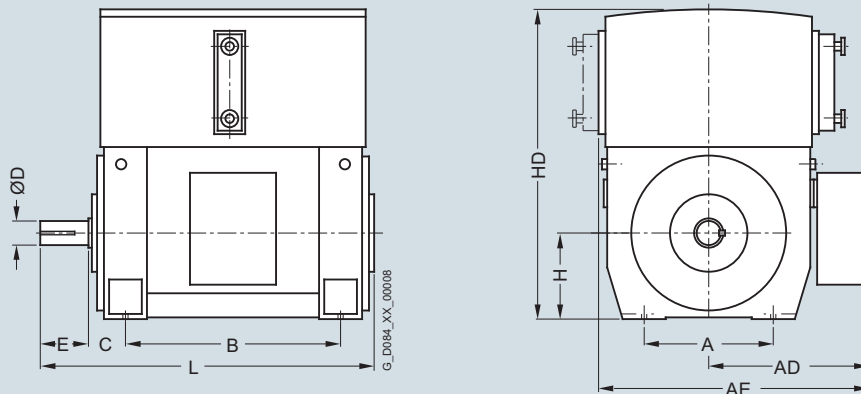


| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|--|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, NEMA version, IM B3 type of construction, anti-friction bearings, Z ventilation – 1RN6 series</b> |              |            |          |          |         |         |         |         |         |          |         |
| <b>6-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN6 710-6HJ.0   | 16700        | 1500       | 1500     | 2560     | 2000    | 355     | 240     | 330     | 710     | 2600     | 3030    |
| 1RN6 712-6HJ.0   | 17400        | 1500       | 1500     | 2560     | 2000    | 355     | 240     | 330     | 710     | 2600     | 3030    |
| 1RN6 714-6HJ.0   | 19100        | 1500       | 1500     | 2560     | 2240    | 355     | 240     | 330     | 710     | 2600     | 3270    |
| 1RN6 716-6HJ.0   | 20200        | 1500       | 1500     | 2560     | 2240    | 355     | 240     | 330     | 710     | 2600     | 3270    |
| <b>8-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN6 710-8HJ.0   | 16500        | 1500       | 1500     | 2560     | 2000    | 355     | 240     | 330     | 710     | 2600     | 3030    |
| 1RN6 712-8HJ.0   | 17300        | 1500       | 1500     | 2560     | 2000    | 355     | 240     | 330     | 710     | 2600     | 3030    |
| 1RN6 714-8HJ.0   | 18900        | 1500       | 1500     | 2560     | 2240    | 355     | 240     | 330     | 710     | 2600     | 3270    |
| 1RN6 716-8HJ.0   | 20000        | 1500       | 1500     | 2560     | 2240    | 355     | 240     | 330     | 710     | 2600     | 3270    |
| <b>10-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN6 710-3HJ.0   | 16300        | 1500       | 1500     | 2560     | 2000    | 355     | 240     | 330     | 710     | 2600     | 3030    |
| 1RN6 712-3HJ.0   | 17100        | 1500       | 1500     | 2560     | 2000    | 355     | 240     | 330     | 710     | 2600     | 3030    |
| 1RN6 714-3HJ.0   | 18700        | 1500       | 1500     | 2560     | 2240    | 355     | 240     | 330     | 710     | 2600     | 3270    |
| 1RN6 716-3HJ.0   | 19900        | 1500       | 1500     | 2560     | 2240    | 355     | 240     | 330     | 710     | 2600     | 3270    |

**Note:**

Higher pole numbers are available on request.

## Dimension drawings

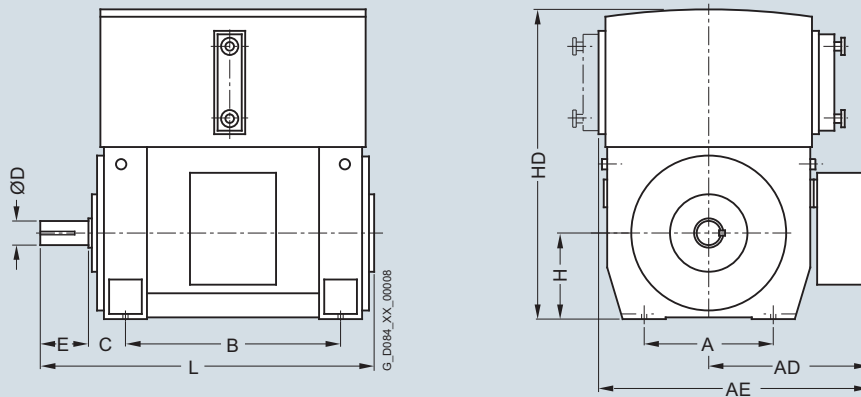

| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|---|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|   |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>9 ... 11 kV, NEMA version, IM B3 type of construction, anti-friction bearings, Z ventilation – 1RN6 series</b> |              |            |          |          |         |         |         |         |         |          |         |
| 6-pole  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN6 710-6HJ.0  | 16500        | 1500       | 1500     | 2560     | 2000    | 355     | 240     | 330     | 710     | 2600     | 3030    |
| 1RN6 712-6HJ.0  | 17200        | 1500       | 1500     | 2560     | 2000    | 355     | 240     | 330     | 710     | 2600     | 3030    |
| 1RN6 714-6HJ.0  | 18900        | 1500       | 1500     | 2560     | 2240    | 355     | 240     | 330     | 710     | 2600     | 3270    |
| 1RN6 716-6HJ.0  | 20000        | 1500       | 1500     | 2560     | 2240    | 355     | 240     | 330     | 710     | 2600     | 3270    |
| 8-pole  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN6 710-8HJ.0  | 16400        | 1500       | 1500     | 2560     | 2000    | 355     | 240     | 330     | 710     | 2600     | 3030    |
| 1RN6 712-8HJ.0  | 17100        | 1500       | 1500     | 2560     | 2000    | 355     | 240     | 330     | 710     | 2600     | 3030    |
| 1RN6 714-8HJ.0  | 18800        | 1500       | 1500     | 2560     | 2240    | 355     | 240     | 330     | 710     | 2600     | 3270    |
| 1RN6 716-8HJ.0  | 19800        | 1500       | 1500     | 2560     | 2240    | 355     | 240     | 330     | 710     | 2600     | 3270    |
| 10-pole   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN6 710-3HJ.0  | 16200        | 1500       | 1500     | 2560     | 2000    | 355     | 240     | 330     | 710     | 2600     | 3030    |
| 1RN6 712-3HJ.0  | 17000        | 1500       | 1500     | 2560     | 2000    | 355     | 240     | 330     | 710     | 2600     | 3030    |
| 1RN6 714-3HJ.0  | 18700        | 1500       | 1500     | 2560     | 2240    | 355     | 240     | 330     | 710     | 2600     | 3270    |
| 1RN6 716-3HJ.0  | 19800        | 1500       | 1500     | 2560     | 2240    | 355     | 240     | 330     | 710     | 2600     | 3270    |

Note:


Higher pole numbers are available on request.

## Motors for line operation

### Water-cooled motors

#### H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Dimension drawings

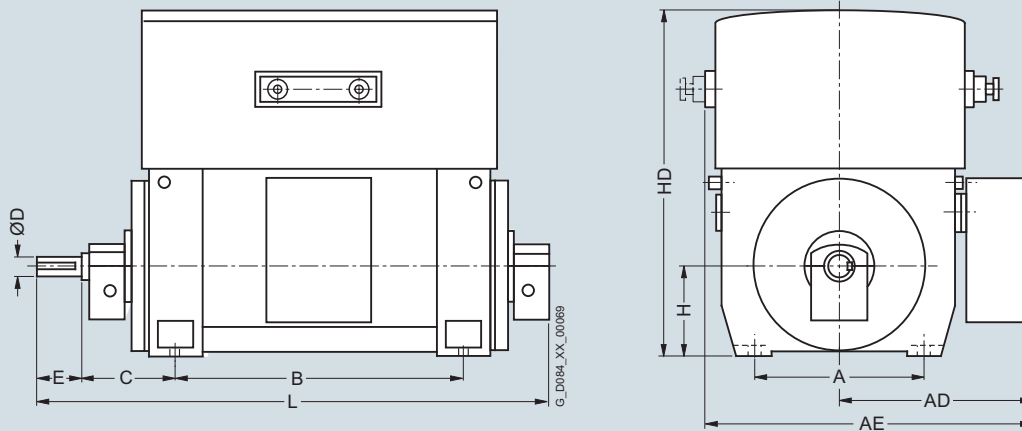

| Motor type | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|------------|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|            |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |

#### Up to 6.6 kV, NEMA version, IM B3 type of construction, sleeve bearings, X ventilation – 1RN6 series

| 2-pole                             |       |      |      |      |      |     |     |     |     |      |      |
|------------------------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RN6 710-2HJ.0                     | 15900 | 1500 | 1500 | 2560 | 2000 | 600 | 180 | 240 | 710 | 2510 | 3370 |
| 1RN6 712-2HJ.0                     | 16800 | 1500 | 1500 | 2560 | 2000 | 600 | 180 | 240 | 710 | 2510 | 3370 |
| 1RN6 714-2HJ.0                     | 18000 | 1500 | 1500 | 2560 | 2240 | 600 | 180 | 240 | 710 | 2510 | 3610 |
| 1RN6 716-2HJ.0                     | 19000 | 1500 | 1500 | 2560 | 2240 | 600 | 180 | 240 | 710 | 2510 | 3610 |
| 4-pole                             |       |      |      |      |      |     |     |     |     |      |      |
| 1RN6 710-4HJ.0-Z K96 <sup>1)</sup> | 17700 | 1500 | 1500 | 2560 | 2000 | 530 | 220 | 280 | 710 | 2510 | 3260 |
| 1RN6 712-4HJ.0-Z K96 <sup>1)</sup> | 18500 | 1500 | 1500 | 2560 | 2000 | 530 | 220 | 280 | 710 | 2510 | 3260 |
| 1RN6 714-4HJ.0-Z K96 <sup>1)</sup> | 19900 | 1500 | 1500 | 2560 | 2240 | 530 | 220 | 280 | 710 | 2510 | 3500 |
| 1RN6 716-4HJ.0-Z K96 <sup>1)</sup> | 20900 | 1500 | 1500 | 2560 | 2240 | 530 | 220 | 280 | 710 | 2510 | 3500 |


| Motor type | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|------------|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|            |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |

#### 9 ... 11 kV, NEMA version, IM B3 type of construction, sleeve bearings, X ventilation – 1RN6 series

| 2-pole                             |       |      |      |      |      |     |     |     |     |      |      |
|------------------------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RN6 710-2HJ.0                     | 15800 | 1500 | 1500 | 2560 | 2000 | 600 | 180 | 240 | 710 | 2510 | 3370 |
| 1RN6 712-2HJ.0                     | 16600 | 1500 | 1500 | 2560 | 2000 | 600 | 180 | 240 | 710 | 2510 | 3370 |
| 1RN6 714-2HJ.0                     | 17800 | 1500 | 1500 | 2560 | 2240 | 600 | 180 | 240 | 710 | 2510 | 3610 |
| 1RN6 716-2HJ.0                     | 18800 | 1500 | 1500 | 2560 | 2240 | 600 | 180 | 240 | 710 | 2510 | 3610 |
| 4-pole                             |       |      |      |      |      |     |     |     |     |      |      |
| 1RN6 710-4HJ.0-Z K96 <sup>1)</sup> | 17400 | 1500 | 1500 | 2560 | 2000 | 530 | 220 | 280 | 710 | 2510 | 3260 |
| 1RN6 712-4HJ.0-Z K96 <sup>1)</sup> | 18200 | 1500 | 1500 | 2560 | 2000 | 530 | 220 | 280 | 710 | 2510 | 3260 |
| 1RN6 714-4HJ.0-Z K96 <sup>1)</sup> | 19700 | 1500 | 1500 | 2560 | 2240 | 530 | 220 | 280 | 710 | 2510 | 3500 |
| 1RN6 716-4HJ.0-Z K96 <sup>1)</sup> | 20600 | 1500 | 1500 | 2560 | 2240 | 530 | 220 | 280 | 710 | 2510 | 3500 |

<sup>1)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.

## Dimension drawings

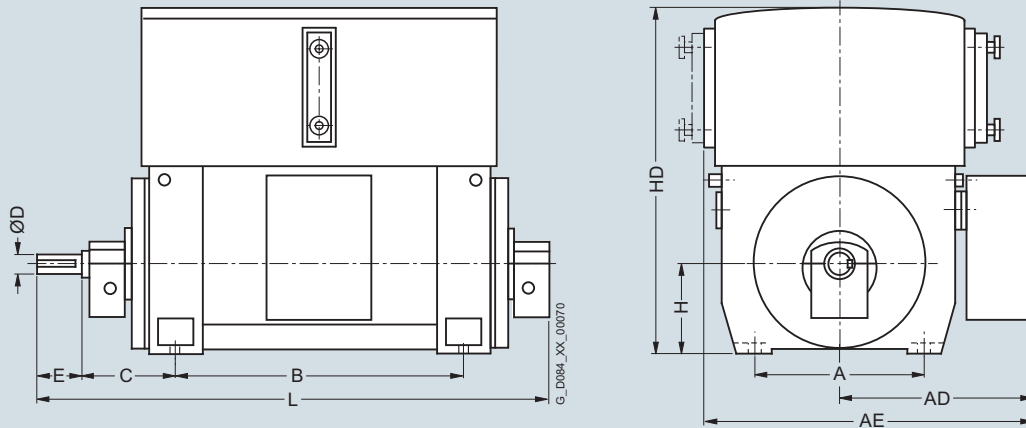

| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|---|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|   |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, NEMA version, IM B3 type of construction, sleeve bearings, Z ventilation – 1RN6 series</b> |              |            |          |          |         |         |         |         |         |          |         |
| <b>6-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN6 710-6HJ.0-Z K96  | 17700        | 1500       | 1500     | 2560     | 2000    | 670     | 240     | 330     | 710     | 2600     | 3600    |
| 1RN6 712-6HJ.0-Z K96  | 18400        | 1500       | 1500     | 2560     | 2000    | 670     | 240     | 330     | 710     | 2600     | 3600    |
| 1RN6 714-6HJ.0-Z K96  | 20200        | 1500       | 1500     | 2560     | 2240    | 670     | 240     | 330     | 710     | 2600     | 3840    |
| 1RN6 716-6HJ.0-Z K96  | 21300        | 1500       | 1500     | 2560     | 2240    | 670     | 240     | 330     | 710     | 2600     | 3840    |
| <b>8-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN6 710-8HJ.0-Z K96  | 17500        | 1500       | 1500     | 2560     | 2000    | 670     | 240     | 330     | 710     | 2600     | 3600    |
| 1RN6 712-8HJ.0-Z K96  | 18300        | 1500       | 1500     | 2560     | 2000    | 670     | 240     | 330     | 710     | 2600     | 3600    |
| 1RN6 714-8HJ.0-Z K96  | 20000        | 1500       | 1500     | 2560     | 2240    | 670     | 240     | 330     | 710     | 2600     | 3840    |
| 1RN6 716-8HJ.0-Z K96  | 21100        | 1500       | 1500     | 2560     | 2240    | 670     | 240     | 330     | 710     | 2600     | 3840    |
| <b>10-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN6 710-3HJ.0-Z K96  | 17300        | 1500       | 1500     | 2560     | 2000    | 670     | 240     | 330     | 710     | 2600     | 3600    |
| 1RN6 712-3HJ.0-Z K96  | 18200        | 1500       | 1500     | 2560     | 2000    | 670     | 240     | 330     | 710     | 2600     | 3600    |
| 1RN6 714-3HJ.0-Z K96  | 19800        | 1500       | 1500     | 2560     | 2240    | 670     | 240     | 330     | 710     | 2600     | 3840    |
| 1RN6 716-3HJ.0-Z K96  | 21000        | 1500       | 1500     | 2560     | 2240    | 670     | 240     | 330     | 710     | 2600     | 3840    |

Note:


Higher pole numbers are available on request.

## Motors for line operation

### Water-cooled motors

#### H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Dimension drawings

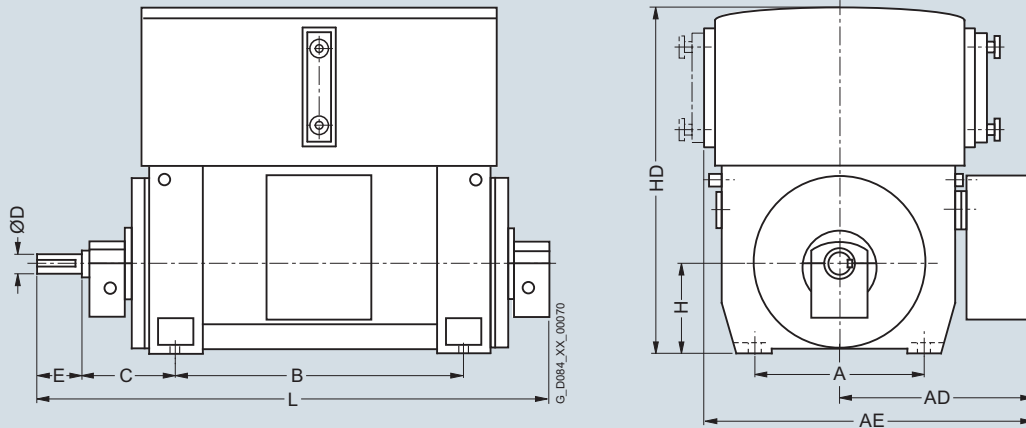


| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|--|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>9 ... 11 kV, NEMA version, IM B3 type of construction, sleeve bearings, Z ventilation – 1RN6 series</b> |              |            |          |          |         |         |         |         |         |          |         |
| <b>6-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN6 710-6HJ.0-Z K96   | 17500        | 1500       | 1500     | 2560     | 2000    | 670     | 240     | 330     | 710     | 2600     | 3600    |
| 1RN6 712-6HJ.0-Z K96   | 18300        | 1500       | 1500     | 2560     | 2000    | 670     | 240     | 330     | 710     | 2600     | 3600    |
| 1RN6 714-6HJ.0-Z K96   | 20000        | 1500       | 1500     | 2560     | 2240    | 670     | 240     | 330     | 710     | 2600     | 3840    |
| 1RN6 716-6HJ.0-Z K96   | 21100        | 1500       | 1500     | 2560     | 2240    | 670     | 240     | 330     | 710     | 2600     | 3840    |
| <b>8-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN6 710-8HJ.0-Z K96   | 17400        | 1500       | 1500     | 2560     | 2000    | 670     | 240     | 330     | 710     | 2600     | 3600    |
| 1RN6 712-8HJ.0-Z K96   | 18200        | 1500       | 1500     | 2560     | 2000    | 670     | 240     | 330     | 710     | 2600     | 3600    |
| 1RN6 714-8HJ.0-Z K96   | 19800        | 1500       | 1500     | 2560     | 2240    | 670     | 240     | 330     | 710     | 2600     | 3840    |
| 1RN6 716-8HJ.0-Z K96   | 20900        | 1500       | 1500     | 2560     | 2240    | 670     | 240     | 330     | 710     | 2600     | 3840    |
| <b>10-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN6 710-3HJ.0-Z K96   | 17300        | 1500       | 1500     | 2560     | 2000    | 670     | 240     | 330     | 710     | 2600     | 3600    |
| 1RN6 712-3HJ.0-Z K96   | 18100        | 1500       | 1500     | 2560     | 2000    | 670     | 240     | 330     | 710     | 2600     | 3600    |
| 1RN6 714-3HJ.0-Z K96   | 19700        | 1500       | 1500     | 2560     | 2240    | 670     | 240     | 330     | 710     | 2600     | 3840    |
| 1RN6 716-3HJ.0-Z K96   | 20800        | 1500       | 1500     | 2560     | 2240    | 670     | 240     | 330     | 710     | 2600     | 3840    |

#### Note:

Higher pole numbers are available on request.



## Dimension drawings

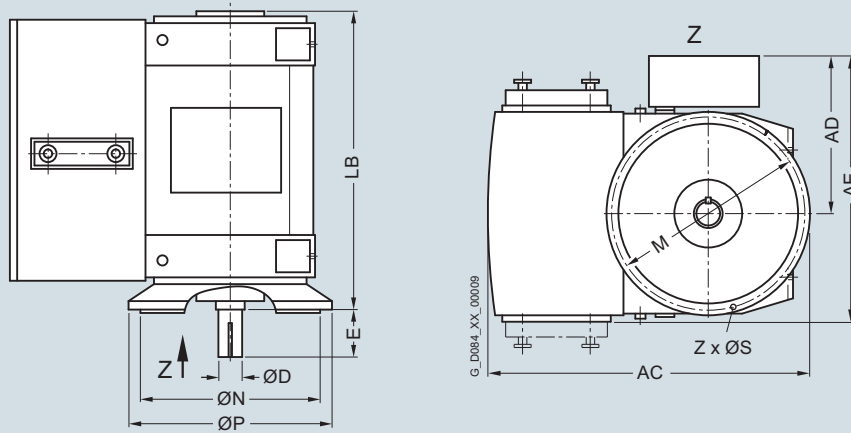

| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |          |         |         |         |         |               |
|---|--------------|------------|----------|----------|---------|---------|----------|---------|---------|---------|---------|---------------|
|   |              | AC<br>mm   | AD<br>mm | AE<br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |
| <b>Up to 6.6 kV, NEMA version, IM V1 type of construction, anti-friction bearings – 1RN6 series</b> |              |            |          |          |         |         |          |         |         |         |         |               |
| <b>6-pole</b>   |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RN6 710-6HJ.8  | 17800        | 2890       | 1500     | 2560     | 240     | 330     | 2870     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RN6 712-6HJ.8  | 18700        | 2890       | 1500     | 2560     | 240     | 330     | 2870     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RN6 714-6HJ.8  | 20400        | 2890       | 1500     | 2560     | 240     | 330     | 3110     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RN6 716-6HJ.8  | 21400        | 2890       | 1500     | 2560     | 240     | 330     | 3110     | 2000    | 1800    | 1900    | 33      | 24            |
| <b>8-pole</b>   |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RN6 710-8HJ.8  | 17700        | 2890       | 1500     | 2560     | 240     | 330     | 2870     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RN6 712-8HJ.8  | 18500        | 2890       | 1500     | 2560     | 240     | 330     | 2870     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RN6 714-8HJ.8  | 20100        | 2890       | 1500     | 2560     | 240     | 330     | 3110     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RN6 716-8HJ.8  | 21200        | 2890       | 1500     | 2560     | 240     | 330     | 3110     | 2000    | 1800    | 1900    | 33      | 24            |
| <b>10-pole</b>  |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RN6 710-3HJ.8  | 17500        | 2890       | 1500     | 2560     | 240     | 330     | 2870     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RN6 712-3HJ.8  | 18300        | 2890       | 1500     | 2560     | 240     | 330     | 2870     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RN6 714-3HJ.8  | 20000        | 2890       | 1500     | 2560     | 240     | 330     | 3110     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RN6 716-3HJ.8  | 21100        | 2890       | 1500     | 2560     | 240     | 330     | 3110     | 2000    | 1800    | 1900    | 33      | 24            |

Note:


Higher pole numbers are available on request.

## Motors for line operation

Water-cooled motors

H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

### Dimension drawings

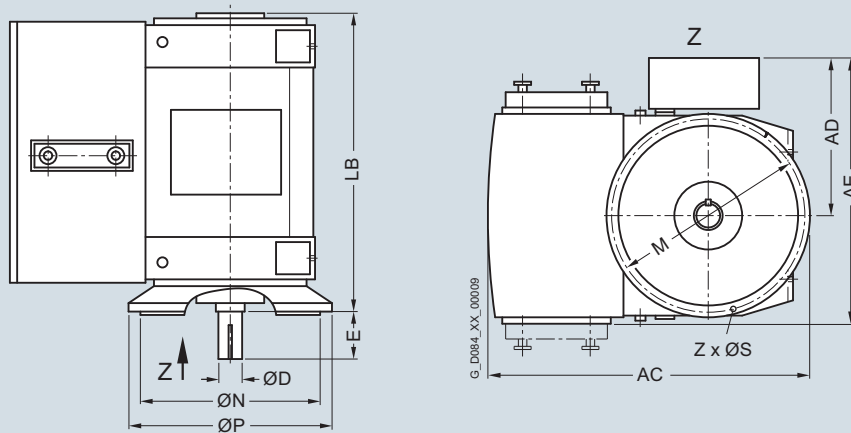


| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |          |         |         |         |         |               |
|--|--------------|------------|----------|----------|---------|---------|----------|---------|---------|---------|---------|---------------|
|  |              | AC<br>mm   | AD<br>mm | AE<br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |
| <b>9 ... 11 kV, NEMA version, IM V1 type of construction, anti-friction bearings – 1RN6 series</b> |              |            |          |          |         |         |          |         |         |         |         |               |
| <b>6-pole</b>  |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RN6 710-6HJ.8   | 17800        | 2890       | 1500     | 2560     | 240     | 330     | 2870     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RN6 712-6HJ.8   | 18700        | 2890       | 1500     | 2560     | 240     | 330     | 2870     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RN6 714-6HJ.8   | 20400        | 2890       | 1500     | 2560     | 240     | 330     | 3110     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RN6 716-6HJ.8   | 21400        | 2890       | 1500     | 2560     | 240     | 330     | 3110     | 2000    | 1800    | 1900    | 33      | 24            |
| <b>8-pole</b>  |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RN6 710-8HJ.8   | 17700        | 2890       | 1500     | 2560     | 240     | 330     | 2870     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RN6 712-8HJ.8   | 18400        | 2890       | 1500     | 2560     | 240     | 330     | 2870     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RN6 714-8HJ.8   | 20100        | 2890       | 1500     | 2560     | 240     | 330     | 3110     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RN6 716-8HJ.8   | 21200        | 2890       | 1500     | 2560     | 240     | 330     | 3110     | 2000    | 1800    | 1900    | 33      | 24            |
| <b>10-pole</b>   |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RN6 710-3HJ.8   | 17500        | 2890       | 1500     | 2560     | 240     | 330     | 2870     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RN6 712-3HJ.8   | 18300        | 2890       | 1500     | 2560     | 240     | 330     | 2870     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RN6 714-3HJ.8   | 20000        | 2890       | 1500     | 2560     | 240     | 330     | 3110     | 2000    | 1800    | 1900    | 33      | 24            |
| 1RN6 716-3HJ.8   | 21100        | 2890       | 1500     | 2560     | 240     | 330     | 3110     | 2000    | 1800    | 1900    | 33      | 24            |

**Note:**

Higher pole numbers are available on request.

## Dimension drawings

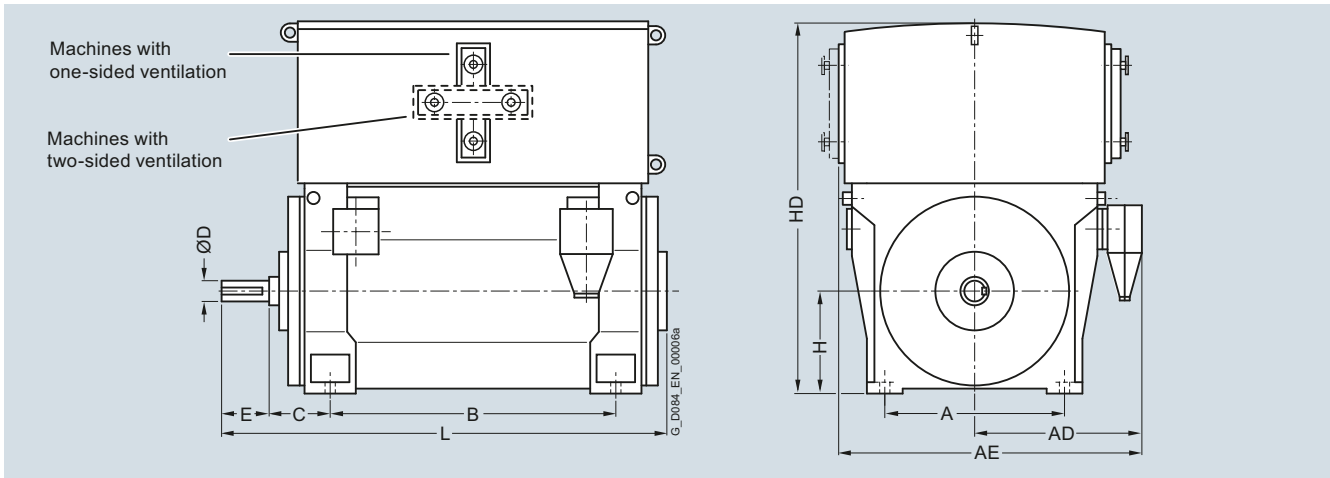

| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|--|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, anti-friction bearings – 1RN7 series<sup>1)</sup> – IC81W</b> |              |            |          |          |         |         |         |         |         |          |         |
| <b>4-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-4   | 15700        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2570     | 3070    |
| 1RN7 712-4   | 16300        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2570     | 3070    |
| 1RN7 714-4   | 17700        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2570     | 3310    |
| 1RN7 716-4   | 18900        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2570     | 3310    |
| <b>6-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-6   | 16000        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2570     | 3070    |
| 1RN7 712-6   | 17000        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2570     | 3070    |
| 1RN7 714-6   | 18500        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2570     | 3310    |
| 1RN7 716-6   | 19600        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2570     | 3310    |
| <b>8-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-8   | 15600        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2570     | 3070    |
| 1RN7 712-8   | 16500        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2570     | 3070    |
| 1RN7 714-8   | 18000        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2570     | 3310    |
| 1RN7 716-8   | 19000        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2570     | 3310    |
| <b>10-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-3   | 15600        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2570     | 3070    |
| 1RN7 712-3   | 16500        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2570     | 3070    |
| 1RN7 714-3   | 18000        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2570     | 3310    |
| 1RN7 716-3   | 19000        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2570     | 3310    |

Note:

Higher pole numbers are available on request.


<sup>1)</sup> The dimensions are also valid for the 1SN7 and 1SL7 series.

## Motors for line operation

Water-cooled motors

### H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Dimension drawings

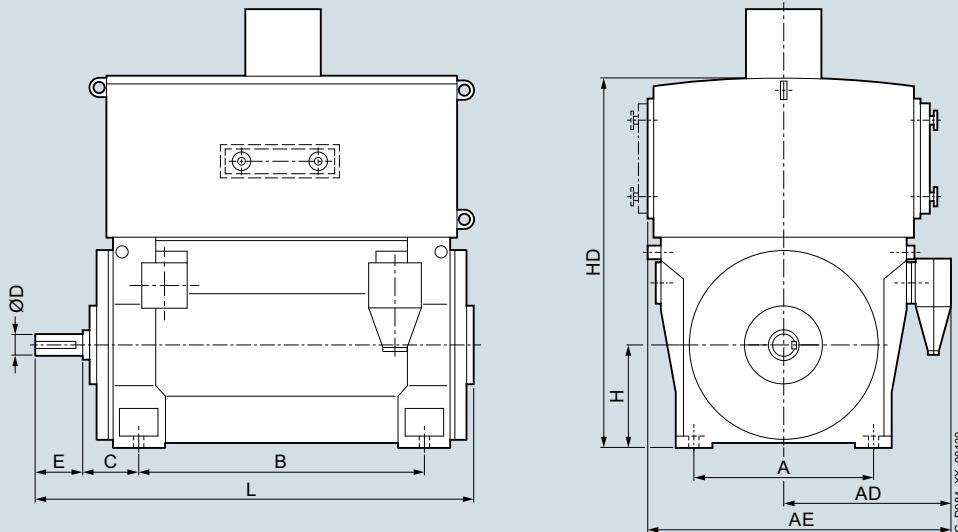

| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |                        |         |
|--|--------------|------------|----------|----------|---------|---------|---------|---------|---------|------------------------|---------|
|  |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>1)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, anti-friction bearings – 1RN7 series<sup>2)</sup> – IC86W</b> |              |            |          |          |         |         |         |         |         |                        |         |
| 4-pole   |              |            |          |          |         |         |         |         |         |                        |         |
| 1RN7 710-4   | 15400        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2900                   | 3070    |
| 1RN7 712-4   | 16000        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2900                   | 3070    |
| 1RN7 714-4   | 17400        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2900                   | 3310    |
| 1RN7 716-4   | 18600        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2900                   | 3310    |
| 6-pole   |              |            |          |          |         |         |         |         |         |                        |         |
| 1RN7 710-6   | 15700        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2900                   | 3070    |
| 1RN7 712-6   | 16800        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2900                   | 3070    |
| 1RN7 714-6   | 18300        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2900                   | 3310    |
| 1RN7 716-6   | 19400        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2900                   | 3310    |
| 8-pole   |              |            |          |          |         |         |         |         |         |                        |         |
| 1RN7 710-8   | 15200        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2900                   | 3070    |
| 1RN7 712-8   | 16100        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2900                   | 3070    |
| 1RN7 714-8   | 17600        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2900                   | 3310    |
| 1RN7 716-8   | 18600        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2900                   | 3310    |
| 10-pole  |              |            |          |          |         |         |         |         |         |                        |         |
| 1RN7 710-3   | 15200        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2900                   | 3070    |
| 1RN7 712-3   | 16100        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2900                   | 3070    |
| 1RN7 714-3   | 17600        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2900                   | 3310    |
| 1RN7 716-3   | 18600        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2900                   | 3310    |


**Note:**

Higher pole numbers are available on request.

<sup>1)</sup> Dimension HD without external blower  
(2 ... 6-pole = 600mm / ≥ 8-pole = 500 mm)

<sup>2)</sup> The dimensions are also valid for the 1SN7 and 1SL7 series.

## Dimension drawings

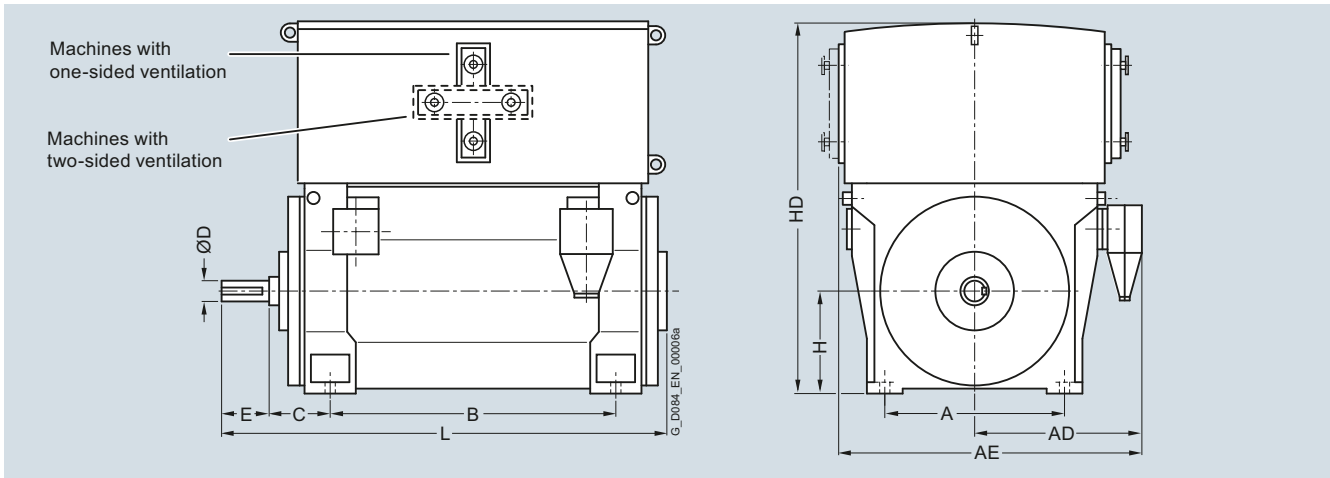

| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|---|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|   |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>9 ... 11 kV, IM B3 type of construction, anti-friction bearings – 1RN7 series<sup>1)</sup> – IC81W</b> |              |            |          |          |         |         |         |         |         |          |         |
| <b>4-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-4  | 16200        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2570     | 3070    |
| 1RN7 712-4  | 16900        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2570     | 3070    |
| 1RN7 714-4  | 18200        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2570     | 3310    |
| 1RN7 716-4  | 19400        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2570     | 3310    |
| <b>6-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-6  | 16600        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2570     | 3070    |
| 1RN7 712-6  | 17600        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2570     | 3070    |
| 1RN7 714-6  | 19100        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2570     | 3310    |
| 1RN7 716-6  | 20200        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2570     | 3310    |
| <b>8-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-8  | 16200        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2570     | 3070    |
| 1RN7 712-8  | 17100        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2570     | 3070    |
| 1RN7 714-8  | 18600        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2570     | 3310    |
| 1RN7 716-8  | 19600        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2570     | 3310    |
| <b>10-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-3  | 16300        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2570     | 3070    |
| 1RN7 712-3  | 17200        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2570     | 3070    |
| 1RN7 714-3  | 18700        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2570     | 3310    |
| 1RN7 716-3  | 19600        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2570     | 3310    |

Note:

Higher pole numbers are available on request.


<sup>1)</sup> The dimensions are also valid for the 1SN7 and 1SL7 series.

## Motors for line operation

### Water-cooled motors

#### H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Dimension drawings

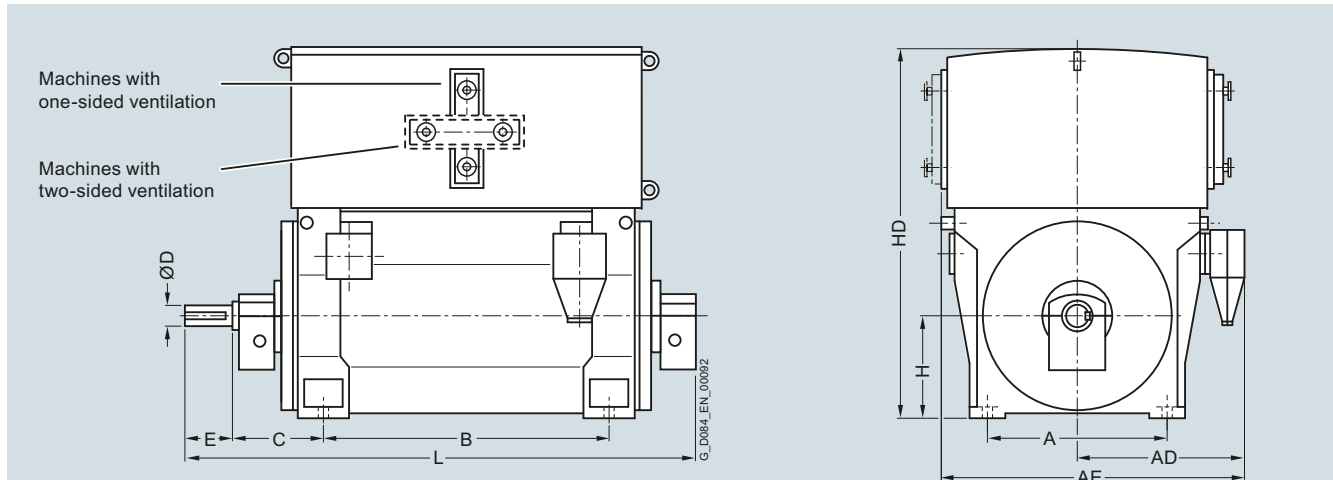


| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|---|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|   |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, sleeve bearings – 1RN7 series<sup>1)</sup> – IC81W</b> |              |            |          |          |         |         |         |         |         |          |         |
| <b>2-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-2  | 14900        | 1500       | 1800     | 2900     | 2000    | 560     | 200     | 280     | 710     | 2570     | 3320    |
| 1RN7 712-2  | 15500        | 1500       | 1800     | 2900     | 2000    | 560     | 200     | 280     | 710     | 2570     | 3320    |
| 1RN7 714-2  | 16700        | 1500       | 1800     | 2900     | 2240    | 560     | 200     | 280     | 710     | 2570     | 3560    |
| 1RN7 716-2  | 17500        | 1500       | 1800     | 2900     | 2240    | 560     | 200     | 280     | 710     | 2570     | 3560    |
| <b>4-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-4  | 16100        | 1500       | 1800     | 2900     | 2000    | 710     | 220     | 350     | 710     | 2570     | 3650    |
| 1RN7 712-4  | 16700        | 1500       | 1800     | 2900     | 2000    | 710     | 220     | 350     | 710     | 2570     | 3650    |
| 1RN7 714-4  | 18000        | 1500       | 1800     | 2900     | 2240    | 710     | 220     | 350     | 710     | 2570     | 3890    |
| 1RN7 716-4  | 19300        | 1500       | 1800     | 2900     | 2240    | 710     | 220     | 350     | 710     | 2570     | 3890    |
| <b>6-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-6  | 16100        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2570     | 3570    |
| 1RN7 712-6  | 17100        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2570     | 3570    |
| 1RN7 714-6  | 18600        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2570     | 3810    |
| 1RN7 716-6  | 19700        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2570     | 3810    |
| <b>8-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-8  | 15700        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2570     | 3570    |
| 1RN7 712-8  | 16600        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2570     | 3570    |
| 1RN7 714-8  | 18000        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2570     | 3810    |
| 1RN7 716-8  | 19000        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2570     | 3810    |
| <b>10-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-3  | 15600        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2570     | 3570    |
| 1RN7 712-3  | 16600        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2570     | 3570    |
| 1RN7 714-3  | 18100        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2570     | 3810    |
| 1RN7 716-3  | 19000        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2570     | 3810    |

#### Note:

Higher pole numbers are available on request.

<sup>1)</sup> The dimensions are also valid for the 1SN7 and 1SL7 series.

## Dimension drawings

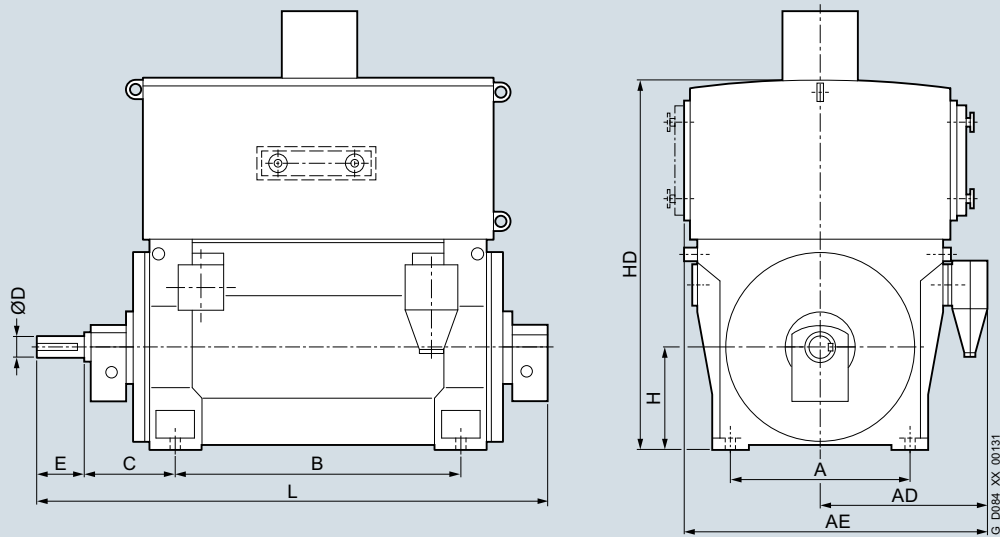

| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |                        |         |
|---|--------------|------------|----------|----------|---------|---------|---------|---------|---------|------------------------|---------|
|   |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>1)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, sleeve bearings – 1RN7 series<sup>2)</sup> – IC86W</b> |              |            |          |          |         |         |         |         |         |                        |         |
| <b>2-pole</b>   |              |            |          |          |         |         |         |         |         |                        |         |
| 1RN7 710-2  | 14600        | 1500       | 1800     | 2900     | 2000    | 560     | 200     | 280     | 710     | 2900                   | 3320    |
| 1RN7 712-2  | 15200        | 1500       | 1800     | 2900     | 2000    | 560     | 200     | 280     | 710     | 2900                   | 3320    |
| 1RN7 714-2  | 16400        | 1500       | 1800     | 2900     | 2240    | 560     | 200     | 280     | 710     | 2900                   | 3560    |
| 1RN7 716-2  | 17200        | 1500       | 1800     | 2900     | 2240    | 560     | 200     | 280     | 710     | 2900                   | 3560    |
| <b>4-pole</b>   |              |            |          |          |         |         |         |         |         |                        |         |
| 1RN7 710-4  | 15800        | 1500       | 1800     | 2900     | 2000    | 710     | 220     | 350     | 710     | 2900                   | 3650    |
| 1RN7 712-4  | 16400        | 1500       | 1800     | 2900     | 2000    | 710     | 220     | 350     | 710     | 2900                   | 3650    |
| 1RN7 714-4  | 17700        | 1500       | 1800     | 2900     | 2240    | 710     | 220     | 350     | 710     | 2900                   | 3890    |
| 1RN7 716-4  | 19000        | 1500       | 1800     | 2900     | 2240    | 710     | 220     | 350     | 710     | 2900                   | 3890    |
| <b>6-pole</b>   |              |            |          |          |         |         |         |         |         |                        |         |
| 1RN7 710-6  | 15800        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2900                   | 3570    |
| 1RN7 712-6  | 16800        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2900                   | 3570    |
| 1RN7 714-6  | 18300        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2900                   | 3810    |
| 1RN7 716-6  | 19400        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2900                   | 3810    |
| <b>8-pole</b>   |              |            |          |          |         |         |         |         |         |                        |         |
| 1RN7 710-8  | 15200        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2900                   | 3570    |
| 1RN7 712-8  | 16200        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2900                   | 3570    |
| 1RN7 714-8  | 17600        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2900                   | 3810    |
| 1RN7 716-8  | 18600        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2900                   | 3810    |
| <b>10-pole</b>  |              |            |          |          |         |         |         |         |         |                        |         |
| 1RN7 710-3  | 15200        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2900                   | 3570    |
| 1RN7 712-3  | 16200        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2900                   | 3570    |
| 1RN7 714-3  | 17700        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2900                   | 3810    |
| 1RN7 716-3  | 18600        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2900                   | 3810    |

Note:

Higher pole numbers are available on request.

<sup>1)</sup> Dimension HD without external blower  
(2 ... 6-pole = 600mm / ≥ 8-pole = 500 mm)


<sup>2)</sup> The dimensions are also valid for the 1SN7 and 1SL7 series.

## Motors for line operation

### Water-cooled motors

#### H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Dimension drawings

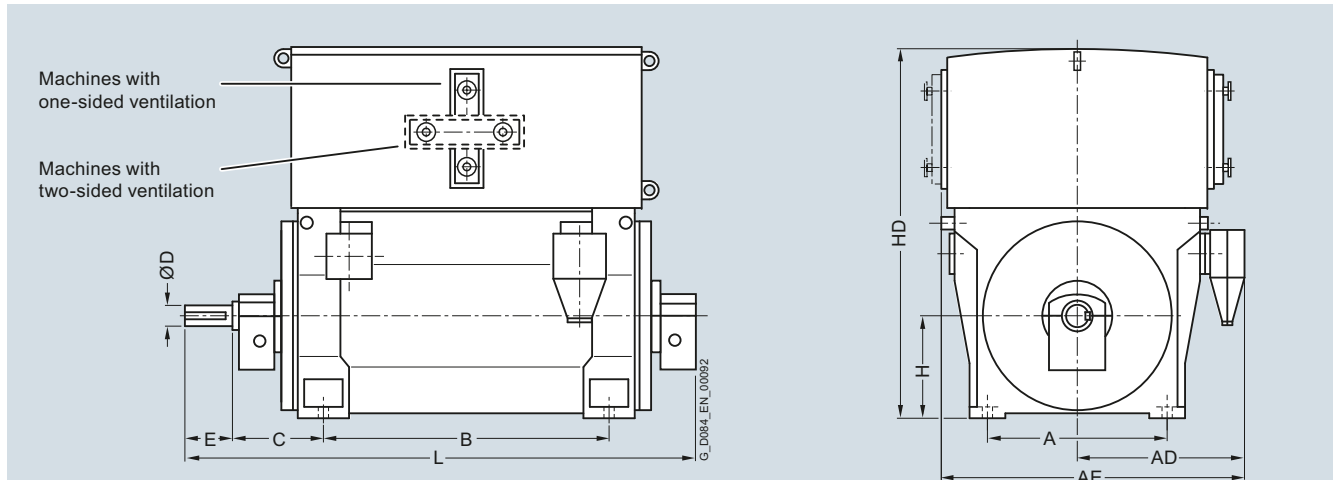

| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|--|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>9 ... 11 kV, IM B3 type of construction, sleeve bearings – 1RN7 series<sup>1)</sup> – IC81W</b> |              |            |          |          |         |         |         |         |         |          |         |
| <b>2-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-2   | 15300        | 1500       | 1800     | 2900     | 2000    | 560     | 200     | 280     | 710     | 2570     | 3320    |
| 1RN7 712-2   | 16000        | 1500       | 1800     | 2900     | 2000    | 560     | 200     | 280     | 710     | 2570     | 3320    |
| 1RN7 714-2   | 17200        | 1500       | 1800     | 2900     | 2240    | 560     | 200     | 280     | 710     | 2570     | 3560    |
| 1RN7 716-2   | 17900        | 1500       | 1800     | 2900     | 2240    | 560     | 200     | 280     | 710     | 2570     | 3560    |
| <b>4-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-4   | 16600        | 1500       | 1800     | 2900     | 2000    | 710     | 220     | 350     | 710     | 2570     | 3650    |
| 1RN7 712-4   | 17300        | 1500       | 1800     | 2900     | 2000    | 710     | 220     | 350     | 710     | 2570     | 3650    |
| 1RN7 714-4   | 18600        | 1500       | 1800     | 2900     | 2240    | 710     | 220     | 350     | 710     | 2570     | 3890    |
| 1RN7 716-4   | 19800        | 1500       | 1800     | 2900     | 2240    | 710     | 220     | 350     | 710     | 2570     | 3890    |
| <b>6-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-6   | 16500        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2570     | 3570    |
| 1RN7 712-6   | 17600        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2570     | 3570    |
| 1RN7 714-6   | 19100        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2570     | 3810    |
| 1RN7 716-6   | 20200        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2570     | 3810    |
| <b>8-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-8   | 16200        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2570     | 3570    |
| 1RN7 712-8   | 17100        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2570     | 3570    |
| 1RN7 714-8   | 18600        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2570     | 3810    |
| 1RN7 716-8   | 19600        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2570     | 3810    |
| <b>10-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-3   | 16300        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2570     | 3570    |
| 1RN7 712-3   | 17300        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2570     | 3570    |
| 1RN7 714-3   | 18700        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2570     | 3810    |
| 1RN7 716-3   | 19600        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2570     | 3810    |


#### Note:

Higher pole numbers are available on request.

<sup>1)</sup> The dimensions are also valid for the 1SN7 and 1SL7 series.



## Dimension drawings

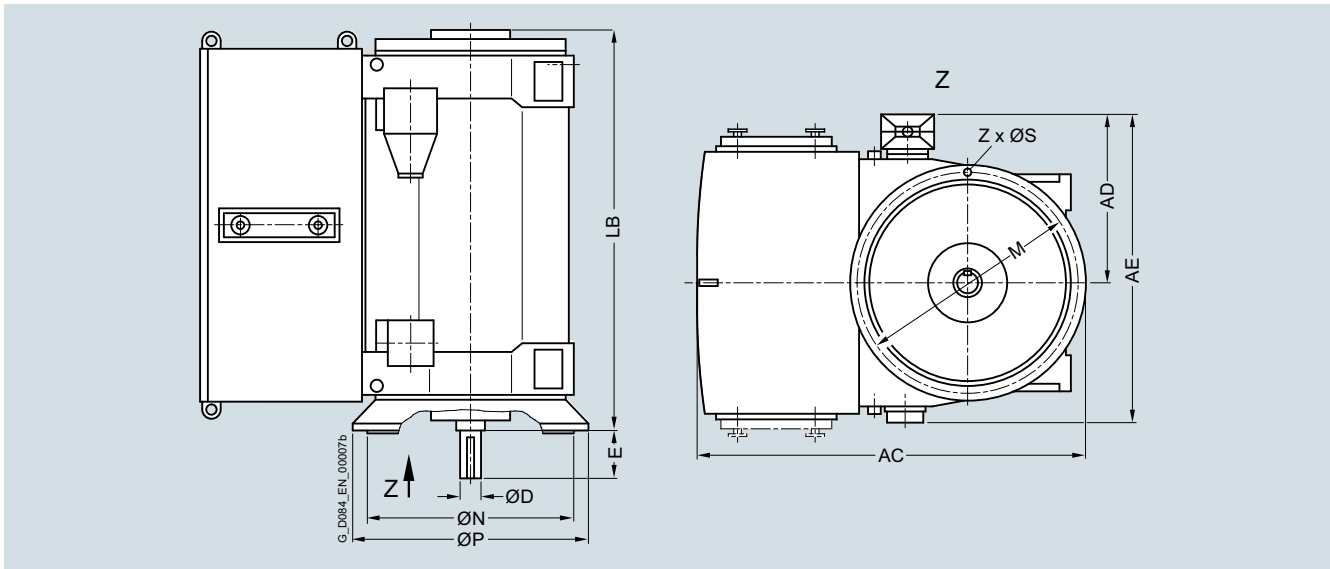

| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |          |         |         |         |         |               |
|---|--------------|------------|----------|----------|---------|---------|----------|---------|---------|---------|---------|---------------|
|   |              | AC<br>mm   | AD<br>mm | AE<br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |
| <b>Up to 6.6 kV, IM V1 type of construction, anti-friction bearings, Z ventilation – 1RN7 series<sup>1)</sup> – IC81W</b> |              |            |          |          |         |         |          |         |         |         |         |               |
| 6-pole  |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RN7 710-6  | 16700        | 2900       | 1800     | 2900     | 220     | 350     | 3140     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RN7 712-6  | 17700        | 2900       | 1800     | 2900     | 220     | 350     | 3140     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RN7 714-6  | 19200        | 2900       | 1800     | 2900     | 220     | 350     | 3380     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RN7 716-6  | 20300        | 2900       | 1800     | 2900     | 220     | 350     | 3380     | 2000    | 1800    | 1900    | 35      | 24            |
| 8-pole  |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RN7 710-8  | 16600        | 2900       | 1800     | 2900     | 220     | 350     | 3140     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RN7 712-8  | 17600        | 2900       | 1800     | 2900     | 220     | 350     | 3140     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RN7 714-8  | 19100        | 2900       | 1800     | 2900     | 220     | 350     | 3380     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RN7 716-8  | 20100        | 2900       | 1800     | 2900     | 220     | 350     | 3380     | 2000    | 1800    | 1900    | 35      | 24            |
| 10-pole   |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RN7 710-3  | 16400        | 2900       | 1800     | 2900     | 220     | 350     | 3140     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RN7 712-3  | 17300        | 2900       | 1800     | 2900     | 220     | 350     | 3140     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RN7 714-3  | 18900        | 2900       | 1800     | 2900     | 220     | 350     | 3380     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RN7 716-3  | 19800        | 2900       | 1800     | 2900     | 220     | 350     | 3380     | 2000    | 1800    | 1900    | 35      | 24            |

Note:

Higher pole numbers are available on request.


<sup>1)</sup> The dimensions are also valid for the 1SN7 and 1SL7 series.

## Motors for line operation

Water-cooled motors

### H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Dimension drawings

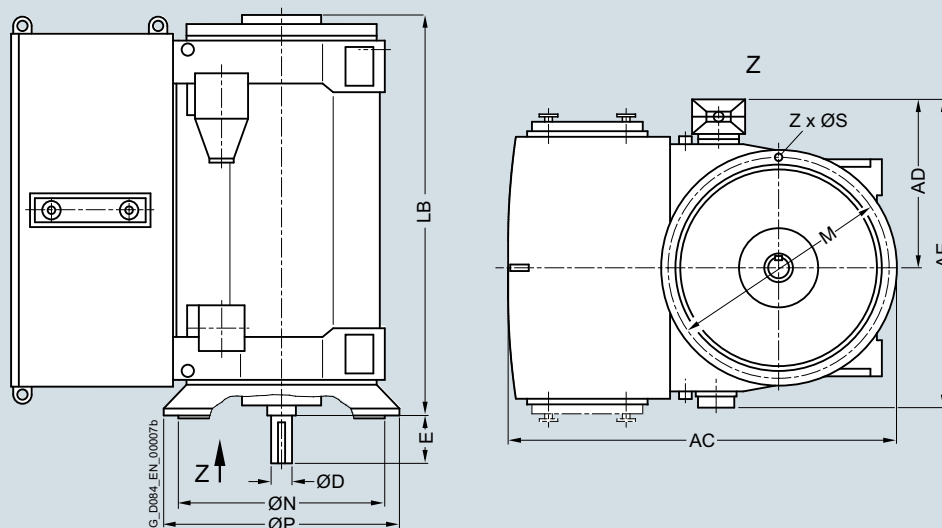

| Motor type | Weight<br>kg | Dimensions |    |    |   |   |    |   |   |   |   |   |
|------------|--------------|------------|----|----|---|---|----|---|---|---|---|---|
|            |              | AC         | AD | AE | D | E | LB | P | N | M | S | Z |

#### 9 ... 11 kV, IM V1 type of construction, anti-friction bearings, Z ventilation – 1RN7 series<sup>1)</sup> – IC81W

| 6-pole     |       |      |      |      |     |     |      |      |      |      |    |    |
|------------|-------|------|------|------|-----|-----|------|------|------|------|----|----|
| 1RN7 710-6 | 17000 | 2900 | 1800 | 2900 | 220 | 350 | 3140 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RN7 712-6 | 18100 | 2900 | 1800 | 2900 | 220 | 350 | 3140 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RN7 714-6 | 19600 | 2900 | 1800 | 2900 | 220 | 350 | 3380 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RN7 716-6 | 20700 | 2900 | 1800 | 2900 | 220 | 350 | 3380 | 2000 | 1800 | 1900 | 35 | 24 |
| 8-pole     |       |      |      |      |     |     |      |      |      |      |    |    |
| 1RN7 710-8 | 16200 | 2900 | 1800 | 2900 | 220 | 350 | 3140 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RN7 712-8 | 17200 | 2900 | 1800 | 2900 | 220 | 350 | 3140 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RN7 714-8 | 18600 | 2900 | 1800 | 2900 | 220 | 350 | 3380 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RN7 716-8 | 19600 | 2900 | 1800 | 2900 | 220 | 350 | 3380 | 2000 | 1800 | 1900 | 35 | 24 |
| 10-pole    |       |      |      |      |     |     |      |      |      |      |    |    |
| 1RN7 710-3 | 16400 | 2900 | 1800 | 2900 | 220 | 350 | 3140 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RN7 712-3 | 17400 | 2900 | 1800 | 2900 | 220 | 350 | 3140 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RN7 714-3 | 18800 | 2900 | 1800 | 2900 | 220 | 350 | 3380 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RN7 716-3 | 19700 | 2900 | 1800 | 2900 | 220 | 350 | 3380 | 2000 | 1800 | 1900 | 35 | 24 |

#### Note:

Higher pole numbers are available on request.

<sup>1)</sup> The dimensions are also valid for the 1SN7 and 1SL7 series.

**Overview**

Using the following options, SIMOTICS HV/TN can be adapted to order-specific requirements. The Article No. is supplemented with a "-Z" and with either one or several order codes.

Other options can be addressed on request with the LOHER VARIO (rib-cooled) or LOHER VARIO PLUS (modular design) motor series.

Example:

**1LA4354-4AN60-Z H05 + K16 + L20**

As standard, 6x Pt100 slot resistance thermometers without surge arrester for 3-wire or 4-wire circuit from the terminal box are integrated in the stator winding.  
The motors are prepared as standard with SPM nipples to monitor the anti-friction bearings.

| Order code | Option description                                       | Remark              |
|------------|--|---------------------|
|            | <b>Paint finish</b>                                      |                     |
| <b>K26</b> | Special paint finish in RAL 7030                         |                     |
| <b>Y53</b> | Standard paint finish in a color different from RAL 7030 | Plain text required |
| <b>Y54</b> | Special paint finish in a color different from RAL 7030  | Plain text required |
|            | <b>Documentation</b>                                     |                     |
| <b>B00</b> | No motor manual  |                     |
| <b>B21</b> | Documentation on CD-ROM instead of paper printout        |                     |
| <b>B22</b> | Documentation as e-mail instead of paper                 |                     |
| <b>B23</b> | Motor manual printed on paper, 3x                        |                     |
| <b>B27</b> | Run out protocol   |                     |
| <b>B28</b> | Protocol air gap calculation                             |                     |
| <b>B34</b> | Document standard inspection and test plan               |                     |
| <b>B35</b> | Document balancing report                                |                     |
| <b>B36</b> | Document test and inspection description                 |                     |
| <b>B37</b> | Document load characteristics                            |                     |
| <b>B38</b> | Document recommended spare parts                         |                     |
| <b>B41</b> | Document instrumentation list                            |                     |
| <b>B43</b> | Document production schedule: Generated once             |                     |
| <b>B44</b> | Document production schedule: Updated biweekly           |                     |
| <b>B45</b> | Document production schedule: Updated monthly            |                     |
| <b>B48</b> | Document order-specific inspection and test plan         |                     |
|            | <b>Document language</b>                                 |                     |
| <b>D00</b> | Documentation in German                                  |                     |
| <b>D54</b> | Documentation in Czech                                   |                     |
| <b>D55</b> | Documentation in Polish                                  |                     |
| <b>D56</b> | Documentation in Russian                                 |                     |
| <b>D72</b> | Documentation in Italian                                 |                     |
| <b>D73</b> | Documentation in Finnish                                 |                     |
| <b>D74</b> | Documentation in Dutch                                   |                     |
| <b>D75</b> | Documentation in Turkish                                 |                     |
| <b>D76</b> | Documentation in English                                 | Standard            |
| <b>D77</b> | Documentation in French                                  |                     |
| <b>D78</b> | Documentation in Spanish                                 |                     |
| <b>D79</b> | Documentation in Portuguese                              |                     |
| <b>D80</b> | Documentation in Bulgarian                               |                     |
| <b>D81</b> | Documentation in Norwegian                               |                     |
| <b>D82</b> | Documentation in Hungarian                               |                     |
| <b>D83</b> | Documentation in Swedish                                 |                     |
| <b>D84</b> | Documentation in Chinese                                 |                     |

## Motors for line operation

### Options and tests

#### Description of options

##### Overview (continued)

| Order code | Option description   | Remark  |
|------------|--|---|
|            | <b>Speed monitoring</b>  |   |
| A03        | Speed monitoring using an inductive proximity switch, Pepperl + Fuchs, incl. terminal box, without evaluation unit                     |   |
| H70        | Rotary pulse encoder LL 861 900 220 (Leine+Linde)  |   |
| H73        | Rotary pulse encoder HOG 10 D1024 I (16 mm)  |   |
| H88        | Rotary pulse encoder HOG 11 DN 1024 I (16 mm) with special anti-corrosion protection   | For marine applications                       |
| H89        | Rotary pulse encoder HOG 11 DN 1024 I (16 mm) with integrated shaft grounding and special anti-corrosion protection                    | For marine applications                       |
|            | <b>Direction of rotation</b>   |   |
| K97        | Rotation clockwise (CW)  |   |
| K98        | Rotation counter-clockwise (CCW)   | Standard                                      |
|            | <b>Noise reduction</b>   |   |
| L20        | Silencer for air inlet   |   |
| L21        | Noise reduction: Silencer for air outlet   | Only for H-compact PLUS and SIMOTICS HV M     |
| L22        | Noise reduction: Lining of interior space  | Only for H-compact PLUS and SIMOTICS HV M     |
| L23        | External metal fan, unidirectional   | Only for H-compact                            |
| L25        | Rustless grid at inlet silencer  | Only for H-compact                            |
|            | <b>Terminal box mounting position</b>  |   |
| K09        | Terminal box on right-hand side, view from DE  | Standard                                      |
| K10        | Terminal box on left-hand side, view from DE   |   |
| K83        | Terminal box rotated through 90°, cable entry from DE  |   |
| K84        | Terminal box rotated through 90°, cable entry from NDE   |   |
| K85        | Terminal box rotated through 180°  |   |
| N81        | Bracket rotated through 180°, terminal box rotated through 90°, cable entry from NDE   | Only for H-compact                            |
| N82        | Bracket rotated through 180°, terminal box rotated through 90°, cable entry from DE  | Only for H-compact                            |
| N83        | Bracket rotated through 180°, terminal box rotated through 180°, cable entry from above  |   |
| N84        | Bracket rotated through 180°, rotated through 90°, cable entry from below  |   |
| N85        | Terminal box on NDE  | Only for H-compact                            |
|            | <b>Terminal box, main and auxiliary terminal box</b>   |   |
| L54        | Terminal box, 6 terminals with 2 cable entries for connection to power supply, rated current > 315 A                                   |   |
| L55        | Star-point terminal box, up to 6.6 kV, 3 terminals   |   |
| L56        | Star-point terminal box, up to 11 kV, 3 terminals  |   |
| L57        | Star-point terminal box, up to 6.6 kV, 6 terminals   |   |
| L58        | Star-point terminal box, for installing current transformer (without current transformer)  |   |
| L59        | Terminal box with sealing chamber for 1 cable entry  |   |
| M50        | Auxiliary terminal box in cast iron  |   |
| M51        | Auxiliary terminal box material: Stainless steel   |   |
| M52        | Separate auxiliary terminal box for anti-condensation heater   | Standard for H-compact PLUS and SIMOTICS HV M |
|            | <b>Terminal box – accessories/equipping</b>  |   |
| K59        | Cable plug connection, rated voltage 2 to 6.6 kV   |   |
| L79        | Gland plate for 3 winding ends to connect to the line supply via separately mounted terminal box, 3 m free cable length from the frame |   |
| L80        | Gland plate for 6 winding ends to connect to the line supply via separately mounted terminal box, 3 m free cable length from the frame |   |
| L83        | Cable plug connection, rated voltage 9 to 11 kV  |   |

## Overview (continued)

| Order code | Option description  | Remark  |
|------------|---|---|
|            | <b>Cooling air monitoring</b>   |   |
| A44        | 1 resistance thermometer Pt100 for 2-, 3- or 4-wire connection from terminal box for cold air temperature   |   |
| A45        | 1 resistance thermometer Pt100 for 2-, 3- or 4-wire connection from terminal box for hot air temperature  |   |
| A46        | 1 double resistance thermometer Pt100 for 2-, 3- or 4-wire connection from terminal box, for cold air temperature   |   |
| A47        | 1 double resistance thermometer Pt100 for 2-, 3- or 4-wire connection from terminal box, for hot air temperature  |   |
| A86        | 1 dial-type thermometer with 2 NO-Contacts for cold air temperature incl. terminal box  |   |
| A87        | 1 dial-type thermometer with 2 NO-Contacts for hot air temperature incl. terminal box   |   |
|            | <b>Bearing version/instrumentation</b>  |   |
| H09 + H11  | DIN flange type for forced oil lubrication for oil inlet with flowmeter, manometer and throttle valve (incl. counter flange) +<br>DIN flange type forced oil lubrication for oil outlet with sight glass (incl. counter flange)       |   |
| H10 + H12  | ANSI flange type for forced oil lubrication for oil inlet with flowmeter, manometer and throttle valve (incl. counter flange) +<br>ANSI flange type for forced oil lubrication for oil outlet with sight glass (incl. counter flange) |   |
| H43        | DIN flange type for forced oil lubrication for in- and outlet without instruments (with counter flanges)  |   |
| H44        | ANSI flange type for forced oil lubrication for in- and outlet without instruments (with counter flanges)   |   |
| K20        | Bearing design on DE for increased forces (reinforced)  | H-compact SH 315 and SH 355 only              |
| K96        | Sleeve bearing instead of anti-friction bearing   |   |
| L18        | DE insulation   |   |
| L27        | Insulated bearing on NDE  | Standard for H-compact PLUS and SIMOTICS HV M |
| L60        | Forced-circulation oil lubrication (with oil cooling) instead of oil-ring lubrication   |   |
| L66        | Air cooling, but prepared for future conversion to forced-circulation oil lubrication   |   |
| P44        | Oil manifold; connections with counter flange; flange flush with the axial shaft face   |   |
|            | <b>Bearing monitoring – sleeve bearings</b>   |   |
| A02        | Shaft vibration monitoring for sleeve bearings, Bently Nevada system  |   |
| A39        | Prepared for shaft vibration monitoring for sleeve bearings (without monitoring system)   |   |
| A41        | 2 resistance thermometers Pt100 for 2-, 3- or 4-wire connection from terminals for sleeve bearing   |   |
| A43        | 2 double resistance thermometers Pt100 for 2-, 3- or 4-wire connection from terminals for sleeve bearing  |   |
| A70        | 2 dial-type thermometers without contacts   |   |
| A71        | 2 dial-type thermometers with contacts  |   |

## Motors for line operation

### Options and tests

#### Description of options

##### Overview (continued)

| Order code | Option description  | Remark  |
|------------|---|---|
|            | <b>Bearing monitoring – anti-friction bearings</b>  |   |
| A40        | 2 resistance thermometers Pt100 for 2-, 3- or 4-wire connection from terminal box for anti-friction bearings  |   |
| A42        | 2 double resistance thermometers Pt100 for 2-, 3- or 4-wire connection from terminals for anti-friction bearings  |   |
| G50        | Shock pulse measuring nipple (SPM) at DE and NDE  | Standard  |
| H05        | Shock pulse measurement (SPM), fixed sensors and distributor box  |   |
| H07        | Shock pulse measurement (SPM), complete alarm box   |   |
|            | <b>Mechanical versions</b>  |   |
| K16        | Second shaft extension up to 50 % rated torque  |   |
| L81        | Vibration severity grade B according to IEC/ EN 60034-14  | Not available for 2-pole motors with roller bearings.                                   |
| Y55        | Non-standard cylindrical shaft extension (an inquiry must be sent to the factory)   |   |
| Y85        | Oil shrink fit for cylindrical, single-stage shaft extension instead of a key connection  |   |
|            | <b>Certified for pump drives</b>  |   |
| E88        | Construction supervision for motors for seawater desalination plants where Siemens AG commissions the acceptance authority                              |   |
| E89        | Construction supervision for motors for seawater desalination plants where a third party commissions the acceptance authority                           |   |
| E90        | Pump drive for seawater desalination plants certified according to Lloyds Register  |   |
|            | <b>Marine applications</b>  | Options and tests for marine and offshore applications: <a href="#">see Chapter 5</a> . |
|            | <b>Others/additional options</b>  |   |
| H08        | Leakage water detection   |   |
| K52        | Degree of protection IP56 non-heavy-sea   |   |
| L15        | Supporting ring for coupling guard  |   |
| L17        | Mounting a coupling provided (finish machined and balanced)   |   |
| L31        | Motor mounting materials for mounting on a steel foundation: Bolts, shims and taper dowels  |   |
| L32        | Motor mounting materials for mounting on a concrete foundation or concrete base: Threaded bolts, armature plates, sole plates, shims and taper dowels   |   |
| L33        | Motor mounting materials to mount on a concrete foundation or concrete base: T-head bolts, foundation bolt sleeves, sole plates, shims and taper dowels |   |
| L91        | Higher number of starts, > 1000 ... 10000 starts per year, for Cu rotors  |   |
| L92        | Higher number of starts, > 5000 ... 10000 starts per year, for Al rotors  |   |
| P45        | External screws made of stainless steel   |   |

## Overview (continued)

| Order code | Option description   | Remark  |
|------------|--|---|
|            | <b>Anti-condensation heating</b>   |   |
| L08        | Anti-condensation heater, rated voltage 400 V  |   |
| L09        | Anti-condensation heater, rated voltage 500 V  |   |
| M12        | Anti-condensation heater for 110 to 120 V  |   |
| M13        | Anti-condensation heater for 220 to 240 V  | Standard for H-compact PLUS and SIMOTICS HV M |
| Y83        | Anti-condensation heater with other rated voltages, V = additional text required)                                      |   |
|            | <b>Ambient conditions</b>  |   |
| D02        | Operation at ambient temperatures up to -50 °C, transport up to -50 °C   |   |
| D03        | Operation at ambient temperatures up to -40 °C, transport up to -40 °C   |   |
| D04        | Operation at ambient temperatures up to -30 °C, transport up to -40 °C   |   |
| E81        | Outdoor use with high salinity or offshore applications (corrosivity grade C5-M/ C5-I)                                 |   |
| E82        | Outdoor use with moderate salinity (corrosivity grade C4)  |   |
| E83        | Outdoor use with low salinity (corrosivity grade C3)   |   |
| M06        | For use in sulfurous or hydrogenous atmosphere   |   |
|            | <b>Winding and motor protection</b>  |   |
| A12        | 6 PTC thermistors without lightning arresters  |   |
| A65        | 6 embedded resistance thermometers Pt100 for 2-, 3- or 4-wire connection from terminal box without lightning arresters | Standard                                      |
| A66        | 6 embedded resistance thermometers Pt100 for 2-, 3- or 4-wire connection from terminal box with lightning arresters    |   |
|            | <b>Tests with acceptance</b>   |   |
| F01        | All standard tests (routine test), with acceptance   |   |
| F15        | Recording of no-load characteristic and determination of core and friction losses, with acceptance                     |   |
| F17        | Recording of short-circuit characteristic and determination of short-circuit losses, with acceptance                   |   |
| F19        | Recording of load characteristic, with acceptance  |   |
| F23        | Dissipation factor test (tan delta) on 2 (test) coils, with acceptance   |   |
| F29        | No-load noise measurement, without noise analysis, with acceptance   |   |
| F31        | Cooling air flow and pressure drop measurement, with acceptance  |   |
| F35        | Recording of current and torque characteristics during acceleration, with acceptance                                   |   |
| F37        | Determination of moment of inertia by retardation method, with acceptance  |   |
| F39        | Overspeed test, with acceptance  |   |
| F41        | Recording of residual voltage curve, with acceptance   |   |
| F53        | Locked-rotor torque and current measurement, with acceptance   |   |
| F55        | Polarization index measurement, with acceptance  |   |
| F61        | Impulse or AC voltage test on 2 (test) coils, with acceptance  | In addition, specify order code F90           |
| F63        | Noise analysis, with acceptance  |   |
| F83        | Type test for horizontal motors with temperature rise test, with acceptance  |   |
| F90        | 2 test coils   |   |
| F93        | Type test for vertical motors with temperature rise test, with acceptance  |   |

## Motors for line operation

### Options and tests

#### Description of options

##### Overview (continued)

| Order code | Option description  | Remark                              |
|------------|---|-------------------------------------|
|            | <b>Tests without acceptance</b>   |                                     |
| F14        | Recording of no-load characteristic and determination of core and friction losses, without acceptance   |                                     |
| F16        | Recording of short-circuit characteristic and determination of short-circuit losses, without acceptance |                                     |
| F18        | Recording of load characteristic, without acceptance  |                                     |
| F22        | Dissipation factor test (tan delta) on 2 (test) coils, without acceptance                               | In addition, specify order code F90 |
| F28        | No-load noise measurement, without noise analysis, without acceptance                                   |                                     |
| F30        | Cooling air flow and pressure drop measurement, without acceptance                                      |                                     |
| F34        | Recording of current and torque characteristics during acceleration, without acceptance                 |                                     |
| F36        | Determination of moment of inertia by retardation method, without acceptance                            |                                     |
| F38        | Overspeed test, without acceptance  |                                     |
| F42        | "Conformance Test (Wet Test)" to NEMA Standard, without acceptance                                      |                                     |
| F52        | Locked-rotor torque and current measurement, without acceptance   |                                     |
| F54        | Polarization index measurement, without acceptance  |                                     |
| F60        | Impulse or AC voltage test on 2 (test) coils, without acceptance  | In addition, specify order code F90 |
| F62        | Noise analysis, without acceptance  |                                     |
| F82        | Type test for horizontal motors with temperature rise test, without acceptance                          |                                     |
| F90        | 2 test coils  |                                     |
| F92        | Type test for vertical motors with temperature rise test, without acceptance                            |                                     |
|            | <b>Extension of liability for defects</b>   | <b>Article number for reorder</b>   |
| Q80        | Extension of liability for defects, by 12 months to a total of 24 months (2 years) from delivery        | 9LD1720-0AA24                       |
| Q81        | Extension of liability for defects, by 18 months to a total of 30 months (2.5 years) from delivery      | 9LD1720-0AA30                       |
| Q82        | Extension of liability for defects, by 24 months to a total of 36 months (3 years) from delivery        | 9LD1720-0AA36                       |
| Q83        | Extension of liability for defects, by 30 months to a total of 42 months (3.5 years) from delivery      | 9LD1720-0AA42                       |
| Q84        | Extension of liability for defects, by 36 months to a total of 48 months (4 years) from delivery        | 9LD1720-0AA48                       |
| Q85        | Extension of liability for defects, by 48 months to a total of 60 months (5 years) from delivery        | 9LD1720-0AA60                       |

#### Conditions for an extension of liability for defects

You will find the currently valid conditions for an extension of liability for defects under:

<http://support.automation.siemens.com/WW/view/en/56715113>



## Motors for converter operation



|              |  |  |  |
|--------------|--|--|--|
| <b>3/2</b>   | <b>General</b>   |  |  |
| 3/2          | <u>Sinusoidal and non-sinusoidal converter output</u>  |  |  |
| <b>3/3</b>   | <b>Converter with non-sinusoidal output</b>  |  |  |
| 3/3          | <u>Air-cooled motors</u>   |  |  |
|              | <u>H-compact 1LA4</u>  |  |  |
|              | Selection and ordering data  |  |  |
| 3/6          | 690 V, 50 Hz<br>(square-law torque drive)  |  |  |
| 3/8          | 690 V, 50 Hz<br>(constant-torque drive)  |  |  |
| 3/10         | 2.3 kV, 50 Hz<br>(square-law torque drive)   |  |  |
| 3/12         | 3.4 to 4.16 kV, 50 Hz<br>(square-law torque drive)   |  |  |
| 3/14         | 2.3 kV, 60 Hz<br>(square-law torque drive)   |  |  |
| 3/16         | 3.4 to 4.16 kV, 60 Hz<br>(square-law torque drive)   |  |  |
| 3/18         | 2.3 kV, 50 Hz<br>(constant-torque drive)   |  |  |
| 3/20         | 3.4 to 4.16 kV, 50 Hz<br>(constant-torque drive)   |  |  |
| 3/22         | 2.3 kV, 60 Hz<br>(constant-torque drive)   |  |  |
| 3/24         | 3.4 to 4.16 kV, 60 Hz<br>(constant-torque drive)   |  |  |
|              | Dimension drawings   |  |  |
| 3/26         | IM B3 type of construction,<br>anti-friction bearings, sleeve bearings                       |  |  |
| 3/29         | IM V1 type of construction,<br>anti-friction bearings  |  |  |
| 3/31         | <u>Air-cooled motors</u>   |  |  |
|              | <u>H-compact 1PQ4</u>  |  |  |
|              | Selection and ordering data  |  |  |
| 3/34         | 690 V, 50 Hz<br>(constant-torque drive)  |  |  |
| 3/36         | 2.3 kV, 50 Hz<br>(constant-torque drive)   |  |  |
| 3/38         | 3.4 to 4.16 kV, 50 Hz<br>(constant-torque drive)   |  |  |
| 3/40         | 6 to 6.6 kV, 50 Hz<br>(constant-torque drive)  |  |  |
| 3/42         | 2.3 kV, 60 Hz<br>(constant-torque drive)   |  |  |
| 3/44         | 3.4 to 4.16 kV, 60 Hz<br>(constant-torque drive)   |  |  |
|              | Dimension drawings   |  |  |
| 3/46         | IM B3 type of construction,<br>anti-friction bearings, sleeve bearings                       |  |  |
| 3/48         | IM V1 type of construction,<br>anti-friction bearings  |  |  |
| 3/49         | <u>Air-cooled motors</u>   |  |  |
|              | <u>H-compact PLUS 1RA4, 1RA6, 1RP6</u><br><u>and SIMOTICS HV M 1RA7</u>                      |  |  |
|              | Selection and ordering data  |  |  |
| 3/50         | 690 V, 50 Hz<br>(square-law torque drive)  |  |  |
| 3/54         | 3.4 to 4.16 kV, 50 Hz<br>(square-law torque drive)   |  |  |
| 3/60         | 690 V, 60 Hz<br>(square-law torque drive)  |  |  |
| 3/64         | 3.4 to 4.16 kV, 60 Hz<br>(square-law torque drive)   |  |  |
|              | Dimension drawings   |  |  |
| 3/70         | IM B3 type of construction,<br>anti-friction bearings, sleeve bearings<br>(1RA4, 1RA6, 1RP6) |  |  |
| 3/75         | IM V1 type of construction,<br>anti-friction bearings (1RA4, 1RA6, 1RP6)                     |  |  |
| 3/78         | IM B3 type of construction, anti-friction<br>bearings, sleeve bearings (1RA7)                |  |  |
| 3/80         | IM V1 type of construction,<br>anti-friction bearings (1RA7)                                 |  |  |
| 3/81         | <u>Air-cooled motors</u>   |  |  |
|              | <u>H-compact PLUS 1RQ4, 1RQ6 and</u><br><u>SIMOTICS HV M 1RQ7</u>                            |  |  |
|              | Selection and ordering data  |  |  |
| 3/82         | 690 V, 50 Hz<br>(square-law torque drive)  |  |  |
| 3/86         | 3.4 to 4.16 kV, 50 Hz<br>(square-law torque drive)   |  |  |
| 3/92         | 690 V, 60 Hz<br>(square-law torque drive)  |  |  |
| 3/96         | 3.4 to 4.16 kV, 60 Hz<br>(square-law torque drive)   |  |  |
|              | Dimension drawings   |  |  |
| 3/102        | IM B3 type of construction, anti-friction<br>bearings, sleeve bearings (1RQ4, 1RQ6)          |  |  |
| 3/109        | IM V1 type of construction,<br>anti-friction bearings (1RQ4, 1RQ6)                           |  |  |
| 3/112        | IM B3 type of construction, anti-friction<br>bearings, sleeve bearings (1RQ7)                |  |  |
| 3/116        | IM V1 type of construction,<br>anti-friction bearings (1RQ7)                                 |  |  |
| 3/117        | <u>Water-cooled motors</u>   |  |  |
|              | <u>H-compact 1LH4</u>  |  |  |
|              | Selection and ordering data  |  |  |
| 3/118        | 690 V, 50 Hz   |  |  |
| 3/118        | 2.3 to 4.16 kV, 50 Hz  |  |  |
|              | Dimension drawings   |  |  |
| 3/119        | IM B3 type of construction,<br>anti-friction bearings  |  |  |
| 3/120        | IM V1 type of construction,<br>anti-friction bearings  |  |  |
| 3/121        | <u>Water-cooled motors</u>   |  |  |
|              | <u>H-compact PLUS 1RN4, 1RN6 and</u><br><u>SIMOTICS HV M 1RN7</u>                            |  |  |
|              | Selection and ordering data  |  |  |
| 3/122        | 690 V, 50 Hz<br>(square-law torque drive)  |  |  |
| 3/126        | 3.4 to 4.16 kV, 50 Hz<br>(square-law torque drive)   |  |  |
| 3/132        | 690 V, 60 Hz<br>(square-law torque drive)  |  |  |
| 3/136        | 3.4 to 4.16 kV, 60 Hz<br>(square-law torque drive)   |  |  |
|              | Dimension drawings   |  |  |
| 3/142        | IM B3 type of construction, anti-friction<br>bearings, sleeve bearings (1RN4, 1RN6)          |  |  |
| 3/148        | IM V1 type of construction,<br>anti-friction bearings (1RN4, 1RN6)                           |  |  |
| 3/150        | IM B3 type of construction, anti-friction<br>bearings, sleeve bearings (1RN7)                |  |  |
| 3/154        | IM V1 type of construction,<br>anti-friction bearings (1RN7)                                 |  |  |
| <b>3/155</b> | <b>Options and tests</b>   |  |  |
|              | <u>Description of options</u>  |  |  |

## Motors for converter operation

### General

#### Sinusoidal and non-sinusoidal converter output

##### Overview

By using variable speed drives, cost savings can be achieved in many applications compared to fixed-speed operation.

H-compact and H-compact PLUS motors have proven themselves many times in variable-speed applications.

They are designed for an optimized drive system with the appropriate SINAMICS converters, couplings and gear units to achieve a reliable drive train with high availability and long lifetime, which results in low lifecycle costs. The integrated drive system also features engineering tools that allow the configuration of the entire drive train and the automation environment with optimized parameters. A tailor-made service concept secures the effective operation of the whole drive train application over a long time.

##### **Sinusoidal output**

For operation with medium-voltage converters SINAMICS PERFECT HARMONY or SINAMICS GM150 and SINAMICS SM150 with sine-wave filter, as a result of the sinusoidal output, line motors for applications with square-law load characteristic are suitable. For converter operation, these motors must be equipped with electrically-isolated bearings at the NDE. The technical data can be taken from the tables in Chapter 2.

The insulation system of these motors corresponds to thermal class 155 (F) – and they are generally utilized to thermal class 130 (B).

##### **Non-sinusoidal output**

For the SIMOTICS HV/TN motor series, special versions have been designed for operation with medium-voltage SINAMICS GM150 and SINAMICS SM150 drive converters or low-voltage SINAMICS G and SINAMICS S drive converters.

These motors have, as standard, a reinforced stator winding insulation so that they can be fed from the specified drive converters without requiring a sine-wave filter. Further, for the medium-voltage version of the motors, both bearings are electrically insulated and the shaft is equipped with a grounding system.

The technical data can be taken from the tables in Chapter 3. The insulation system of these motors corresponds to thermal class 155 (F) – and they are generally utilized to thermal class 155 (F).

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact 1LA4

#### Overview



#### Technical data

##### Overview of technical data

| <b>H-compact 1LA4</b>            |   |
|----------------------------------|---|
| <b>Rated voltage</b>             | 690 V ... 6.6 kV  |
| <b>Rated frequency</b>           | 50/60 Hz  |
| <b>Motor type</b>                | Induction motor with squirrel-cage rotor  |
| <b>Type of construction</b>      | IM B3, IM V1  |
| <b>Degree of protection</b>      | IP55  |
| <b>Cooling method</b>            | IC411   |
| <b>Stator winding insulation</b> | Insulation system, thermal class 155 (F), utilized to 155 (F)                   |
| <b>Shaft height</b>              | 450 ... 630 mm  |
| <b>Bearings</b>                  | Anti-friction bearings, sleeve bearings   |
| <b>Cage material</b>             | Die-cast aluminum or copper (dependent on the shaft height and number of poles) |
| <b>Standards</b>                 | IEC, EN   |
| <b>Frame design</b>              | Cast iron with cooling ribs   |

## Motors for converter operation

Converter with non-sinusoidal output

### Air-cooled motors · H-compact 1LA4

#### Technical data (continued)


**Power ranges for IEC motors with reinforced insulation for SINAMICS converters without sine-wave filter**

1LA4, 1MS4 (Ex ec), 1MG4 (Ex pxb) series


Insulation system, thermal class 155 (F), utilized to 155 (F)

The power data listed here apply for an ambient temperature of 40 °C and an installation altitude ≤ 1000 m.

690 V; 50 Hz

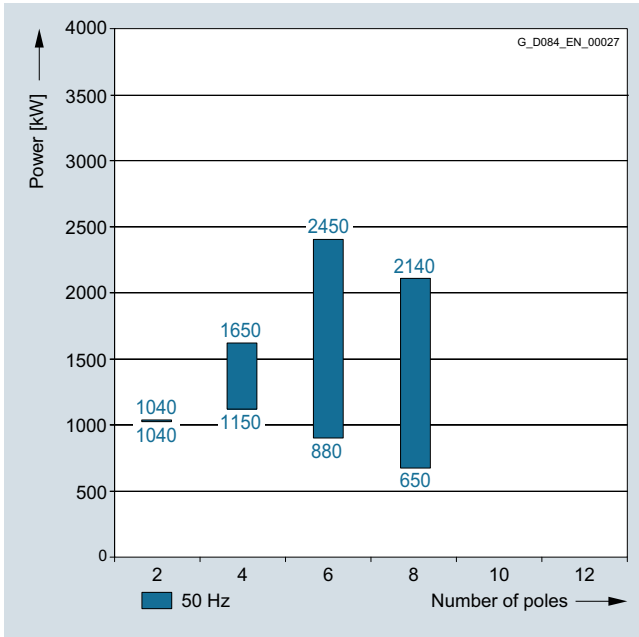


2.3 kV; 50 and 60 Hz

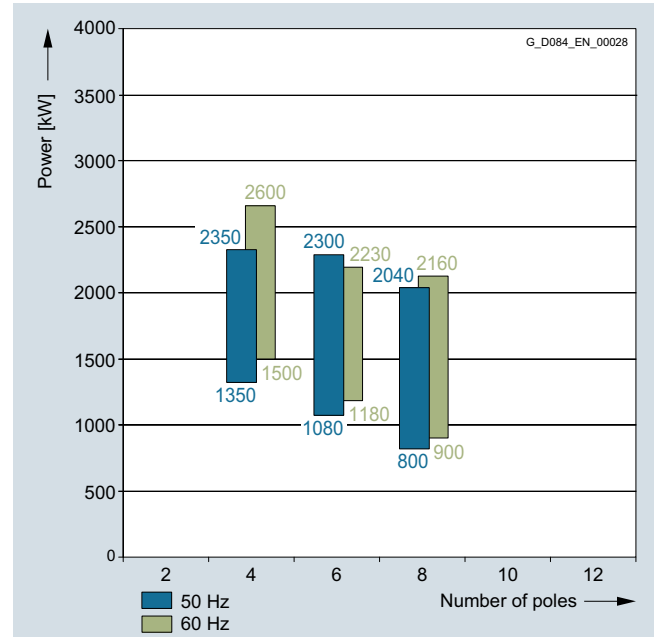


**Technical data** (continued)

3.4 to 4.16 kV; 50 and 60 Hz

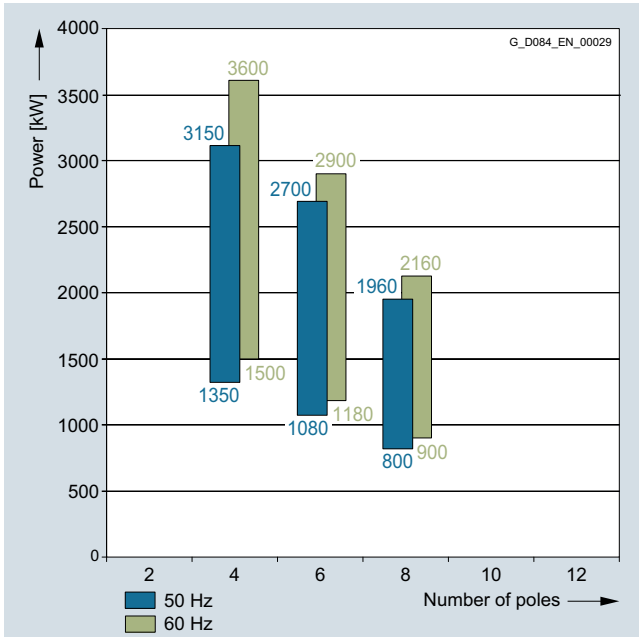

6 to 6.6 kV; 50 Hz

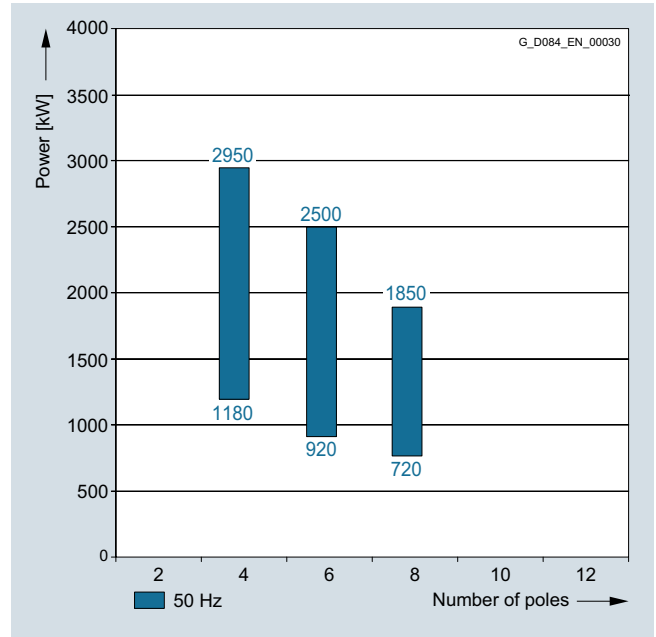

## Motors for converter operation

Converter with non-sinusoidal output

### Air-cooled motors · H-compact 1LA4

#### Selection and ordering data

| Rated power                      | Low-voltage motor<br>H-compact | Operating values at rated output for utilization 155 (F) |             |                       |                         |                          |                               |                       |                                      |
|----------------------------------|--------------------------------|--|-------------|-----------------------|-------------------------|--------------------------|-------------------------------|-----------------------|--------------------------------------|
| IEC                              |                                | Rated speed  | Efficiency  | Power factor          | Rated current at 690 V  | Rated torque             | Break-down torque             | Moment of inertia     | Mechanical speed limit <sup>1)</sup> |
| $P_{\text{rated 155 (F)}}$<br>kW |                                | $n_{\text{rated}}$<br>rpm                                | $\eta$<br>% | $\cos \varphi$<br>[-] | $I_{\text{rated}}$<br>A | $T_{\text{rated}}$<br>Nm | $T_B/T_{\text{rated}}$<br>[-] | J<br>kgm <sup>2</sup> | $n_{\text{max}}$<br>rpm              |
| <b>690 V, 50 Hz</b>              |                                |  |             |                       |                         |                          |                               |                       |                                      |
| 2-pole                           |                                |  |             |                       |                         |                          |                               |                       |                                      |
| 1040                             | <b>1LA4 454-2CM00</b>          | 2981   | 97.2        | 0.92                  | 970                     | 3331                     | 2.70                          | 22.2                  | 3000                                 |
| 4-pole                           |                                |  |             |                       |                         |                          |                               |                       |                                      |
| 1150                             | <b>1LA4 454-4AM0</b>           | 1491   | 97.2        | 0.89                  | 1120                    | 7365                     | 2.50                          | 33.9                  | 2400                                 |
| 1300                             | <b>1LA4 500-4CM0</b>           | 1491   | 96.9        | 0.88                  | 1280                    | 8326                     | 2.10                          | 44.3                  | 2200                                 |
| 1500                             | <b>1LA4 502-4CM0</b>           | 1492   | 97.2        | 0.87                  | 1480                    | 9600                     | 2.30                          | 49.0                  | 2200                                 |
| 1650                             | <b>1LA4 504-4CM0</b>           | 1491   | 97.2        | 0.89                  | 1600                    | 10567                    | 2.10                          | 56.2                  | 2200                                 |
| 6-pole                           |                                |  |             |                       |                         |                          |                               |                       |                                      |
| 880                              | <b>1LA4 454-6AM0</b>           | 993  | 97.1        | 0.86                  | 880                     | 8462                     | 2.50                          | 53.5                  | 2200                                 |
| 1250                             | <b>1LA4 500-6CM0</b>           | 995  | 97.1        | 0.85                  | 1260                    | 11996                    | 2.35                          | 82.1                  | 2100                                 |
| 1350                             | <b>1LA4 502-6CM0</b>           | 995  | 97.1        | 0.86                  | 1360                    | 12956                    | 2.35                          | 92.4                  | 2100                                 |
| 1500                             | <b>1LA4 504-6CM0</b>           | 995  | 97.2        | 0.86                  | 1500                    | 14395                    | 2.35                          | 102.6                 | 2100                                 |
| 1750                             | <b>1LA4 560-6CM0</b>           | 995  | 97.4        | 0.86                  | 1740                    | 16795                    | 2.60                          | 141.5                 | 2000                                 |
| 1950                             | <b>1LA4 562-6CM0</b>           | 995  | 97.5        | 0.86                  | 1940                    | 18714                    | 2.60                          | 162.1                 | 2000                                 |
| 2150                             | <b>1LA4 564-6CM0</b>           | 995  | 97.6        | 0.86                  | 2150                    | 20634                    | 2.60                          | 188.5                 | 2000                                 |
| 2300                             | <b>1LA4 634-6CM0</b>           | 997  | 97.3        | 0.88                  | 2250                    | 22030                    | 2.70                          | 297.0                 | O. R. <sup>2)</sup>                  |
| 2450                             | <b>1LA4 636-6CM0</b>           | 997  | 97.3        | 0.89                  | 2350                    | 23495                    | 2.70                          | 323.0                 | O. R. <sup>2)</sup>                  |
| 8-pole                           |                                |  |             |                       |                         |                          |                               |                       |                                      |
| 650                              | <b>1LA4 454-8AM0</b>           | 745  | 96.6        | 0.80                  | 700                     | 8331                     | 2.40                          | 52.8                  | 2200                                 |
| 900                              | <b>1LA4 500-8CM0</b>           | 746  | 96.6        | 0.80                  | 970                     | 11520                    | 2.20                          | 81.7                  | 2100                                 |
| 970                              | <b>1LA4 502-8CM0</b>           | 746  | 96.7        | 0.80                  | 1040                    | 12416                    | 2.30                          | 91.9                  | 2100                                 |
| 1080                             | <b>1LA4 504-8CM0</b>           | 746  | 96.8        | 0.80                  | 1160                    | 13824                    | 2.30                          | 102.2                 | 2100                                 |
| 1250                             | <b>1LA4 560-8CM0</b>           | 746  | 96.9        | 0.80                  | 1340                    | 16000                    | 2.60                          | 141.6                 | 2000                                 |
| 1400                             | <b>1LA4 562-8CM0</b>           | 746  | 97.0        | 0.80                  | 1500                    | 17920                    | 2.60                          | 162.3                 | 2000                                 |
| 1630                             | <b>1LA4 564-8CM0</b>           | 746  | 97.1        | 0.81                  | 1740                    | 20864                    | 2.60                          | 188.8                 | 2000                                 |
| 1900                             | <b>1LA4 634-8CM0</b>           | 746  | 96.8        | 0.86                  | 1900                    | 24321                    | 2.65                          | 294.0                 | O. R. <sup>2)</sup>                  |
| 2140                             | <b>1LA4 636-8CM0</b>           | 746  | 97.0        | 0.85                  | 2150                    | 27357                    | 2.60                          | 320.0                 | O. R. <sup>2)</sup>                  |

#### Type of construction:

|                        |   |
|------------------------|---|
| IM B3                  | 0 |
| IM V1 (with canopy)    | 4 |
| IM V1 (without canopy) | 8 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> On request.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact 1LA4

| Motor type<br>(repeated) | Partial load values for square-law torque drive |                     |                     |                     |                                     |                     |                     |                     |                                     |                     |                     |                     |
|--------------------------|---|---------------------|---------------------|---------------------|-------------------------------------|---------------------|---------------------|---------------------|-------------------------------------|---------------------|---------------------|---------------------|
|                          | $P/P_{\text{rated}}$ 155 (F) = 75 %             |                     |                     |                     | $P/P_{\text{rated}}$ 155 (F) = 50 % |                     |                     |                     | $P/P_{\text{rated}}$ 155 (F) = 25 % |                     |                     |                     |
|                          | $P$   | $n$                 | $\eta$              | $\cos \varphi$      | $P$                                 | $n$                 | $\eta$              | $\cos \varphi$      | $P$                                 | $n$                 | $\eta$              | $\cos \varphi$      |
|                          | kW  | rpm                 | %                   | [-]                 | kW                                  | rpm                 | %                   | [-]                 | kW                                  | rpm                 | %                   | [-]                 |
|                          | <b>Square-law torque drive</b>                  |                     |                     |                     |                                     |                     |                     |                     |                                     |                     |                     |                     |
| 2-pole                   |   |                     |                     |                     |                                     |                     |                     |                     |                                     |                     |                     |                     |
| 1LA4 454-2...            | 780   | 2709                | 97.2                | 0.92                | 520                                 | 2366                | 97.1                | 0.90                | 260                                 | 1878                | 96.6                | 0.83                |
| 4-pole                   |   |                     |                     |                     |                                     |                     |                     |                     |                                     |                     |                     |                     |
| 1LA4 454-4...            | 863   | 1355                | 97.2                | 0.89                | 575                                 | 1183                | 97.2                | 0.86                | 288                                 | 939                 | 96.7                | 0.76                |
| 1LA4 500-4...            | 975   | 1355                | 97.0                | 0.88                | 650                                 | 1183                | 96.9                | 0.86                | 325                                 | 939                 | 96.3                | 0.77                |
| 1LA4 502-4...            | 1125  | 1356                | 97.2                | 0.86                | 750                                 | 1184                | 97.0                | 0.84                | 375                                 | 940                 | 96.4                | 0.73                |
| 1LA4 504-4...            | 1238  | 1355                | 97.3                | 0.89                | 825                                 | 1183                | 97.2                | 0.87                | 413                                 | 939                 | 96.7                | 0.79                |
| 6-pole                   |   |                     |                     |                     |                                     |                     |                     |                     |                                     |                     |                     |                     |
| 1LA4 454-6...            | 660   | 902                 | 96.9                | 0.85                | 440                                 | 788                 | 96.8                | 0.81                | 220                                 | 626                 | 96.0                | 0.69                |
| 1LA4 500-6...            | 938   | 904                 | 97.1                | 0.85                | 625                                 | 790                 | 96.9                | 0.81                | 313                                 | 627                 | 96.0                | 0.69                |
| 1LA4 502-6...            | 1013  | 904                 | 97.1                | 0.86                | 675                                 | 790                 | 97.0                | 0.82                | 338                                 | 627                 | 96.1                | 0.70                |
| 1LA4 504-6...            | 1125  | 904                 | 97.2                | 0.86                | 750                                 | 790                 | 97.0                | 0.83                | 375                                 | 627                 | 96.2                | 0.72                |
| 1LA4 560-6...            | 1313  | 904                 | 97.4                | 0.86                | 875                                 | 790                 | 97.1                | 0.81                | 438                                 | 627                 | 96.3                | 0.70                |
| 1LA4 562-6...            | 1463  | 904                 | 97.5                | 0.86                | 975                                 | 790                 | 97.1                | 0.81                | 488                                 | 627                 | 96.2                | 0.69                |
| 1LA4 564-6...            | 1613  | 904                 | 97.6                | 0.86                | 1075                                | 790                 | 97.2                | 0.82                | 538                                 | 627                 | 96.3                | 0.70                |
| 1LA4 634-6...            | O. R. <sup>2)</sup>                             | O. R. <sup>2)</sup> | O. R. <sup>2)</sup> | O. R. <sup>2)</sup> | O. R. <sup>2)</sup>                 | O. R. <sup>2)</sup> | O. R. <sup>2)</sup> | O. R. <sup>2)</sup> | O. R. <sup>2)</sup>                 | O. R. <sup>2)</sup> | O. R. <sup>2)</sup> | O. R. <sup>2)</sup> |
| 1LA4 636-6...            | O. R. <sup>2)</sup>                             | O. R. <sup>2)</sup> | O. R. <sup>2)</sup> | O. R. <sup>2)</sup> | O. R. <sup>2)</sup>                 | O. R. <sup>2)</sup> | O. R. <sup>2)</sup> | O. R. <sup>2)</sup> | O. R. <sup>2)</sup>                 | O. R. <sup>2)</sup> | O. R. <sup>2)</sup> | O. R. <sup>2)</sup> |
| 8-pole                   |   |                     |                     |                     |                                     |                     |                     |                     |                                     |                     |                     |                     |
| 1LA4 454-8...            | 488   | 677                 | 96.5                | 0.77                | 325                                 | 591                 | 96.2                | 0.72                | 163                                 | 469                 | 95.1                | 0.58                |
| 1LA4 500-8...            | 675   | 678                 | 96.6                | 0.78                | 450                                 | 592                 | 96.2                | 0.73                | 225                                 | 470                 | 95.0                | 0.60                |
| 1LA4 502-8...            | 728   | 678                 | 96.7                | 0.79                | 485                                 | 592                 | 96.3                | 0.74                | 243                                 | 470                 | 95.1                | 0.61                |
| 1LA4 504-8...            | 810   | 678                 | 96.8                | 0.79                | 540                                 | 592                 | 96.3                | 0.74                | 270                                 | 470                 | 95.2                | 0.60                |
| 1LA4 560-8...            | 938   | 678                 | 96.8                | 0.78                | 625                                 | 592                 | 96.4                | 0.73                | 313                                 | 470                 | 95.1                | 0.58                |
| 1LA4 562-8...            | 1050  | 678                 | 96.9                | 0.78                | 700                                 | 592                 | 96.4                | 0.73                | 350                                 | 470                 | 95.1                | 0.58                |
| 1LA4 564-8...            | 1223  | 678                 | 97.0                | 0.79                | 815                                 | 592                 | 96.4                | 0.73                | 408                                 | 470                 | 95.2                | 0.59                |
| 1LA4 634-8...            | O. R. <sup>2)</sup>                             | O. R. <sup>2)</sup> | O. R. <sup>2)</sup> | O. R. <sup>2)</sup> | O. R. <sup>2)</sup>                 | O. R. <sup>2)</sup> | O. R. <sup>2)</sup> | O. R. <sup>2)</sup> | O. R. <sup>2)</sup>                 | O. R. <sup>2)</sup> | O. R. <sup>2)</sup> | O. R. <sup>2)</sup> |
| 1LA4 636-8...            | O. R. <sup>2)</sup>                             | O. R. <sup>2)</sup> | O. R. <sup>2)</sup> | O. R. <sup>2)</sup> | O. R. <sup>2)</sup>                 | O. R. <sup>2)</sup> | O. R. <sup>2)</sup> | O. R. <sup>2)</sup> | O. R. <sup>2)</sup>                 | O. R. <sup>2)</sup> | O. R. <sup>2)</sup> | O. R. <sup>2)</sup> |

## Motors for converter operation

Converter with non-sinusoidal output

### Air-cooled motors · H-compact 1LA4

#### Selection and ordering data

| Rated power<br><br>IEC<br><br>$P_{\text{rated}}$ 155 (F)<br>kW | Low-voltage motor<br>H-compact<br><br>Article No. | Operating values at rated output for utilization 155 (F) |             |                       |                         |                          |  |                       |                                      |
|--|---|--|-------------|-----------------------|-------------------------|--------------------------|--|-----------------------|--------------------------------------|
|  |   | Rated speed  | Efficiency  | Power factor          | Rated current at 690 V  | Rated torque             | Break-down torque                      | Moment of inertia     | Mechanical speed limit <sup>1)</sup> |
|  |   | $n_{\text{rated}}$<br>rpm                                | $\eta$<br>% | $\cos \varphi$<br>[-] | $I_{\text{rated}}$<br>A | $T_{\text{rated}}$<br>Nm | $T_{\text{B}}/T_{\text{rated}}$<br>[-] | J<br>kgm <sup>2</sup> | $n_{\text{max}}$<br>rpm              |
| <b>690 V, 50 Hz</b>  |   |  |             |                       |                         |                          |  |                       |                                      |
| 2-pole   |   |  |             |                       |                         |                          |  |                       |                                      |
| 1040   | <b>1LA4 454-2CM00</b>                             | 2981   | 97.2        | 0.92                  | 970                     | 3331                     | 2.70                                   | 22.2                  | 3000                                 |
| 4-pole   |   |  |             |                       |                         |                          |  |                       |                                      |
| 1150   | <b>1LA4 454-4AM0</b>                              | 1491   | 97.2        | 0.89                  | 1120                    | 7365                     | 2.50                                   | 33.9                  | 2400                                 |
| 1300   | <b>1LA4 500-4CM0</b>                              | 1491   | 96.9        | 0.88                  | 1280                    | 8326                     | 2.10                                   | 44.3                  | 2200                                 |
| 1500   | <b>1LA4 502-4CM0</b>                              | 1492   | 97.2        | 0.87                  | 1480                    | 9600                     | 2.30                                   | 49.0                  | 2200                                 |
| 1650   | <b>1LA4 504-4CM0</b>                              | 1491   | 97.2        | 0.89                  | 1600                    | 10567                    | 2.10                                   | 56.2                  | 2200                                 |
| 6-pole   |   |  |             |                       |                         |                          |  |                       |                                      |
| 880  | <b>1LA4 454-6AM0</b>                              | 993  | 96.9        | 0.86                  | 880                     | 8462                     | 2.50                                   | 53.5                  | 2200                                 |
| 1250   | <b>1LA4 500-6CM0</b>                              | 995  | 97.1        | 0.85                  | 1260                    | 11996                    | 2.35                                   | 82.1                  | 2100                                 |
| 1350   | <b>1LA4 502-6CM0</b>                              | 995  | 97.1        | 0.86                  | 1360                    | 12956                    | 2.35                                   | 92.4                  | 2100                                 |
| 1500   | <b>1LA4 504-6CM0</b>                              | 995  | 97.2        | 0.86                  | 1500                    | 14395                    | 2.35                                   | 102.6                 | 2100                                 |
| 1750   | <b>1LA4 560-6CM0</b>                              | 995  | 97.4        | 0.86                  | 1740                    | 16795                    | 2.60                                   | 141.5                 | 2000                                 |
| 1950   | <b>1LA4 562-6CM0</b>                              | 995  | 97.5        | 0.86                  | 1940                    | 18714                    | 2.60                                   | 162.1                 | 2000                                 |
| 2150   | <b>1LA4 564-6CM0</b>                              | 995  | 97.6        | 0.86                  | 2150                    | 20634                    | 2.60                                   | 188.5                 | 2000                                 |
| 2300   | <b>1LA4 634-6CM0</b>                              | 997  | 97.3        | 0.88                  | 2250                    | 22030                    | 2.70                                   | 297.0                 | 1200                                 |
| 2450   | <b>1LA4 636-6CM0</b>                              | 997  | 97.3        | 0.89                  | 2350                    | 23495                    | 2.70                                   | 323.0                 | 1200                                 |
| 8-pole   |   |  |             |                       |                         |                          |  |                       |                                      |
| 650  | <b>1LA4 454-8AM0</b>                              | 745  | 96.6        | 0.80                  | 700                     | 8331                     | 2.40                                   | 52.8                  | 2200                                 |
| 900  | <b>1LA4 500-8CM0</b>                              | 746  | 96.6        | 0.80                  | 970                     | 11520                    | 2.20                                   | 81.7                  | 2100                                 |
| 970  | <b>1LA4 502-8CM0</b>                              | 746  | 96.7        | 0.80                  | 1040                    | 12416                    | 2.30                                   | 91.9                  | 2100                                 |
| 1080   | <b>1LA4 504-8CM0</b>                              | 760  | 96.8        | 0.80                  | 1160                    | 13570                    | 2.30                                   | 102.2                 | 2100                                 |
| 1250   | <b>1LA4 560-8CM0</b>                              | 746  | 96.9        | 0.80                  | 1340                    | 16000                    | 2.60                                   | 141.6                 | 2000                                 |
| 1400   | <b>1LA4 562-8CM0</b>                              | 746  | 97.0        | 0.80                  | 1500                    | 17920                    | 2.60                                   | 162.3                 | 2000                                 |
| 1630   | <b>1LA4 564-8CM0</b>                              | 746  | 97.1        | 0.81                  | 1740                    | 20864                    | 2.60                                   | 188.8                 | 2000                                 |
| 1900   | <b>1LA4 634-8CM0</b>                              | 746  | 96.8        | 0.86                  | 1900                    | 24321                    | 2.65                                   | 294.0                 | 1200                                 |
| 2140   | <b>1LA4 636-8CM0</b>                              | 746  | 97.0        | 0.85                  | 2150                    | 27357                    | 2.60                                   | 320.0                 | 1200                                 |

#### Type of construction:

|                        |   |
|------------------------|---|
| IM B3                  | 0 |
| IM V1 (with canopy)    | 4 |
| IM V1 (without canopy) | 8 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.



## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact 1LA4

| Motor type<br>(repeated) | Constant-torque drive, speed range |                 |             |                       |                 |                 |             |                       |                 |                 |             |                       |
|--------------------------|------------------------------------|-----------------|-------------|-----------------------|-----------------|-----------------|-------------|-----------------------|-----------------|-----------------|-------------|-----------------------|
|                          | 1:2                                |                 |             |                       | 1:5             |                 |             |                       | 1:10            |                 |             |                       |
|                          | $P_{max}$<br>kW                    | $T_{max}$<br>Nm | $\eta$<br>% | $\cos \varphi$<br>[-] | $P_{max}$<br>kW | $T_{max}$<br>Nm | $\eta$<br>% | $\cos \varphi$<br>[-] | $P_{max}$<br>kW | $T_{max}$<br>Nm | $\eta$<br>% | $\cos \varphi$<br>[-] |
|                          | <b>Constant-torque drive</b>       |                 |             |                       |                 |                 |             |                       |                 |                 |             |                       |
| 2-pole                   |                                    |                 |             |                       |                 |                 |             |                       |                 |                 |             |                       |
| 1LA4 454-2...            | 970                                | 3107            | 96.9        | 0.91                  | 800             | 2563            | 97.1        | 0.91                  | 750             | 2402            | 97.1        | 0.91                  |
| 4-pole                   |                                    |                 |             |                       |                 |                 |             |                       |                 |                 |             |                       |
| 1LA4 454-4...            | 1060                               | 6789            | 97.1        | 0.88                  | 940             | 6020            | 97.3        | 0.88                  | 900             | 5764            | 97.3        | 0.88                  |
| 1LA4 500-4...            | 1200                               | 7685            | 96.7        | 0.87                  | 1000            | 6404            | 96.9        | 0.87                  | 940             | 6020            | 96.9        | 0.87                  |
| 1LA4 502-4...            | 1400                               | 8960            | 96.9        | 0.85                  | 1170            | 7488            | 97.1        | 0.85                  | 1100            | 7040            | 97.1        | 0.85                  |
| 1LA4 504-4...            | 1500                               | 9607            | 97.0        | 0.88                  | 1250            | 8006            | 97.2        | 0.88                  | 1200            | 7685            | 97.2        | 0.88                  |
| 6-pole                   |                                    |                 |             |                       |                 |                 |             |                       |                 |                 |             |                       |
| 1LA4 454-6...            | 820                                | 7885            | 97.0        | 0.85                  | 700             | 6731            | 97.2        | 0.84                  | 660             | 6347            | 97.2        | 0.84                  |
| 1LA4 500-6...            | 1180                               | 11324           | 96.8        | 0.84                  | 1020            | 9789            | 97.0        | 0.83                  | 960             | 9213            | 97.1        | 0.83                  |
| 1LA4 502-6...            | 1280                               | 12284           | 97.0        | 0.84                  | 1120            | 10749           | 97.1        | 0.84                  | 1040            | 9981            | 97.2        | 0.84                  |
| 1LA4 504-6...            | 1430                               | 13724           | 97.1        | 0.84                  | 1260            | 12092           | 97.2        | 0.84                  | 1180            | 11324           | 97.3        | 0.84                  |
| 1LA4 560-6...            | 1650                               | 15835           | 97.1        | 0.82                  | 1450            | 13916           | 97.3        | 0.83                  | 1350            | 12956           | 97.4        | 0.83                  |
| 1LA4 562-6...            | 1850                               | 17754           | 97.2        | 0.83                  | 1650            | 15835           | 97.3        | 0.83                  | 1550            | 14875           | 97.4        | 0.83                  |
| 1LA4 564-6...            | 2100                               | 20154           | 97.1        | 0.83                  | 1850            | 17754           | 97.4        | 0.84                  | 1800            | 17275           | 97.4        | 0.84                  |
| 1LA4 634-6...            | 2180                               | 20880           | 97.2        | 0.88                  | 1960            | 18773           | 97.2        | 0.87                  | 1875            | 17959           | 97.1        | 0.87                  |
| 1LA4 636-6...            | 2325                               | 22269           | 97.3        | 0.89                  | 2080            | 19922           | 97.2        | 0.89                  | 1985            | 19012           | 97.2        | 0.89                  |
| 8-pole                   |                                    |                 |             |                       |                 |                 |             |                       |                 |                 |             |                       |
| 1LA4 454-8...            | 580                                | 7434            | 96.4        | 0.79                  | 490             | 6281            | 96.6        | 0.76                  | 450             | 5768            | 96.6        | 0.74                  |
| 1LA4 500-8...            | 900                                | 11520           | 96.5        | 0.81                  | 770             | 9856            | 96.5        | 0.79                  | 710             | 9088            | 96.5        | 0.78                  |
| 1LA4 502-8...            | 970                                | 12416           | 96.6        | 0.81                  | 850             | 10880           | 96.6        | 0.79                  | 780             | 9984            | 96.6        | 0.78                  |
| 1LA4 504-8...            | 1080                               | 13570           | 96.7        | 0.81                  | 940             | 11811           | 96.7        | 0.79                  | 880             | 11057           | 96.7        | 0.78                  |
| 1LA4 560-8...            | 1150                               | 14720           | 96.8        | 0.79                  | 980             | 12544           | 96.8        | 0.77                  | 930             | 11904           | 96.8        | 0.76                  |
| 1LA4 562-8...            | 1290                               | 16512           | 96.9        | 0.79                  | 1100            | 14080           | 96.9        | 0.78                  | 1050            | 13440           | 96.9        | 0.77                  |
| 1LA4 564-8...            | 1500                               | 19200           | 96.9        | 0.80                  | 1280            | 16384           | 97.0        | 0.79                  | 1250            | 16000           | 97.0        | 0.78                  |
| 1LA4 634-8...            | 1725                               | 22081           | 96.8        | 0.85                  | 1560            | 19969           | 96.7        | 0.84                  | 1460            | 18689           | 96.7        | 0.83                  |
| 1LA4 636-8...            | 1950                               | 24961           | 97.0        | 0.85                  | 1760            | 22529           | 96.9        | 0.84                  | 1670            | 21377           | 96.9        | 0.83                  |

## Motors for converter operation

Converter with non-sinusoidal output

### Air-cooled motors · H-compact 1LA4

#### Selection and ordering data

| Rated power            |                        | High voltage motor<br>H-compact | Operating values at rated output for utilization 155 (F) |            |                |                         |              |                   |                   |                                      |
|------------------------|------------------------|---------------------------------|--|------------|----------------|-------------------------|--------------|-------------------|-------------------|--------------------------------------|
| IEC                    |                        |                                 | Rated speed  | Efficiency | Power factor   | Rated current<br>2.3 kV | Rated torque | Break-down torque | Moment of inertia | Mechanical speed limit <sup>1)</sup> |
| $P_{rated}$<br>155 (F) | $P_{rated}$<br>130 (B) |                                 | $n_{rated}$  | $\eta$     | $\cos \varphi$ | $I_{rated}$             | $T_{rated}$  | $T_B/T_{rated}$   | J                 | $n_{max}$                            |
| kW                     | kW                     | Article No.                     | rpm  | %          | [-]            | A                       | Nm           | [-]               | kgm <sup>2</sup>  | rpm                                  |
| <b>2.3 kV, 50 Hz</b>   |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 4-pole                 |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 1350                   | 1180                   | <b>1LA4 500-4CV0</b>            | 1493   | 97.0       | 0.87           | 400                     | 8634         | 2.50              | 42                | 2200                                 |
| 1500                   | 1280                   | <b>1LA4 502-4CV0</b>            | 1493   | 97.2       | 0.87           | 445                     | 9594         | 2.60              | 47                | 2200                                 |
| 1650                   | 1420                   | <b>1LA4 504-4CV0</b>            | 1493   | 97.3       | 0.88           | 485                     | 10553        | 2.60              | 54                | 2200                                 |
| 1850                   | 1550                   | <b>1LA4 560-4CV0</b>            | 1494   | 97.5       | 0.87           | 550                     | 11824        | 2.40              | 79                | 2000                                 |
| 2100                   | 1750                   | <b>1LA4 562-4CV0</b>            | 1494   | 97.5       | 0.87           | 620                     | 13422        | 2.40              | 92                | 2000                                 |
| 2350                   | 1900                   | <b>1LA4 564-4CV0</b>            | 1494   | 97.5       | 0.87           | 700                     | 15020        | 2.40              | 104               | 2000                                 |
| 6-pole                 |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 1080                   | 940                    | <b>1LA4 500-6CV0</b>            | 995  | 97.0       | 0.86           | 325                     | 10365        | 2.40              | 82                | 2100                                 |
| 1180                   | 1030                   | <b>1LA4 502-6CV0</b>            | 995  | 97.0       | 0.87           | 350                     | 11324        | 2.40              | 92                | 2100                                 |
| 1280                   | 1130                   | <b>1LA4 504-6CV0</b>            | 995  | 97.1       | 0.87           | 380                     | 12284        | 2.40              | 103               | 2100                                 |
| 1500                   | 1320                   | <b>1LA4 560-6CV0</b>            | 995  | 97.3       | 0.86           | 450                     | 14395        | 2.60              | 142               | 2000                                 |
| 1750                   | 1500                   | <b>1LA4 562-6CV0</b>            | 995  | 97.4       | 0.86           | 520                     | 16795        | 2.70              | 162               | 2000                                 |
| 1950                   | 1700                   | <b>1LA4 564-6CV0</b>            | 995  | 97.5       | 0.87           | 580                     | 18714        | 2.50              | 189               | 2000                                 |
| 2300                   | ~ <sup>2)</sup>        | <b>1LA4 632-6CV0</b>            | 995  | 97.1       | 0.89           | 670                     | 22075        | 2.40              | 269               | 1500                                 |
| 8-pole                 |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 800                    | 690                    | <b>1LA4 500-8CV0</b>            | 745  | 96.5       | 0.81           | 255                     | 10254        | 2.10              | 82                | 2100                                 |
| 850                    | 750                    | <b>1LA4 502-8CV0</b>            | 745  | 96.5       | 0.81           | 275                     | 10895        | 2.10              | 92                | 2100                                 |
| 950                    | 800                    | <b>1LA4 504-8CV0</b>            | 745  | 96.5       | 0.81           | 305                     | 12177        | 2.10              | 102               | 2100                                 |
| 1120                   | 980                    | <b>1LA4 560-8CV0</b>            | 745  | 96.8       | 0.83           | 350                     | 14356        | 2.20              | 142               | 2000                                 |
| 1250                   | 1090                   | <b>1LA4 562-8CV0</b>            | 745  | 96.9       | 0.83           | 390                     | 16022        | 2.20              | 162               | 2000                                 |
| 1450                   | 1270                   | <b>1LA4 564-8CV0</b>            | 745  | 97.0       | 0.83           | 450                     | 18585        | 2.20              | 189               | 2000                                 |
| 1650                   | ~ <sup>2)</sup>        | <b>1LA4 632-8CV0</b>            | 745  | 96.7       | 0.84           | 510                     | 21151        | 2.20              | 265               | 1500                                 |
| 1850                   | ~ <sup>2)</sup>        | <b>1LA4 634-8CV0</b>            | 746  | 96.8       | 0.84           | 570                     | 23683        | 2.40              | 294               | 1500                                 |
| 2040                   | ~ <sup>2)</sup>        | <b>1LA4 636-8CV0</b>            | 745  | 96.9       | 0.85           | 620                     | 26150        | 2.10              | 320               | 1500                                 |

#### Type of construction:

|                        |   |
|------------------------|---|
| IM B3                  | 0 |
| IM V1 (with canopy)    | 4 |
| IM V1 (without canopy) | 8 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> Utilization 130 (B) on request.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact 1LA4

| Motor type<br>(repeated) | Partial load values for square-law torque drive |      |        |                |                                     |      |        |                |                                     |     |        |                |
|--------------------------|---|------|--------|----------------|-------------------------------------|------|--------|----------------|-------------------------------------|-----|--------|----------------|
|                          | $P/P_{\text{rated}}$ 155 (F) = 75 %             |      |        |                | $P/P_{\text{rated}}$ 155 (F) = 50 % |      |        |                | $P/P_{\text{rated}}$ 155 (F) = 25 % |     |        |                |
|                          | $P$   | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$ | $\eta$ | $\cos \varphi$ |
|                          | kW  | rpm  | %      | [-]            | kW                                  | rpm  | %      | [-]            | kW                                  | rpm | %      | [-]            |
|                          | <b>Square-law torque drive</b>                  |      |        |                |                                     |      |        |                |                                     |     |        |                |
| 4-pole                   |   |      |        |                |                                     |      |        |                |                                     |     |        |                |
| 1LA4 500-4...            | 1013  | 1357 | 97.0   | 0.87           | 675                                 | 1185 | 96.9   | 0.84           | 338                                 | 941 | 96.5   | 0.73           |
| 1LA4 502-4...            | 1125  | 1357 | 97.1   | 0.87           | 750                                 | 1185 | 97.0   | 0.84           | 375                                 | 941 | 96.5   | 0.73           |
| 1LA4 504-4...            | 1238  | 1357 | 97.2   | 0.88           | 825                                 | 1185 | 97.1   | 0.86           | 413                                 | 941 | 96.8   | 0.77           |
| 1LA4 560-4...            | 1388  | 1357 | 97.4   | 0.85           | 925                                 | 1186 | 97.2   | 0.81           | 463                                 | 941 | 96.8   | 0.68           |
| 1LA4 562-4...            | 1575  | 1357 | 97.5   | 0.86           | 1050                                | 1186 | 97.4   | 0.83           | 525                                 | 941 | 97.0   | 0.71           |
| 1LA4 564-4...            | 1763  | 1357 | 97.5   | 0.86           | 1175                                | 1186 | 97.4   | 0.83           | 588                                 | 941 | 97.0   | 0.72           |
| 6-pole                   |   |      |        |                |                                     |      |        |                |                                     |     |        |                |
| 1LA4 500-6...            | 810   | 904  | 96.9   | 0.86           | 540                                 | 790  | 96.7   | 0.83           | 270                                 | 627 | 96.2   | 0.72           |
| 1LA4 502-6...            | 885   | 904  | 97.0   | 0.86           | 590                                 | 790  | 97.0   | 0.84           | 295                                 | 627 | 96.4   | 0.73           |
| 1LA4 504-6...            | 960   | 904  | 97.1   | 0.87           | 640                                 | 790  | 97.0   | 0.84           | 320                                 | 627 | 96.5   | 0.74           |
| 1LA4 560-6...            | 1125  | 904  | 97.3   | 0.85           | 750                                 | 790  | 97.2   | 0.81           | 375                                 | 627 | 96.7   | 0.70           |
| 1LA4 562-6...            | 1313  | 904  | 97.4   | 0.85           | 875                                 | 790  | 97.2   | 0.82           | 438                                 | 627 | 96.7   | 0.70           |
| 1LA4 564-6...            | 1463  | 904  | 97.5   | 0.86           | 975                                 | 790  | 97.3   | 0.84           | 488                                 | 627 | 96.9   | 0.73           |
| 1LA4 632-6...            | 1725  | 904  | 97.2   | 0.89           | 1150                                | 789  | 97.0   | 0.86           | 575                                 | 626 | 96.7   | 0.77           |
| 8-pole                   |   |      |        |                |                                     |      |        |                |                                     |     |        |                |
| 1LA4 500-8...            | 600   | 677  | 96.3   | 0.80           | 400                                 | 591  | 96.1   | 0.75           | 200                                 | 469 | 95.2   | 0.62           |
| 1LA4 502-8...            | 638   | 677  | 96.4   | 0.80           | 425                                 | 591  | 96.1   | 0.75           | 213                                 | 469 | 95.2   | 0.62           |
| 1LA4 504-8...            | 713   | 677  | 96.4   | 0.80           | 475                                 | 591  | 96.2   | 0.75           | 238                                 | 469 | 95.2   | 0.62           |
| 1LA4 560-8...            | 840   | 677  | 96.8   | 0.82           | 560                                 | 591  | 96.6   | 0.78           | 280                                 | 469 | 96.1   | 0.66           |
| 1LA4 562-8...            | 938   | 677  | 96.9   | 0.82           | 625                                 | 591  | 96.7   | 0.78           | 313                                 | 469 | 96.1   | 0.66           |
| 1LA4 564-8...            | 1088  | 677  | 97.0   | 0.82           | 725                                 | 591  | 96.8   | 0.78           | 363                                 | 469 | 96.1   | 0.66           |
| 1LA4 632-8...            | 1240  | 677  | 96.6   | 0.83           | 825                                 | 592  | 96.4   | 0.79           | 415                                 | 470 | 95.8   | 0.68           |
| 1LA4 634-8...            | 1390  | 678  | 96.7   | 0.82           | 925                                 | 592  | 96.4   | 0.78           | 465                                 | 470 | 95.7   | 0.66           |
| 1LA4 636-8...            | 1530  | 677  | 96.8   | 0.84           | 1020                                | 592  | 96.7   | 0.80           | 510                                 | 470 | 96.1   | 0.70           |

## Motors for converter operation

Converter with non-sinusoidal output

### Air-cooled motors · H-compact 1LA4

#### Selection and ordering data

| Rated power                |             | High voltage motor<br>H-compact | Operating values at rated output for utilization 155 (F) |                    |              |                         |                  |                   |                        |                                      |
|----------------------------|-------------|---------------------------------|--|--------------------|--------------|-------------------------|------------------|-------------------|------------------------|--------------------------------------|
| IEC                        | Article No. |                                 | Rated speed  | Efficiency         | Power factor | Rated current at 3.4 kV | Rated torque     | Break-down torque | Moment of inertia      | Mechanical speed limit <sup>1)</sup> |
| $P_{155(F)}^{rated}$<br>kW |             |                                 | $P_{130(B)}^{rated}$<br>kW                               | $n_{rated}$<br>rpm | $\eta$<br>%  | $\cos \varphi$<br>[-]   | $I_{rated}$<br>A | $T_{rated}$<br>Nm | $T_B/T_{rated}$<br>[-] | J<br>kgm <sup>2</sup>                |

#### 3.4 ... 4.16 kV, 50 Hz

##### 4-pole

|      |                |                     |      |      |      |     |       |      |     |      |
|------|----------------|---------------------|------|------|------|-----|-------|------|-----|------|
| 1350 | 1180           | <b>1LA4 500-4CV</b> | 1493 | 97.0 | 0.87 | 280 | 8634  | 2.50 | 42  | 2200 |
| 1500 | 1280           | <b>1LA4 502-4CV</b> | 1493 | 97.2 | 0.87 | 310 | 9594  | 2.60 | 47  | 2200 |
| 1650 | 1420           | <b>1LA4 504-4CV</b> | 1493 | 97.3 | 0.88 | 335 | 10553 | 2.60 | 54  | 2200 |
| 1850 | 1550           | <b>1LA4 560-4CV</b> | 1494 | 97.5 | 0.87 | 380 | 11824 | 2.40 | 79  | 2000 |
| 2100 | 1750           | <b>1LA4 562-4CV</b> | 1494 | 97.5 | 0.87 | 435 | 13422 | 2.40 | 92  | 2000 |
| 2350 | 1900           | <b>1LA4 564-4CV</b> | 1494 | 97.5 | 0.87 | 485 | 15020 | 2.40 | 104 | 2000 |
| 2600 | <sup>-2)</sup> | <b>1LA4 632-4CV</b> | 1494 | 97.5 | 0.88 | 530 | 16620 | 2.20 | 157 | 1500 |
| 2900 | <sup>-2)</sup> | <b>1LA4 634-4CV</b> | 1494 | 97.6 | 0.88 | 590 | 18537 | 2.20 | 171 | 1500 |
| 3150 | <sup>-2)</sup> | <b>1LA4 636-4CV</b> | 1494 | 97.7 | 0.88 | 640 | 20136 | 2.20 | 186 | 1500 |

##### 6-pole

|      |                |                     |     |      |      |     |       |      |     |      |
|------|----------------|---------------------|-----|------|------|-----|-------|------|-----|------|
| 1080 | 940            | <b>1LA4 500-6CV</b> | 995 | 97.0 | 0.86 | 225 | 10365 | 2.40 | 82  | 2100 |
| 1180 | 1030           | <b>1LA4 502-6CV</b> | 995 | 97.0 | 0.87 | 245 | 11324 | 2.40 | 92  | 2100 |
| 1280 | 1130           | <b>1LA4 504-6CV</b> | 995 | 97.1 | 0.87 | 265 | 12284 | 2.40 | 103 | 2100 |
| 1500 | 1320           | <b>1LA4 560-6CV</b> | 995 | 97.3 | 0.86 | 315 | 14395 | 2.60 | 142 | 2000 |
| 1750 | 1500           | <b>1LA4 562-6CV</b> | 995 | 97.4 | 0.86 | 365 | 16795 | 2.70 | 162 | 2000 |
| 1950 | 1700           | <b>1LA4 564-6CV</b> | 995 | 97.5 | 0.87 | 400 | 18714 | 2.50 | 189 | 2000 |
| 2220 | <sup>-2)</sup> | <b>1LA4 632-6CV</b> | 995 | 97.1 | 0.89 | 450 | 21308 | 2.30 | 269 | 1500 |
| 2480 | <sup>-2)</sup> | <b>1LA4 634-6CV</b> | 995 | 97.2 | 0.89 | 500 | 23803 | 2.20 | 297 | 1500 |
| 2700 | <sup>-2)</sup> | <b>1LA4 636-6CV</b> | 995 | 97.3 | 0.89 | 550 | 25915 | 2.20 | 323 | 1500 |

##### 8-pole

|      |                |                       |     |      |      |     |       |      |     |      |
|------|----------------|-----------------------|-----|------|------|-----|-------|------|-----|------|
| 800  | 690            | <b>1LA4 500-8CV</b>   | 745 | 96.5 | 0.81 | 180 | 10254 | 2.10 | 82  | 2100 |
| 850  | 750            | <b>1LA4 502-8CV</b>   | 745 | 96.5 | 0.81 | 190 | 10895 | 2.10 | 92  | 2100 |
| 950  | 800            | <b>1LA4 504-8CV</b>   | 745 | 96.5 | 0.81 | 215 | 12177 | 2.10 | 102 | 2100 |
| 1120 | 980            | <b>1LA4 560-8CV</b>   | 745 | 96.8 | 0.83 | 245 | 14356 | 2.20 | 142 | 2000 |
| 1250 | 1090           | <b>1LA4 562-8CV</b>   | 745 | 96.9 | 0.83 | 270 | 16022 | 2.20 | 162 | 2000 |
| 1450 | 1270           | <b>1LA4 564-8CV</b>   | 745 | 97.0 | 0.83 | 315 | 18585 | 2.20 | 189 | 2000 |
| 1570 | <sup>-2)</sup> | <b>1LA4 632-8CV 0</b> | 745 | 96.6 | 0.84 | 340 | 20126 | 2.30 | 265 | 1500 |
| 1780 | <sup>-2)</sup> | <b>1LA4 634-8CV 0</b> | 745 | 96.7 | 0.84 | 385 | 22817 | 2.30 | 294 | 1500 |
| 1960 | <sup>-2)</sup> | <b>1LA4 636-8CV 0</b> | 745 | 96.8 | 0.85 | 415 | 25125 | 2.20 | 320 | 1500 |

#### Voltage code:

|                |   |
|----------------|---|
| 4.16 kV, 50 Hz | 4 |
| Other voltage  | 9 |

#### Type of construction:

|                        |   |
|------------------------|---|
| IM B3                  | 0 |
| IM V1 (with canopy)    | 4 |
| IM V1 (without canopy) | 8 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> Utilization 130 (B) on request.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact 1LA4

| Motor type<br>(repeated) | Partial load values for square-law torque drive |      |        |                |                                     |      |        |                |                                     |     |        |                |
|--------------------------|---|------|--------|----------------|-------------------------------------|------|--------|----------------|-------------------------------------|-----|--------|----------------|
|                          | $P/P_{\text{rated}}$ 155 (F) = 75 %             |      |        |                | $P/P_{\text{rated}}$ 155 (F) = 50 % |      |        |                | $P/P_{\text{rated}}$ 155 (F) = 25 % |     |        |                |
|                          | $P$   | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$ | $\eta$ | $\cos \varphi$ |
|                          | kW  | rpm  | %      | [-]            | kW                                  | rpm  | %      | [-]            | kW                                  | rpm | %      | [-]            |
|                          | <b>Square-law torque drive</b>                  |      |        |                |                                     |      |        |                |                                     |     |        |                |
| <b>4-pole</b>            |   |      |        |                |                                     |      |        |                |                                     |     |        |                |
| 1LA4 500-4...            | 1013  | 1357 | 97.0   | 0.87           | 675                                 | 1185 | 96.9   | 0.84           | 338                                 | 941 | 96.5   | 0.73           |
| 1LA4 502-4...            | 1125  | 1357 | 97.1   | 0.87           | 750                                 | 1185 | 97.0   | 0.84           | 375                                 | 941 | 96.5   | 0.73           |
| 1LA4 504-4...            | 1238  | 1357 | 97.2   | 0.88           | 825                                 | 1185 | 97.1   | 0.86           | 413                                 | 941 | 96.8   | 0.77           |
| 1LA4 560-4...            | 1388  | 1357 | 97.4   | 0.85           | 925                                 | 1186 | 97.2   | 0.81           | 463                                 | 941 | 96.8   | 0.68           |
| 1LA4 562-4...            | 1575  | 1357 | 97.5   | 0.86           | 1050                                | 1186 | 97.4   | 0.83           | 525                                 | 941 | 97.0   | 0.71           |
| 1LA4 564-4...            | 1763  | 1357 | 97.5   | 0.86           | 1175                                | 1186 | 97.4   | 0.83           | 588                                 | 941 | 97.0   | 0.72           |
| 1LA4 632-4...            | 1950  | 1357 | 97.5   | 0.87           | 1300                                | 1185 | 97.5   | 0.85           | 650                                 | 940 | 97.2   | 0.76           |
| 1LA4 634-4...            | 2175  | 1357 | 97.6   | 0.87           | 1450                                | 1185 | 97.6   | 0.85           | 725                                 | 940 | 97.3   | 0.76           |
| 1LA4 636-4...            | 2363  | 1357 | 97.6   | 0.87           | 1575                                | 1185 | 97.6   | 0.85           | 788                                 | 940 | 97.4   | 0.77           |
| <b>6-pole</b>            |   |      |        |                |                                     |      |        |                |                                     |     |        |                |
| 1LA4 500-6...            | 810   | 904  | 96.9   | 0.86           | 540                                 | 790  | 96.7   | 0.83           | 270                                 | 627 | 96.2   | 0.72           |
| 1LA4 502-6...            | 885   | 904  | 97.0   | 0.86           | 590                                 | 790  | 97.0   | 0.84           | 295                                 | 627 | 96.4   | 0.73           |
| 1LA4 504-6...            | 960   | 904  | 97.1   | 0.87           | 640                                 | 790  | 97.0   | 0.84           | 320                                 | 627 | 96.5   | 0.74           |
| 1LA4 560-6...            | 1125  | 904  | 97.3   | 0.85           | 750                                 | 790  | 97.2   | 0.81           | 375                                 | 627 | 96.7   | 0.70           |
| 1LA4 562-6...            | 1313  | 904  | 97.4   | 0.85           | 875                                 | 790  | 97.2   | 0.82           | 438                                 | 627 | 96.7   | 0.70           |
| 1LA4 564-6...            | 1463  | 904  | 97.5   | 0.86           | 975                                 | 790  | 97.3   | 0.84           | 488                                 | 627 | 96.9   | 0.73           |
| 1LA4 632-6...            | 1665  | 904  | 97.1   | 0.89           | 1110                                | 789  | 97.1   | 0.87           | 555                                 | 626 | 96.7   | 0.79           |
| 1LA4 634-6...            | 1860  | 904  | 97.2   | 0.89           | 1240                                | 789  | 97.2   | 0.87           | 620                                 | 626 | 96.9   | 0.80           |
| 1LA4 636-6...            | 2025  | 905  | 97.3   | 0.89           | 1350                                | 789  | 97.3   | 0.87           | 675                                 | 627 | 96.9   | 0.80           |
| <b>8-pole</b>            |   |      |        |                |                                     |      |        |                |                                     |     |        |                |
| 1LA4 500-8...            | 600   | 677  | 96.3   | 0.80           | 400                                 | 591  | 96.1   | 0.75           | 200                                 | 469 | 95.2   | 0.62           |
| 1LA4 502-8...            | 638   | 677  | 96.4   | 0.80           | 425                                 | 591  | 96.1   | 0.75           | 213                                 | 469 | 95.2   | 0.62           |
| 1LA4 504-8...            | 713   | 677  | 96.4   | 0.80           | 475                                 | 591  | 96.2   | 0.75           | 238                                 | 469 | 95.2   | 0.62           |
| 1LA4 560-8...            | 840   | 677  | 96.8   | 0.82           | 560                                 | 591  | 96.6   | 0.78           | 280                                 | 469 | 96.1   | 0.66           |
| 1LA4 562-8...            | 938   | 677  | 96.9   | 0.82           | 625                                 | 591  | 96.7   | 0.78           | 313                                 | 469 | 96.1   | 0.66           |
| 1LA4 564-8...            | 1088  | 677  | 97.0   | 0.82           | 725                                 | 591  | 96.8   | 0.78           | 363                                 | 469 | 96.1   | 0.66           |
| 1LA4 632-8...            | 1180  | 678  | 96.6   | 0.82           | 785                                 | 592  | 96.5   | 0.78           | 395                                 | 470 | 95.9   | 0.66           |
| 1LA4 634-8...            | 1335  | 678  | 96.7   | 0.83           | 890                                 | 592  | 96.5   | 0.79           | 445                                 | 470 | 95.9   | 0.68           |
| 1LA4 636-8...            | 1470  | 677  | 96.8   | 0.84           | 980                                 | 592  | 96.7   | 0.80           | 490                                 | 470 | 96.1   | 0.70           |

## Motors for converter operation

Converter with non-sinusoidal output

### Air-cooled motors · H-compact 1LA4

#### Selection and ordering data

| Rated power            |                        | High voltage motor<br>H-compact | Operating values at rated output for utilization 155 (F) |            |                |                         |              |                   |                   |                                      |
|------------------------|------------------------|---------------------------------|--|------------|----------------|-------------------------|--------------|-------------------|-------------------|--------------------------------------|
| IEC                    |                        |                                 | Rated speed  | Efficiency | Power factor   | Rated current<br>2.3 kV | Rated torque | Break-down torque | Moment of inertia | Mechanical speed limit <sup>1)</sup> |
| $P_{rated}$<br>155 (F) | $P_{rated}$<br>130 (B) |                                 | $n_{rated}$  | $\eta$     | $\cos \varphi$ | $I_{rated}$             | $T_{rated}$  | $T_B/T_{rated}$   | J                 | $n_{max}$                            |
| kW                     | kW                     | Article No.                     | rpm  | %          | [-]            | A                       | Nm           | [-]               | kgm <sup>2</sup>  | rpm                                  |
| <b>2.3 kV, 60 Hz</b>   |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 4-pole                 |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 1500                   | 1260                   | <b>1LA4 500-4CV1</b>            | 1793   | 96.8       | 0.87           | 445                     | 7989         | 2.50              | 42                | 2200                                 |
| 1650                   | 1350                   | <b>1LA4 502-4CV1</b>            | 1793   | 96.8       | 0.87           | 490                     | 8787         | 2.50              | 47                | 2200                                 |
| 1800                   | 1450                   | <b>1LA4 504-4CV1</b>            | 1793   | 96.8       | 0.87           | 540                     | 9586         | 2.50              | 54                | 2200                                 |
| 2000                   | 1600                   | <b>1LA4 560-4CV1</b>            | 1794   | 97.3       | 0.87           | 590                     | 10645        | 2.40              | 79                | 2000                                 |
| 2300                   | 1850                   | <b>1LA4 562-4CV1</b>            | 1794   | 97.3       | 0.87           | 680                     | 12242        | 2.40              | 92                | 2000                                 |
| 2600                   | 2100                   | <b>1LA4 564-4CV1</b>            | 1794   | 97.3       | 0.87           | 770                     | 13839        | 2.40              | 104               | 2000                                 |
| 6-pole                 |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 1180                   | 1020                   | <b>1LA4 500-6CV1</b>            | 1195   | 96.8       | 0.87           | 350                     | 9429         | 2.40              | 82                | 2100                                 |
| 1320                   | 1150                   | <b>1LA4 502-6CV1</b>            | 1195   | 97.0       | 0.87           | 395                     | 10548        | 2.40              | 92                | 2100                                 |
| 1450                   | 1250                   | <b>1LA4 504-6CV1</b>            | 1195   | 97.1       | 0.87           | 430                     | 11587        | 2.50              | 103               | 2100                                 |
| 1650                   | 1400                   | <b>1LA4 560-6CV1</b>            | 1195   | 97.2       | 0.86           | 495                     | 13185        | 2.60              | 142               | 2000                                 |
| 1900                   | 1550                   | <b>1LA4 562-6CV1</b>            | 1195   | 97.4       | 0.86           | 570                     | 15183        | 2.60              | 162               | 2000                                 |
| 2150                   | 1750                   | <b>1LA4 564-6CV1</b>            | 1195   | 97.5       | 0.87           | 640                     | 17180        | 2.60              | 189               | 2000                                 |
| 2230                   | – <sup>2)</sup>        | <b>1LA4 632-6CV1</b>            | 1195   | 96.7       | 0.89           | 650                     | 17825        | 2.40              | 234               | 1500                                 |
| 8-pole                 |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 900                    | 750                    | <b>1LA4 500-8CV1</b>            | 896  | 96.4       | 0.79           | 295                     | 9592         | 2.30              | 82                | 2100                                 |
| 950                    | 780                    | <b>1LA4 502-8CV1</b>            | 896  | 96.4       | 0.79           | 315                     | 10124        | 2.30              | 92                | 2100                                 |
| 1050                   | 850                    | <b>1LA4 504-8CV1</b>            | 896  | 96.4       | 0.79           | 345                     | 11190        | 2.30              | 102               | 2100                                 |
| 1200                   | 1030                   | <b>1LA4 560-8CV1</b>            | 895  | 96.8       | 0.83           | 375                     | 12803        | 2.20              | 142               | 2000                                 |
| 1380                   | 1190                   | <b>1LA4 562-8CV1</b>            | 895  | 96.8       | 0.83           | 430                     | 14724        | 2.30              | 162               | 2000                                 |
| 1580                   | 1280                   | <b>1LA4 564-8CV1</b>            | 895  | 96.9       | 0.83           | 495                     | 16857        | 2.40              | 189               | 2000                                 |
| 1800                   | – <sup>2)</sup>        | <b>1LA4 632-8CV1</b>            | 895  | 96.6       | 0.85           | 550                     | 19205        | 2.10              | 265               | 1500                                 |
| 2000                   | – <sup>2)</sup>        | <b>1LA4 634-8CV1</b>            | 895  | 96.7       | 0.86           | 600                     | 21339        | 2.00              | 294               | 1500                                 |
| 2160                   | – <sup>2)</sup>        | <b>1LA4 636-8CV1</b>            | 895  | 96.8       | 0.86           | 650                     | 23046        | 2.10              | 320               | 1500                                 |

#### Type of construction:

|                        |   |
|------------------------|---|
| IM B3                  | 0 |
| IM V1 (with canopy)    | 4 |
| IM V1 (without canopy) | 8 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> Utilization 130 (B) on request.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact 1LA4

| Motor type<br>(repeated) | Partial load values for square-law torque drive |      |        |                |                                     |      |        |                |                                     |      |        |                |
|--------------------------|---|------|--------|----------------|-------------------------------------|------|--------|----------------|-------------------------------------|------|--------|----------------|
|                          | $P/P_{\text{rated}}$ 155 (F) = 75 %             |      |        |                | $P/P_{\text{rated}}$ 155 (F) = 50 % |      |        |                | $P/P_{\text{rated}}$ 155 (F) = 25 % |      |        |                |
|                          | $P$   | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$  | $\eta$ | $\cos \varphi$ |
|                          | kW  | rpm  | %      | [-]            | kW                                  | rpm  | %      | [-]            | kW                                  | rpm  | %      | [-]            |
|                          | <b>Square-law torque drive</b>                  |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 4-pole                   |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1LA4 500-4...            | 1125  | 1629 | 96.5   | 0.86           | 750                                 | 1423 | 96.2   | 0.82           | 375                                 | 1130 | 95.5   | 0.71           |
| 1LA4 502-4...            | 1238  | 1629 | 96.7   | 0.86           | 825                                 | 1423 | 96.4   | 0.83           | 413                                 | 1130 | 95.7   | 0.73           |
| 1LA4 504-4...            | 1350  | 1629 | 96.8   | 0.87           | 900                                 | 1423 | 96.5   | 0.84           | 450                                 | 1130 | 95.9   | 0.75           |
| 1LA4 560-4...            | 1500  | 1630 | 97.1   | 0.86           | 1000                                | 1424 | 96.9   | 0.82           | 500                                 | 1130 | 96.4   | 0.72           |
| 1LA4 562-4...            | 1725  | 1630 | 97.2   | 0.86           | 1150                                | 1424 | 97.2   | 0.83           | 575                                 | 1130 | 96.8   | 0.74           |
| 1LA4 564-4...            | 1950  | 1630 | 97.3   | 0.87           | 1300                                | 1424 | 97.3   | 0.84           | 650                                 | 1130 | 96.9   | 0.74           |
| 6-pole                   |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1LA4 500-6...            | 885   | 1086 | 96.8   | 0.86           | 590                                 | 949  | 96.6   | 0.83           | 295                                 | 753  | 96.0   | 0.74           |
| 1LA4 502-6...            | 990   | 1086 | 96.9   | 0.86           | 660                                 | 949  | 96.7   | 0.83           | 330                                 | 753  | 96.0   | 0.74           |
| 1LA4 504-6...            | 1088  | 1086 | 97.0   | 0.86           | 725                                 | 949  | 96.7   | 0.83           | 363                                 | 753  | 96.0   | 0.73           |
| 1LA4 560-6...            | 1238  | 1086 | 97.2   | 0.85           | 825                                 | 949  | 97.0   | 0.82           | 413                                 | 753  | 96.3   | 0.72           |
| 1LA4 562-6...            | 1425  | 1086 | 97.3   | 0.85           | 950                                 | 949  | 97.0   | 0.82           | 475                                 | 753  | 96.4   | 0.72           |
| 1LA4 564-6...            | 1613  | 1086 | 97.4   | 0.86           | 1075                                | 949  | 97.1   | 0.83           | 538                                 | 753  | 96.5   | 0.73           |
| 1LA4 632-6...            | 1675  | 1086 | 96.6   | 0.88           | 1115                                | 945  | 96.4   | 0.85           | 560                                 | 755  | 95.8   | 0.77           |
| 8-pole                   |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1LA4 500-8...            | 675   | 814  | 96.3   | 0.79           | 450                                 | 711  | 95.8   | 0.74           | 225                                 | 564  | 94.8   | 0.62           |
| 1LA4 502-8...            | 713   | 814  | 96.3   | 0.78           | 475                                 | 711  | 95.8   | 0.73           | 238                                 | 564  | 94.8   | 0.60           |
| 1LA4 504-8...            | 788   | 814  | 96.3   | 0.78           | 525                                 | 711  | 95.9   | 0.73           | 263                                 | 564  | 94.9   | 0.61           |
| 1LA4 560-8...            | 900   | 813  | 96.7   | 0.82           | 600                                 | 710  | 96.4   | 0.78           | 300                                 | 564  | 95.7   | 0.66           |
| 1LA4 562-8...            | 1035  | 813  | 96.8   | 0.82           | 690                                 | 710  | 96.4   | 0.77           | 345                                 | 564  | 95.7   | 0.66           |
| 1LA4 564-8...            | 1185  | 813  | 96.8   | 0.81           | 790                                 | 710  | 96.4   | 0.76           | 395                                 | 564  | 95.7   | 0.65           |
| 1LA4 632-8...            | 1350  | 814  | 96.4   | 0.84           | 900                                 | 708  | 96.1   | 0.81           | 450                                 | 566  | 95.5   | 0.71           |
| 1LA4 634-8...            | 1500  | 814  | 96.6   | 0.85           | 1000                                | 708  | 96.4   | 0.82           | 500                                 | 565  | 95.8   | 0.73           |
| 1LA4 636-8...            | 1620  | 814  | 96.7   | 0.84           | 1080                                | 708  | 96.5   | 0.82           | 540                                 | 565  | 95.9   | 0.72           |

## Motors for converter operation

Converter with non-sinusoidal output

### Air-cooled motors · H-compact 1LA4

#### Selection and ordering data

| Rated power                   |                        | High voltage motor<br>H-compact | Operating values at rated output for utilization 155 (F) |            |                |                          |              |                   |                   |                                      |
|-------------------------------|------------------------|---------------------------------|--|------------|----------------|--------------------------|--------------|-------------------|-------------------|--------------------------------------|
| IEC                           |                        |                                 | Rated speed  | Efficiency | Power factor   | Rated current at 4.16 kV | Rated torque | Break-down torque | Moment of inertia | Mechanical speed limit <sup>1)</sup> |
| $P_{rated}$<br>155 (F)        | $P_{rated}$<br>130 (B) |                                 | $n_{rated}$  | $\eta$     | $\cos \varphi$ | $I_{rated}$              | $T_{rated}$  | $T_B/T_{rated}$   | J                 | $n_{max}$                            |
| kW                            | kW                     | Article No.                     | rpm  | %          | [-]            | A                        | Nm           | [-]               | kgm <sup>2</sup>  | rpm                                  |
| <b>3.4 ... 4.16 kV, 60 Hz</b> |                        |                                 |  |            |                |                          |              |                   |                   |                                      |
| 4-pole                        |                        |                                 |  |            |                |                          |              |                   |                   |                                      |
| 1500                          | 1260                   | <b>1LA4 500-4CV5</b>            | 1793   | 96.8       | 0.87           | 245                      | 7989         | 2.50              | 42                | 2200                                 |
| 1650                          | 1350                   | <b>1LA4 502-4CV5</b>            | 1793   | 96.8       | 0.87           | 270                      | 8787         | 2.50              | 47                | 2200                                 |
| 1800                          | 1450                   | <b>1LA4 504-4CV5</b>            | 1793   | 96.8       | 0.87           | 295                      | 9586         | 2.50              | 54                | 2200                                 |
| 2000                          | 1600                   | <b>1LA4 560-4CV5</b>            | 1794   | 97.3       | 0.87           | 330                      | 10645        | 2.40              | 79                | 2000                                 |
| 2300                          | 1850                   | <b>1LA4 562-4CV5</b>            | 1794   | 97.3       | 0.87           | 375                      | 12242        | 2.40              | 92                | 2000                                 |
| 2600                          | 2100                   | <b>1LA4 564-4CV5</b>            | 1794   | 97.3       | 0.87           | 425                      | 13839        | 2.40              | 104               | 2000                                 |
| 2950                          | <sup>-2)</sup>         | <b>1LA4 632-4CV5 0</b>          | 1794   | 97.2       | 0.87           | 485                      | 15702        | 2.40              | 157               | 1500                                 |
| 3320                          | <sup>-2)</sup>         | <b>1LA4 634-4CV5 0</b>          | 1794   | 97.3       | 0.87           | 540                      | 17672        | 2.20              | 171               | 1500                                 |
| 3600                          | <sup>-2)</sup>         | <b>1LA4 636-4CV5 0</b>          | 1795   | 97.5       | 0.87           | 590                      | 19161        | 2.40              | 186               | 1500                                 |
| 6-pole                        |                        |                                 |  |            |                |                          |              |                   |                   |                                      |
| 1180                          | 1020                   | <b>1LA4 500-6CV5</b>            | 1195   | 96.8       | 0.87           | 194                      | 9429         | 2.40              | 82                | 2100                                 |
| 1320                          | 1150                   | <b>1LA4 502-6CV5</b>            | 1195   | 97.0       | 0.87           | 215                      | 10548        | 2.40              | 92                | 2100                                 |
| 1450                          | 1250                   | <b>1LA4 504-6CV5</b>            | 1195   | 97.1       | 0.87           | 240                      | 11587        | 2.50              | 103               | 2100                                 |
| 1650                          | 1400                   | <b>1LA4 560-6CV5</b>            | 1195   | 97.2       | 0.86           | 275                      | 13185        | 2.60              | 142               | 2000                                 |
| 1900                          | 1550                   | <b>1LA4 562-6CV5</b>            | 1195   | 97.4       | 0.86           | 315                      | 15183        | 2.60              | 162               | 2000                                 |
| 2150                          | 1750                   | <b>1LA4 564-6CV5</b>            | 1195   | 97.5       | 0.87           | 350                      | 17180        | 2.60              | 189               | 2000                                 |
| 2400                          | <sup>-2)</sup>         | <b>1LA4 632-6CV5</b>            | 1195   | 96.8       | 0.89           | 385                      | 19183        | 2.40              | 269               | 1500                                 |
| 2700                          | <sup>-2)</sup>         | <b>1LA4 634-6CV5</b>            | 1195   | 96.9       | 0.89           | 435                      | 21587        | 2.20              | 297               | 1500                                 |
| 2900                          | <sup>-2)</sup>         | <b>1LA4 636-6CV5</b>            | 1195   | 97.0       | 0.89           | 465                      | 23181        | 2.20              | 323               | 1500                                 |
| 8-pole                        |                        |                                 |  |            |                |                          |              |                   |                   |                                      |
| 900                           | 750                    | <b>1LA4 500-8CV5</b>            | 896  | 96.4       | 0.79           | 164                      | 9592         | 2.30              | 82                | 2100                                 |
| 950                           | 780                    | <b>1LA4 502-8CV5</b>            | 896  | 96.4       | 0.79           | 174                      | 10124        | 2.30              | 92                | 2100                                 |
| 1050                          | 850                    | <b>1LA4 504-8CV5</b>            | 896  | 96.4       | 0.79           | 192                      | 11190        | 2.30              | 102               | 2100                                 |
| 1200                          | 1030                   | <b>1LA4 560-8CV5</b>            | 895  | 96.8       | 0.83           | 205                      | 12803        | 2.20              | 142               | 2000                                 |
| 1380                          | 1190                   | <b>1LA4 562-8CV5</b>            | 895  | 96.8       | 0.83           | 240                      | 14724        | 2.30              | 162               | 2000                                 |
| 1580                          | 1280                   | <b>1LA4 564-8CV5</b>            | 895  | 96.9       | 0.83           | 275                      | 16857        | 2.40              | 189               | 2000                                 |
| 1800                          | <sup>-2)</sup>         | <b>1LA4 632-8CV5</b>            | 895  | 96.6       | 0.85           | 305                      | 19205        | 2.20              | 265               | 1500                                 |
| 1960                          | <sup>-2)</sup>         | <b>1LA4 634-8CV5</b>            | 895  | 96.7       | 0.86           | 325                      | 20912        | 2.00              | 294               | 1500                                 |
| 2160                          | <sup>-2)</sup>         | <b>1LA4 636-8CV5</b>            | 895  | 96.8       | 0.86           | 360                      | 23046        | 2.10              | 320               | 1500                                 |

#### Type of construction:

|                        |   |
|------------------------|---|
| IM B3                  | 0 |
| IM V1 (with canopy)    | 4 |
| IM V1 (without canopy) | 8 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see Page 3/2.

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> Utilization 130 (B) on request.



## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact 1LA4

| Motor type<br>(repeated)       | Partial load values for square-law torque drive |      |        |                |                                     |      |        |                |                                     |      |        |                |
|--------------------------------|---|------|--------|----------------|-------------------------------------|------|--------|----------------|-------------------------------------|------|--------|----------------|
|                                | $P/P_{\text{rated}}$ 155 (F) = 75 %             |      |        |                | $P/P_{\text{rated}}$ 155 (F) = 50 % |      |        |                | $P/P_{\text{rated}}$ 155 (F) = 25 % |      |        |                |
|                                | $P$   | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$  | $\eta$ | $\cos \varphi$ |
|                                | kW  | rpm  | %      | [-]            | kW                                  | rpm  | %      | [-]            | kW                                  | rpm  | %      | [-]            |
| <b>Square-law torque drive</b> |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| <b>4-pole</b>                  |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1LA4 500-4...                  | 1125  | 1629 | 96.5   | 0.86           | 750                                 | 1423 | 96.2   | 0.82           | 375                                 | 1130 | 95.5   | 0.71           |
| 1LA4 502-4...                  | 1238  | 1629 | 96.7   | 0.86           | 825                                 | 1423 | 96.4   | 0.83           | 413                                 | 1130 | 95.7   | 0.73           |
| 1LA4 504-4...                  | 1350  | 1629 | 96.8   | 0.87           | 900                                 | 1423 | 96.5   | 0.84           | 450                                 | 1130 | 95.9   | 0.75           |
| 1LA4 560-4...                  | 1500  | 1630 | 97.1   | 0.86           | 1000                                | 1424 | 96.9   | 0.82           | 500                                 | 1130 | 96.4   | 0.72           |
| 1LA4 562-4...                  | 1725  | 1630 | 97.2   | 0.86           | 1150                                | 1424 | 97.2   | 0.83           | 575                                 | 1130 | 96.8   | 0.74           |
| 1LA4 564-4...                  | 1950  | 1630 | 97.3   | 0.87           | 1300                                | 1424 | 97.3   | 0.84           | 650                                 | 1130 | 96.9   | 0.74           |
| 1LA4 632-4...                  | 2215  | 1630 | 97.2   | 0.86           | 1475                                | 1419 | 97.0   | 0.83           | 740                                 | 1132 | 96.6   | 0.73           |
| 1LA4 634-4...                  | 2490  | 1631 | 97.3   | 0.86           | 1660                                | 1419 | 97.2   | 0.83           | 830                                 | 1132 | 96.8   | 0.74           |
| 1LA4 636-4...                  | 2700  | 1631 | 97.4   | 0.87           | 1800                                | 1419 | 97.2   | 0.83           | 900                                 | 1132 | 96.8   | 0.74           |
| <b>6-pole</b>                  |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1LA4 500-6...                  | 885   | 1086 | 96.8   | 0.86           | 590                                 | 949  | 96.6   | 0.83           | 295                                 | 753  | 96.0   | 0.74           |
| 1LA4 502-6...                  | 990   | 1086 | 96.9   | 0.86           | 660                                 | 949  | 96.7   | 0.83           | 330                                 | 753  | 96.0   | 0.74           |
| 1LA4 504-6...                  | 1088  | 1086 | 97.0   | 0.86           | 725                                 | 949  | 96.7   | 0.83           | 363                                 | 753  | 96.0   | 0.73           |
| 1LA4 560-6...                  | 1238  | 1086 | 97.2   | 0.85           | 825                                 | 949  | 97.0   | 0.82           | 413                                 | 753  | 96.3   | 0.72           |
| 1LA4 562-6...                  | 1425  | 1086 | 97.3   | 0.85           | 950                                 | 949  | 97.0   | 0.82           | 475                                 | 753  | 96.4   | 0.72           |
| 1LA4 564-6...                  | 1613  | 1086 | 97.4   | 0.86           | 1075                                | 949  | 97.1   | 0.83           | 538                                 | 753  | 96.5   | 0.73           |
| 1LA4 632-6...                  | 1800  | 1086 | 96.7   | 0.88           | 1200                                | 945  | 96.5   | 0.86           | 600                                 | 755  | 95.9   | 0.78           |
| 1LA4 634-6...                  | 2025  | 1086 | 97.0   | 0.89           | 1350                                | 945  | 96.8   | 0.87           | 675                                 | 755  | 96.4   | 0.80           |
| 1LA4 636-6...                  | 2175  | 1086 | 97.0   | 0.89           | 1450                                | 945  | 96.9   | 0.87           | 725                                 | 755  | 96.4   | 0.80           |
| <b>8-pole</b>                  |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1LA4 500-8...                  | 675   | 814  | 96.3   | 0.79           | 450                                 | 711  | 95.8   | 0.74           | 225                                 | 564  | 94.8   | 0.62           |
| 1LA4 502-8...                  | 713   | 814  | 96.3   | 0.78           | 475                                 | 711  | 95.8   | 0.73           | 238                                 | 564  | 94.8   | 0.60           |
| 1LA4 504-8...                  | 788   | 814  | 96.3   | 0.78           | 525                                 | 711  | 95.9   | 0.73           | 263                                 | 564  | 94.9   | 0.61           |
| 1LA4 560-8...                  | 900   | 813  | 96.7   | 0.82           | 600                                 | 710  | 96.4   | 0.78           | 300                                 | 564  | 95.7   | 0.66           |
| 1LA4 562-8...                  | 1035  | 813  | 96.8   | 0.82           | 690                                 | 710  | 96.4   | 0.77           | 345                                 | 564  | 95.7   | 0.66           |
| 1LA4 564-8...                  | 1185  | 813  | 96.8   | 0.81           | 790                                 | 710  | 96.4   | 0.76           | 395                                 | 564  | 95.7   | 0.65           |
| 1LA4 632-8...                  | 1350  | 814  | 96.3   | 0.83           | 900                                 | 709  | 95.9   | 0.79           | 450                                 | 566  | 95.1   | 0.67           |
| 1LA4 634-8...                  | 1470  | 814  | 96.5   | 0.84           | 980                                 | 708  | 96.3   | 0.82           | 490                                 | 566  | 95.8   | 0.72           |
| 1LA4 636-8...                  | 1620  | 814  | 96.6   | 0.84           | 1080                                | 708  | 96.4   | 0.81           | 540                                 | 566  | 95.8   | 0.72           |

## Motors for converter operation

Converter with non-sinusoidal output

### Air-cooled motors · H-compact 1LA4

#### Selection and ordering data

| Rated power            |                        | High voltage motor<br>H-compact | Operating values at rated output for utilization 155 (F) |            |                |                         |              |                   |                   |                                      |
|------------------------|------------------------|---------------------------------|--|------------|----------------|-------------------------|--------------|-------------------|-------------------|--------------------------------------|
| IEC                    |                        |                                 | Rated speed  | Efficiency | Power factor   | Rated current<br>2.3 kV | Rated torque | Break-down torque | Moment of inertia | Mechanical speed limit <sup>1)</sup> |
| $P_{rated}$<br>155 (F) | $P_{rated}$<br>130 (B) |                                 | $n_{rated}$  | $\eta$     | $\cos \varphi$ | $I_{rated}$             | $T_{rated}$  | $T_B/T_{rated}$   | J                 | $n_{max}$                            |
| kW                     | kW                     | Article No.                     | rpm  | %          | [-]            | A                       | Nm           | [-]               | kgm <sup>2</sup>  | rpm                                  |
| <b>2.3 kV, 50 Hz</b>   |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 4-pole                 |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 1350                   | 1180                   | <b>1LA4 500-4CV0</b>            | 1493   | 97.0       | 0.87           | 400                     | 8634         | 2.50              | 42                | 2200                                 |
| 1500                   | 1280                   | <b>1LA4 502-4CV0</b>            | 1493   | 97.2       | 0.87           | 445                     | 9594         | 2.60              | 47                | 2200                                 |
| 1650                   | 1420                   | <b>1LA4 504-4CV0</b>            | 1493   | 97.3       | 0.88           | 485                     | 10553        | 2.60              | 54                | 2200                                 |
| 1850                   | 1550                   | <b>1LA4 560-4CV0</b>            | 1494   | 97.5       | 0.87           | 550                     | 11824        | 2.40              | 79                | 2000                                 |
| 2100                   | 1750                   | <b>1LA4 562-4CV0</b>            | 1494   | 97.5       | 0.87           | 620                     | 13422        | 2.40              | 92                | 2000                                 |
| 2350                   | 1900                   | <b>1LA4 564-4CV0</b>            | 1494   | 97.5       | 0.87           | 700                     | 15020        | 2.40              | 104               | 2000                                 |
| 6-pole                 |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 1080                   | 940                    | <b>1LA4 500-6CV0</b>            | 995  | 97.0       | 0.86           | 325                     | 10365        | 2.40              | 82                | 2100                                 |
| 1180                   | 1030                   | <b>1LA4 502-6CV0</b>            | 995  | 97.0       | 0.87           | 350                     | 11324        | 2.40              | 92                | 2100                                 |
| 1280                   | 1130                   | <b>1LA4 504-6CV0</b>            | 995  | 97.1       | 0.87           | 380                     | 12284        | 2.40              | 103               | 2100                                 |
| 1500                   | 1320                   | <b>1LA4 560-6CV0</b>            | 995  | 97.3       | 0.86           | 450                     | 14395        | 2.60              | 142               | 2000                                 |
| 1750                   | 1500                   | <b>1LA4 562-6CV0</b>            | 995  | 97.4       | 0.86           | 520                     | 16795        | 2.70              | 162               | 2000                                 |
| 1950                   | 1700                   | <b>1LA4 564-6CV0</b>            | 995  | 97.5       | 0.87           | 580                     | 18714        | 2.50              | 189               | 2000                                 |
| 2300                   | ~ <sup>2)</sup>        | <b>1LA4 632-6CV0</b>            | 995  | 97.1       | 0.89           | 670                     | 22075        | 2.40              | 269               | 1500                                 |
| 8-pole                 |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 800                    | 690                    | <b>1LA4 500-8CV0</b>            | 745  | 96.5       | 0.81           | 255                     | 10254        | 2.10              | 82                | 2100                                 |
| 850                    | 750                    | <b>1LA4 502-8CV0</b>            | 745  | 96.5       | 0.81           | 275                     | 10895        | 2.10              | 92                | 2100                                 |
| 950                    | 800                    | <b>1LA4 504-8CV0</b>            | 745  | 96.5       | 0.81           | 305                     | 12177        | 2.10              | 102               | 2100                                 |
| 1120                   | 980                    | <b>1LA4 560-8CV0</b>            | 745  | 96.8       | 0.83           | 350                     | 14356        | 2.20              | 142               | 2000                                 |
| 1250                   | 1090                   | <b>1LA4 562-8CV0</b>            | 745  | 96.9       | 0.83           | 390                     | 16022        | 2.20              | 162               | 2000                                 |
| 1450                   | 1270                   | <b>1LA4 564-8CV0</b>            | 745  | 97.0       | 0.83           | 450                     | 18585        | 2.20              | 189               | 2000                                 |
| 1650                   | ~ <sup>2)</sup>        | <b>1LA4 632-8CV0</b>            | 745  | 96.7       | 0.84           | 510                     | 21151        | 2.20              | 265               | 1500                                 |
| 1850                   | ~ <sup>2)</sup>        | <b>1LA4 634-8CV0</b>            | 746  | 96.8       | 0.84           | 570                     | 23683        | 2.40              | 294               | 1500                                 |
| 2040                   | ~ <sup>2)</sup>        | <b>1LA4 636-8CV0</b>            | 745  | 96.9       | 0.85           | 620                     | 26150        | 2.10              | 320               | 1500                                 |

#### Type of construction:

|                        |   |
|------------------------|---|
| IM B3                  | 0 |
| IM V1 (with canopy)    | 4 |
| IM V1 (without canopy) | 8 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> Utilization 130 (B) on request.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact 1LA4

| Motor type<br>(repeated) | Constant-torque drive, speed range |           |        |                |           |           |        |                |           |           |        |                |
|--------------------------|------------------------------------|-----------|--------|----------------|-----------|-----------|--------|----------------|-----------|-----------|--------|----------------|
|                          | 1:2                                |           |        |                | 1:5       |           |        |                | 1:10      |           |        |                |
|                          | $P_{max}$                          | $T_{max}$ | $\eta$ | $\cos \varphi$ | $P_{max}$ | $T_{max}$ | $\eta$ | $\cos \varphi$ | $P_{max}$ | $T_{max}$ | $\eta$ | $\cos \varphi$ |
|                          | kW                                 | Nm        | %      | [-]            | kW        | Nm        | %      | [-]            | kW        | Nm        | %      | [-]            |
|                          | <b>Constant-torque drive</b>       |           |        |                |           |           |        |                |           |           |        |                |
| <b>4-pole</b>            |                                    |           |        |                |           |           |        |                |           |           |        |                |
| 1LA4 500-4...            | 1300                               | 8315      | 96.8   | 0.85           | 1050      | 6716      | 96.9   | 0.85           | 940       | 6012      | 96.9   | 0.84           |
| 1LA4 502-4...            | 1450                               | 9274      | 97.0   | 0.85           | 1180      | 7547      | 97.1   | 0.85           | 1060      | 6780      | 97.1   | 0.85           |
| 1LA4 504-4...            | 1600                               | 10233     | 97.1   | 0.86           | 1320      | 8443      | 97.2   | 0.86           | 1180      | 7547      | 97.2   | 0.86           |
| 1LA4 560-4...            | 1760                               | 11249     | 97.3   | 0.85           | 1450      | 9268      | 97.4   | 0.84           | 1320      | 8437      | 97.4   | 0.83           |
| 1LA4 562-4...            | 2040                               | 13039     | 97.3   | 0.85           | 1680      | 10738     | 97.4   | 0.85           | 1550      | 9907      | 97.4   | 0.84           |
| 1LA4 564-4...            | 2300                               | 14701     | 97.3   | 0.85           | 1900      | 12144     | 97.4   | 0.85           | 1750      | 11185     | 97.4   | 0.84           |
| <b>6-pole</b>            |                                    |           |        |                |           |           |        |                |           |           |        |                |
| 1LA4 500-6...            | 1060                               | 10173     | 96.6   | 0.85           | 880       | 8445      | 96.8   | 0.84           | 800       | 7678      | 96.9   | 0.84           |
| 1LA4 502-6...            | 1160                               | 11133     | 96.8   | 0.86           | 970       | 9309      | 97.0   | 0.86           | 880       | 8445      | 97.0   | 0.85           |
| 1LA4 504-6...            | 1260                               | 12092     | 96.8   | 0.86           | 1060      | 10173     | 97.0   | 0.86           | 960       | 9213      | 97.1   | 0.86           |
| 1LA4 560-6...            | 1480                               | 14204     | 97.0   | 0.84           | 1250      | 11996     | 97.2   | 0.84           | 1120      | 10749     | 97.2   | 0.83           |
| 1LA4 562-6...            | 1720                               | 16507     | 97.1   | 0.84           | 1450      | 13916     | 97.3   | 0.83           | 1250      | 11996     | 97.3   | 0.83           |
| 1LA4 564-6...            | 1930                               | 18522     | 97.3   | 0.85           | 1650      | 15835     | 97.4   | 0.85           | 1400      | 13436     | 97.5   | 0.85           |
| 1LA4 632-6...            | 2210                               | 21190     | 97.1   | 0.89           | 1795      | 17720     | 97.0   | 0.88           | 1680      | 16115     | 97.0   | 0.87           |
| <b>8-pole</b>            |                                    |           |        |                |           |           |        |                |           |           |        |                |
| 1LA4 500-8...            | 790                                | 10126     | 96.1   | 0.79           | 650       | 8331      | 96.3   | 0.78           | 580       | 7434      | 96.3   | 0.76           |
| 1LA4 502-8...            | 850                                | 10895     | 96.1   | 0.80           | 730       | 9357      | 96.2   | 0.79           | 650       | 8331      | 96.3   | 0.77           |
| 1LA4 504-8...            | 950                                | 12177     | 96.1   | 0.80           | 800       | 10254     | 96.2   | 0.78           | 710       | 9100      | 96.3   | 0.77           |
| 1LA4 560-8...            | 1090                               | 13971     | 96.6   | 0.82           | 890       | 11408     | 96.8   | 0.81           | 800       | 10254     | 96.8   | 0.79           |
| 1LA4 562-8...            | 1240                               | 15894     | 96.7   | 0.82           | 1020      | 13074     | 96.9   | 0.81           | 920       | 11792     | 96.9   | 0.80           |
| 1LA4 564-8...            | 1440                               | 18457     | 96.8   | 0.82           | 1200      | 15381     | 97.0   | 0.81           | 1100      | 14099     | 97.0   | 0.80           |
| 1LA4 632-8...            | 1585                               | 20305     | 96.6   | 0.84           | 1285      | 16495     | 96.5   | 0.82           | 1205      | 15440     | 96.4   | 0.81           |
| 1LA4 634-8...            | 1775                               | 22735     | 96.7   | 0.83           | 1445      | 18470     | 96.6   | 0.81           | 1350      | 17285     | 96.5   | 0.80           |
| 1LA4 636-8...            | 1960                               | 25100     | 96.8   | 0.85           | 1590      | 20395     | 96.8   | 0.83           | 1490      | 19090     | 96.7   | 0.82           |

## Motors for converter operation

Converter with non-sinusoidal output

### Air-cooled motors · H-compact 1LA4

#### Selection and ordering data

| Rated power                   |                        | High voltage motor<br>H-compact | Operating values at rated output for utilization 155 (F) |            |                |                         |              |                   |                   |                                      |
|-------------------------------|------------------------|---------------------------------|--|------------|----------------|-------------------------|--------------|-------------------|-------------------|--------------------------------------|
| IEC                           |                        |                                 | Rated speed  | Efficiency | Power factor   | Rated current at 3.4 kV | Rated torque | Break-down torque | Moment of inertia | Mechanical speed limit <sup>1)</sup> |
| $P_{rated}$<br>155 (F)        | $P_{rated}$<br>130 (B) |                                 | $n_{rated}$  | $\eta$     | $\cos \varphi$ | $I_{rated}$             | $T_{rated}$  | $T_B/T_{rated}$   | J                 | $n_{max}$                            |
| kW                            | kW                     | Article No.                     | rpm  | %          | [-]            | A                       | Nm           | [-]               | kgm <sup>2</sup>  | rpm                                  |
| <b>3.4 ... 4.16 kV, 50 Hz</b> |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 4-pole                        |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 1350                          | 1180                   | <b>1LA4 500-4CV</b>             | 1493   | 97.0       | 0.87           | 280                     | 8634         | 2.50              | 42                | 2200                                 |
| 1500                          | 1280                   | <b>1LA4 502-4CV</b>             | 1493   | 97.2       | 0.87           | 310                     | 9594         | 2.60              | 47                | 2200                                 |
| 1650                          | 1420                   | <b>1LA4 504-4CV</b>             | 1493   | 97.3       | 0.88           | 335                     | 10553        | 2.60              | 54                | 2200                                 |
| 1850                          | 1550                   | <b>1LA4 560-4CV</b>             | 1494   | 97.5       | 0.87           | 380                     | 11824        | 2.40              | 79                | 2000                                 |
| 2100                          | 1750                   | <b>1LA4 562-4CV</b>             | 1494   | 97.5       | 0.87           | 435                     | 13422        | 2.40              | 92                | 2000                                 |
| 2350                          | 1900                   | <b>1LA4 564-4CV</b>             | 1494   | 97.5       | 0.87           | 485                     | 15020        | 2.40              | 104               | 2000                                 |
| 2600                          | <sup>-2)</sup>         | <b>1LA4 632-4CV 0</b>           | 1494   | 97.5       | 0.88           | 530                     | 16620        | 2.20              | 157               | 1500                                 |
| 2900                          | <sup>-2)</sup>         | <b>1LA4 634-4CV 0</b>           | 1494   | 97.6       | 0.88           | 590                     | 18537        | 2.20              | 171               | 1500                                 |
| 3150                          | <sup>-2)</sup>         | <b>1LA4 636-4CV 0</b>           | 1494   | 97.7       | 0.88           | 640                     | 20136        | 2.20              | 186               | 1500                                 |
| 6-pole                        |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 1080                          | 940                    | <b>1LA4 500-6CV</b>             | 995  | 97.0       | 0.86           | 225                     | 10365        | 2.40              | 82                | 2100                                 |
| 1180                          | 1030                   | <b>1LA4 502-6CV</b>             | 995  | 97.0       | 0.87           | 245                     | 11324        | 2.40              | 92                | 2100                                 |
| 1280                          | 1130                   | <b>1LA4 504-6CV</b>             | 995  | 97.1       | 0.87           | 265                     | 12284        | 2.40              | 103               | 2100                                 |
| 1500                          | 1320                   | <b>1LA4 560-6CV</b>             | 995  | 97.3       | 0.86           | 315                     | 14395        | 2.60              | 142               | 2000                                 |
| 1750                          | 1500                   | <b>1LA4 562-6CV</b>             | 995  | 97.4       | 0.86           | 365                     | 16795        | 2.70              | 162               | 2000                                 |
| 1950                          | 1700                   | <b>1LA4 564-6CV</b>             | 995  | 97.5       | 0.87           | 400                     | 18714        | 2.50              | 189               | 2000                                 |
| 2220                          | <sup>-2)</sup>         | <b>1LA4 632-6CV</b>             | 995  | 97.1       | 0.89           | 450                     | 21308        | 2.30              | 269               | 1500                                 |
| 2480                          | <sup>-2)</sup>         | <b>1LA4 634-6CV</b>             | 995  | 97.2       | 0.89           | 500                     | 23803        | 2.20              | 297               | 1500                                 |
| 2700                          | <sup>-2)</sup>         | <b>1LA4 636-6CV</b>             | 995  | 97.3       | 0.89           | 550                     | 25915        | 2.20              | 323               | 1500                                 |
| 8-pole                        |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 800                           | 690                    | <b>1LA4 500-8CV</b>             | 745  | 96.5       | 0.81           | 180                     | 10254        | 2.10              | 82                | 2100                                 |
| 850                           | 750                    | <b>1LA4 502-8CV</b>             | 745  | 96.5       | 0.81           | 190                     | 10895        | 2.10              | 92                | 2100                                 |
| 950                           | 800                    | <b>1LA4 504-8CV</b>             | 745  | 96.5       | 0.81           | 215                     | 12177        | 2.10              | 102               | 2100                                 |
| 1120                          | 980                    | <b>1LA4 560-8CV</b>             | 745  | 96.8       | 0.83           | 245                     | 14356        | 2.20              | 142               | 2000                                 |
| 1250                          | 1090                   | <b>1LA4 562-8CV</b>             | 745  | 96.9       | 0.83           | 270                     | 16022        | 2.20              | 162               | 2000                                 |
| 1450                          | 1270                   | <b>1LA4 564-8CV</b>             | 745  | 97.0       | 0.83           | 315                     | 18585        | 2.20              | 189               | 2000                                 |
| 1570                          | <sup>-2)</sup>         | <b>1LA4 632-8CV</b>             | 745  | 96.6       | 0.84           | 340                     | 20126        | 2.30              | 265               | 1500                                 |
| 1780                          | <sup>-2)</sup>         | <b>1LA4 634-8CV</b>             | 745  | 96.7       | 0.84           | 385                     | 22817        | 2.30              | 294               | 1500                                 |
| 1960                          | <sup>-2)</sup>         | <b>1LA4 636-8CV</b>             | 745  | 96.8       | 0.85           | 415                     | 25125        | 2.20              | 320               | 1500                                 |

#### Voltage code:

|                |          |
|----------------|----------|
| 4.16 kV, 50 Hz | <b>4</b> |
| Other voltage  | <b>9</b> |

#### Type of construction:

|                        |          |
|------------------------|----------|
| IM B3                  | <b>0</b> |
| IM V1 (with canopy)    | <b>4</b> |
| IM V1 (without canopy) | <b>8</b> |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> Utilization 130 (B) on request.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact 1LA4

| Motor type<br>(repeated) | Constant-torque drive, speed range |            |        |                |            |            |        |                |            |            |        |                |
|--------------------------|------------------------------------|------------|--------|----------------|------------|------------|--------|----------------|------------|------------|--------|----------------|
|                          | 1:2                                |            |        |                | 1:5        |            |        |                | 1:10       |            |        |                |
|                          | $P_{\max}$                         | $T_{\max}$ | $\eta$ | $\cos \varphi$ | $P_{\max}$ | $T_{\max}$ | $\eta$ | $\cos \varphi$ | $P_{\max}$ | $T_{\max}$ | $\eta$ | $\cos \varphi$ |
|                          | kW                                 | Nm         | %      | [-]            | kW         | Nm         | %      | [-]            | kW         | Nm         | %      | [-]            |
|                          | <b>Constant-torque drive</b>       |            |        |                |            |            |        |                |            |            |        |                |
| <b>4-pole</b>            |                                    |            |        |                |            |            |        |                |            |            |        |                |
| 1LA4 500-4...            | 1300                               | 8315       | 96.8   | 0.85           | 1050       | 6716       | 96.9   | 0.85           | 940        | 6012       | 96.9   | 0.84           |
| 1LA4 502-4...            | 1450                               | 9274       | 97.0   | 0.85           | 1180       | 7547       | 97.1   | 0.85           | 1060       | 6780       | 97.1   | 0.85           |
| 1LA4 504-4...            | 1600                               | 10233      | 97.1   | 0.86           | 1320       | 8443       | 97.2   | 0.86           | 1180       | 7547       | 97.2   | 0.86           |
| 1LA4 560-4...            | 1760                               | 11249      | 97.3   | 0.85           | 1450       | 9268       | 97.4   | 0.84           | 1320       | 8437       | 97.4   | 0.83           |
| 1LA4 562-4...            | 2040                               | 13039      | 97.3   | 0.85           | 1680       | 10738      | 97.4   | 0.85           | 1550       | 9907       | 97.4   | 0.84           |
| 1LA4 564-4...            | 2300                               | 14701      | 97.3   | 0.85           | 1900       | 12144      | 97.4   | 0.85           | 1750       | 11185      | 97.4   | 0.84           |
| 1LA4 632-4...            | 2495                               | 15950      | 97.4   | 0.88           | 2030       | 12960      | 97.4   | 0.87           | 1900       | 12130      | 97.4   | 0.87           |
| 1LA4 634-4...            | 2780                               | 17790      | 97.5   | 0.88           | 2260       | 14460      | 97.5   | 0.87           | 2110       | 13530      | 97.4   | 0.87           |
| 1LA4 636-4...            | 3020                               | 19330      | 97.6   | 0.88           | 2460       | 15700      | 97.6   | 0.87           | 2300       | 14700      | 97.5   | 0.87           |
| <b>6-pole</b>            |                                    |            |        |                |            |            |        |                |            |            |        |                |
| 1LA4 500-6...            | 1060                               | 10173      | 96.6   | 0.85           | 880        | 8445       | 96.8   | 0.84           | 800        | 7678       | 96.9   | 0.84           |
| 1LA4 502-6...            | 1160                               | 11133      | 96.8   | 0.86           | 970        | 9309       | 97.0   | 0.86           | 880        | 8445       | 97.0   | 0.85           |
| 1LA4 504-6...            | 1260                               | 12092      | 96.8   | 0.86           | 1060       | 10173      | 97.0   | 0.86           | 960        | 9213       | 97.1   | 0.86           |
| 1LA4 560-6...            | 1480                               | 14204      | 97.0   | 0.84           | 1250       | 11996      | 97.2   | 0.84           | 1120       | 10749      | 97.2   | 0.83           |
| 1LA4 562-6...            | 1720                               | 16507      | 97.1   | 0.84           | 1450       | 13916      | 97.3   | 0.83           | 1250       | 11996      | 97.3   | 0.83           |
| 1LA4 564-6...            | 1930                               | 18522      | 97.3   | 0.85           | 1650       | 15835      | 97.4   | 0.85           | 1400       | 13436      | 97.5   | 0.85           |
| 1LA4 632-6...            | 2130                               | 20456      | 97.0   | 0.89           | 1730       | 16620      | 97.0   | 0.88           | 1620       | 15555      | 97.0   | 0.88           |
| 1LA4 634-6...            | 2380                               | 22839      | 97.1   | 0.89           | 1935       | 18545      | 97.2   | 0.89           | 1810       | 17342      | 97.1   | 0.88           |
| 1LA4 636-6...            | 2590                               | 24880      | 97.3   | 0.89           | 2100       | 20215      | 97.3   | 0.89           | 1970       | 18920      | 97.2   | 0.88           |
| <b>8-pole</b>            |                                    |            |        |                |            |            |        |                |            |            |        |                |
| 1LA4 500-8...            | 790                                | 10126      | 96.1   | 0.79           | 650        | 8331       | 96.3   | 0.78           | 580        | 7434       | 96.3   | 0.76           |
| 1LA4 502-8...            | 850                                | 10895      | 96.1   | 0.80           | 730        | 9357       | 96.2   | 0.79           | 650        | 8331       | 96.3   | 0.77           |
| 1LA4 504-8...            | 950                                | 12177      | 96.1   | 0.80           | 800        | 10254      | 96.2   | 0.78           | 710        | 9100       | 96.3   | 0.77           |
| 1LA4 560-8...            | 1090                               | 13971      | 96.6   | 0.82           | 890        | 11408      | 96.8   | 0.81           | 800        | 10254      | 96.8   | 0.79           |
| 1LA4 562-8...            | 1240                               | 15894      | 96.7   | 0.82           | 1020       | 13074      | 96.9   | 0.81           | 920        | 11792      | 96.9   | 0.80           |
| 1LA4 564-8...            | 1440                               | 18457      | 96.8   | 0.82           | 1200       | 15381      | 97.0   | 0.81           | 1100       | 14099      | 97.0   | 0.80           |
| 1LA4 632-8...            | 1510                               | 19310      | 96.5   | 0.84           | 1225       | 15697      | 96.4   | 0.82           | 1145       | 14690      | 96.3   | 0.81           |
| 1LA4 634-8...            | 1710                               | 21903      | 96.7   | 0.84           | 1390       | 17796      | 96.6   | 0.82           | 1300       | 16666      | 96.5   | 0.81           |
| 1LA4 636-8...            | 1880                               | 24118      | 96.8   | 0.85           | 1530       | 19596      | 96.7   | 0.83           | 1430       | 18340      | 96.7   | 0.82           |

## Motors for converter operation

Converter with non-sinusoidal output

### Air-cooled motors · H-compact 1LA4

#### Selection and ordering data

| Rated power            |                        | High voltage motor<br>H-compact | Operating values at rated output for utilization 155 (F) |            |                |                         |              |                      |                      |   |
|------------------------|------------------------|---------------------------------|--|------------|----------------|-------------------------|--------------|----------------------|----------------------|---|
| IEC                    |                        |                                 | Rated speed  | Efficiency | Power factor   | Rated current<br>2.3 kV | Rated torque | Break-down<br>torque | Moment<br>of inertia | Mechanical<br>speed limit <sup>1)</sup> |
| $P_{rated}$<br>155 (F) | $P_{rated}$<br>130 (B) |                                 | $n_{rated}$  | $\eta$     | $\cos \varphi$ | $I_{rated}$             | $T_{rated}$  | $T_B/T_{rated}$      | J                    | $n_{max}$                               |
| kW                     | kW                     | Article No.                     | rpm  | %          | [-]            | A                       | Nm           | [-]                  | kgm <sup>2</sup>     | rpm                                     |
| <b>2.3 kV, 60 Hz</b>   |                        |                                 |  |            |                |                         |              |                      |                      |   |
| 4-pole                 |                        |                                 |  |            |                |                         |              |                      |                      |   |
| 1500                   | 1260                   | <b>1LA4 500-4CV1</b>            | 1793   | 96.8       | 0.87           | 445                     | 7989         | 2.50                 | 42                   | 2200                                    |
| 1650                   | 1350                   | <b>1LA4 502-4CV1</b>            | 1793   | 96.8       | 0.87           | 490                     | 8787         | 2.50                 | 47                   | 2200                                    |
| 1800                   | 1450                   | <b>1LA4 504-4CV1</b>            | 1793   | 96.8       | 0.87           | 540                     | 9586         | 2.50                 | 54                   | 2200                                    |
| 2000                   | 1600                   | <b>1LA4 560-4CV1</b>            | 1794   | 97.3       | 0.87           | 590                     | 10645        | 2.40                 | 79                   | 2000                                    |
| 2300                   | 1850                   | <b>1LA4 562-4CV1</b>            | 1794   | 97.3       | 0.87           | 680                     | 12242        | 2.40                 | 92                   | 2000                                    |
| 2600                   | 2100                   | <b>1LA4 564-4CV1</b>            | 1794   | 97.3       | 0.87           | 770                     | 13839        | 2.40                 | 104                  | 2000                                    |
| 6-pole                 |                        |                                 |  |            |                |                         |              |                      |                      |   |
| 1180                   | 1020                   | <b>1LA4 500-6CV1</b>            | 1195   | 96.8       | 0.87           | 350                     | 9429         | 2.40                 | 82                   | 2100                                    |
| 1320                   | 1150                   | <b>1LA4 502-6CV1</b>            | 1195   | 97.0       | 0.87           | 395                     | 10548        | 2.40                 | 92                   | 2100                                    |
| 1450                   | 1250                   | <b>1LA4 504-6CV1</b>            | 1195   | 97.1       | 0.87           | 430                     | 11587        | 2.50                 | 103                  | 2100                                    |
| 1650                   | 1400                   | <b>1LA4 560-6CV1</b>            | 1195   | 97.2       | 0.86           | 495                     | 13185        | 2.60                 | 142                  | 2000                                    |
| 1900                   | 1550                   | <b>1LA4 562-6CV1</b>            | 1195   | 97.4       | 0.86           | 570                     | 15183        | 2.60                 | 162                  | 2000                                    |
| 2150                   | 1750                   | <b>1LA4 564-6CV1</b>            | 1195   | 97.5       | 0.87           | 640                     | 17180        | 2.60                 | 189                  | 2000                                    |
| 2230                   | — <sup>2)</sup>        | <b>1LA4 632-6CV1</b>            | 1195   | 96.7       | 0.89           | 650                     | 17825        | 2.40                 | 234                  | 1500                                    |
| 8-pole                 |                        |                                 |  |            |                |                         |              |                      |                      |   |
| 900                    | 750                    | <b>1LA4 500-8CV1</b>            | 896  | 96.4       | 0.79           | 295                     | 9592         | 2.30                 | 82                   | 2100                                    |
| 950                    | 780                    | <b>1LA4 502-8CV1</b>            | 896  | 96.4       | 0.79           | 315                     | 10124        | 2.30                 | 92                   | 2100                                    |
| 1050                   | 850                    | <b>1LA4 504-8CV1</b>            | 896  | 96.4       | 0.79           | 345                     | 11190        | 2.30                 | 102                  | 2100                                    |
| 1200                   | 1030                   | <b>1LA4 560-8CV1</b>            | 895  | 96.8       | 0.83           | 375                     | 12803        | 2.20                 | 142                  | 2000                                    |
| 1380                   | 1190                   | <b>1LA4 562-8CV1</b>            | 895  | 96.8       | 0.83           | 430                     | 14724        | 2.30                 | 162                  | 2000                                    |
| 1580                   | 1280                   | <b>1LA4 564-8CV1</b>            | 895  | 96.9       | 0.83           | 495                     | 16857        | 2.40                 | 189                  | 2000                                    |
| 1800                   | — <sup>2)</sup>        | <b>1LA4 632-8CV1</b>            | 895  | 96.6       | 0.85           | 550                     | 19205        | 2.10                 | 265                  | 1500                                    |
| 2000                   | — <sup>2)</sup>        | <b>1LA4 634-8CV1</b>            | 895  | 96.7       | 0.86           | 600                     | 21339        | 2.00                 | 294                  | 1500                                    |
| 2160                   | — <sup>2)</sup>        | <b>1LA4 636-8CV1</b>            | 895  | 96.8       | 0.86           | 650                     | 23046        | 2.10                 | 320                  | 1500                                    |

#### Type of construction:

|                        |   |
|------------------------|---|
| IM B3                  | 0 |
| IM V1 (with canopy)    | 4 |
| IM V1 (without canopy) | 8 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> Utilization 130 (B) on request.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact 1LA4

| Motor type<br>(repeated) | Constant-torque drive, speed range |           |        |                |           |           |        |                |           |           |        |                |
|--------------------------|------------------------------------|-----------|--------|----------------|-----------|-----------|--------|----------------|-----------|-----------|--------|----------------|
|                          | 1:2                                |           |        |                | 1:5       |           |        |                | 1:10      |           |        |                |
|                          | $P_{max}$                          | $T_{max}$ | $\eta$ | $\cos \varphi$ | $P_{max}$ | $T_{max}$ | $\eta$ | $\cos \varphi$ | $P_{max}$ | $T_{max}$ | $\eta$ | $\cos \varphi$ |
|                          | kW                                 | Nm        | %      | [-]            | kW        | Nm        | %      | [-]            | kW        | Nm        | %      | [-]            |
|                          | <b>Constant-torque drive</b>       |           |        |                |           |           |        |                |           |           |        |                |
| <b>4-pole</b>            |                                    |           |        |                |           |           |        |                |           |           |        |                |
| 1LA4 500-4...            | 1470                               | 7829      | 96.5   | 0.86           | 1270      | 6764      | 96.5   | 0.86           | 1150      | 6125      | 96.5   | 0.85           |
| 1LA4 502-4...            | 1600                               | 8521      | 96.5   | 0.86           | 1320      | 7030      | 96.5   | 0.85           | 1200      | 6391      | 96.5   | 0.85           |
| 1LA4 504-4...            | 1750                               | 9320      | 96.5   | 0.86           | 1500      | 7989      | 96.5   | 0.86           | 1350      | 7190      | 96.5   | 0.85           |
| 1LA4 560-4...            | 1920                               | 10220     | 97.1   | 0.87           | 1610      | 8570      | 97.2   | 0.86           | 1500      | 7984      | 97.2   | 0.85           |
| 1LA4 562-4...            | 2250                               | 11976     | 97.1   | 0.87           | 1880      | 10007     | 97.2   | 0.86           | 1750      | 9315      | 97.2   | 0.85           |
| 1LA4 564-4...            | 2580                               | 13733     | 97.1   | 0.87           | 2250      | 11976     | 97.2   | 0.86           | 2100      | 11178     | 97.2   | 0.86           |
| <b>6-pole</b>            |                                    |           |        |                |           |           |        |                |           |           |        |                |
| 1LA4 500-6...            | 1160                               | 9269      | 96.6   | 0.86           | 980       | 7831      | 96.7   | 0.86           | 880       | 7032      | 96.7   | 0.85           |
| 1LA4 502-6...            | 1300                               | 10388     | 96.7   | 0.85           | 1120      | 8950      | 96.8   | 0.85           | 1020      | 8151      | 96.8   | 0.85           |
| 1LA4 504-6...            | 1430                               | 11427     | 96.9   | 0.86           | 1250      | 9988      | 97.0   | 0.86           | 1150      | 9189      | 97.0   | 0.85           |
| 1LA4 560-6...            | 1630                               | 13025     | 97.0   | 0.84           | 1450      | 11587     | 97.1   | 0.84           | 1350      | 10788     | 97.1   | 0.84           |
| 1LA4 562-6...            | 1880                               | 15023     | 97.1   | 0.85           | 1650      | 13185     | 97.1   | 0.85           | 1520      | 12146     | 97.2   | 0.84           |
| 1LA4 564-6...            | 2130                               | 17020     | 97.3   | 0.86           | 1930      | 15422     | 97.3   | 0.86           | 1800      | 14383     | 97.4   | 0.86           |
| 1LA4 632-6...            | 2165                               | 17297     | 96.6   | 0.89           | 1760      | 14048     | 96.4   | 0.88           | 1650      | 13166     | 96.3   | 0.87           |
| <b>8-pole</b>            |                                    |           |        |                |           |           |        |                |           |           |        |                |
| 1LA4 500-8...            | 880                                | 9378      | 96.0   | 0.79           | 780       | 8313      | 96.0   | 0.77           | 710       | 7567      | 96.0   | 0.76           |
| 1LA4 502-8...            | 950                                | 10124     | 96.0   | 0.79           | 870       | 9272      | 96.0   | 0.78           | 780       | 8313      | 96.0   | 0.77           |
| 1LA4 504-8...            | 1050                               | 11190     | 96.0   | 0.79           | 970       | 10338     | 96.0   | 0.78           | 880       | 9378      | 96.0   | 0.77           |
| 1LA4 560-8...            | 1200                               | 12803     | 96.6   | 0.83           | 1010      | 10776     | 96.7   | 0.82           | 930       | 9922      | 96.7   | 0.81           |
| 1LA4 562-8...            | 1380                               | 14724     | 96.6   | 0.82           | 1190      | 12696     | 96.7   | 0.81           | 1100      | 11736     | 96.8   | 0.81           |
| 1LA4 564-8...            | 1580                               | 16857     | 96.8   | 0.82           | 1420      | 15150     | 96.9   | 0.81           | 1320      | 14083     | 96.9   | 0.81           |
| 1LA4 632-8...            | 1746                               | 18629     | 96.4   | 0.85           | 1422      | 15172     | 96.2   | 0.84           | 1332      | 14212     | 96.3   | 0.83           |
| 1LA4 634-8...            | 1940                               | 20699     | 96.6   | 0.85           | 1580      | 16858     | 96.4   | 0.84           | 1480      | 15791     | 96.4   | 0.84           |
| 1LA4 636-8...            | 2095                               | 22355     | 96.6   | 0.85           | 1705      | 18206     | 96.5   | 0.84           | 1598      | 17054     | 96.4   | 0.84           |

## Motors for converter operation

Converter with non-sinusoidal output

### Air-cooled motors · H-compact 1LA4

#### Selection and ordering data

| Rated power                   |                        | High voltage motor<br>H-compact | Operating values at rated output for utilization 155 (F) |            |                |                          |              |                   |                   |                                      |
|-------------------------------|------------------------|---------------------------------|--|------------|----------------|--------------------------|--------------|-------------------|-------------------|--------------------------------------|
| IEC                           |                        |                                 | Rated speed  | Efficiency | Power factor   | Rated current at 4.16 kV | Rated torque | Break-down torque | Moment of inertia | Mechanical speed limit <sup>1)</sup> |
| $P_{rated}$<br>155 (F)        | $P_{rated}$<br>130 (B) |                                 | $n_{rated}$  | $\eta$     | $\cos \varphi$ | $I_{rated}$              | $T_{rated}$  | $T_B/T_{rated}$   | J                 | $n_{max}$                            |
| kW                            | kW                     | Article No.                     | rpm  | %          | [-]            | A                        | Nm           | [-]               | kgm <sup>2</sup>  | rpm                                  |
| <b>3.4 ... 4.16 kV, 60 Hz</b> |                        |                                 |  |            |                |                          |              |                   |                   |                                      |
| 4-pole                        |                        |                                 |  |            |                |                          |              |                   |                   |                                      |
| 1500                          | 1260                   | <b>1LA4 500-4CV5</b>            | 1793   | 96.8       | 0.87           | 245                      | 7989         | 2.50              | 42                | 2200                                 |
| 1650                          | 1350                   | <b>1LA4 502-4CV5</b>            | 1793   | 96.8       | 0.87           | 270                      | 8787         | 2.50              | 47                | 2200                                 |
| 1800                          | 1450                   | <b>1LA4 504-4CV5</b>            | 1793   | 96.8       | 0.87           | 295                      | 9586         | 2.50              | 54                | 2200                                 |
| 2000                          | 1600                   | <b>1LA4 560-4CV5</b>            | 1794   | 97.3       | 0.87           | 330                      | 10645        | 2.40              | 79                | 2000                                 |
| 2300                          | 1850                   | <b>1LA4 562-4CV5</b>            | 1794   | 97.3       | 0.87           | 375                      | 12242        | 2.40              | 92                | 2000                                 |
| 2600                          | 2100                   | <b>1LA4 564-4CV5</b>            | 1794   | 97.3       | 0.87           | 425                      | 13839        | 2.40              | 104               | 2000                                 |
| 2950                          | <sup>-2)</sup>         | <b>1LA4 632-4CV5 0</b>          | 1794   | 97.2       | 0.87           | 485                      | 15702        | 2.40              | 157               | 1500                                 |
| 3320                          | <sup>-2)</sup>         | <b>1LA4 634-4CV5 0</b>          | 1794   | 97.3       | 0.87           | 540                      | 17672        | 2.20              | 171               | 1500                                 |
| 3600                          | <sup>-2)</sup>         | <b>1LA4 636-4CV5 0</b>          | 1795   | 97.5       | 0.87           | 590                      | 19161        | 2.40              | 186               | 1500                                 |
| 6-pole                        |                        |                                 |  |            |                |                          |              |                   |                   |                                      |
| 1180                          | 1020                   | <b>1LA4 500-6CV5</b>            | 1195   | 96.8       | 0.87           | 194                      | 9429         | 2.40              | 82                | 2100                                 |
| 1320                          | 1150                   | <b>1LA4 502-6CV5</b>            | 1195   | 97.0       | 0.87           | 215                      | 10548        | 2.40              | 92                | 2100                                 |
| 1450                          | 1250                   | <b>1LA4 504-6CV5</b>            | 1195   | 97.1       | 0.87           | 240                      | 11587        | 2.50              | 103               | 2100                                 |
| 1650                          | 1400                   | <b>1LA4 560-6CV5</b>            | 1195   | 97.2       | 0.86           | 275                      | 13185        | 2.60              | 142               | 2000                                 |
| 1900                          | 1550                   | <b>1LA4 562-6CV5</b>            | 1195   | 97.4       | 0.86           | 315                      | 15183        | 2.60              | 162               | 2000                                 |
| 2150                          | 1750                   | <b>1LA4 564-6CV5</b>            | 1195   | 97.5       | 0.87           | 350                      | 17180        | 2.60              | 189               | 2000                                 |
| 2400                          | <sup>-2)</sup>         | <b>1LA4 632-6CV5</b>            | 1195   | 96.8       | 0.89           | 385                      | 19183        | 2.40              | 269               | 1500                                 |
| 2700                          | <sup>-2)</sup>         | <b>1LA4 634-6CV5</b>            | 1195   | 96.9       | 0.89           | 435                      | 21587        | 2.20              | 297               | 1500                                 |
| 2900                          | <sup>-2)</sup>         | <b>1LA4 636-6CV5</b>            | 1195   | 97.0       | 0.89           | 465                      | 23181        | 2.20              | 323               | 1500                                 |
| 8-pole                        |                        |                                 |  |            |                |                          |              |                   |                   |                                      |
| 900                           | 750                    | <b>1LA4 500-8CV5</b>            | 896  | 96.4       | 0.79           | 164                      | 9592         | 2.30              | 82                | 2100                                 |
| 950                           | 780                    | <b>1LA4 502-8CV5</b>            | 896  | 96.4       | 0.79           | 174                      | 10124        | 2.30              | 92                | 2100                                 |
| 1050                          | 850                    | <b>1LA4 504-8CV5</b>            | 896  | 96.4       | 0.79           | 192                      | 11190        | 2.30              | 102               | 2100                                 |
| 1200                          | 1030                   | <b>1LA4 560-8CV5</b>            | 895  | 96.8       | 0.83           | 205                      | 12803        | 2.20              | 142               | 2000                                 |
| 1380                          | 1190                   | <b>1LA4 562-8CV5</b>            | 895  | 96.8       | 0.83           | 240                      | 14724        | 2.30              | 162               | 2000                                 |
| 1580                          | 1280                   | <b>1LA4 564-8CV5</b>            | 895  | 96.9       | 0.83           | 275                      | 16857        | 2.40              | 189               | 2000                                 |
| 1800                          | <sup>-2)</sup>         | <b>1LA4 632-8CV5</b>            | 895  | 96.6       | 0.85           | 305                      | 19205        | 2.20              | 265               | 1500                                 |
| 1960                          | <sup>-2)</sup>         | <b>1LA4 634-8CV5</b>            | 895  | 96.7       | 0.86           | 325                      | 20912        | 2.00              | 294               | 1500                                 |
| 2160                          | <sup>-2)</sup>         | <b>1LA4 636-8CV5</b>            | 895  | 96.8       | 0.86           | 360                      | 23046        | 2.10              | 320               | 1500                                 |

#### Type of construction:

|                        |   |
|------------------------|---|
| IM B3                  | 0 |
| IM V1 (with canopy)    | 4 |
| IM V1 (without canopy) | 8 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> Utilization 130 (B) on request.



## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact 1LA4


| Motor type<br>(repeated) | Constant-torque drive, speed range |            |        |                |            |            |        |                |            |            |        |                |
|--------------------------|------------------------------------|------------|--------|----------------|------------|------------|--------|----------------|------------|------------|--------|----------------|
|                          | 1:2                                |            |        |                | 1:5        |            |        |                | 1:10       |            |        |                |
|                          | $P_{\max}$                         | $T_{\max}$ | $\eta$ | $\cos \varphi$ | $P_{\max}$ | $T_{\max}$ | $\eta$ | $\cos \varphi$ | $P_{\max}$ | $T_{\max}$ | $\eta$ | $\cos \varphi$ |
|                          | kW                                 | Nm         | %      | [-]            | kW         | Nm         | %      | [-]            | kW         | Nm         | %      | [-]            |
|                          | <b>Constant-torque drive</b>       |            |        |                |            |            |        |                |            |            |        |                |
| <b>4-pole</b>            |                                    |            |        |                |            |            |        |                |            |            |        |                |
| 1LA4 500-4...            | 1470                               | 7829       | 96.5   | 0.86           | 1270       | 6764       | 96.5   | 0.86           | 1150       | 6125       | 96.5   | 0.85           |
| 1LA4 502-4...            | 1600                               | 8521       | 96.5   | 0.86           | 1320       | 7030       | 96.5   | 0.85           | 1200       | 6391       | 96.5   | 0.85           |
| 1LA4 504-4...            | 1750                               | 9320       | 96.5   | 0.86           | 1500       | 7989       | 96.5   | 0.86           | 1350       | 7190       | 96.5   | 0.85           |
| 1LA4 560-4...            | 1920                               | 10220      | 97.1   | 0.87           | 1610       | 8570       | 97.2   | 0.86           | 1500       | 7984       | 97.2   | 0.85           |
| 1LA4 562-4...            | 2250                               | 11976      | 97.1   | 0.87           | 1880       | 10007      | 97.2   | 0.86           | 1750       | 9315       | 97.2   | 0.85           |
| 1LA4 564-4...            | 2580                               | 13733      | 97.1   | 0.87           | 2250       | 11976      | 97.2   | 0.86           | 2100       | 11178      | 97.2   | 0.86           |
| 1LA4 632-4...            | 2860                               | 15219      | 97.2   | 0.87           | 2330       | 12389      | 97.0   | 0.86           | 2185       | 11616      | 96.9   | 0.85           |
| 1LA4 634-4...            | 3220                               | 17135      | 97.3   | 0.87           | 2625       | 13957      | 97.1   | 0.86           | 2455       | 13052      | 97.1   | 0.85           |
| 1LA4 636-4...            | 3490                               | 18567      | 97.4   | 0.87           | 2845       | 15125      | 97.2   | 0.86           | 2665       | 14166      | 97.2   | 0.85           |
| <b>6-pole</b>            |                                    |            |        |                |            |            |        |                |            |            |        |                |
| 1LA4 500-6...            | 1160                               | 9269       | 96.6   | 0.86           | 980        | 7831       | 96.7   | 0.86           | 880        | 7032       | 96.7   | 0.85           |
| 1LA4 502-6...            | 1300                               | 10388      | 96.7   | 0.85           | 1120       | 8950       | 96.8   | 0.85           | 1020       | 8151       | 96.8   | 0.85           |
| 1LA4 504-6...            | 1430                               | 11427      | 96.9   | 0.86           | 1250       | 9988       | 97.0   | 0.86           | 1150       | 9189       | 97.0   | 0.85           |
| 1LA4 560-6...            | 1630                               | 13025      | 97.0   | 0.84           | 1450       | 11587      | 97.1   | 0.84           | 1350       | 10788      | 97.1   | 0.84           |
| 1LA4 562-6...            | 1880                               | 15023      | 97.1   | 0.85           | 1650       | 13185      | 97.1   | 0.85           | 1520       | 12146      | 97.2   | 0.84           |
| 1LA4 564-6...            | 2130                               | 17020      | 97.3   | 0.86           | 1930       | 15422      | 97.3   | 0.86           | 1800       | 14383      | 97.4   | 0.86           |
| 1LA4 632-6...            | 2330                               | 18613      | 96.7   | 0.89           | 1895       | 15124      | 96.5   | 0.88           | 1775       | 14163      | 96.4   | 0.88           |
| 1LA4 634-6...            | 2620                               | 20937      | 96.9   | 0.89           | 2135       | 17042      | 96.8   | 0.89           | 2000       | 15960      | 96.7   | 0.88           |
| 1LA4 636-6...            | 2815                               | 22489      | 97.0   | 0.89           | 2290       | 18276      | 96.9   | 0.89           | 2145       | 17115      | 96.8   | 0.88           |
| <b>8-pole</b>            |                                    |            |        |                |            |            |        |                |            |            |        |                |
| 1LA4 500-8...            | 880                                | 9378       | 96.0   | 0.79           | 780        | 8313       | 96.0   | 0.77           | 710        | 7567       | 96.0   | 0.76           |
| 1LA4 502-8...            | 950                                | 10124      | 96.0   | 0.79           | 870        | 9272       | 96.0   | 0.78           | 780        | 8313       | 96.0   | 0.77           |
| 1LA4 504-8...            | 1050                               | 11190      | 96.0   | 0.79           | 970        | 10338      | 96.0   | 0.78           | 880        | 9378       | 96.0   | 0.77           |
| 1LA4 560-8...            | 1200                               | 12803      | 96.6   | 0.83           | 1010       | 10776      | 96.7   | 0.82           | 930        | 9922       | 96.7   | 0.81           |
| 1LA4 562-8...            | 1380                               | 14724      | 96.6   | 0.82           | 1190       | 12696      | 96.7   | 0.81           | 1100       | 11736      | 96.8   | 0.81           |
| 1LA4 564-8...            | 1580                               | 16857      | 96.8   | 0.82           | 1420       | 15150      | 96.9   | 0.81           | 1320       | 14083      | 96.9   | 0.81           |
| 1LA4 632-8...            | 1746                               | 18629      | 96.3   | 0.84           | 1422       | 15172      | 96.1   | 0.82           | 1332       | 14212      | 95.9   | 0.81           |
| 1LA4 634-8...            | 1901                               | 20285      | 96.5   | 0.85           | 1548       | 16520      | 96.4   | 0.84           | 1450       | 15475      | 96.3   | 0.83           |
| 1LA4 636-8...            | 2095                               | 22355      | 96.6   | 0.85           | 1706       | 18206      | 96.5   | 0.84           | 1598       | 17054      | 96.4   | 0.83           |

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact 1LA4

#### Dimension drawings

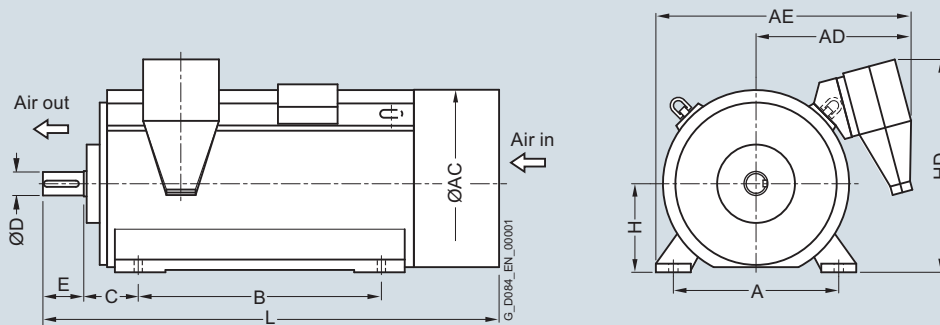

| Motor type   | Weight<br>kg | Dimensions |      |                    |                      |      |     |     |     |     |                  |      |
|--|--------------|------------|------|--------------------|----------------------|------|-----|-----|-----|-----|------------------|------|
|  |              | A          | AC   | AD <sup>1)3)</sup> | AE <sup>1)2)3)</sup> | B    | C   | D   | E   | H   | HD <sup>4)</sup> | L    |
| Up to 6.6 kV, anti-friction bearings, IM B3 type of construction |              |            |      |                    |                      |      |     |     |     |     |                  |      |
| 2-pole   |              |            |      |                    |                      |      |     |     |     |     |                  |      |
| 1LA4454-2CM00  | 5200         | 850        | 960  | 825                | 1340                 | 1250 | 280 | 95  | 130 | 450 | 1100             | 2320 |
| 4-pole   |              |            |      |                    |                      |      |     |     |     |     |                  |      |
| 1LA4454-4A..0  | 5300         | 850        | 960  | 825                | 1340                 | 1250 | 280 | 130 | 200 | 450 | 1100             | 2390 |
| 1LA4500-4C..0  | 6200         | 950        | 1070 | 875                | 1440                 | 1320 | 315 | 140 | 200 | 500 | 1200             | 2525 |
| 1LA4502-4C..0  | 6500         | 950        | 1070 | 875                | 1440                 | 1320 | 315 | 140 | 200 | 500 | 1200             | 2525 |
| 1LA4504-4C..0  | 7000         | 950        | 1070 | 875                | 1440                 | 1320 | 315 | 140 | 200 | 500 | 1200             | 2525 |
| 1LA4560-4C..0  | 8200         | 1060       | 1210 | 925                | 1560                 | 1400 | 335 | 160 | 240 | 560 | 1310             | 2775 |
| 1LA4562-4C..0  | 8900         | 1060       | 1210 | 925                | 1560                 | 1400 | 335 | 160 | 240 | 560 | 1310             | 2775 |
| 1LA4564-4C..0  | 9700         | 1060       | 1210 | 925                | 1560                 | 1400 | 335 | 160 | 240 | 560 | 1310             | 2775 |
| 1LA4632-4C..0  | 12200        | 1120       | 1350 | 945                | 1560                 | 1600 | 335 | 170 | 240 | 630 | 1410             | 3015 |
| 1LA4634-4C..0  | 12800        | 1120       | 1350 | 945                | 1560                 | 1600 | 335 | 170 | 240 | 630 | 1410             | 3015 |
| 1LA4636-4C..0  | 13600        | 1120       | 1350 | 945                | 1560                 | 1600 | 335 | 170 | 240 | 630 | 1410             | 3015 |
| 6-pole   |              |            |      |                    |                      |      |     |     |     |     |                  |      |
| 1LA4454-6AM00  | 5200         | 850        | 960  | 825                | 1340                 | 1250 | 280 | 130 | 200 | 450 | 1100             | 2390 |
| 1LA4500-6C..0  | 6400         | 950        | 1070 | 875                | 1440                 | 1320 | 315 | 140 | 200 | 500 | 1200             | 2525 |
| 1LA4502-6C..0  | 6800         | 950        | 1070 | 875                | 1440                 | 1320 | 315 | 140 | 200 | 500 | 1200             | 2525 |
| 1LA4504-6C..0  | 7300         | 950        | 1070 | 875                | 1440                 | 1320 | 315 | 140 | 200 | 500 | 1200             | 2525 |
| 1LA4560-6C..0  | 8500         | 1060       | 1210 | 925                | 1560                 | 1400 | 335 | 160 | 240 | 560 | 1310             | 2775 |
| 1LA4562-6C..0  | 9300         | 1060       | 1210 | 925                | 1560                 | 1400 | 335 | 160 | 240 | 560 | 1310             | 2775 |
| 1LA4564-6C..0  | 10100        | 1060       | 1210 | 925                | 1560                 | 1400 | 335 | 160 | 240 | 560 | 1310             | 2775 |
| 1LA4632-6C..0  | 12700        | 1120       | 1350 | 945                | 1560                 | 1600 | 335 | 180 | 240 | 630 | 1410             | 3015 |
| 1LA4634-6C..0  | 13400        | 1120       | 1350 | 945                | 1560                 | 1600 | 335 | 180 | 240 | 630 | 1410             | 3015 |
| 1LA4636-6C..0  | 14100        | 1120       | 1350 | 945                | 1560                 | 1600 | 335 | 180 | 240 | 630 | 1410             | 3015 |
| 8-pole   |              |            |      |                    |                      |      |     |     |     |     |                  |      |
| 1LA4454-8AM00  | 5200         | 850        | 960  | 825                | 1340                 | 1250 | 280 | 130 | 200 | 450 | 1100             | 2390 |
| 1LA4500-8C..0  | 6400         | 950        | 1070 | 875                | 1440                 | 1320 | 315 | 140 | 200 | 500 | 1200             | 2525 |
| 1LA4502-8C..0  | 6700         | 950        | 1070 | 875                | 1440                 | 1320 | 315 | 140 | 200 | 500 | 1200             | 2525 |
| 1LA4504-8C..0  | 7200         | 950        | 1070 | 875                | 1440                 | 1320 | 315 | 140 | 200 | 500 | 1200             | 2525 |
| 1LA4560-8C..0  | 8500         | 1060       | 1210 | 925                | 1560                 | 1400 | 335 | 160 | 240 | 560 | 1310             | 2775 |
| 1LA4562-8C..0  | 9200         | 1060       | 1210 | 925                | 1560                 | 1400 | 335 | 160 | 240 | 560 | 1310             | 2775 |
| 1LA4564-8C..0  | 10000        | 1060       | 1210 | 925                | 1560                 | 1400 | 335 | 160 | 240 | 560 | 1310             | 2775 |
| 1LA4632-8C..0  | 12500        | 1120       | 1350 | 945                | 1560                 | 1600 | 335 | 180 | 240 | 630 | 1410             | 3015 |
| 1LA4634-8C..0  | 13300        | 1120       | 1350 | 945                | 1560                 | 1600 | 335 | 180 | 240 | 630 | 1410             | 3015 |
| 1LA4636-8C..0  | 14000        | 1120       | 1350 | 945                | 1560                 | 1600 | 335 | 180 | 240 | 630 | 1410             | 3015 |

Note: Higher pole numbers are available on request.


<sup>1)</sup> For  $V_{\text{rated}} = 690$  V, the dimension changes by + 100 mm.

<sup>2)</sup> For  $V_{\text{rated}} = 690$  V and  $I_{\text{rated}} > 1230$  A, the dimension changes by + 475 mm (a second main terminal box is required).

<sup>3)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.

<sup>4)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 70 mm.

#### Dimension drawings

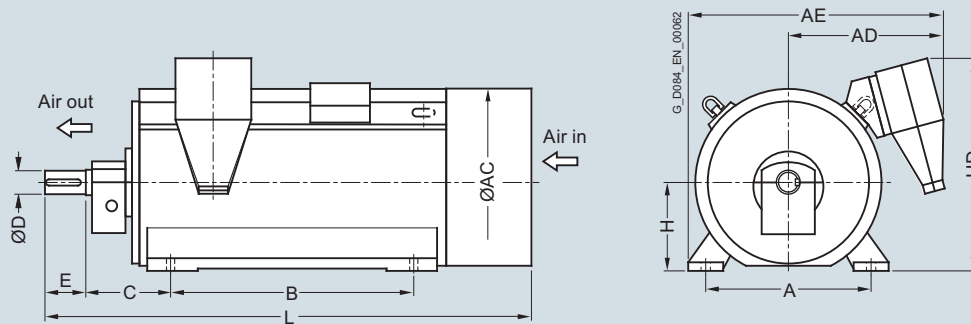

| Motor type   | Weight<br>kg | Dimensions |          |                          |                            |         |         |         |         |         |                        |         |
|--|--------------|------------|----------|--------------------------|----------------------------|---------|---------|---------|---------|---------|------------------------|---------|
|  |              | A<br>mm    | AC<br>mm | AD <sup>1)3)</sup><br>mm | AE <sup>1)2)3)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>4)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, sleeve bearings, IM B3 type of construction</b> |              |            |          |                          |                            |         |         |         |         |         |                        |         |
| <b>2-pole</b>  |              |            |          |                          |                            |         |         |         |         |         |                        |         |
| 1LA4454-2CM00-Z K96  | 5200         | 850        | 960      | 825                      | 1340                       | 1250    | 475     | 95      | 130     | 450     | 1100                   | 2515    |
| <b>4-pole</b>  |              |            |          |                          |                            |         |         |         |         |         |                        |         |
| 1LA4454-4A..0-Z K96  | 5400         | 850        | 960      | 825                      | 1340                       | 1250    | 475     | 130     | 200     | 450     | 1100                   | 2745    |
| 1LA4500-4C..0-Z K96  | 6300         | 950        | 1070     | 875                      | 1440                       | 1320    | 500     | 140     | 200     | 500     | 1200                   | 2870    |
| 1LA4502-4C..0-Z K96  | 6700         | 950        | 1070     | 875                      | 1440                       | 1320    | 500     | 140     | 200     | 500     | 1200                   | 2870    |
| 1LA4504-4C..0-Z K96  | 7200         | 950        | 1070     | 875                      | 1440                       | 1320    | 500     | 140     | 200     | 500     | 1200                   | 2870    |
| 1LA4560-4C..0-Z K96  | 8500         | 1060       | 1210     | 925                      | 1560                       | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3170    |
| 1LA4562-4C..0-Z K96  | 9200         | 1060       | 1210     | 925                      | 1560                       | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3170    |
| 1LA4564-4C..0-Z K96  | 10000        | 1060       | 1210     | 925                      | 1560                       | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3170    |
| 1LA4632-4C..0-Z K96  | 12500        | 1120       | 1350     | 945                      | 1560                       | 1600    | 560     | 170     | 240     | 630     | 1410                   | 3450    |
| 1LA4634-4C..0-Z K96  | 13100        | 1120       | 1350     | 945                      | 1560                       | 1600    | 560     | 170     | 240     | 630     | 1410                   | 3450    |
| 1LA4636-4C..0-Z K96  | 13900        | 1120       | 1350     | 945                      | 1560                       | 1600    | 560     | 170     | 240     | 630     | 1410                   | 3450    |
| <b>6-pole</b>  |              |            |          |                          |                            |         |         |         |         |         |                        |         |
| 1LA4454-6AM00-Z K96  | 5300         | 850        | 960      | 825                      | 1340                       | 1250    | 475     | 130     | 200     | 450     | 1100                   | 2745    |
| 1LA4500-6C..0-Z K96  | 6600         | 950        | 1070     | 875                      | 1440                       | 1320    | 530     | 140     | 200     | 500     | 1200                   | 2900    |
| 1LA4502-6C..0-Z K96  | 7000         | 950        | 1070     | 875                      | 1440                       | 1320    | 530     | 140     | 200     | 500     | 1200                   | 2900    |
| 1LA4504-6C..0-Z K96  | 7500         | 950        | 1070     | 875                      | 1440                       | 1320    | 530     | 140     | 200     | 500     | 1200                   | 2900    |
| 1LA4560-6C..0-Z K96  | 8800         | 1060       | 1210     | 925                      | 1560                       | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3170    |
| 1LA4562-6C..0-Z K96  | 9500         | 1060       | 1210     | 925                      | 1560                       | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3170    |
| 1LA4564-6C..0-Z K96  | 10400        | 1060       | 1210     | 925                      | 1560                       | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3170    |
| 1LA4632-6C..0-Z K96  | 13000        | 1120       | 1350     | 945                      | 1560                       | 1600    | 560     | 180     | 240     | 630     | 1410                   | 3450    |
| 1LA4634-6C..0-Z K96  | 13700        | 1120       | 1350     | 945                      | 1560                       | 1600    | 560     | 180     | 240     | 630     | 1410                   | 3450    |
| 1LA4636-6C..0-Z K96  | 14500        | 1120       | 1350     | 945                      | 1560                       | 1600    | 560     | 180     | 240     | 630     | 1410                   | 3450    |

<sup>1)</sup> For  $V_{\text{rated}} = 690$  V, the dimension changes by + 100 mm.

<sup>2)</sup> For  $V_{\text{rated}} = 690$  V and  $I_{\text{rated}} > 1230$  A, the dimension changes by + 475 mm (a second main terminal box is required).

<sup>3)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.


<sup>4)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 70 mm.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact 1LA4

#### Dimension drawings (continued)

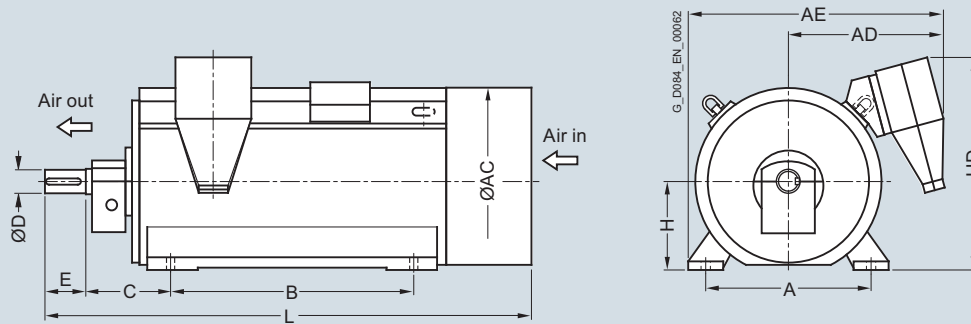

| Motor type | Weight<br>kg | Dimensions |    |                    |                      |   |   |   |   |   |                  |   |
|------------|--------------|------------|----|--------------------|----------------------|---|---|---|---|---|------------------|---|
|            |              | A          | AC | AD <sup>1)3)</sup> | AE <sup>1)2)3)</sup> | B | C | D | E | H | HD <sup>4)</sup> | L |

#### Up to 6.6 kV, sleeve bearings, IM B3 type of construction

##### 8-pole

|                     |       |      |      |     |      |      |     |     |     |     |      |      |
|---------------------|-------|------|------|-----|------|------|-----|-----|-----|-----|------|------|
| 1LA4454-8AM00-Z K96 | 5300  | 850  | 960  | 825 | 1340 | 1250 | 475 | 130 | 200 | 450 | 1100 | 2745 |
| 1LA4500-8C..0-Z K96 | 6600  | 950  | 1070 | 875 | 1440 | 1320 | 530 | 140 | 200 | 500 | 1200 | 2900 |
| 1LA4502-8C..0-Z K96 | 6900  | 950  | 1070 | 875 | 1440 | 1320 | 530 | 140 | 200 | 500 | 1200 | 2900 |
| 1LA4504-8C..0-Z K96 | 7400  | 950  | 1070 | 875 | 1440 | 1320 | 530 | 140 | 200 | 500 | 1200 | 2900 |
| 1LA4560-8C..0-Z K96 | 8800  | 1060 | 1210 | 925 | 1560 | 1400 | 560 | 160 | 240 | 560 | 1310 | 3170 |
| 1LA4562-8C..0-Z K96 | 9500  | 1060 | 1210 | 925 | 1560 | 1400 | 560 | 160 | 240 | 560 | 1310 | 3170 |
| 1LA4564-8C..0-Z K96 | 10300 | 1060 | 1210 | 925 | 1560 | 1400 | 560 | 160 | 240 | 560 | 1310 | 3170 |
| 1LA4632-8C..0-Z K96 | 12800 | 1120 | 1350 | 945 | 1560 | 1600 | 560 | 180 | 240 | 630 | 1410 | 3450 |
| 1LA4634-8C..0-Z K96 | 13600 | 1120 | 1350 | 945 | 1560 | 1600 | 560 | 180 | 240 | 630 | 1410 | 3450 |
| 1LA4636-8C..0-Z K96 | 14400 | 1120 | 1350 | 945 | 1560 | 1600 | 560 | 180 | 240 | 630 | 1410 | 3450 |

#### Note:

Higher pole numbers are available on request.


<sup>1)</sup> For  $V_{\text{rated}} = 690$  V, the dimension changes by + 100 mm.

<sup>2)</sup> For  $V_{\text{rated}} = 690$  V and  $I_{\text{rated}} > 1230$  A, the dimension changes by + 475 mm (a second main terminal box is required).

<sup>3)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.

<sup>4)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 70 mm.

### Dimension drawings

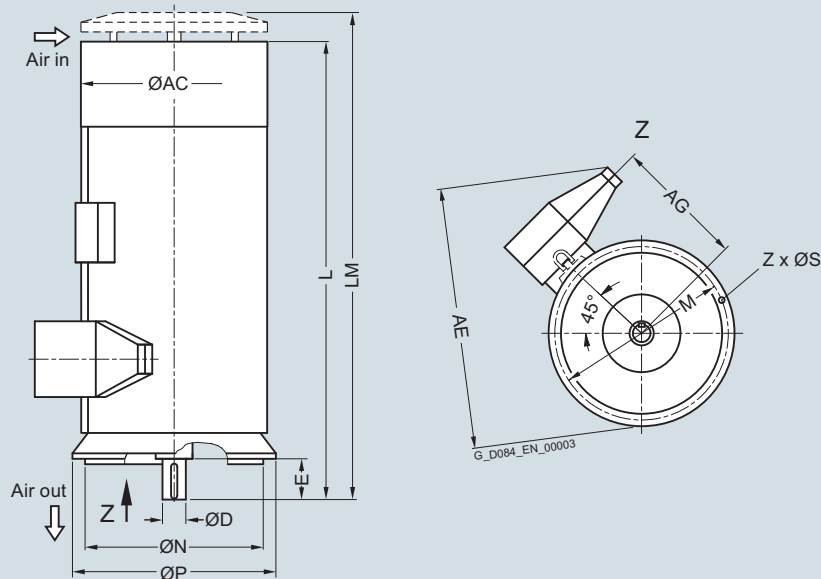

| Motor type | Weight<br>kg | Dimensions |                    |                  |    |    |    |    |    |    |    |    |          |
|------------|--------------|------------|--------------------|------------------|----|----|----|----|----|----|----|----|----------|
|            |              | AC         | AG <sup>1)2)</sup> | AE <sup>3)</sup> | D  | E  | L  | LM | P  | N  | M  | S  | Z        |
|            |              | mm         | mm                 | mm               | mm | mm | mm | mm | mm | mm | mm | mm | Quantity |

#### Up to 6.6 kV, anti-friction bearings, IM V1 type of construction

##### 4-pole

|               |      |      |     |      |     |     |      |      |      |      |      |    |    |
|---------------|------|------|-----|------|-----|-----|------|------|------|------|------|----|----|
| 1LA4454-4AM0. | 5200 | 960  | 770 | 1550 | 130 | 200 | 2390 | 2550 | 1150 | 1000 | 1080 | 26 | 8  |
| 1LA4500-4C... | 6100 | 1070 | 840 | 1660 | 140 | 200 | 2525 | 2695 | 1250 | 1120 | 1180 | 26 | 16 |
| 1LA4502-4C... | 6500 | 1070 | 840 | 1660 | 140 | 200 | 2525 | 2695 | 1250 | 1120 | 1180 | 26 | 16 |
| 1LA4504-4C... | 7000 | 1070 | 840 | 1660 | 140 | 200 | 2525 | 2695 | 1250 | 1120 | 1180 | 26 | 16 |
| 1LA4560-4C... | 8300 | 1210 | 910 | 1800 | 160 | 240 | 2775 | 2955 | 1400 | 1250 | 1320 | 26 | 16 |
| 1LA4562-4C... | 9000 | 1210 | 910 | 1800 | 160 | 240 | 2775 | 2955 | 1400 | 1250 | 1320 | 26 | 16 |
| 1LA4564-4C... | 9700 | 1210 | 910 | 1800 | 160 | 240 | 2775 | 2955 | 1400 | 1250 | 1320 | 26 | 16 |

##### 6-pole

|               |       |      |     |      |     |     |      |      |      |      |      |    |    |
|---------------|-------|------|-----|------|-----|-----|------|------|------|------|------|----|----|
| 1LA4454-6AM0. | 5200  | 960  | 770 | 1550 | 130 | 200 | 2390 | 2550 | 1150 | 1000 | 1080 | 26 | 8  |
| 1LA4500-6C... | 6400  | 1070 | 840 | 1660 | 140 | 200 | 2525 | 2695 | 1250 | 1120 | 1180 | 26 | 16 |
| 1LA4502-6C... | 6800  | 1070 | 840 | 1660 | 140 | 200 | 2525 | 2695 | 1250 | 1120 | 1180 | 26 | 16 |
| 1LA4504-6C... | 7300  | 1070 | 840 | 1660 | 140 | 200 | 2525 | 2695 | 1250 | 1120 | 1180 | 26 | 16 |
| 1LA4560-6C... | 8500  | 1210 | 910 | 1800 | 160 | 240 | 2775 | 2955 | 1400 | 1250 | 1320 | 26 | 16 |
| 1LA4562-6C... | 9300  | 1210 | 910 | 1800 | 160 | 240 | 2775 | 2955 | 1400 | 1250 | 1320 | 26 | 16 |
| 1LA4564-6C... | 10100 | 1210 | 910 | 1800 | 160 | 240 | 2775 | 2955 | 1400 | 1250 | 1320 | 26 | 16 |
| 1LA4632-6C... | 12700 | 1350 | 980 | 1820 | 180 | 240 | 3115 | 3305 | 1400 | 1250 | 1320 | 26 | 16 |
| 1LA4634-6C... | 13400 | 1350 | 980 | 1820 | 180 | 240 | 3115 | 3305 | 1400 | 1250 | 1320 | 26 | 16 |
| 1LA4636-6C... | 14100 | 1350 | 980 | 1820 | 180 | 240 | 3115 | 3305 | 1400 | 1250 | 1320 | 26 | 16 |

<sup>1)</sup> For  $V_{\text{rated}} = 690 \text{ V}$ , the dimension changes by  $- 50 \text{ mm}$ .

<sup>2)</sup> For currents  $I_{\text{rated}} > 315 \text{ A}$ , the dimension changes by  $+ 45 \text{ mm}$ .


<sup>3)</sup> For currents  $I_{\text{rated}} > 315 \text{ A}$ , the dimension changes by  $+ 180 \text{ mm}$ .

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact 1LA4

### Dimension drawings (continued)

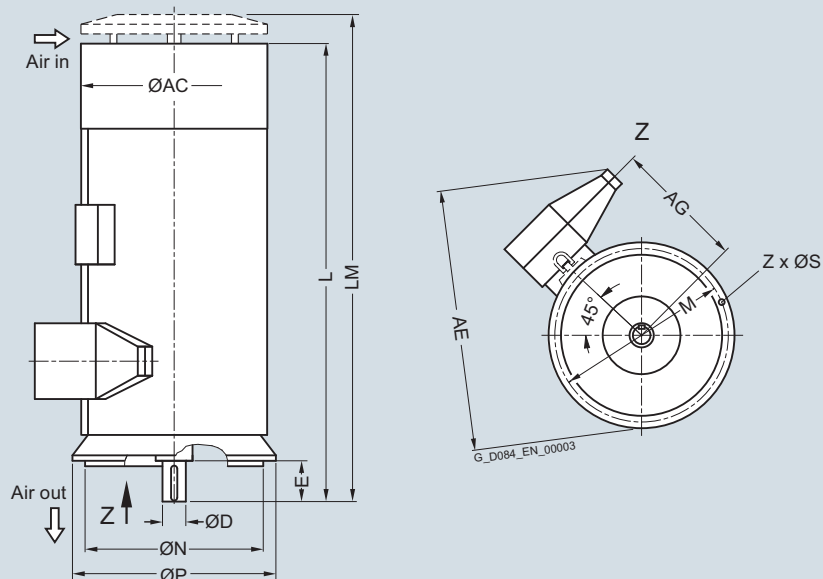

| Motor type | Weight<br>kg | Dimensions |                          |                        |         |         |         |          |         |         |         |         |               |
|------------|--------------|------------|--------------------------|------------------------|---------|---------|---------|----------|---------|---------|---------|---------|---------------|
|            |              | AC<br>mm   | AG <sup>1)2)</sup><br>mm | AE <sup>3)</sup><br>mm | D<br>mm | E<br>mm | L<br>mm | LM<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |

#### Up to 6.6 kV, anti-friction bearings, IM V1 type of construction

8-pole

|               |       |      |     |      |     |     |      |      |      |      |      |    |    |
|---------------|-------|------|-----|------|-----|-----|------|------|------|------|------|----|----|
| 1LA4454-8AM0. | 5200  | 960  | 770 | 1550 | 130 | 200 | 2390 | 2550 | 1000 | 1150 | 1080 | 26 | 8  |
| 1LA4500-8C... | 6400  | 1070 | 840 | 1660 | 140 | 200 | 2525 | 2695 | 1250 | 1120 | 1180 | 26 | 16 |
| 1LA4502-8C... | 6800  | 1070 | 840 | 1660 | 140 | 200 | 2525 | 2695 | 1250 | 1120 | 1180 | 26 | 16 |
| 1LA4504-8C... | 7200  | 1070 | 840 | 1660 | 140 | 200 | 2525 | 2695 | 1250 | 1120 | 1180 | 26 | 16 |
| 1LA4560-8C... | 8500  | 1210 | 910 | 1800 | 160 | 240 | 2775 | 2955 | 1400 | 1250 | 1320 | 26 | 16 |
| 1LA4562-8C... | 9200  | 1210 | 910 | 1800 | 160 | 240 | 2775 | 2955 | 1400 | 1250 | 1320 | 26 | 16 |
| 1LA4564-8C... | 10000 | 1210 | 910 | 1800 | 160 | 240 | 2775 | 2955 | 1400 | 1250 | 1320 | 26 | 16 |
| 1LA4632-8C... | 12500 | 1350 | 980 | 1820 | 180 | 240 | 3115 | 3305 | 1400 | 1250 | 1320 | 26 | 16 |
| 1LA4634-8C... | 13300 | 1350 | 980 | 1820 | 180 | 240 | 3115 | 3305 | 1400 | 1250 | 1320 | 26 | 16 |
| 1LA4636-8C... | 14000 | 1350 | 980 | 1820 | 180 | 240 | 3115 | 3305 | 1400 | 1250 | 1320 | 26 | 16 |

#### Note:

Higher pole numbers are available on request.

<sup>1)</sup> For  $V_{rated} = 690$  V, the dimension changes by  $-50$  mm.

<sup>2)</sup> For currents  $I_{rated} > 315$  A, the dimension changes by  $+45$  mm.

<sup>3)</sup> For currents  $I_{rated} > 315$  A, the dimension changes by  $+180$  mm.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact 1PQ4

#### Overview



#### Technical data

##### Overview of technical data

| <b>H-compact 1PQ4</b>            |   |
|----------------------------------|---|
| <b>Rated voltage</b>             | 690 V ... 6.6 kV  |
| <b>Rated frequency</b>           | 50/60 Hz  |
| <b>Motor type</b>                | Induction motor with squirrel-cage rotor  |
| <b>Type of construction</b>      | IM B3, IM V1  |
| <b>Degree of protection</b>      | IP55  |
| <b>Cooling method</b>            | IC416   |
| <b>Stator winding insulation</b> | Insulation system, thermal class 155 (F), utilized to 155 (F)                   |
| <b>Shaft height</b>              | 450 ... 630 mm  |
| <b>Bearings</b>                  | Anti-friction bearings, sleeve bearings   |
| <b>Cage material</b>             | Die-cast aluminum or copper (dependent on the shaft height and number of poles) |
| <b>Standards</b>                 | IEC, EN   |
| <b>Frame design</b>              | Cast iron with cooling ribs   |

## Motors for converter operation

Converter with non-sinusoidal output

### Air-cooled motors · H-compact 1PQ4

#### Technical data (continued)


**Power ranges for IEC motors with reinforced insulation for SINAMICS drive converters without sine-wave filter**

#### 1PQ4 series


Insulation system, thermal class 155 (F), utilized to 155 (F)

The power data listed here apply for an ambient temperature of 40 °C and an installation altitude ≤ 1000 m.

690 V; 50 Hz

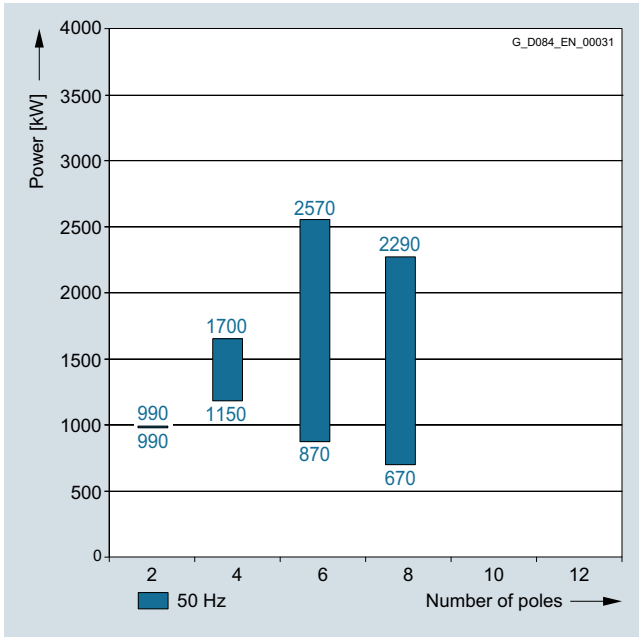

2.3 kV; 50 and 60 Hz

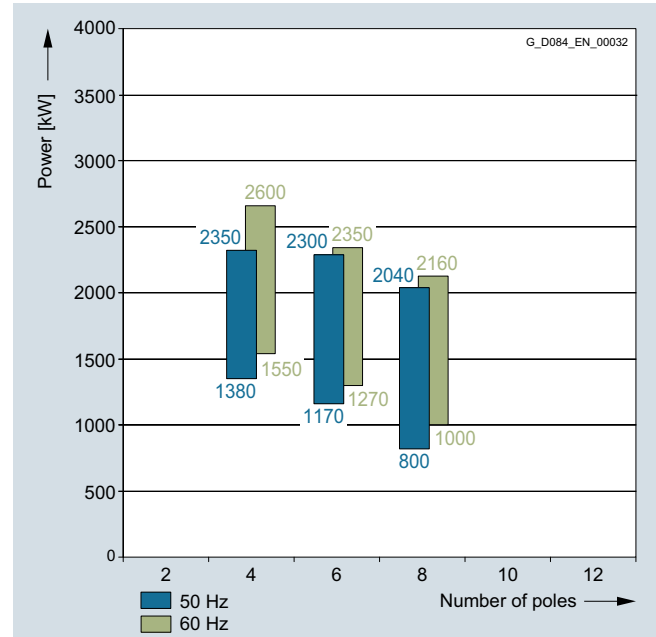


3




**Technical data** (continued)

3.4 to 4.16 kV; 50 and 60 Hz

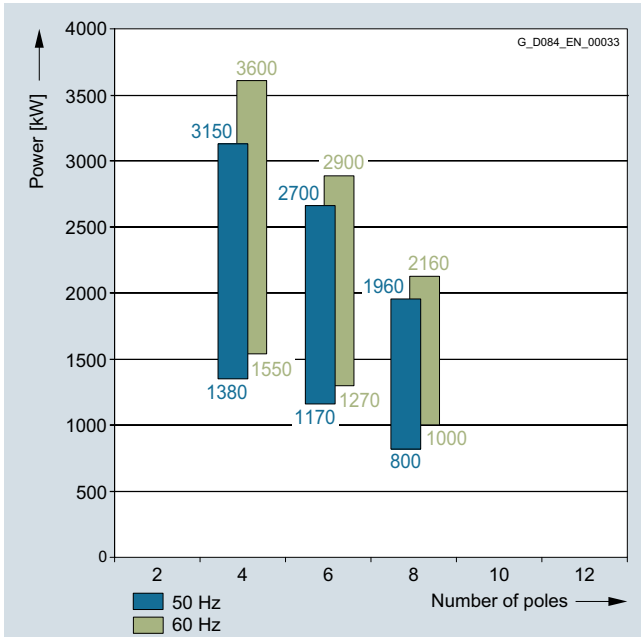

6 to 6.6 kV; 50 Hz

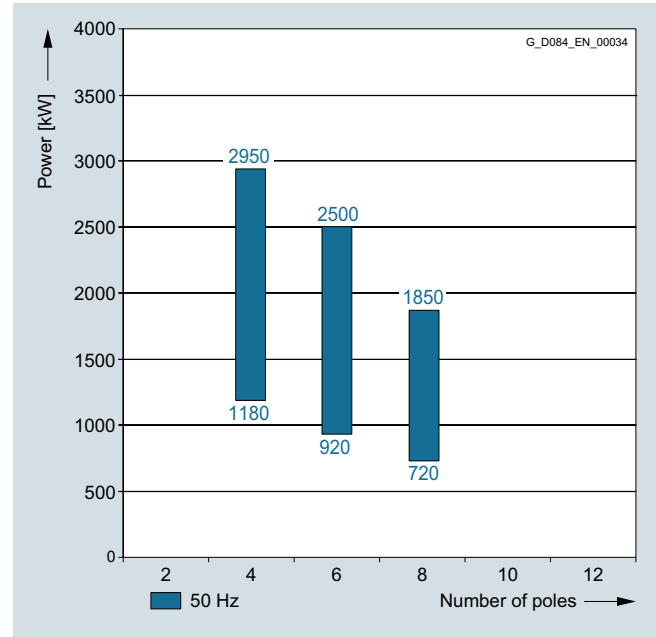

3

## Motors for converter operation

Converter with non-sinusoidal output

### Air-cooled motors · H-compact 1PQ4

#### Selection and ordering data

| Rated power<br><b>IEC</b><br>$P_{\text{rated}}$ 155 (F)<br>kW | <b>Low-voltage motor<br/>H-compact</b><br><br>Article No. | Operating values at rated output for utilization 155 (F) |                           |                                       |   |  |  |  |   |
|---|---|--|---------------------------|---------------------------------------|---|--|--|--|---|
|   |   | Rated speed<br>$n_{\text{rated}}$<br>rpm                 | Efficiency<br>$\eta$<br>% | Power factor<br>$\cos \varphi$<br>[-] | Rated current at 690 V<br>$I_{\text{rated}}$<br>A | Rated torque<br>$T_{\text{rated}}$<br>Nm | Break-down torque<br>$T_B/T_{\text{rated}}$<br>[-] | Moment of inertia<br>J<br>kgm <sup>2</sup> | Mechanical speed limit <sup>1)</sup><br>$n_{\text{max}}$<br>rpm |
| <b>690 V, 50 Hz</b>   |   |  |                           |                                       |   |  |  |  |   |
| 2-pole  |   |  |                           |                                       |   |  |  |  |   |
| 990   | <b>1PQ4 454-2CM0</b>                                      | 2983   | 97.3                      | 0.92                                  | 930   | 3169                                     | 2.80   | 22.2                                       | 3000  |
| 4-pole  |   |  |                           |                                       |   |  |  |  |   |
| 1150  | <b>1PQ4 454-4AM0</b>                                      | 1491   | 97.5                      | 0.89                                  | 1100  | 7365                                     | 2.50   | 33.9                                       | 2400  |
| 1340  | <b>1PQ4 500-4CM0</b>                                      | 1490   | 97.3                      | 0.88                                  | 1300  | 8588                                     | 2.00   | 44.3                                       | 2400  |
| 1550  | <b>1PQ4 502-4CM0</b>                                      | 1492   | 97.5                      | 0.87                                  | 1520  | 9920                                     | 2.20   | 49.0                                       | 2400  |
| 1700  | <b>1PQ4 504-4CM0</b>                                      | 1490   | 97.4                      | 0.89                                  | 1640  | 10895                                    | 2.00   | 56.2                                       | 2400  |
| 6-pole  |   |  |                           |                                       |   |  |  |  |   |
| 870   | <b>1PQ4 454-6AM0</b>                                      | 993  | 97.3                      | 0.86                                  | 870   | 8366                                     | 2.50   | 53.5                                       | 2200  |
| 1350  | <b>1PQ4 500-6CM0</b>                                      | 995  | 97.2                      | 0.86                                  | 1360  | 12956                                    | 2.20   | 82.1                                       | 2200  |
| 1480  | <b>1PQ4 502-6CM0</b>                                      | 995  | 97.2                      | 0.86                                  | 1480  | 14204                                    | 2.15   | 92.4                                       | 2200  |
| 1630  | <b>1PQ4 504-6CM0</b>                                      | 995  | 97.3                      | 0.87                                  | 1620  | 15643                                    | 2.15   | 102.6                                      | 2200  |
| 1900  | <b>1PQ4 560-6CM0</b>                                      | 995  | 97.5                      | 0.86                                  | 1900  | 18234                                    | 2.30   | 141.5                                      | 2000  |
| 2100  | <b>1PQ4 562-6CM0</b>                                      | 995  | 97.5                      | 0.86                                  | 2100  | 20154                                    | 2.40   | 162.1                                      | 2000  |
| 2300  | <b>1PQ4 564-6CM0</b>                                      | 995  | 97.6                      | 0.87                                  | 2250  | 22073                                    | 2.40   | 188.5                                      | 2000  |
| 2455  | <b>1PQ4 634-6CM0</b>                                      | 996  | 97.4                      | 0.88                                  | 2400  | 23538                                    | 3.00   | 331.5                                      | 1200  |
| 2570  | <b>1PQ4 636-6CM0</b>                                      | 996  | 97.4                      | 0.89                                  | 2500  | 24640                                    | 3.00   | 361.5                                      | 1200  |
| 8-pole  |   |  |                           |                                       |   |  |  |  |   |
| 670   | <b>1PQ4 454-8AM0</b>                                      | 745  | 96.7                      | 0.80                                  | 720   | 8588                                     | 2.40   | 52.8                                       | 2200  |
| 950   | <b>1PQ4 500-8CM0</b>                                      | 746  | 96.7                      | 0.80                                  | 1020  | 12160                                    | 2.10   | 81.7                                       | 2200  |
| 1050  | <b>1PQ4 502-8CM0</b>                                      | 746  | 96.8                      | 0.81                                  | 1120  | 13440                                    | 2.10   | 91.9                                       | 2200  |
| 1150  | <b>1PQ4 504-8CM0</b>                                      | 746  | 96.9                      | 0.81                                  | 1220  | 14720                                    | 2.10   | 102.2                                      | 2200  |
| 1400  | <b>1PQ4 560-8CM0</b>                                      | 745  | 97.0                      | 0.81                                  | 1500  | 17944                                    | 2.30   | 141.6                                      | 2000  |
| 1600  | <b>1PQ4 562-8CM0</b>                                      | 746  | 97.1                      | 0.82                                  | 1680  | 20480                                    | 2.30   | 162.3                                      | 2000  |
| 1850  | <b>1PQ4 564-8CM0</b>                                      | 746  | 97.1                      | 0.82                                  | 1940  | 23680                                    | 2.30   | 188.8                                      | 2000  |
| 2030  | <b>1PQ4 634-8CM0</b>                                      | 746  | 97.0                      | 0.86                                  | 2050  | 25985                                    | 2.40   | 330.0                                      | 1200  |
| 2290  | <b>1PQ4 636-8CM0</b>                                      | 746  | 97.1                      | 0.86                                  | 2300  | 29314                                    | 2.40   | 360.0                                      | 1200  |

#### Type of construction:

|                        |          |
|------------------------|----------|
| IM B3                  | <b>0</b> |
| IM V1 (with canopy)    | <b>4</b> |
| IM V1 (without canopy) | <b>8</b> |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact 1PQ4

| Motor type<br>(repeated) | Constant-torque drive, speed range |                  |             |                       |                 |                  |             |                       |                 |                  |             |                       |
|--------------------------|------------------------------------|------------------|-------------|-----------------------|-----------------|------------------|-------------|-----------------------|-----------------|------------------|-------------|-----------------------|
|                          | 1:2                                |                  |             |                       | 1:5             |                  |             |                       | 1:10            |                  |             |                       |
|                          | $P_{max}$<br>kW                    | $T_{max}$<br>rpm | $\eta$<br>% | $\cos \varphi$<br>[-] | $P_{max}$<br>kW | $T_{max}$<br>rpm | $\eta$<br>% | $\cos \varphi$<br>[-] | $P_{max}$<br>kW | $T_{max}$<br>rpm | $\eta$<br>% | $\cos \varphi$<br>[-] |
|                          | <b>Constant-torque drive</b>       |                  |             |                       |                 |                  |             |                       |                 |                  |             |                       |
| 2-pole                   |                                    |                  |             |                       |                 |                  |             |                       |                 |                  |             |                       |
| 1PQ4 454-2...            | 990                                | 3169             | 97.3        | 0.92                  | 880             | 2817             | 97.3        | 0.92                  | 850             | 2721             | 97.3        | 0.92                  |
| 4-pole                   |                                    |                  |             |                       |                 |                  |             |                       |                 |                  |             |                       |
| 1PQ4 454-4...            | 1130                               | 7237             | 97.5        | 0.89                  | 1060            | 6789             | 97.6        | 0.89                  | 1020            | 6533             | 97.6        | 0.88                  |
| 1PQ4 500-4...            | 1320                               | 8460             | 97.2        | 0.88                  | 1230            | 7883             | 97.3        | 0.88                  | 1200            | 7690             | 97.3        | 0.88                  |
| 1PQ4 502-4...            | 1530                               | 9792             | 97.5        | 0.87                  | 1420            | 9088             | 97.6        | 0.87                  | 1390            | 8896             | 97.6        | 0.87                  |
| 1PQ4 504-4...            | 1680                               | 10767            | 97.4        | 0.89                  | 1540            | 9869             | 97.5        | 0.89                  | 1510            | 9677             | 97.5        | 0.89                  |
| 6-pole                   |                                    |                  |             |                       |                 |                  |             |                       |                 |                  |             |                       |
| 1PQ4 454-6...            | 870                                | 8366             | 97.3        | 0.86                  | 770             | 7405             | 97.4        | 0.85                  | 740             | 7116             | 97.4        | 0.85                  |
| 1PQ4 500-6...            | 1350                               | 12956            | 97.2        | 0.85                  | 1320            | 12668            | 97.2        | 0.85                  | 1300            | 12476            | 97.2        | 0.85                  |
| 1PQ4 502-6...            | 1480                               | 14204            | 97.2        | 0.86                  | 1430            | 13724            | 97.2        | 0.86                  | 1420            | 13628            | 97.2        | 0.86                  |
| 1PQ4 504-6...            | 1630                               | 15643            | 97.3        | 0.87                  | 1580            | 15163            | 97.3        | 0.87                  | 1570            | 15067            | 97.3        | 0.87                  |
| 1PQ4 560-6...            | 1900                               | 18234            | 97.5        | 0.86                  | 1750            | 16795            | 97.5        | 0.86                  | 1700            | 16315            | 97.5        | 0.85                  |
| 1PQ4 562-6...            | 2100                               | 20154            | 97.5        | 0.86                  | 2000            | 19194            | 97.5        | 0.86                  | 1950            | 18714            | 97.6        | 0.86                  |
| 1PQ4 564-6...            | 2300                               | 22073            | 97.6        | 0.87                  | 2250            | 21593            | 97.6        | 0.87                  | 2200            | 21113            | 97.6        | 0.87                  |
| 1PQ4 634-6...            | 2455                               | 23538            | 97.4        | 0.88                  | 2455            | 23538            | 97.4        | 0.88                  | 2455            | 23538            | 97.4        | 0.88                  |
| 1PQ4 636-6...            | 2570                               | 24640            | 97.4        | 0.89                  | 2570            | 24640            | 97.4        | 0.89                  | 2570            | 24640            | 97.4        | 0.89                  |
| 8-pole                   |                                    |                  |             |                       |                 |                  |             |                       |                 |                  |             |                       |
| 1PQ4 454-8...            | 670                                | 8588             | 96.7        | 0.80                  | 640             | 8203             | 96.7        | 0.80                  | 610             | 7819             | 96.8        | 0.79                  |
| 1PQ4 500-8...            | 950                                | 12160            | 96.7        | 0.80                  | 950             | 12160            | 96.7        | 0.80                  | 950             | 12160            | 96.7        | 0.80                  |
| 1PQ4 502-8...            | 1050                               | 13440            | 96.8        | 0.81                  | 1050            | 13440            | 96.8        | 0.81                  | 1050            | 13440            | 96.8        | 0.81                  |
| 1PQ4 504-8...            | 1150                               | 14720            | 96.9        | 0.81                  | 1150            | 14720            | 96.9        | 0.81                  | 1150            | 14720            | 96.9        | 0.81                  |
| 1PQ4 560-8...            | 1400                               | 17944            | 97.0        | 0.81                  | 1300            | 16663            | 97.0        | 0.80                  | 1300            | 16663            | 97.0        | 0.80                  |
| 1PQ4 562-8...            | 1600                               | 20480            | 97.1        | 0.82                  | 1500            | 19200            | 97.1        | 0.82                  | 1500            | 19200            | 97.1        | 0.82                  |
| 1PQ4 564-8...            | 1850                               | 23680            | 97.1        | 0.82                  | 1700            | 21760            | 97.1        | 0.81                  | 1700            | 21760            | 97.1        | 0.81                  |
| 1PQ4 634-8...            | 2030                               | 25985            | 97.0        | 0.86                  | 2030            | 25985            | 97.0        | 0.86                  | 2030            | 25985            | 97.0        | 0.86                  |
| 1PQ4 636-8...            | 2290                               | 29314            | 97.1        | 0.86                  | 2290            | 29314            | 97.1        | 0.86                  | 2290            | 29314            | 97.1        | 0.86                  |

## Motors for converter operation

Converter with non-sinusoidal output

### Air-cooled motors · H-compact 1PQ4

#### Selection and ordering data

| Rated power            |                        | High voltage motor<br>H-compact | Operating values at rated output for utilization 155 (F) |            |                |                         |              |                   |                   |                                      |
|------------------------|------------------------|---------------------------------|--|------------|----------------|-------------------------|--------------|-------------------|-------------------|--------------------------------------|
| IEC                    |                        |                                 | Rated speed  | Efficiency | Power factor   | Rated current<br>2.3 kV | Rated torque | Break-down torque | Moment of inertia | Mechanical speed limit <sup>1)</sup> |
| $P_{rated}$<br>155 (F) | $P_{rated}$<br>130 (B) |                                 | $n_{rated}$  | $\eta$     | $\cos \varphi$ | $I_{rated}$             | $T_{rated}$  | $T_B/T_{rated}$   | J                 | $n_{max}$                            |
| kW                     | kW                     | Article No.                     | rpm  | %          | [-]            | A                       | Nm           | [-]               | kgm <sup>2</sup>  | rpm                                  |
| <b>2.3 kV, 50 Hz</b>   |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 4-pole                 |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 1380                   | 1200                   | <b>1PQ4 500-4CV0</b>            | 1492   | 97.4       | 0.87           | 410                     | 8833         | 2.35              | 42.3              | 2400                                 |
| 1530                   | 1320                   | <b>1PQ4 502-4CV0</b>            | 1492   | 97.5       | 0.87           | 455                     | 9793         | 2.35              | 47.0              | 2400                                 |
| 1680                   | 1470                   | <b>1PQ4 504-4CV0</b>            | 1492   | 97.6       | 0.88           | 490                     | 10753        | 2.35              | 54.2              | 2400                                 |
| 1850                   | 1550                   | <b>1PQ4 560-4CV0</b>            | 1494   | 97.8       | 0.87           | 550                     | 11826        | 2.45              | 79.0              | 2200                                 |
| 2100                   | 1750                   | <b>1PQ4 562-4CV0</b>            | 1494   | 97.8       | 0.87           | 620                     | 13424        | 2.45              | 92.0              | 2200                                 |
| 2350                   | 1900                   | <b>1PQ4 564-4CV0</b>            | 1494   | 97.8       | 0.87           | 690                     | 15022        | 2.45              | 104.0             | 2200                                 |
| 6-pole                 |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 1170                   | 1050                   | <b>1PQ4 500-6CV0</b>            | 994  | 97.2       | 0.87           | 345                     | 11241        | 2.20              | 82.1              | 2200                                 |
| 1280                   | 1150                   | <b>1PQ4 502-6CV0</b>            | 994  | 97.2       | 0.87           | 380                     | 12298        | 2.20              | 92.4              | 2200                                 |
| 1380                   | 1250                   | <b>1PQ4 504-6CV0</b>            | 994  | 97.2       | 0.87           | 410                     | 13259        | 2.20              | 102.6             | 2200                                 |
| 1700                   | 1480                   | <b>1PQ4 560-6CV0</b>            | 995  | 97.4       | 0.86           | 510                     | 16317        | 2.25              | 141.5             | 2000                                 |
| 1900                   | 1680                   | <b>1PQ4 562-6CV0</b>            | 995  | 97.5       | 0.87           | 560                     | 18236        | 2.40              | 162.1             | 2000                                 |
| 2150                   | 1900                   | <b>1PQ4 564-6CV0</b>            | 995  | 97.6       | 0.87           | 640                     | 20636        | 2.25              | 188.5             | 2000                                 |
| 2300                   | – <sup>3)</sup>        | <b>1PQ4 632-6CV0</b>            | 995  | 97.1       | 0.89           | 670                     | 22075        | 2.40              | 269.0             | O. R. <sup>2)</sup>                  |
| 8-pole                 |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 800                    | 800                    | <b>1PQ4 500-8CV0</b>            | 746  | 96.6       | 0.81           | 255                     | 10241        | 2.20              | 81.7              | 2200                                 |
| 850                    | 850                    | <b>1PQ4 502-8CV0</b>            | 746  | 96.6       | 0.81           | 275                     | 10881        | 2.20              | 91.9              | 2200                                 |
| 950                    | 950                    | <b>1PQ4 504-8CV0</b>            | 746  | 96.6       | 0.81           | 305                     | 12162        | 2.20              | 102.2             | 2200                                 |
| 1300                   | 1140                   | <b>1PQ4 560-8CV0</b>            | 744  | 96.8       | 0.84           | 400                     | 16687        | 1.90              | 141.6             | 2000                                 |
| 1450                   | 1270                   | <b>1PQ4 562-8CV0</b>            | 744  | 96.9       | 0.84           | 445                     | 18612        | 1.90              | 162.3             | 2000                                 |
| 1700                   | 1500                   | <b>1PQ4 564-8CV0</b>            | 744  | 97.0       | 0.84           | 520                     | 21821        | 1.90              | 188.8             | 2000                                 |
| 1850                   | – <sup>3)</sup>        | <b>1PQ4 634-8CV0</b>            | 746  | 96.8       | 0.84           | 570                     | 23683        | 2.40              | 294.0             | O. R. <sup>2)</sup>                  |
| 2040                   | – <sup>3)</sup>        | <b>1PQ4 636-8CV0</b>            | 745  | 96.9       | 0.85           | 620                     | 26150        | 2.10              | 320.0             | O. R. <sup>2)</sup>                  |

#### Type of construction:

|                        |   |
|------------------------|---|
| IM B3                  | 0 |
| IM V1 (with canopy)    | 4 |
| IM V1 (without canopy) | 8 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> On request.

<sup>3)</sup> Utilization 130 (B) on request.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact 1PQ4

| Motor type<br>(repeated) | Constant-torque drive, speed range |            |        |                |            |            |        |                |            |            |        |                |
|--------------------------|------------------------------------|------------|--------|----------------|------------|------------|--------|----------------|------------|------------|--------|----------------|
|                          | 1:2                                |            |        |                | 1:5        |            |        |                | 1:10       |            |        |                |
|                          | $P_{\max}$                         | $T_{\max}$ | $\eta$ | $\cos \varphi$ | $P_{\max}$ | $T_{\max}$ | $\eta$ | $\cos \varphi$ | $P_{\max}$ | $T_{\max}$ | $\eta$ | $\cos \varphi$ |
|                          | kW                                 | Nm         | %      | [-]            | kW         | Nm         | %      | [-]            | kW         | Nm         | %      | [-]            |
|                          | <b>Constant-torque drive</b>       |            |        |                |            |            |        |                |            |            |        |                |
| 4-pole                   |                                    |            |        |                |            |            |        |                |            |            |        |                |
| 1PQ4 500-4...            | 1350                               | 8641       | 97.4   | 0.87           | 1280       | 8193       | 97.4   | 0.87           | 1230       | 7873       | 97.4   | 0.86           |
| 1PQ4 502-4...            | 1500                               | 9601       | 97.5   | 0.87           | 1430       | 9153       | 97.5   | 0.87           | 1380       | 8833       | 97.5   | 0.87           |
| 1PQ4 504-4...            | 1650                               | 10561      | 97.6   | 0.88           | 1560       | 9985       | 97.6   | 0.88           | 1500       | 9601       | 97.6   | 0.88           |
| 1PQ4 560-4...            | 1850                               | 11826      | 97.8   | 0.87           | 1780       | 11378      | 97.8   | 0.87           | 1730       | 11059      | 97.8   | 0.87           |
| 1PQ4 562-4...            | 2100                               | 13424      | 97.8   | 0.87           | 2030       | 12976      | 97.8   | 0.87           | 1980       | 12657      | 97.8   | 0.87           |
| 1PQ4 564-4...            | 2350                               | 15022      | 97.8   | 0.87           | 2300       | 14702      | 97.8   | 0.87           | 2250       | 14383      | 97.8   | 0.87           |
| 6-pole                   |                                    |            |        |                |            |            |        |                |            |            |        |                |
| 1PQ4 500-6...            | 1170                               | 11241      | 97.2   | 0.87           | 1170       | 11241      | 97.2   | 0.87           | 1120       | 10761      | 97.2   | 0.87           |
| 1PQ4 502-6...            | 1280                               | 12298      | 97.2   | 0.87           | 1280       | 12298      | 97.2   | 0.87           | 1220       | 11721      | 97.2   | 0.87           |
| 1PQ4 504-6...            | 1380                               | 13259      | 97.2   | 0.87           | 1380       | 13259      | 97.2   | 0.87           | 1320       | 12682      | 97.3   | 0.87           |
| 1PQ4 560-6...            | 1700                               | 16317      | 97.4   | 0.86           | 1700       | 16317      | 97.4   | 0.86           | 1600       | 15357      | 97.4   | 0.86           |
| 1PQ4 562-6...            | 1900                               | 18236      | 97.5   | 0.87           | 1900       | 18236      | 97.5   | 0.87           | 1800       | 17276      | 97.5   | 0.87           |
| 1PQ4 564-6...            | 2150                               | 20636      | 97.6   | 0.87           | 2150       | 20636      | 97.6   | 0.87           | 2050       | 19676      | 97.6   | 0.87           |
| 1PQ4 632-6...            | 2210                               | 21212      | 97.1   | 0.89           | 1795       | 17228      | 97.0   | 0.88           | 1680       | 16125      | 97.0   | 0.87           |
| 8-pole                   |                                    |            |        |                |            |            |        |                |            |            |        |                |
| 1PQ4 500-8...            | 800                                | 10241      | 96.6   | 0.81           | 800        | 10241      | 96.6   | 0.81           | 760        | 9729       | 96.6   | 0.81           |
| 1PQ4 502-8...            | 850                                | 10881      | 96.6   | 0.81           | 850        | 10881      | 96.6   | 0.81           | 810        | 10369      | 96.6   | 0.81           |
| 1PQ4 504-8...            | 980                                | 12546      | 96.6   | 0.81           | 980        | 12546      | 96.6   | 0.81           | 930        | 11905      | 96.6   | 0.81           |
| 1PQ4 560-8...            | 1300                               | 16687      | 96.8   | 0.84           | 1260       | 16173      | 96.8   | 0.84           | 1230       | 15788      | 96.8   | 0.84           |
| 1PQ4 562-8...            | 1450                               | 18612      | 96.9   | 0.84           | 1440       | 18484      | 96.9   | 0.84           | 1400       | 17970      | 96.9   | 0.84           |
| 1PQ4 564-8...            | 1700                               | 21821      | 97.0   | 0.84           | 1690       | 21693      | 97.0   | 0.84           | 1650       | 21179      | 97.0   | 0.84           |
| 1PQ4 634-8...            | 1775                               | 22723      | 96.7   | 0.83           | 1445       | 18498      | 96.6   | 0.81           | 1350       | 17282      | 96.5   | 0.80           |
| 1PQ4 636-8...            | 1960                               | 25125      | 96.8   | 0.85           | 1590       | 20382      | 96.8   | 0.83           | 1490       | 19100      | 96.7   | 0.82           |

## Motors for converter operation

Converter with non-sinusoidal output

### Air-cooled motors · H-compact 1PQ4

#### Selection and ordering data

| Rated power                   |                        | High voltage motor<br>H-compact | Operating values at rated output for utilization 155 (F) |            |                |                         |              |                   |                   |                                      |
|-------------------------------|------------------------|---------------------------------|--|------------|----------------|-------------------------|--------------|-------------------|-------------------|--------------------------------------|
| IEC                           |                        |                                 | Rated speed  | Efficiency | Power factor   | Rated current at 3.4 kV | Rated torque | Break-down torque | Moment of inertia | Mechanical speed limit <sup>1)</sup> |
| $P_{rated}$<br>155 (F)        | $P_{rated}$<br>130 (B) | Article No.                     | $n_{rated}$  | $\eta$     | $\cos \varphi$ | $I_{rated}$             | $T_{rated}$  | $T_B/T_{rated}$   | J                 | $n_{max}$                            |
| kW                            | kW                     |                                 | rpm  | %          | [-]            | A                       | Nm           | [-]               | kgm <sup>2</sup>  | rpm                                  |
| <b>3.4 ... 4.16 kV, 50 Hz</b> |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 4-pole                        |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 1380                          | 1200                   | <b>1PQ4 500-4CV</b>             | 1492   | 97.4       | 0.87           | 285                     | 8833         | 2.35              | 42.3              | 2400                                 |
| 1530                          | 1320                   | <b>1PQ4 502-4CV</b>             | 1492   | 97.5       | 0.87           | 315                     | 9793         | 2.35              | 47.0              | 2400                                 |
| 1680                          | 1470                   | <b>1PQ4 504-4CV</b>             | 1492   | 97.6       | 0.88           | 340                     | 10753        | 2.35              | 54.2              | 2400                                 |
| 1850                          | 1550                   | <b>1PQ4 560-4CV</b>             | 1494   | 97.8       | 0.87           | 380                     | 11826        | 2.45              | 79.0              | 2200                                 |
| 2100                          | 1750                   | <b>1PQ4 562-4CV</b>             | 1494   | 97.8       | 0.87           | 430                     | 13424        | 2.45              | 92.0              | 2200                                 |
| 2350                          | 1900                   | <b>1PQ4 564-4CV</b>             | 1494   | 97.8       | 0.87           | 485                     | 15022        | 2.45              | 104.0             | 2200                                 |
| 2600                          | — <sup>3)</sup>        | <b>1PQ4 632-4CV 0</b>           | 1494   | 97.5       | 0.88           | 530                     | 16620        | 2.20              | 157.0             | O. R. <sup>2)</sup>                  |
| 2900                          | — <sup>3)</sup>        | <b>1PQ4 634-4CV 0</b>           | 1494   | 97.6       | 0.88           | 590                     | 18537        | 2.20              | 171.0             | O. R. <sup>2)</sup>                  |
| 3150                          | — <sup>3)</sup>        | <b>1PQ4 636-4CV 0</b>           | 1494   | 97.7       | 0.88           | 640                     | 20136        | 2.20              | 186.0             | O. R. <sup>2)</sup>                  |
| 6-pole                        |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 1170                          | 1050                   | <b>1PQ4 500-6CV</b>             | 994  | 97.2       | 0.87           | 240                     | 11241        | 2.20              | 82.1              | 2200                                 |
| 1280                          | 1150                   | <b>1PQ4 502-6CV</b>             | 994  | 97.2       | 0.87           | 265                     | 12298        | 2.20              | 92.4              | 2200                                 |
| 1380                          | 1250                   | <b>1PQ4 504-6CV</b>             | 994  | 97.2       | 0.87           | 285                     | 13259        | 2.20              | 102.6             | 2200                                 |
| 1700                          | 1480                   | <b>1PQ4 560-6CV</b>             | 995  | 97.4       | 0.86           | 355                     | 16317        | 2.25              | 141.5             | 2000                                 |
| 1900                          | 1680                   | <b>1PQ4 562-6CV</b>             | 995  | 97.5       | 0.87           | 390                     | 18236        | 2.40              | 162.1             | 2000                                 |
| 2150                          | 1900                   | <b>1PQ4 564-6CV</b>             | 995  | 97.6       | 0.87           | 445                     | 20636        | 2.25              | 188.5             | 2000                                 |
| 2220                          | — <sup>3)</sup>        | <b>1PQ4 632-6CV</b>             | 995  | 97.1       | 0.89           | 450                     | 21308        | 2.30              | 269.0             | O. R. <sup>2)</sup>                  |
| 2480                          | — <sup>3)</sup>        | <b>1PQ4 634-6CV</b>             | 995  | 97.2       | 0.89           | 500                     | 23803        | 2.20              | 297.0             | O. R. <sup>2)</sup>                  |
| 2700                          | — <sup>3)</sup>        | <b>1PQ4 636-6CV</b>             | 995  | 97.3       | 0.89           | 550                     | 25915        | 2.20              | 323.0             | O. R. <sup>2)</sup>                  |
| 8-pole                        |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 800                           | 800                    | <b>1PQ4 500-8CV</b>             | 746  | 96.6       | 0.81           | 178                     | 10241        | 2.20              | 81.7              | 2200                                 |
| 850                           | 850                    | <b>1PQ4 502-8CV</b>             | 746  | 96.6       | 0.81           | 190                     | 10881        | 2.20              | 91.9              | 2200                                 |
| 950                           | 950                    | <b>1PQ4 504-8CV</b>             | 746  | 96.6       | 0.81           | 210                     | 12162        | 2.20              | 102.2             | 2200                                 |
| 1300                          | 1140                   | <b>1PQ4 560-8CV</b>             | 744  | 96.8       | 0.84           | 280                     | 16687        | 1.90              | 141.6             | 2000                                 |
| 1450                          | 1270                   | <b>1PQ4 562-8CV</b>             | 744  | 96.9       | 0.84           | 310                     | 18612        | 1.90              | 162.3             | 2000                                 |
| 1700                          | 1500                   | <b>1PQ4 564-8CV</b>             | 744  | 97.0       | 0.84           | 365                     | 21821        | 1.90              | 188.8             | 2000                                 |
| 1780                          | — <sup>3)</sup>        | <b>1PQ4 634-8CV</b>             | 745  | 96.7       | 0.84           | 385                     | 22817        | 2.30              | 294.0             | O. R. <sup>2)</sup>                  |
| 1960                          | — <sup>3)</sup>        | <b>1PQ4 636-8CV</b>             | 745  | 96.8       | 0.85           | 415                     | 25125        | 2.20              | 320.0             | O. R. <sup>2)</sup>                  |

#### Voltage code:

|                |   |
|----------------|---|
| 4.16 kV, 50 Hz | 4 |
| Other voltage  | 9 |

#### Type of construction:

|                        |   |
|------------------------|---|
| IM B3                  | 0 |
| IM V1 (with canopy)    | 4 |
| IM V1 (without canopy) | 8 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> On request.

<sup>3)</sup> Utilization 130 (B) on request.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact 1PQ4

| Motor type<br>(repeated) | Constant-torque drive, speed range |            |        |                |            |            |        |                |            |            |        |                |
|--------------------------|------------------------------------|------------|--------|----------------|------------|------------|--------|----------------|------------|------------|--------|----------------|
|                          | 1:2                                |            |        |                | 1:5        |            |        |                | 1:10       |            |        |                |
|                          | $P_{\max}$                         | $T_{\max}$ | $\eta$ | $\cos \varphi$ | $P_{\max}$ | $T_{\max}$ | $\eta$ | $\cos \varphi$ | $P_{\max}$ | $T_{\max}$ | $\eta$ | $\cos \varphi$ |
|                          | kW                                 | Nm         | %      | [-]            | kW         | Nm         | %      | [-]            | kW         | Nm         | %      | [-]            |
|                          | <b>Constant-torque drive</b>       |            |        |                |            |            |        |                |            |            |        |                |
| <b>4-pole</b>            |                                    |            |        |                |            |            |        |                |            |            |        |                |
| 1PQ4 500-4...            | 1350                               | 8641       | 97.4   | 0.87           | 1280       | 8193       | 97.4   | 0.87           | 1230       | 7873       | 97.4   | 0.86           |
| 1PQ4 502-4...            | 1500                               | 9601       | 97.5   | 0.87           | 1430       | 9153       | 97.5   | 0.87           | 1380       | 8833       | 97.5   | 0.87           |
| 1PQ4 504-4...            | 1650                               | 10561      | 97.6   | 0.88           | 1560       | 9985       | 97.6   | 0.88           | 1500       | 9601       | 97.6   | 0.88           |
| 1PQ4 560-4...            | 1850                               | 11826      | 97.8   | 0.87           | 1780       | 11378      | 97.8   | 0.87           | 1730       | 11059      | 97.8   | 0.87           |
| 1PQ4 562-4...            | 2100                               | 13424      | 97.8   | 0.87           | 2030       | 12976      | 97.8   | 0.87           | 1980       | 12657      | 97.8   | 0.87           |
| 1PQ4 564-4...            | 2350                               | 15022      | 97.3   | 0.85           | 1900       | 12145      | 97.8   | 0.87           | 2250       | 14383      | 97.8   | 0.87           |
| 1PQ4 632-4...            | 2495                               | 15949      | 97.4   | 0.88           | 2030       | 12976      | 97.4   | 0.87           | 1900       | 12145      | 97.4   | 0.87           |
| 1PQ4 634-4...            | 2780                               | 17770      | 97.5   | 0.88           | 2260       | 14446      | 97.5   | 0.87           | 2110       | 13488      | 97.4   | 0.87           |
| 1PQ4 636-4...            | 3020                               | 19305      | 97.6   | 0.88           | 2460       | 15725      | 97.6   | 0.87           | 2300       | 14702      | 97.5   | 0.87           |
| <b>6-pole</b>            |                                    |            |        |                |            |            |        |                |            |            |        |                |
| 1PQ4 500-6...            | 1170                               | 11241      | 97.2   | 0.87           | 1170       | 11241      | 97.1   | 0.87           | 1120       | 11529      | 97.2   | 0.87           |
| 1PQ4 502-6...            | 1280                               | 12298      | 97.2   | 0.87           | 1280       | 12298      | 96.9   | 0.87           | 1220       | 12970      | 97.2   | 0.87           |
| 1PQ4 504-6...            | 1380                               | 13259      | 97.2   | 0.87           | 1380       | 13259      | 97.4   | 0.87           | 1320       | 14700      | 97.3   | 0.87           |
| 1PQ4 560-6...            | 1700                               | 16317      | 97.4   | 0.86           | 1700       | 16317      | 97.5   | 0.87           | 1600       | 16796      | 97.4   | 0.86           |
| 1PQ4 562-6...            | 1900                               | 18236      | 97.5   | 0.87           | 1900       | 18236      | 97.5   | 0.87           | 1800       | 18716      | 97.5   | 0.87           |
| 1PQ4 564-6...            | 2150                               | 20636      | 97.6   | 0.87           | 2150       | 20636      | 97.6   | 0.87           | 2050       | 21595      | 97.6   | 0.87           |
| 1PQ4 632-6...            | 2130                               | 20444      | 97.0   | 0.89           | 1730       | 16605      | 97.0   | 0.88           | 1620       | 15549      | 97.0   | 0.88           |
| 1PQ4 634-6...            | 2380                               | 22843      | 97.1   | 0.89           | 1935       | 18572      | 97.2   | 0.89           | 1810       | 17372      | 97.1   | 0.88           |
| 1PQ4 636-6...            | 2590                               | 24859      | 97.3   | 0.89           | 2100       | 20156      | 97.3   | 0.89           | 1970       | 18908      | 97.2   | 0.88           |
| <b>8-pole</b>            |                                    |            |        |                |            |            |        |                |            |            |        |                |
| 1PQ4 500-8...            | 800                                | 10241      | 96.6   | 0.81           | 800        | 10241      | 96.6   | 0.81           | 760        | 9729       | 96.6   | 0.81           |
| 1PQ4 502-8...            | 850                                | 10881      | 96.6   | 0.81           | 850        | 10881      | 96.6   | 0.81           | 810        | 10369      | 96.6   | 0.81           |
| 1PQ4 504-8...            | 980                                | 12546      | 96.6   | 0.81           | 980        | 12546      | 96.6   | 0.81           | 930        | 11905      | 96.6   | 0.81           |
| 1PQ4 560-8...            | 1300                               | 16687      | 96.8   | 0.84           | 1260       | 16173      | 96.8   | 0.84           | 1230       | 15788      | 96.8   | 0.84           |
| 1PQ4 562-8...            | 1450                               | 18612      | 96.9   | 0.84           | 1440       | 18484      | 96.9   | 0.84           | 1400       | 17970      | 96.9   | 0.84           |
| 1PQ4 564-8...            | 1700                               | 21821      | 97.0   | 0.84           | 1690       | 21693      | 97.0   | 0.84           | 1650       | 21179      | 97.0   | 0.84           |
| 1PQ4 634-8...            | 1710                               | 21920      | 96.7   | 0.84           | 1390       | 17818      | 96.6   | 0.82           | 1300       | 16664      | 96.5   | 0.81           |
| 1PQ4 636-8...            | 1880                               | 24099      | 96.8   | 0.85           | 1530       | 19613      | 96.7   | 0.83           | 1430       | 18331      | 96.7   | 0.82           |

## Motors for converter operation

Converter with non-sinusoidal output

### Air-cooled motors · H-compact 1PQ4

#### Selection and ordering data

| Rated power<br><b>IEC</b><br>$P_{\text{rated}}$ 155 (F)<br>kW | <b>High voltage motor<br/>H-compact</b><br><br>Article No. | Operating values at rated output for utilization 155 (F) |                           |                                       |  |  |  |  |   |
|---|--|--|---------------------------|---------------------------------------|--|--|--|--|---|
|   |  | Rated speed<br>$n_{\text{rated}}$<br>rpm                 | Efficiency<br>$\eta$<br>% | Power factor<br>$\cos \varphi$<br>[-] | Rated current at 6.6 kV<br>$I_{\text{rated}}$<br>A | Rated torque<br>$T_{\text{rated}}$<br>Nm | Break-down torque<br>$T_B/T_{\text{rated}}$<br>[-] | Moment of inertia<br>J<br>kgm <sup>2</sup> | Mechanical speed limit <sup>1)</sup><br>$n_{\text{max}}$<br>rpm |
| <b>6 ... 6.6 kV, 50 Hz</b>                                    |  |  |                           |                                       |  |  |  |  |   |
| 4-pole  |  |  |                           |                                       |  |  |  |  |   |
| 1180  | <b>1PQ4 500-4CV</b> ■■■                                    | 1493   | 96.8                      | 0.87                                  | 122  | 7548                                     | 2.60   | 42.0                                       | 2400  |
| 1300  | <b>1PQ4 502-4CV</b> ■■■                                    | 1493   | 96.9                      | 0.87                                  | 134  | 8315                                     | 2.60   | 47.0                                       | 2400  |
| 1450  | <b>1PQ4 504-4CV</b> ■■■                                    | 1493   | 97.1                      | 0.88                                  | 148  | 9275                                     | 2.50   | 54.0                                       | 2400  |
| 1600  | <b>1PQ4 560-4CV</b> ■■■                                    | 1494   | 97.2                      | 0.86                                  | 168  | 10228                                    | 2.60   | 79.0                                       | 2200  |
| 1850  | <b>1PQ4 562-4CV</b> ■■■                                    | 1494   | 97.4                      | 0.87                                  | 190  | 11826                                    | 2.60   | 92.0                                       | 2200  |
| 2100  | <b>1PQ4 564-4CV</b> ■■■                                    | 1494   | 97.5                      | 0.87                                  | 215  | 13424                                    | 2.60   | 104.0                                      | 2200  |
| 2400  | <b>1PQ4 632-4CV</b> ■ 0                                    | 1494   | 97.3                      | 0.88                                  | 245  | 15341                                    | 2.40   | 157.0                                      | O. R. <sup>2)</sup>   |
| 2700  | <b>1PQ4 634-4CV</b> ■ 0                                    | 1494   | 97.4                      | 0.87                                  | 280  | 17259                                    | 2.40   | 171.0                                      | O. R. <sup>2)</sup>   |
| 2950  | <b>1PQ4 636-4CV</b> ■ 0                                    | 1494   | 97.5                      | 0.87                                  | 305  | 18857                                    | 2.40   | 186.0                                      | O. R. <sup>2)</sup>   |
| 6-pole  |  |  |                           |                                       |  |  |  |  |   |
| 920   | <b>1PQ4 500-6CV</b> ■■■                                    | 995  | 96.6                      | 0.86                                  | 97   | 8830                                     | 2.50   | 82.0                                       | 2200  |
| 1030  | <b>1PQ4 502-6CV</b> ■■■                                    | 995  | 96.7                      | 0.87                                  | 108  | 9886                                     | 2.40   | 92.0                                       | 2200  |
| 1120  | <b>1PQ4 504-6CV</b> ■■■                                    | 995  | 96.8                      | 0.87                                  | 116  | 10750                                    | 2.40   | 103.0                                      | 2200  |
| 1400  | <b>1PQ4 560-6CV</b> ■■■                                    | 996  | 97.1                      | 0.86                                  | 146  | 13424                                    | 2.70   | 142.0                                      | 2000  |
| 1550  | <b>1PQ4 562-6CV</b> ■■■                                    | 996  | 97.2                      | 0.86                                  | 162  | 14862                                    | 2.70   | 162.0                                      | 2000  |
| 1700  | <b>1PQ4 564-6CV</b> ■■■                                    | 996  | 97.3                      | 0.87                                  | 176  | 16300                                    | 2.50   | 189.0                                      | 2000  |
| 2050  | <b>1PQ4 632-6CV</b> ■■■                                    | 995  | 97.0                      | 0.88                                  | 210  | 19676                                    | 2.40   | 269.0                                      | O. R. <sup>2)</sup>   |
| 2300  | <b>1PQ4 634-6CV</b> ■■■                                    | 995  | 97.1                      | 0.89                                  | 235  | 22075                                    | 2.40   | 297.0                                      | O. R. <sup>2)</sup>   |
| 2500  | <b>1PQ4 636-6CV</b> ■■■                                    | 995  | 97.1                      | 0.88                                  | 255  | 23995                                    | 2.40   | 323.0                                      | O. R. <sup>2)</sup>   |
| 8-pole  |  |  |                           |                                       |  |  |  |  |   |
| 720   | <b>1PQ4 500-8CV</b> ■■■                                    | 746  | 96.0                      | 0.80                                  | 82   | 9217                                     | 2.30   | 82.0                                       | 2200  |
| 760   | <b>1PQ4 502-8CV</b> ■■■                                    | 746  | 96.2                      | 0.81                                  | 85   | 9729                                     | 2.30   | 92.0                                       | 2200  |
| 820   | <b>1PQ4 504-8CV</b> ■■■                                    | 746  | 96.3                      | 0.81                                  | 92   | 10497                                    | 2.30   | 102.0                                      | 2200  |
| 1050  | <b>1PQ4 560-8CV</b> ■■■                                    | 745  | 96.6                      | 0.82                                  | 116  | 13460                                    | 2.40   | 142.0                                      | 2000  |
| 1180  | <b>1PQ4 562-8CV</b> ■■■                                    | 745  | 96.7                      | 0.82                                  | 130  | 15126                                    | 2.40   | 162.0                                      | 2000  |
| 1350  | <b>1PQ4 564-8CV</b> ■■■                                    | 745  | 96.8                      | 0.83                                  | 146  | 17305                                    | 2.40   | 189.0                                      | 2000  |
| 1500  | <b>1PQ4 632-8CV</b> ■■■                                    | 746  | 96.5                      | 0.83                                  | 164  | 19202                                    | 2.50   | 265.0                                      | O. R. <sup>2)</sup>   |
| 1700  | <b>1PQ4 634-8CV</b> ■■■                                    | 746  | 96.6                      | 0.83                                  | 186  | 21763                                    | 2.50   | 294.0                                      | O. R. <sup>2)</sup>   |
| 1850  | <b>1PQ4 636-8CV</b> ■■■                                    | 746  | 96.7                      | 0.83                                  | 200  | 23683                                    | 2.50   | 320.0                                      | O. R. <sup>2)</sup>   |

#### Voltage code:

|               |   |
|---------------|---|
| 6 kV, 50 Hz   | 6 |
| 6.6 kV, 50 Hz | 7 |
| Other voltage | 9 |

#### Type of construction:

|                        |   |
|------------------------|---|
| IM B3                  | 0 |
| IM V1 (with canopy)    | 4 |
| IM V1 (without canopy) | 8 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> On request.



## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact 1PQ4

| Motor type<br>(repeated) | Constant-torque drive, speed range |                  |             |                       |                  |                  |             |                       |                  |                  |             |                       |
|--------------------------|------------------------------------|------------------|-------------|-----------------------|------------------|------------------|-------------|-----------------------|------------------|------------------|-------------|-----------------------|
|                          | 1:2                                |                  |             |                       | 1:5              |                  |             |                       | 1:10             |                  |             |                       |
|                          | $P_{\max}$<br>kW                   | $T_{\max}$<br>Nm | $\eta$<br>% | $\cos \varphi$<br>[-] | $P_{\max}$<br>kW | $T_{\max}$<br>Nm | $\eta$<br>% | $\cos \varphi$<br>[-] | $P_{\max}$<br>kW | $T_{\max}$<br>Nm | $\eta$<br>% | $\cos \varphi$<br>[-] |
|                          | <b>Constant-torque drive</b>       |                  |             |                       |                  |                  |             |                       |                  |                  |             |                       |
| <b>4-pole</b>            |                                    |                  |             |                       |                  |                  |             |                       |                  |                  |             |                       |
| 1PQ4 500-4...            | 1180                               | 7548             | 96.8        | 0.87                  | 1180             | 7548             | 96.8        | 0.87                  | 1070             | 6844             | 96.7        | 0.86                  |
| 1PQ4 502-4...            | 1300                               | 8315             | 96.9        | 0.87                  | 1300             | 8315             | 96.9        | 0.87                  | 1200             | 7676             | 96.8        | 0.87                  |
| 1PQ4 504-4...            | 1450                               | 9275             | 97.1        | 0.88                  | 1450             | 9275             | 97.1        | 0.88                  | 1370             | 8763             | 97.0        | 0.88                  |
| 1PQ4 560-4...            | 1600                               | 10228            | 97.2        | 0.86                  | 1600             | 10228            | 97.2        | 0.86                  | 1450             | 9269             | 97.1        | 0.84                  |
| 1PQ4 562-4...            | 1850                               | 11826            | 97.4        | 0.87                  | 1850             | 11826            | 97.4        | 0.87                  | 1700             | 10867            | 97.3        | 0.86                  |
| 1PQ4 564-4...            | 2100                               | 13424            | 97.5        | 0.87                  | 2100             | 13424            | 97.5        | 0.87                  | 1950             | 12465            | 97.4        | 0.87                  |
| 1PQ4 632-4...            | 2400                               | 15341            | 97.3        | 0.88                  | 2400             | 15341            | 97.3        | 0.88                  | 2100             | 13424            | 97.3        | 0.87                  |
| 1PQ4 634-4...            | 2700                               | 17259            | 97.4        | 0.87                  | 2700             | 17259            | 97.4        | 0.87                  | 2450             | 15661            | 97.4        | 0.86                  |
| 1PQ4 636-4...            | 2950                               | 18857            | 97.5        | 0.87                  | 2950             | 18857            | 97.5        | 0.87                  | 2750             | 17579            | 97.5        | 0.86                  |
| <b>6-pole</b>            |                                    |                  |             |                       |                  |                  |             |                       |                  |                  |             |                       |
| 1PQ4 500-6...            | 920                                | 8830             | 96.6        | 0.86                  | 920              | 8830             | 96.6        | 0.86                  | 920              | 8830             | 96.6        | 0.86                  |
| 1PQ4 502-6...            | 1030                               | 9886             | 96.7        | 0.87                  | 1030             | 9886             | 96.7        | 0.87                  | 1030             | 9886             | 96.7        | 0.87                  |
| 1PQ4 504-6...            | 1120                               | 10750            | 96.8        | 0.87                  | 1120             | 10750            | 96.8        | 0.87                  | 1120             | 10750            | 96.8        | 0.87                  |
| 1PQ4 560-6...            | 1400                               | 13424            | 97.1        | 0.86                  | 1400             | 13424            | 97.1        | 0.86                  | 1400             | 13424            | 97.2        | 0.86                  |
| 1PQ4 562-6...            | 1550                               | 14862            | 97.2        | 0.86                  | 1550             | 14862            | 97.2        | 0.86                  | 1550             | 14862            | 97.3        | 0.86                  |
| 1PQ4 564-6...            | 1700                               | 16300            | 97.3        | 0.87                  | 1700             | 16300            | 97.3        | 0.87                  | 1700             | 16300            | 97.4        | 0.87                  |
| 1PQ4 632-6...            | 2050                               | 19676            | 97.0        | 0.88                  | 2050             | 19676            | 97.0        | 0.88                  | 2050             | 19676            | 97.0        | 0.88                  |
| 1PQ4 634-6...            | 2300                               | 22075            | 97.1        | 0.89                  | 2300             | 22075            | 97.1        | 0.89                  | 2300             | 22075            | 97.0        | 0.89                  |
| 1PQ4 636-6...            | 2500                               | 23995            | 97.1        | 0.88                  | 2500             | 23995            | 97.1        | 0.88                  | 2500             | 23995            | 97.1        | 0.88                  |
| <b>8-pole</b>            |                                    |                  |             |                       |                  |                  |             |                       |                  |                  |             |                       |
| 1PQ4 500-8...            | 720                                | 9217             | 96.0        | 0.80                  | 720              | 9217             | 96.0        | 0.80                  | 720              | 9217             | 96.1        | 0.81                  |
| 1PQ4 502-8...            | 760                                | 9729             | 96.2        | 0.81                  | 760              | 9729             | 96.2        | 0.81                  | 760              | 9729             | 96.2        | 0.81                  |
| 1PQ4 504-8...            | 820                                | 10497            | 96.3        | 0.81                  | 820              | 10497            | 96.3        | 0.81                  | 820              | 10497            | 96.3        | 0.81                  |
| 1PQ4 560-8...            | 1050                               | 13460            | 96.6        | 0.82                  | 1050             | 13460            | 96.6        | 0.82                  | 1050             | 13460            | 96.6        | 0.82                  |
| 1PQ4 562-8...            | 1180                               | 15126            | 96.7        | 0.82                  | 1180             | 15126            | 96.7        | 0.82                  | 1180             | 15126            | 96.8        | 0.82                  |
| 1PQ4 564-8...            | 1350                               | 17305            | 96.8        | 0.83                  | 1350             | 17305            | 96.8        | 0.83                  | 1350             | 17305            | 96.8        | 0.82                  |
| 1PQ4 632-8...            | 1500                               | 19202            | 96.5        | 0.83                  | 1500             | 19202            | 96.5        | 0.83                  | 1500             | 19202            | 96.5        | 0.83                  |
| 1PQ4 634-8...            | 1700                               | 21763            | 96.6        | 0.83                  | 1700             | 21763            | 96.6        | 0.83                  | 1700             | 21763            | 96.6        | 0.83                  |
| 1PQ4 636-8...            | 1850                               | 23683            | 96.7        | 0.83                  | 1850             | 23683            | 96.7        | 0.83                  | 1850             | 23683            | 96.7        | 0.83                  |

## Motors for converter operation

Converter with non-sinusoidal output

### Air-cooled motors · H-compact 1PQ4

#### Selection and ordering data

| Rated power                  |                        | High voltage motor<br>H-compact | Operating values at rated output for utilization 155 (F) |            |                |                         |              |                   |                   |                                      |
|------------------------------|------------------------|---------------------------------|--|------------|----------------|-------------------------|--------------|-------------------|-------------------|--------------------------------------|
| IEC                          |                        |                                 | Rated speed  | Efficiency | Power factor   | Rated current<br>2.3 kV | Rated torque | Break-down torque | Moment of inertia | Mechanical speed limit <sup>1)</sup> |
| $P_{rated}$<br>155 (F)       | $P_{rated}$<br>130 (B) |                                 | $n_{rated}$  | $\eta$     | $\cos \varphi$ | $I_{rated}$             | $T_{rated}$  | $T_B/T_{rated}$   | J                 | $n_{max}$                            |
| kW                           | kW                     | Article No.                     | rpm  | %          | [-]            | A                       | Nm           | [-]               | kgm <sup>2</sup>  | rpm                                  |
| <b>2.3 kV, 60 Hz</b>         |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 4-pole                       |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 1550                         | 1320                   | <b>1PQ4 500-4CV1</b> ■          | 1793   | 97.5       | 0.88           | 455                     | 8256         | 2.50              | 42.3              | 2400                                 |
| 1700                         | 1400                   | <b>1PQ4 502-4CV1</b> ■          | 1793   | 97.5       | 0.88           | 495                     | 9055         | 2.50              | 47.0              | 2400                                 |
| 1850                         | 1550                   | <b>1PQ4 504-4CV1</b> ■          | 1793   | 97.5       | 0.88           | 540                     | 9854         | 2.50              | 54.2              | 2400                                 |
| 2000                         | 1600                   | <b>1PQ4 560-4CV1</b> ■          | 1794   | 97.7       | 0.87           | 590                     | 10647        | 2.40              | 79.0              | 2200                                 |
| 2300                         | 1850                   | <b>1PQ4 562-4CV1</b> ■          | 1794   | 97.7       | 0.87           | 680                     | 12244        | 2.40              | 92.0              | 2200                                 |
| 2600                         | 2100                   | <b>1PQ4 564-4CV1</b> ■          | 1794   | 97.7       | 0.87           | 770                     | 13841        | 2.40              | 104.0             | 2200                                 |
| 6-pole                       |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 1270                         | 1120                   | <b>1PQ4 500-6CV1</b> ■          | 1195   | 97.1       | 0.87           | 375                     | 10149        | 2.25              | 82.1              | 2200                                 |
| 1420                         | 1250                   | <b>1PQ4 502-6CV1</b> ■          | 1196   | 97.3       | 0.87           | 420                     | 11339        | 2.25              | 92.4              | 2200                                 |
| 1600                         | 1400                   | <b>1PQ4 504-6CV1</b> ■          | 1195   | 97.4       | 0.87           | 475                     | 12787        | 2.25              | 102.6             | 2200                                 |
| 1850                         | 1600                   | <b>1PQ4 560-6CV1</b> ■          | 1195   | 97.5       | 0.87           | 550                     | 14785        | 2.40              | 141.5             | 2000                                 |
| 2050                         | 1780                   | <b>1PQ4 562-6CV1</b> ■          | 1195   | 97.5       | 0.87           | 610                     | 16383        | 2.40              | 162.1             | 2000                                 |
| 2350                         | 2000                   | <b>1PQ4 564-6CV1</b> ■          | 1195   | 97.6       | 0.87           | 690                     | 18780        | 2.40              | 188.5             | 2000                                 |
| 8-pole                       |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| 1000                         | 900                    | <b>1PQ4 500-8CV1</b> ■          | 895  | 96.7       | 0.81           | 320                     | 10670        | 2.10              | 81.7              | 2200                                 |
| 1100                         | 1000                   | <b>1PQ4 502-8CV1</b> ■          | 895  | 96.7       | 0.81           | 355                     | 11737        | 2.10              | 91.9              | 2200                                 |
| 1200                         | 1100                   | <b>1PQ4 504-8CV1</b> ■          | 895  | 96.7       | 0.81           | 385                     | 12804        | 2.10              | 102.2             | 2200                                 |
| 1400                         | 1220                   | <b>1PQ4 560-8CV1</b> ■          | 894  | 96.9       | 0.84           | 430                     | 14955        | 1.90              | 141.6             | 2000                                 |
| 1630                         | 1420                   | <b>1PQ4 562-8CV1</b> ■          | 894  | 97.0       | 0.84           | 500                     | 17412        | 1.90              | 162.3             | 2000                                 |
| 1860                         | 1600                   | <b>1PQ4 564-8CV1</b> ■          | 894  | 97.1       | 0.84           | 570                     | 19869        | 2.10              | 188.8             | 2000                                 |
| 2000                         | – <sup>3)</sup>        | <b>1PQ4 634-8CV1</b> ■          | 895  | 96.7       | 0.86           | 600                     | 21341        | 2.00              | 294.0             | O. R. <sup>2)</sup>                  |
| 2160                         | – <sup>3)</sup>        | <b>1PQ4 636-8CV1</b> ■          | 895  | 96.8       | 0.86           | 650                     | 23048        | 2.10              | 320.0             | O. R. <sup>2)</sup>                  |
| <b>Type of construction:</b> |                        |                                 |  |            |                |                         |              |                   |                   |                                      |
| IM B3                        |                        |                                 | <b>0</b>   |            |                |                         |              |                   |                   |                                      |
| IM V1 (with canopy)          |                        |                                 | <b>4</b>   |            |                |                         |              |                   |                   |                                      |
| IM V1 (without canopy)       |                        |                                 | <b>8</b>   |            |                |                         |              |                   |                   |                                      |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> On request.

<sup>3)</sup> Utilization 130 (B) on request.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact 1PQ4

| Motor type<br>(repeated) | Constant-torque drive, speed range |            |        |                |            |            |        |                |            |            |        |                |
|--------------------------|------------------------------------|------------|--------|----------------|------------|------------|--------|----------------|------------|------------|--------|----------------|
|                          | 1:2                                |            |        |                | 1:5        |            |        |                | 1:10       |            |        |                |
|                          | $P_{\max}$                         | $T_{\max}$ | $\eta$ | $\cos \varphi$ | $P_{\max}$ | $T_{\max}$ | $\eta$ | $\cos \varphi$ | $P_{\max}$ | $T_{\max}$ | $\eta$ | $\cos \varphi$ |
|                          | kW                                 | Nm         | %      | [-]            | kW         | Nm         | %      | [-]            | kW         | Nm         | %      | [-]            |
|                          | <b>Constant-torque drive</b>       |            |        |                |            |            |        |                |            |            |        |                |
| 4-pole                   |                                    |            |        |                |            |            |        |                |            |            |        |                |
| 1PQ4 500-4...            | 1550                               | 8256       | 97.5   | 0.88           | 1550       | 8256       | 97.5   | 0.88           | 1480       | 7883       | 97.5   | 0.88           |
| 1PQ4 502-4...            | 1700                               | 9055       | 97.5   | 0.88           | 1700       | 9055       | 97.5   | 0.88           | 1620       | 8629       | 97.5   | 0.88           |
| 1PQ4 504-4...            | 1850                               | 9854       | 97.5   | 0.88           | 1850       | 9854       | 97.5   | 0.88           | 1780       | 9481       | 97.5   | 0.88           |
| 1PQ4 560-4...            | 2000                               | 10647      | 97.7   | 0.87           | 1940       | 10327      | 97.7   | 0.87           | 1900       | 10114      | 97.7   | 0.87           |
| 1PQ4 562-4...            | 2300                               | 12244      | 97.7   | 0.87           | 2300       | 12244      | 97.7   | 0.87           | 2250       | 11977      | 97.7   | 0.87           |
| 1PQ4 564-4...            | 2600                               | 13841      | 97.7   | 0.87           | 2600       | 13841      | 97.7   | 0.87           | 2550       | 13574      | 97.7   | 0.87           |
| 6-pole                   |                                    |            |        |                |            |            |        |                |            |            |        |                |
| 1PQ4 500-6...            | 1270                               | 10149      | 97.1   | 0.87           | 1270       | 10149      | 97.1   | 0.87           | 1200       | 9590       | 97.1   | 0.87           |
| 1PQ4 502-6...            | 1420                               | 11339      | 96.9   | 0.87           | 1420       | 11339      | 96.9   | 0.87           | 1350       | 10780      | 96.9   | 0.87           |
| 1PQ4 504-6...            | 1600                               | 12787      | 97.4   | 0.87           | 1600       | 12787      | 97.4   | 0.87           | 1530       | 12227      | 97.4   | 0.87           |
| 1PQ4 560-6...            | 1850                               | 14785      | 97.5   | 0.87           | 1850       | 14785      | 97.5   | 0.87           | 1750       | 13985      | 97.5   | 0.87           |
| 1PQ4 562-6...            | 2050                               | 16383      | 97.5   | 0.87           | 2050       | 16383      | 97.5   | 0.87           | 1950       | 15584      | 97.5   | 0.87           |
| 1PQ4 564-6...            | 2350                               | 18780      | 97.6   | 0.87           | 2350       | 18780      | 97.6   | 0.87           | 2250       | 17981      | 97.6   | 0.87           |
| 8-pole                   |                                    |            |        |                |            |            |        |                |            |            |        |                |
| 1PQ4 500-8...            | 1000                               | 10670      | 96.7   | 0.81           | 1000       | 10670      | 96.7   | 0.81           | 950        | 10137      | 96.7   | 0.81           |
| 1PQ4 502-8...            | 1100                               | 11737      | 96.7   | 0.81           | 1100       | 11737      | 96.7   | 0.81           | 1050       | 11204      | 96.7   | 0.81           |
| 1PQ4 504-8...            | 1200                               | 12804      | 96.7   | 0.81           | 1200       | 12804      | 96.7   | 0.81           | 1150       | 12271      | 96.7   | 0.81           |
| 1PQ4 560-8...            | 1400                               | 14955      | 96.9   | 0.84           | 1400       | 14955      | 96.9   | 0.84           | 1350       | 14421      | 96.9   | 0.84           |
| 1PQ4 562-8...            | 1630                               | 17412      | 97.0   | 0.84           | 1630       | 17412      | 97.0   | 0.84           | 1580       | 16878      | 97.0   | 0.84           |
| 1PQ4 564-8...            | 1860                               | 19869      | 97.1   | 0.84           | 1860       | 19869      | 97.1   | 0.84           | 1800       | 19228      | 97.1   | 0.84           |
| 1PQ4 634-8...            | 1940                               | 20701      | 96.6   | 0.85           | 1580       | 16859      | 96.4   | 0.84           | 1480       | 15792      | 96.4   | 0.84           |
| 1PQ4 636-8...            | 2095                               | 22354      | 96.6   | 0.85           | 1705       | 18193      | 96.5   | 0.84           | 1598       | 17051      | 96.4   | 0.84           |

## Motors for converter operation

Converter with non-sinusoidal output

### Air-cooled motors · H-compact 1PQ4

#### Selection and ordering data

| Rated power                   |                        | High voltage motor<br>H-compact | Operating values at rated output for utilization 155 (F) |            |                |                          |              |                   |                   |                                      |
|-------------------------------|------------------------|---------------------------------|--|------------|----------------|--------------------------|--------------|-------------------|-------------------|--------------------------------------|
| IEC                           |                        |                                 | Rated speed  | Efficiency | Power factor   | Rated current at 4.16 kV | Rated torque | Break-down torque | Moment of inertia | Mechanical speed limit <sup>1)</sup> |
| $P_{rated}$<br>155 (F)        | $P_{rated}$<br>130 (B) |                                 | $n_{rated}$  | $\eta$     | $\cos \varphi$ | $I_{rated}$              | $T_{rated}$  | $T_B/T_{rated}$   | J                 | $n_{max}$                            |
| kW                            | kW                     | Article No.                     | rpm  | %          | [-]            | A                        | Nm           | [-]               | kgm <sup>2</sup>  | rpm                                  |
| <b>3.4 ... 4.16 kV, 60 Hz</b> |                        |                                 |  |            |                |                          |              |                   |                   |                                      |
| 4-pole                        |                        |                                 |  |            |                |                          |              |                   |                   |                                      |
| 1550                          | 1320                   | <b>1PQ4 500-4CV5</b>            | 1793   | 97.5       | 0.88           | 250                      | 8256         | 2.50              | 42.3              | 2400                                 |
| 1700                          | 1400                   | <b>1PQ4 502-4CV5</b>            | 1793   | 97.5       | 0.88           | 275                      | 9055         | 2.50              | 47.0              | 2400                                 |
| 1850                          | 1550                   | <b>1PQ4 504-4CV5</b>            | 1793   | 97.5       | 0.88           | 300                      | 9854         | 2.50              | 54.2              | 2400                                 |
| 2000                          | 1600                   | <b>1PQ4 560-4CV5</b>            | 1794   | 97.7       | 0.87           | 325                      | 10647        | 2.40              | 79.0              | 2200                                 |
| 2300                          | 1850                   | <b>1PQ4 562-4CV5</b>            | 1794   | 97.7       | 0.87           | 375                      | 12244        | 2.40              | 92.0              | 2200                                 |
| 2600                          | 2100                   | <b>1PQ4 564-4CV5</b>            | 1794   | 97.7       | 0.87           | 425                      | 13841        | 2.40              | 104.0             | 2200                                 |
| 2950                          | — <sup>3)</sup>        | <b>1PQ4 632-4CV5 0</b>          | 1794   | 97.2       | 0.87           | 485                      | 15704        | 2.40              | 157.0             | O. R. <sup>2)</sup>                  |
| 3320                          | — <sup>3)</sup>        | <b>1PQ4 634-4CV5 0</b>          | 1794   | 97.3       | 0.87           | 540                      | 17673        | 2.20              | 171.0             | O. R. <sup>2)</sup>                  |
| 3600                          | — <sup>3)</sup>        | <b>1PQ4 636-4CV5 0</b>          | 1795   | 97.5       | 0.87           | 590                      | 19153        | 2.40              | 186.0             | O. R. <sup>2)</sup>                  |
| 6-pole                        |                        |                                 |  |            |                |                          |              |                   |                   |                                      |
| 1270                          | 1120                   | <b>1PQ4 500-6CV5</b>            | 1195   | 97.1       | 0.87           | 210                      | 10149        | 2.25              | 82.1              | 2200                                 |
| 1420                          | 1250                   | <b>1PQ4 502-6CV5</b>            | 1196   | 97.3       | 0.87           | 235                      | 11339        | 2.25              | 92.4              | 2200                                 |
| 1600                          | 1400                   | <b>1PQ4 504-6CV5</b>            | 1195   | 97.4       | 0.87           | 260                      | 12787        | 2.25              | 102.6             | 2200                                 |
| 1850                          | 1600                   | <b>1PQ4 560-6CV5</b>            | 1195   | 97.5       | 0.87           | 305                      | 14785        | 2.40              | 141.5             | 2000                                 |
| 2050                          | 1780                   | <b>1PQ4 562-6CV5</b>            | 1195   | 97.5       | 0.87           | 335                      | 16383        | 2.40              | 162.1             | 2000                                 |
| 2350                          | 2000                   | <b>1PQ4 564-6CV5</b>            | 1195   | 97.6       | 0.87           | 385                      | 18780        | 2.40              | 188.5             | 2000                                 |
| 2400                          | — <sup>3)</sup>        | <b>1PQ4 632-6CV5</b>            | 1195   | 96.8       | 0.89           | 385                      | 19180        | 2.40              | 269.0             | O. R. <sup>2)</sup>                  |
| 2700                          | — <sup>3)</sup>        | <b>1PQ4 634-6CV5</b>            | 1195   | 96.9       | 0.89           | 435                      | 21577        | 2.20              | 297.0             | O. R. <sup>2)</sup>                  |
| 2900                          | — <sup>3)</sup>        | <b>1PQ4 636-6CV5</b>            | 1195   | 97.0       | 0.89           | 465                      | 23176        | 2.20              | 323.0             | O. R. <sup>2)</sup>                  |
| 8-pole                        |                        |                                 |  |            |                |                          |              |                   |                   |                                      |
| 1000                          | 900                    | <b>1PQ4 500-8CV5</b>            | 895  | 96.7       | 0.81           | 178                      | 10670        | 2.10              | 81.7              | 2200                                 |
| 1100                          | 1000                   | <b>1PQ4 502-8CV5</b>            | 895  | 96.7       | 0.81           | 194                      | 11737        | 2.10              | 91.9              | 2200                                 |
| 1200                          | 1100                   | <b>1PQ4 504-8CV5</b>            | 895  | 96.7       | 0.81           | 215                      | 12804        | 2.10              | 102.2             | 2200                                 |
| 1400                          | 1220                   | <b>1PQ4 560-8CV5</b>            | 894  | 96.9       | 0.84           | 240                      | 14955        | 1.90              | 141.6             | 2000                                 |
| 1630                          | 1420                   | <b>1PQ4 562-8CV5</b>            | 894  | 97.0       | 0.84           | 280                      | 17412        | 1.90              | 162.3             | 2000                                 |
| 1860                          | 1600                   | <b>1PQ4 564-8CV5</b>            | 894  | 97.1       | 0.84           | 315                      | 19869        | 2.10              | 188.8             | 2000                                 |
| 1960                          | — <sup>3)</sup>        | <b>1PQ4 634-8CV5</b>            | 895  | 96.7       | 0.86           | 325                      | 20914        | 2.00              | 294.0             | O. R. <sup>2)</sup>                  |
| 2160                          | — <sup>3)</sup>        | <b>1PQ4 636-8CV5</b>            | 895  | 96.8       | 0.86           | 360                      | 23048        | 2.10              | 320.0             | O. R. <sup>2)</sup>                  |

#### Type of construction:

|                        |   |
|------------------------|---|
| IM B3                  | 0 |
| IM V1 (with canopy)    | 4 |
| IM V1 (without canopy) | 8 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation.

Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> On request.

<sup>3)</sup> Utilization 130 (B) on request.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact 1PQ4


| Motor type<br>(repeated) | Constant-torque drive, speed range |            |        |                |            |            |        |                |            |            |        |                |
|--------------------------|------------------------------------|------------|--------|----------------|------------|------------|--------|----------------|------------|------------|--------|----------------|
|                          | 1:2                                |            |        |                | 1:5        |            |        |                | 1:10       |            |        |                |
|                          | $P_{\max}$                         | $T_{\max}$ | $\eta$ | $\cos \varphi$ | $P_{\max}$ | $T_{\max}$ | $\eta$ | $\cos \varphi$ | $P_{\max}$ | $T_{\max}$ | $\eta$ | $\cos \varphi$ |
|                          | kW                                 | Nm         | %      | [-]            | kW         | Nm         | %      | [-]            | kW         | Nm         | %      | [-]            |
|                          | <b>Constant-torque drive</b>       |            |        |                |            |            |        |                |            |            |        |                |
| <b>4-pole</b>            |                                    |            |        |                |            |            |        |                |            |            |        |                |
| 1PQ4 500-4...            | 1550                               | 8256       | 97.5   | 0.88           | 1550       | 8256       | 97.5   | 0.88           | 1480       | 7883       | 97.5   | 0.88           |
| 1PQ4 502-4...            | 1700                               | 9055       | 97.5   | 0.88           | 1700       | 9055       | 97.5   | 0.88           | 1620       | 8629       | 97.5   | 0.88           |
| 1PQ4 504-4...            | 1850                               | 9854       | 97.5   | 0.88           | 1850       | 9854       | 97.5   | 0.88           | 1780       | 9481       | 97.5   | 0.88           |
| 1PQ4 560-4...            | 2000                               | 10647      | 97.7   | 0.87           | 1940       | 10327      | 97.7   | 0.87           | 1900       | 10114      | 97.7   | 0.87           |
| 1PQ4 562-4...            | 2300                               | 12244      | 97.7   | 0.87           | 2300       | 12244      | 97.7   | 0.87           | 2250       | 11977      | 97.7   | 0.87           |
| 1PQ4 564-4...            | 2600                               | 13841      | 97.7   | 0.87           | 2600       | 13841      | 97.7   | 0.87           | 2550       | 13574      | 97.7   | 0.87           |
| 1PQ4 632-4...            | 2860                               | 15225      | 97.2   | 0.87           | 2330       | 12403      | 97.0   | 0.86           | 2185       | 11631      | 96.9   | 0.85           |
| 1PQ4 634-4...            | 3220                               | 17141      | 97.3   | 0.87           | 2625       | 13974      | 97.1   | 0.86           | 2455       | 13069      | 97.1   | 0.85           |
| 1PQ4 636-4...            | 3490                               | 18568      | 97.4   | 0.87           | 2845       | 15136      | 97.2   | 0.86           | 2665       | 14179      | 97.2   | 0.85           |
| <b>6-pole</b>            |                                    |            |        |                |            |            |        |                |            |            |        |                |
| 1PQ4 500-6...            | 1270                               | 10149      | 97.1   | 0.87           | 1270       | 10149      | 97.1   | 0.87           | 1200       | 9590       | 97.1   | 0.87           |
| 1PQ4 502-6...            | 1420                               | 11339      | 96.9   | 0.87           | 1420       | 11339      | 96.9   | 0.87           | 1350       | 10780      | 96.9   | 0.87           |
| 1PQ4 504-6...            | 1600                               | 12787      | 97.4   | 0.87           | 1600       | 12787      | 97.4   | 0.87           | 1530       | 12227      | 97.4   | 0.87           |
| 1PQ4 560-6...            | 1850                               | 14785      | 97.5   | 0.87           | 1850       | 14785      | 97.5   | 0.87           | 1750       | 13985      | 97.5   | 0.87           |
| 1PQ4 562-6...            | 2050                               | 16383      | 97.5   | 0.87           | 2050       | 16383      | 97.5   | 0.87           | 1950       | 15584      | 97.5   | 0.87           |
| 1PQ4 564-6...            | 2350                               | 18780      | 97.6   | 0.87           | 2350       | 18780      | 97.6   | 0.87           | 2250       | 17981      | 97.6   | 0.87           |
| 1PQ4 632-6...            | 2330                               | 18621      | 96.7   | 0.89           | 1895       | 15144      | 96.5   | 0.88           | 1775       | 14185      | 96.4   | 0.88           |
| 1PQ4 634-6...            | 2620                               | 20938      | 96.9   | 0.89           | 2135       | 17062      | 96.8   | 0.89           | 2000       | 15983      | 96.7   | 0.88           |
| 1PQ4 636-6...            | 2815                               | 22496      | 97.0   | 0.89           | 2290       | 18301      | 96.9   | 0.89           | 2145       | 17142      | 96.8   | 0.88           |
| <b>8-pole</b>            |                                    |            |        |                |            |            |        |                |            |            |        |                |
| 1PQ4 500-8...            | 1000                               | 10670      | 96.7   | 0.81           | 1000       | 10670      | 96.7   | 0.81           | 950        | 10137      | 96.7   | 0.81           |
| 1PQ4 502-8...            | 1100                               | 11737      | 96.7   | 0.81           | 1100       | 11737      | 96.7   | 0.81           | 1050       | 11204      | 96.7   | 0.81           |
| 1PQ4 504-8...            | 1200                               | 12804      | 96.7   | 0.81           | 1200       | 12804      | 96.7   | 0.81           | 1150       | 12271      | 96.7   | 0.81           |
| 1PQ4 560-8...            | 1400                               | 14955      | 96.9   | 0.84           | 1400       | 14955      | 96.9   | 0.84           | 1350       | 14421      | 96.9   | 0.84           |
| 1PQ4 562-8...            | 1630                               | 17412      | 97.0   | 0.84           | 1630       | 17412      | 97.0   | 0.84           | 1580       | 16878      | 97.0   | 0.84           |
| 1PQ4 564-8...            | 1860                               | 19869      | 97.1   | 0.84           | 1860       | 19869      | 97.1   | 0.84           | 1800       | 19228      | 97.1   | 0.84           |
| 1PQ4 634-8...            | 1901                               | 20284      | 96.5   | 0.85           | 1548       | 16518      | 96.4   | 0.84           | 1450       | 15472      | 96.3   | 0.83           |
| 1PQ4 636-8...            | 2095                               | 22354      | 96.6   | 0.85           | 1706       | 18204      | 96.5   | 0.84           | 1598       | 17051      | 96.4   | 0.83           |

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact 1PQ4

#### Dimension drawings

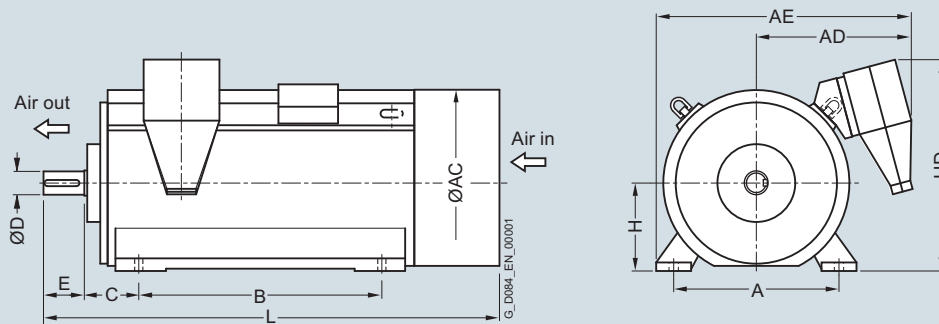

| Motor type  | Weight<br>kg | Dimensions |          |                          |                            |         |         |         |         |         |                        |         |
|---|--------------|------------|----------|--------------------------|----------------------------|---------|---------|---------|---------|---------|------------------------|---------|
|   |              | A<br>mm    | AC<br>mm | AD <sup>1)3)</sup><br>mm | AE <sup>1)2)3)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>4)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, anti-friction bearings, IM B3 type of construction</b> |              |            |          |                          |                            |         |         |         |         |         |                        |         |
| <b>2-pole</b>   |              |            |          |                          |                            |         |         |         |         |         |                        |         |
| 1PQ4454-2CM00   | 5350         | 850        | 960      | 920                      | 1440                       | 1250    | 280     | 95      | 130     | 450     | 1100                   | 2766    |
| <b>4-pole</b>   |              |            |          |                          |                            |         |         |         |         |         |                        |         |
| 1PQ4454-4AM00   | 5300         | 850        | 960      | 920                      | 1440                       | 1250    | 280     | 130     | 200     | 450     | 1100                   | 2836    |
| 1PQ4500-4C..0   | 6400         | 950        | 1070     | 875                      | 1440                       | 1320    | 315     | 140     | 200     | 500     | 1200                   | 3005    |
| 1PQ4502-4C..0   | 6800         | 950        | 1070     | 875                      | 1440                       | 1320    | 315     | 140     | 200     | 500     | 1200                   | 3005    |
| 1PQ4504-4C..0   | 7300         | 950        | 1070     | 875                      | 1440                       | 1320    | 315     | 140     | 200     | 500     | 1200                   | 3005    |
| 1PQ4560-4C..0   | 8600         | 1060       | 1210     | 925                      | 1560                       | 1400    | 335     | 160     | 240     | 560     | 1310                   | 3291    |
| 1PQ4562-4C..0   | 9300         | 1060       | 1210     | 925                      | 1560                       | 1400    | 335     | 160     | 240     | 560     | 1310                   | 3291    |
| 1PQ4564-4C..0   | 10100        | 1060       | 1210     | 925                      | 1560                       | 1400    | 335     | 160     | 240     | 560     | 1310                   | 3291    |
| 1PQ4632-4C..0   | 12700        | 1120       | 1350     | 945                      | 1560                       | 1600    | 335     | 170     | 240     | 630     | 1410                   | 3359    |
| 1PQ4634-4C..0   | 13300        | 1120       | 1350     | 945                      | 1560                       | 1600    | 335     | 170     | 240     | 630     | 1410                   | 3359    |
| 1PQ4636-4C..0   | 14200        | 1120       | 1350     | 945                      | 1560                       | 1600    | 335     | 170     | 240     | 630     | 1410                   | 3359    |
| <b>6-pole</b>   |              |            |          |                          |                            |         |         |         |         |         |                        |         |
| 1PQ4454-6AM00   | 5400         | 850        | 960      | 920                      | 1440                       | 1250    | 280     | 130     | 200     | 450     | 1100                   | 2836    |
| 1PQ4500-6C..0   | 6700         | 950        | 1070     | 875                      | 1440                       | 1320    | 315     | 140     | 200     | 500     | 1200                   | 3005    |
| 1PQ4502-6C..0   | 7100         | 950        | 1070     | 875                      | 1440                       | 1320    | 315     | 140     | 200     | 500     | 1200                   | 3005    |
| 1PQ4504-6C..0   | 7600         | 950        | 1070     | 875                      | 1440                       | 1320    | 315     | 140     | 200     | 500     | 1200                   | 3005    |
| 1PQ4560-6C..0   | 8900         | 1060       | 1210     | 925                      | 1560                       | 1400    | 335     | 160     | 240     | 560     | 1310                   | 3291    |
| 1PQ4562-6C..0   | 9600         | 1060       | 1210     | 925                      | 1560                       | 1400    | 335     | 160     | 240     | 560     | 1310                   | 3291    |
| 1PQ4564-6C..0   | 10500        | 1060       | 1210     | 925                      | 1560                       | 1400    | 335     | 160     | 240     | 560     | 1310                   | 3291    |
| 1PQ4632-6C..0   | 12800        | 1120       | 1350     | 960                      | 1630                       | 1600    | 335     | 180     | 240     | 630     | 1410                   | 3359    |
| 1PQ4634-6C..0   | 13800        | 1120       | 1350     | 960                      | 1630                       | 1600    | 335     | 180     | 240     | 630     | 1410                   | 3359    |
| 1PQ4636-6C..0   | 14600        | 1120       | 1350     | 960                      | 1630                       | 1600    | 335     | 180     | 240     | 630     | 1410                   | 3359    |
| <b>8-pole</b>   |              |            |          |                          |                            |         |         |         |         |         |                        |         |
| 1PQ4454-8AM00   | 5400         | 850        | 960      | 920                      | 1630                       | 1250    | 280     | 130     | 200     | 450     | 1100                   | 2836    |
| 1PQ4500-8C..0   | 6700         | 950        | 1070     | 875                      | 1440                       | 1320    | 315     | 140     | 200     | 500     | 1200                   | 3005    |
| 1PQ4502-8C..0   | 7000         | 950        | 1070     | 875                      | 1440                       | 1320    | 315     | 140     | 200     | 500     | 1200                   | 3005    |
| 1PQ4504-8C..0   | 7500         | 950        | 1070     | 875                      | 1440                       | 1320    | 315     | 140     | 200     | 500     | 1200                   | 3005    |
| 1PQ4560-8C..0   | 8900         | 1060       | 1210     | 925                      | 1560                       | 1400    | 335     | 160     | 240     | 560     | 1310                   | 3291    |
| 1PQ4562-8C..0   | 9600         | 1060       | 1210     | 925                      | 1560                       | 1400    | 335     | 160     | 240     | 560     | 1310                   | 3291    |
| 1PQ4564-8C..0   | 10400        | 1060       | 1210     | 925                      | 1560                       | 1400    | 335     | 160     | 240     | 560     | 1310                   | 3291    |
| 1PQ4632-8C..0   | 12800        | 1120       | 1350     | 960                      | 1630                       | 1600    | 335     | 180     | 240     | 630     | 1410                   | 3359    |
| 1PQ4634-8C..0   | 13400        | 1120       | 1350     | 960                      | 1630                       | 1600    | 335     | 180     | 240     | 630     | 1410                   | 3359    |
| 1PQ4636-8C..0   | 14300        | 1120       | 1350     | 960                      | 1630                       | 1600    | 335     | 180     | 240     | 630     | 1410                   | 3359    |

Note: Higher pole numbers are available on request.


<sup>1)</sup> For  $V_{\text{rated}} = 690$  V, the dimension changes by + 100 mm.

<sup>2)</sup> For  $V_{\text{rated}} = 690$  V and  $I_{\text{rated}} > 1230$  A, the dimension changes by + 475 mm (a second main terminal box is required).

<sup>3)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.

<sup>4)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 70 mm.

#### Dimension drawings

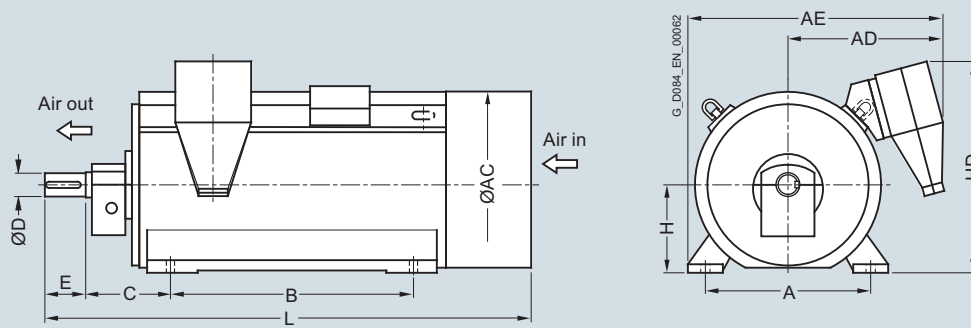

| Motor type   | Weight<br>kg | Dimensions |          |                          |                            |         |         |         |         |         |                        |         |
|--|--------------|------------|----------|--------------------------|----------------------------|---------|---------|---------|---------|---------|------------------------|---------|
|  |              | A<br>mm    | AC<br>mm | AD <sup>1)3)</sup><br>mm | AE <sup>1)2)3)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>4)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, sleeve bearings, IM B3 type of construction</b> |              |            |          |                          |                            |         |         |         |         |         |                        |         |
| <b>2-pole</b>  |              |            |          |                          |                            |         |         |         |         |         |                        |         |
| 1PQ4454-2AM00-Z K96  | 5400         | 850        | 960      | 920                      | 1440                       | 1250    | 475     | 95      | 130     | 450     | 1100                   | 2961    |
| <b>4-pole</b>  |              |            |          |                          |                            |         |         |         |         |         |                        |         |
| 1PQ4454-4AM00-Z K96  | 5300         | 850        | 960      | 920                      | 1440                       | 1250    | 475     | 130     | 200     | 450     | 1100                   | 3031    |
| 1PQ4500-4C..0-Z K96  | 6400         | 950        | 1070     | 875                      | 1440                       | 1320    | 500     | 140     | 200     | 500     | 1200                   | 3190    |
| 1PQ4502-4C..0-Z K96  | 6800         | 950        | 1070     | 875                      | 1440                       | 1320    | 500     | 140     | 200     | 500     | 1200                   | 3190    |
| 1PQ4504-4C..0-Z K96  | 7300         | 950        | 1070     | 875                      | 1440                       | 1320    | 500     | 140     | 200     | 500     | 1200                   | 3190    |
| 1PQ4560-4C..0-Z K96  | 8600         | 1060       | 1210     | 925                      | 1560                       | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3710    |
| 1PQ4562-4C..0-Z K96  | 9300         | 1060       | 1210     | 925                      | 1560                       | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3710    |
| 1PQ4564-4C..0-Z K96  | 10100        | 1060       | 1210     | 925                      | 1560                       | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3710    |
| 1PQ4632-4C..0-Z K96  | 12700        | 1120       | 1350     | 945                      | 1560                       | 1600    | 560     | 170     | 240     | 630     | 1410                   | 3814    |
| 1PQ4634-4C..0-Z K96  | 13300        | 1120       | 1350     | 945                      | 1560                       | 1600    | 560     | 170     | 240     | 630     | 1410                   | 3814    |
| 1PQ4636-4C..0-Z K96  | 14200        | 1120       | 1350     | 945                      | 1560                       | 1600    | 560     | 170     | 240     | 630     | 1410                   | 3814    |
| <b>6-pole</b>  |              |            |          |                          |                            |         |         |         |         |         |                        |         |
| 1PQ4454-6AM00-Z K96  | 5400         | 850        | 960      | 920                      | 1440                       | 1250    | 475     | 130     | 200     | 450     | 1100                   | 3031    |
| 1PQ4500-6C..0-Z K96  | 6700         | 950        | 1070     | 875                      | 1440                       | 1320    | 530     | 140     | 200     | 500     | 1200                   | 3190    |
| 1PQ4502-6C..0-Z K96  | 7100         | 950        | 1070     | 875                      | 1440                       | 1320    | 530     | 140     | 200     | 500     | 1200                   | 3190    |
| 1PQ4504-6C..0-Z K96  | 7600         | 950        | 1070     | 875                      | 1440                       | 1320    | 530     | 140     | 200     | 500     | 1200                   | 3190    |
| 1PQ4560-6C..0-Z K96  | 8900         | 1060       | 1210     | 925                      | 1560                       | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3710    |
| 1PQ4562-6C..0-Z K96  | 9600         | 1060       | 1210     | 925                      | 1560                       | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3710    |
| 1PQ4564-6C..0-Z K96  | 10500        | 1060       | 1210     | 925                      | 1560                       | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3710    |
| 1PQ4632-6C..0-Z K96  | 12800        | 1120       | 1350     | 960                      | 1630                       | 1600    | 560     | 180     | 240     | 630     | 1410                   | 3814    |
| 1PQ4634-6C..0-Z K96  | 13800        | 1120       | 1350     | 960                      | 1630                       | 1600    | 560     | 180     | 240     | 630     | 1410                   | 3814    |
| 1PQ4636-6C..0-Z K96  | 14600        | 1120       | 1350     | 960                      | 1630                       | 1600    | 560     | 180     | 240     | 630     | 1410                   | 3814    |
| <b>8-pole</b>  |              |            |          |                          |                            |         |         |         |         |         |                        |         |
| 1PQ4454-8AM00-Z K96  | 5400         | 850        | 960      | 920                      | 1630                       | 1250    | 475     | 130     | 200     | 450     | 1100                   | 3031    |
| 1PQ4500-8C..0-Z K96  | 6700         | 950        | 1070     | 875                      | 1440                       | 1320    | 530     | 140     | 200     | 500     | 1200                   | 3190    |
| 1PQ4502-8C..0-Z K96  | 7000         | 950        | 1070     | 875                      | 1440                       | 1320    | 530     | 140     | 200     | 500     | 1200                   | 3190    |
| 1PQ4504-8C..0-Z K96  | 7500         | 950        | 1070     | 875                      | 1440                       | 1320    | 530     | 140     | 200     | 500     | 1200                   | 3190    |
| 1PQ4560-8C..0-Z K96  | 8900         | 1060       | 1210     | 925                      | 1560                       | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3710    |
| 1PQ4562-8C..0-Z K96  | 9600         | 1060       | 1210     | 925                      | 1560                       | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3710    |
| 1PQ4564-8C..0-Z K96  | 10400        | 1060       | 1210     | 925                      | 1560                       | 1400    | 560     | 160     | 240     | 560     | 1310                   | 3710    |
| 1PQ4632-8C..0-Z K96  | 12800        | 1120       | 1350     | 960                      | 1630                       | 1600    | 560     | 180     | 240     | 630     | 1410                   | 3814    |
| 1PQ4634-8C..0-Z K96  | 13400        | 1120       | 1350     | 960                      | 1630                       | 1600    | 560     | 180     | 240     | 630     | 1410                   | 3814    |
| 1PQ4636-8C..0-Z K96  | 14300        | 1120       | 1350     | 960                      | 1630                       | 1600    | 560     | 180     | 240     | 630     | 1410                   | 3814    |

Note: Higher pole numbers are available on request.

- <sup>1)</sup> For  $V_{\text{rated}} = 690$  V, the dimension changes by + 100 mm.  
<sup>2)</sup> For  $V_{\text{rated}} = 690$  V and  $I_{\text{rated}} > 1230$  A, the dimension changes by + 475 mm (a second main terminal box is required).

- <sup>3)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.


- <sup>4)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 70 mm.

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact 1PQ4

### Dimension drawings

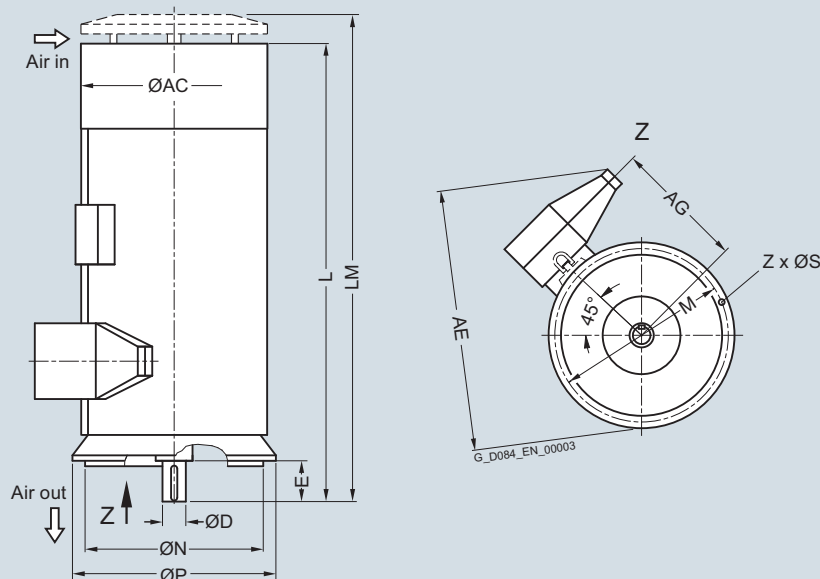

| Motor type  | Weight<br>kg | Dimensions |                          | AE <sup>3)</sup><br>mm | D<br>mm | E<br>mm | L<br>mm | LM<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |
|---|--------------|------------|--------------------------|------------------------|---------|---------|---------|----------|---------|---------|---------|---------|---------------|
|   |              | AC<br>mm   | AG <sup>1)2)</sup><br>mm |                        |         |         |         |          |         |         |         |         |               |
| <b>Up to 6.6 kV, anti-friction bearings, IM V1 type of construction</b> |              |            |                          |                        |         |         |         |          |         |         |         |         |               |
| <b>4-pole</b>   |              |            |                          |                        |         |         |         |          |         |         |         |         |               |
| 1PQ4454-4AM04   | 5200         | 960        | 770                      | 1550                   | 130     | 200     | 3062    | 3212     | 1150    | 1000    | 1080    | 26      | 8             |
| 1PQ4500-4C..4   | 6200         | 1070       | 840                      | 1660                   | 140     | 200     | 3205    | 3255     | 1250    | 1120    | 1180    | 26      | 16            |
| 1PQ4502-4C..4   | 6600         | 1070       | 840                      | 1660                   | 140     | 200     | 3205    | 3255     | 1250    | 1120    | 1180    | 26      | 16            |
| 1PQ4504-4C..4   | 7100         | 1070       | 840                      | 1660                   | 140     | 200     | 3205    | 3255     | 1250    | 1120    | 1180    | 26      | 16            |
| 1PQ4560-4C..4   | 8400         | 1210       | 910                      | 1800                   | 160     | 240     | 3496    | 3546     | 1400    | 1250    | 1320    | 26      | 16            |
| 1PQ4562-4C..4   | 9100         | 1210       | 910                      | 1800                   | 160     | 240     | 3496    | 3546     | 1400    | 1250    | 1320    | 26      | 16            |
| 1PQ4564-4C..4   | 9800         | 1210       | 910                      | 1800                   | 160     | 240     | 3496    | 3546     | 1400    | 1250    | 1320    | 26      | 16            |
| <b>6-pole</b>   |              |            |                          |                        |         |         |         |          |         |         |         |         |               |
| 1PQ4454-6AM04   | 5500         | 960        | 770                      | 1550                   | 130     | 200     | 3062    | 3212     | 1150    | 1000    | 1080    | 26      | 8             |
| 1PQ4500-6C..4   | 6500         | 1070       | 840                      | 1660                   | 140     | 200     | 3205    | 3255     | 1250    | 1120    | 1180    | 26      | 16            |
| 1PQ4502-6C..4   | 6900         | 1070       | 840                      | 1660                   | 140     | 200     | 3205    | 3255     | 1250    | 1120    | 1180    | 26      | 16            |
| 1PQ4504-6C..4   | 7400         | 1070       | 840                      | 1660                   | 140     | 200     | 3205    | 3255     | 1250    | 1120    | 1180    | 26      | 16            |
| 1PQ4560-6C..4   | 8600         | 1210       | 910                      | 1800                   | 160     | 240     | 3496    | 3546     | 1400    | 1250    | 1320    | 26      | 16            |
| 1PQ4562-6C..4   | 9400         | 1210       | 910                      | 1800                   | 160     | 240     | 3496    | 3546     | 1400    | 1250    | 1320    | 26      | 16            |
| 1PQ4564-6C..4   | 10200        | 1210       | 910                      | 1800                   | 160     | 240     | 3496    | 3546     | 1400    | 1250    | 1320    | 26      | 16            |
| 1PQ4632-6C..4   | 13100        | 1350       | 980                      | 1820                   | 180     | 240     | 3564    | 3614     | 1400    | 1250    | 1320    | 26      | 16            |
| 1PQ4634-6C..4   | 13800        | 1350       | 980                      | 1820                   | 180     | 240     | 3564    | 3614     | 1400    | 1250    | 1320    | 26      | 16            |
| 1PQ4636-6C..4   | 14600        | 1350       | 980                      | 1820                   | 180     | 240     | 3564    | 3614     | 1400    | 1250    | 1320    | 26      | 16            |
| <b>8-pole</b>   |              |            |                          |                        |         |         |         |          |         |         |         |         |               |
| 1PQ4454-8AM04   | 5500         | 960        | 770                      | 1550                   | 130     | 200     | 3062    | 3212     | 1000    | 1150    | 1080    | 26      | 8             |
| 1PQ4500-8C..4   | 6500         | 1070       | 840                      | 1660                   | 140     | 200     | 3205    | 3255     | 1250    | 1120    | 1180    | 26      | 16            |
| 1PQ4502-8C..4   | 6900         | 1070       | 840                      | 1660                   | 140     | 200     | 3205    | 3255     | 1250    | 1120    | 1180    | 26      | 16            |
| 1PQ4504-8C..4   | 7300         | 1070       | 840                      | 1660                   | 140     | 200     | 3205    | 3255     | 1250    | 1120    | 1180    | 26      | 16            |
| 1PQ4560-8C..4   | 8600         | 1210       | 910                      | 1800                   | 160     | 240     | 3496    | 3546     | 1400    | 1250    | 1320    | 26      | 16            |
| 1PQ4562-8C..4   | 9300         | 1210       | 910                      | 1800                   | 160     | 240     | 3496    | 3546     | 1400    | 1250    | 1320    | 26      | 16            |
| 1PQ4564-8C..4   | 10100        | 1210       | 910                      | 1800                   | 160     | 240     | 3496    | 3546     | 1400    | 1250    | 1320    | 26      | 16            |
| 1PQ4632-8C..4   | 13100        | 1350       | 980                      | 1820                   | 180     | 240     | 3564    | 3614     | 1400    | 1250    | 1320    | 26      | 16            |
| 1PQ4634-8C..4   | 13800        | 1350       | 980                      | 1820                   | 180     | 240     | 3564    | 3614     | 1400    | 1250    | 1320    | 26      | 16            |
| 1PQ4636-8C..4   | 14600        | 1350       | 980                      | 1820                   | 180     | 240     | 3564    | 3614     | 1400    | 1250    | 1320    | 26      | 16            |

**Note:** Higher pole numbers are available on request.

<sup>1)</sup> For  $V_{rated} = 690$  V, the dimension changes by  $- 50$  mm.

<sup>3)</sup> For currents  $I_{rated} > 315$  A, the dimension changes by  $+ 180$  mm.

<sup>2)</sup> For currents  $I_{rated} > 315$  A, the dimension changes by  $+ 45$  mm.



## Motors for converter operation

### Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Overview



#### Technical data

##### Overview of technical data

| H-compact PLUS 1RA4, 1RA6, 1RP6, SIMOTICS HV M 1RA7 |  |
|---|--|
| Rated voltage                                       | 690 V ... 4.16 kV                              |
| Rated frequency                                     | 50/60 Hz                                       |
| Motor type  | Induction motor with squirrel-cage rotor       |
| Type of construction                                | IM B3, IM V1                                   |
| Degree of protection                                | IP23   |
| Cooling method                                      | IC01   |
| Stator winding insulation                           | Insulation system, thermal class 155 (F)       |
| Shaft height  | 450 ... 710 mm                                 |
| Bearings  | Anti-friction bearings, sleeve bearings        |
| Cage material                                       | Copper   |
| Standards   | IEC, EN  |
| Frame design for shaft heights 450 ... 560 mm       | Housing: Cast iron<br>Cooling enclosure: Steel |
| Frame design for shaft heights 630 ... 710 mm       | Housing: Steel<br>Cooling enclosure: Steel     |

The following versions can be offered on request:

- 2-pole up to 75 Hz
- 4-pole up to 100 Hz
- 6-pole up to 90 Hz

For individual motor types, it must be ensured that the motor does not run-through any critical speed in the required speed control range and that the maximum speed does not exceed the mechanical speed limit of the motor! Please contact your Siemens sales person regarding this check. The motor types are marked with footnotes in the following data tables.

<sup>1)</sup> Maximum and minimum power ratings can be different for specific voltage levels.

#### Technical data (continued)

##### Power ranges for IEC motors with reinforced insulation for SINAMICS drive converters without sine-wave filter


##### 1RA4/1RA6 and 1RP6 series

##### 1RA7 series


Insulation system, thermal class 155 (F)

The power data listed here apply for an ambient temperature of 40 °C and an installation altitude ≤ 1000 m.

690 V; 50 Hz and 60 Hz

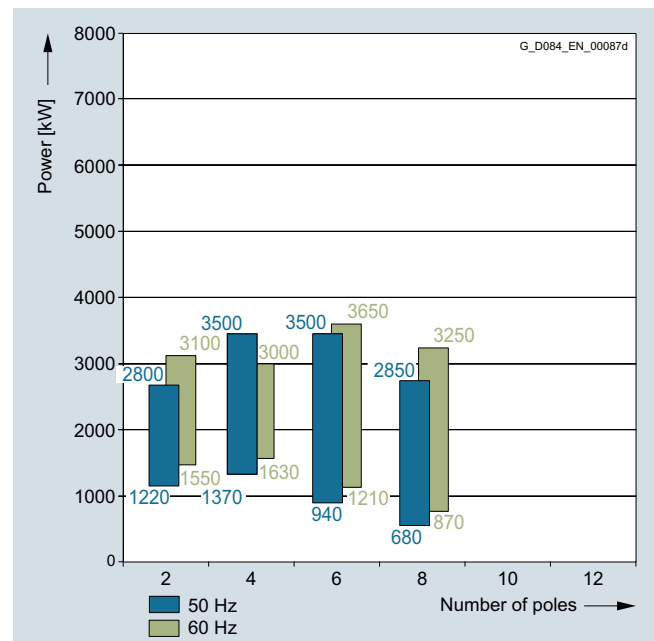

3.4 kV to 4.16 kV; 50 Hz and 60 Hz<sup>1)</sup>

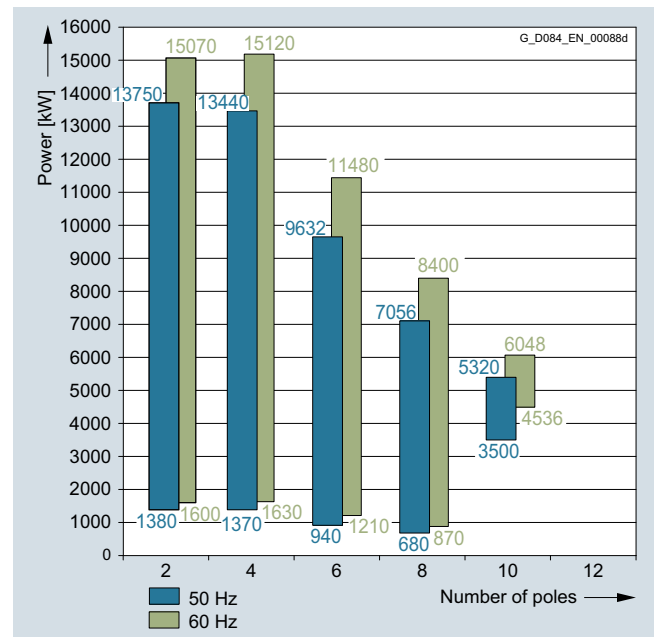

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

### Selection and ordering data

| Rated power<br><b>IEC</b><br>$P_{\text{rated}}$ 155 (F)<br>kW | Low voltage motor<br>H-compact PLUS<br><br>Article No. | Operating values at rated output for utilization 155 (F) |             |                       |                         |                          |                               |                       |                                      |
|---|--|--|-------------|-----------------------|-------------------------|--------------------------|-------------------------------|-----------------------|--------------------------------------|
|   |  | Rated speed  | Efficiency  | Power factor          | Rated current<br>690 V  | Rated torque             | Break-down torque             | Moment of inertia     | Mechanical speed limit <sup>1)</sup> |
|   |  | $n_{\text{rated}}$<br>rpm                                | $\eta$<br>% | $\cos \varphi$<br>[-] | $I_{\text{rated}}$<br>A | $T_{\text{rated}}$<br>Nm | $T_B/T_{\text{rated}}$<br>[-] | J<br>kgm <sup>2</sup> | $n_{\text{max}}$<br>rpm              |
| <b>690 V, 50 Hz</b>   |  |  |             |                       |                         |                          |                               |                       |                                      |
| 2-pole  |  |  |             |                       |                         |                          |                               |                       |                                      |
| 1220  | <b>1RA6 450-2HP00</b>                                  | 2980   | 95.5        | 0.90                  | 1180                    | 3913                     | 2.20                          | 13                    | 3000                                 |
| 1520  | <b>1RA6 452-2HP00</b>                                  | 2980   | 96.0        | 0.90                  | 2x740                   | 4875                     | 2.10                          | 14                    | 3000                                 |
| 1600  | <b>1RA6 454-2HP00</b>                                  | 2983   | 96.2        | 0.92                  | 2x760                   | 5129                     | 2.30                          | 16                    | 3000                                 |
| 1700  | <b>1RA6 456-2HP00</b>                                  | 2983   | 96.2        | 0.92                  | 2x800                   | 5445                     | 2.30                          | 18                    | 3000                                 |
| 2250  | <b>1RA6 500-2HP00</b>                                  | 2975   | 96.4        | 0.90                  | 2x1080                  | 7222                     | 2.30                          | 19                    | 3000                                 |
| 2550  | <b>1RA6 502-2HP00</b>                                  | 2974   | 96.6        | 0.90                  | 2x1220                  | 8188                     | 2.10                          | 20                    | 3000                                 |
| 2800  | <b>1RA6 504-2HP00</b>                                  | 2977   | 96.7        | 0.92                  | 4x660                   | 8982                     | 2.50                          | 24                    | 3000 <sup>3)</sup>                   |
| 4-pole  |  |  |             |                       |                         |                          |                               |                       |                                      |
| 1370  | <b>1RA6 450-4HP00</b>                                  | 1484   | 95.6        | 0.89                  | 2x670                   | 8833                     | 2.40                          | 20                    | 1800                                 |
| 1500  | <b>1RA6 452-4HP00</b>                                  | 1484   | 95.6        | 0.90                  | 2x730                   | 9671                     | 2.40                          | 22                    | 1800                                 |
| 1640  | <b>1RA6 454-4HP00</b>                                  | 1484   | 96.0        | 0.90                  | 2x790                   | 10568                    | 2.40                          | 25                    | 1800                                 |
| 1860  | <b>1RA6 456-4HP00</b>                                  | 1485   | 96.2        | 0.90                  | 2x900                   | 11977                    | 2.30                          | 29                    | 1800                                 |
| 2300 <sup>2)</sup>  | <b>1RA6 500-4HP00</b>                                  | 1486   | 96.6        | 0.90                  | 2x1100                  | 14780                    | 2.35                          | 42                    | 1800                                 |
| 2350 <sup>2)</sup>  | <b>1RA6 502-4HP00</b>                                  | 1486   | 96.6        | 0.92                  | 2x1100                  | 15102                    | 2.50                          | 46                    | 1800                                 |
| 2800 <sup>2)</sup>  | <b>1RA6 504-4HP00</b>                                  | 1488   | 96.9        | 0.90                  | 4x670                   | 17969                    | 2.60                          | 52                    | 1800                                 |
| 3200 <sup>2)</sup>  | <b>1RA6 560-4HP00</b>                                  | 1486   | 96.8        | 0.92                  | 4x750                   | 20564                    | 2.15                          | 82                    | 1800                                 |
| 3500 <sup>2)</sup>  | <b>1RA6 562-4HP00</b>                                  | 1487   | 96.9        | 0.92                  | 4x820                   | 22476                    | 2.15                          | 93                    | 1800                                 |
| <b>Type of construction:</b>                                  |  |  |             |                       |                         |                          |                               |                       |                                      |
| IM B3 <b>0</b>  |  |  |             |                       |                         |                          |                               |                       |                                      |
| IM V1 (without canopy) <b>8</b>                               |  |  |             |                       |                         |                          |                               |                       |                                      |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation.

Additional details [see Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> Data of vertical motors (IM V1) on request.

<sup>3)</sup> There are speed exclusion ranges for this type. It must be ensured that the motors are not continuously operated in these speed ranges. The exclusion ranges must be clarified in advance in the factory.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

Motor type  
(repeated)

Partial load values for square-law torque drive

 $P/P_{\text{rated}}$  155 (F) = 75 % $P/P_{\text{rated}}$  155 (F) = 50 % $P/P_{\text{rated}}$  155 (F) = 25 %

| $P$ | $n$ | $\eta$ | $\cos \varphi$ | $P$ | $n$ | $\eta$ | $\cos \varphi$ | $P$ | $n$ | $\eta$ | $\cos \varphi$ |
|-----|-----|--------|----------------|-----|-----|--------|----------------|-----|-----|--------|----------------|
| kW  | rpm | %      | [-]            | kW  | rpm | %      | [-]            | kW  | rpm | %      | [-]            |

Square-law torque drive

2-pole

|                |      |      |      |      |      |      |      |      |     |      |      |      |
|----------------|------|------|------|------|------|------|------|------|-----|------|------|------|
| 1RA6 450-2HP0. | 916  | 2709 | 95.8 | 0.91 | 610  | 2371 | 96.0 | 0.90 | 305 | 1883 | 96.0 | 0.85 |
| 1RA6 452-2HP0. | 1141 | 2708 | 96.4 | 0.91 | 760  | 2371 | 96.6 | 0.91 | 380 | 1883 | 96.5 | 0.87 |
| 1RA6 454-2HP0. | 1201 | 2710 | 96.5 | 0.92 | 800  | 2372 | 96.6 | 0.91 | 400 | 1884 | 96.6 | 0.87 |
| 1RA6 456-2HP0. | 1276 | 2711 | 96.5 | 0.92 | 850  | 2373 | 96.7 | 0.92 | 425 | 1884 | 96.6 | 0.88 |
| 1RA6 500-2HP0. | 1688 | 2708 | 96.6 | 0.89 | 1125 | 2369 | 96.7 | 0.87 | 563 | 1883 | 96.7 | 0.79 |
| 1RA6 502-2HP0. | 1913 | 2707 | 96.8 | 0.89 | 1275 | 2368 | 96.9 | 0.87 | 638 | 1882 | 96.9 | 0.81 |
| 1RA6 504-2HP0. | 2101 | 2710 | 96.9 | 0.91 | 1400 | 2370 | 97.0 | 0.90 | 701 | 1883 | 97.0 | 0.84 |

4-pole

|                |      |      |      |      |      |      |      |      |     |     |      |      |
|----------------|------|------|------|------|------|------|------|------|-----|-----|------|------|
| 1RA6 450-4HP0. | 1028 | 1350 | 95.9 | 0.88 | 685  | 1182 | 96.1 | 0.86 | 343 | 940 | 95.9 | 0.79 |
| 1RA6 452-4HP0. | 1125 | 1350 | 96.0 | 0.90 | 750  | 1182 | 96.2 | 0.88 | 375 | 940 | 96.2 | 0.83 |
| 1RA6 454-4HP0. | 1230 | 1350 | 96.3 | 0.90 | 820  | 1183 | 96.5 | 0.89 | 410 | 940 | 96.4 | 0.84 |
| 1RA6 456-4HP0. | 1395 | 1351 | 96.5 | 0.89 | 930  | 1183 | 96.6 | 0.88 | 465 | 941 | 96.5 | 0.82 |
| 1RA6 500-4HP0. | 1726 | 1353 | 96.7 | 0.89 | 1150 | 1183 | 96.9 | 0.86 | 575 | 941 | 96.8 | 0.77 |
| 1RA6 502-4HP0. | 1763 | 1353 | 96.8 | 0.91 | 1175 | 1184 | 96.9 | 0.88 | 588 | 941 | 96.9 | 0.80 |
| 1RA6 504-4HP0. | 2100 | 1354 | 97.0 | 0.89 | 1400 | 1184 | 97.1 | 0.86 | 700 | 941 | 96.9 | 0.74 |
| 1RA6 560-4HP0. | 2401 | 1353 | 97.0 | 0.91 | 1600 | 1184 | 97.2 | 0.90 | 801 | 941 | 97.3 | 0.85 |
| 1RA6 562-4HP0. | 2626 | 1354 | 97.1 | 0.91 | 1750 | 1184 | 97.3 | 0.90 | 876 | 941 | 97.3 | 0.85 |

3

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

### Selection and ordering data

| Rated power<br><br>IEC<br><br>$P_{\text{rated}}$ 155 (F)<br>kW | Low voltage motor<br>H-compact PLUS<br><br>Article No. | Operating values at rated output for utilization 155 (F) |             |                       |                         |                          |                               |                       |                                      |
|--|--|--|-------------|-----------------------|-------------------------|--------------------------|-------------------------------|-----------------------|--------------------------------------|
|  |  | Rated speed  | Efficiency  | Power factor          | Rated current<br>690 V  | Rated torque             | Break-down torque             | Moment of inertia     | Mechanical speed limit <sup>1)</sup> |
|  |  | $n_{\text{rated}}$<br>rpm                                | $\eta$<br>% | $\cos \varphi$<br>[-] | $I_{\text{rated}}$<br>A | $T_{\text{rated}}$<br>Nm | $T_B/T_{\text{rated}}$<br>[-] | J<br>kgm <sup>2</sup> | $n_{\text{max}}$<br>rpm              |
| <b>690 V, 50 Hz</b>  |  |  |             |                       |                         |                          |                               |                       |                                      |
| 6-pole   |  |  |             |                       |                         |                          |                               |                       |                                      |
| 940  | <b>1RA6 450-6HP0</b>                                   | 990  | 95.8        | 0.86                  | 950                     | 9079                     | 2.30                          | 26                    | 1200                                 |
| 1040   | <b>1RA6 452-6HP0</b>                                   | 991  | 95.9        | 0.86                  | 1060                    | 10039                    | 2.30                          | 29                    | 1200                                 |
| 1180   | <b>1RA6 454-6HP0</b>                                   | 991  | 96.0        | 0.86                  | 1200                    | 11394                    | 2.30                          | 32                    | 1200                                 |
| 1330   | <b>1RA6 456-6HP0</b>                                   | 992  | 96.2        | 0.86                  | 2x670                   | 12823                    | 2.30                          | 37                    | 1200                                 |
| 1800   | <b>1RA6 500-6HP0</b>                                   | 988  | 96.0        | 0.85                  | 2x920                   | 17399                    | 1.75                          | 56                    | 1500                                 |
| 2000   | <b>1RA6 502-6HP0</b>                                   | 988  | 96.2        | 0.86                  | 2x1020                  | 19332                    | 1.80                          | 62                    | 1500                                 |
| 2300   | <b>1RA6 504-6HP0</b>                                   | 989  | 96.4        | 0.85                  | 2x1180                  | 22209                    | 1.95                          | 69                    | 1500                                 |
| 2400   | <b>1RA6 506-6HP0</b>                                   | 990  | 96.4        | 0.86                  | 2x1220                  | 23152                    | 1.95                          | 77                    | 1500                                 |
| 2850   | <b>1RA6 560-6HP0</b>                                   | 990  | 96.6        | 0.87                  | 3x950                   | 27492                    | 2.25                          | 108                   | 1500                                 |
| 3200   | <b>1RA6 562-6HP0</b>                                   | 991  | 96.9        | 0.86                  | 3x1080                  | 30838                    | 2.45                          | 119                   | 1500                                 |
| 3500   | <b>1RA6 564-6HP0</b>                                   | 990  | 96.8        | 0.88                  | 3x1140                  | 33763                    | 2.20                          | 132                   | 1500                                 |
| 8-pole   |  |  |             |                       |                         |                          |                               |                       |                                      |
| 680  | <b>1RA6 450-8HP0</b>                                   | 743  | 94.9        | 0.83                  | 720                     | 8750                     | 2.30                          | 32                    | 1200                                 |
| 750  | <b>1RA6 452-8HP0</b>                                   | 743  | 95.2        | 0.84                  | 780                     | 9651                     | 2.40                          | 36                    | 1200                                 |
| 880  | <b>1RA6 454-8HP0</b>                                   | 743  | 95.2        | 0.84                  | 920                     | 11324                    | 2.40                          | 40                    | 1200                                 |
| 970  | <b>1RA6 456-8HP0</b>                                   | 744  | 95.4        | 0.84                  | 1020                    | 12476                    | 2.40                          | 46                    | 1200                                 |
| 1400   | <b>1RA6 500-8HP0</b>                                   | 741  | 95.8        | 0.83                  | 2x740                   | 18043                    | 1.85                          | 69                    | 1125                                 |
| 1560   | <b>1RA6 502-8HP0</b>                                   | 742  | 95.9        | 0.83                  | 2x820                   | 20078                    | 1.85                          | 76                    | 1125                                 |
| 1720   | <b>1RA6 504-8HP0</b>                                   | 742  | 96.0        | 0.83                  | 2x900                   | 22137                    | 1.95                          | 85                    | 1125                                 |
| 1900   | <b>1RA6 506-8HP0</b>                                   | 743  | 96.2        | 0.83                  | 2x1000                  | 24421                    | 2.10                          | 94                    | 1125                                 |
| 1960   | <b>1RA6 560-8HP0</b>                                   | 743  | 96.6        | 0.84                  | 2x1020                  | 25192                    | 2.15                          | 128                   | 1125                                 |
| 2300   | <b>1RA6 562-8HP0</b>                                   | 743  | 96.6        | 0.84                  | 2x1180                  | 29563                    | 2.20                          | 141                   | 1125                                 |
| 2600   | <b>1RA6 564-8HP0</b>                                   | 743  | 96.7        | 0.84                  | 4x670                   | 33419                    | 2.45                          | 156                   | 1125                                 |
| 2850   | <b>1RA6 566-8HP0</b>                                   | 743  | 96.7        | 0.85                  | 4x730                   | 36632                    | 2.25                          | 173                   | 1125                                 |

#### Type of construction:

|                        |   |
|------------------------|---|
| IM B3                  | 0 |
| IM V1 (without canopy) | 8 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation.

Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> Data of vertical motors (IM V1) on request.

<sup>3)</sup> There are speed exclusion ranges for this type. It must be ensured that the motors are not continuously operated in these speed ranges. The exclusion ranges must be clarified in advance in the factory.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

Motor type  
(repeated)

Partial load values for square-law torque drive

 $P/P_{\text{rated}}$  155 (F) = 75 % $P/P_{\text{rated}}$  155 (F) = 50 % $P/P_{\text{rated}}$  155 (F) = 25 %

| $P$ | $n$ | $\eta$ | $\cos \varphi$ | $P$ | $n$ | $\eta$ | $\cos \varphi$ | $P$ | $n$ | $\eta$ | $\cos \varphi$ |
|-----|-----|--------|----------------|-----|-----|--------|----------------|-----|-----|--------|----------------|
| kW  | rpm | %      | [-]            | kW  | rpm | %      | [-]            | kW  | rpm | %      | [-]            |

Square-law torque drive

6-pole

|                |      |     |      |      |      |     |      |      |     |     |      |      |
|----------------|------|-----|------|------|------|-----|------|------|-----|-----|------|------|
| 1RA6 450-6HP0. | 705  | 900 | 96.1 | 0.85 | 470  | 789 | 96.3 | 0.82 | 235 | 627 | 96.2 | 0.73 |
| 1RA6 452-6HP0. | 780  | 901 | 96.3 | 0.85 | 520  | 789 | 96.4 | 0.82 | 260 | 627 | 96.3 | 0.73 |
| 1RA6 454-6HP0. | 885  | 901 | 96.3 | 0.85 | 590  | 789 | 96.4 | 0.83 | 295 | 627 | 96.4 | 0.74 |
| 1RA6 456-6HP0. | 998  | 902 | 96.5 | 0.84 | 665  | 789 | 96.6 | 0.81 | 333 | 627 | 96.3 | 0.71 |
| 1RA6 500-6HP0. | 1350 | 898 | 96.3 | 0.85 | 900  | 787 | 96.4 | 0.84 | 450 | 626 | 96.3 | 0.78 |
| 1RA6 502-6HP0. | 1500 | 898 | 96.4 | 0.86 | 1000 | 787 | 96.6 | 0.84 | 500 | 626 | 96.4 | 0.78 |
| 1RA6 504-6HP0. | 1725 | 899 | 96.5 | 0.85 | 1150 | 787 | 96.6 | 0.83 | 575 | 626 | 96.4 | 0.75 |
| 1RA6 506-6HP0. | 1800 | 900 | 96.6 | 0.86 | 1200 | 788 | 96.7 | 0.84 | 600 | 626 | 96.5 | 0.77 |
| 1RA6 560-6HP0. | 2138 | 900 | 96.7 | 0.87 | 1425 | 788 | 96.8 | 0.86 | 713 | 627 | 96.7 | 0.80 |
| 1RA6 562-6HP0. | 2400 | 901 | 97.0 | 0.86 | 1600 | 789 | 97.0 | 0.84 | 800 | 627 | 96.7 | 0.76 |
| 1RA6 564-6HP0. | 2625 | 900 | 97.0 | 0.88 | 1750 | 788 | 97.1 | 0.87 | 875 | 626 | 97.0 | 0.82 |

8-pole

|                |      |     |      |      |      |     |      |      |     |     |      |      |
|----------------|------|-----|------|------|------|-----|------|------|-----|-----|------|------|
| 1RA6 450-8HP0. | 510  | 676 | 95.1 | 0.80 | 340  | 592 | 95.0 | 0.75 | 170 | 470 | 94.4 | 0.63 |
| 1RA6 452-8HP0. | 563  | 676 | 95.4 | 0.81 | 375  | 592 | 95.4 | 0.77 | 188 | 470 | 94.9 | 0.65 |
| 1RA6 454-8HP0. | 660  | 676 | 95.4 | 0.82 | 440  | 592 | 95.4 | 0.77 | 220 | 470 | 94.8 | 0.65 |
| 1RA6 456-8HP0. | 728  | 676 | 95.6 | 0.82 | 485  | 592 | 95.6 | 0.77 | 243 | 470 | 95.1 | 0.65 |
| 1RA6 500-8HP0. | 1050 | 674 | 95.9 | 0.82 | 700  | 590 | 95.9 | 0.80 | 350 | 469 | 95.5 | 0.70 |
| 1RA6 502-8HP0. | 1170 | 674 | 96.0 | 0.82 | 780  | 591 | 96.1 | 0.80 | 390 | 469 | 95.6 | 0.70 |
| 1RA6 504-8HP0. | 1290 | 675 | 96.1 | 0.82 | 860  | 591 | 96.1 | 0.79 | 430 | 470 | 95.7 | 0.70 |
| 1RA6 506-8HP0. | 1425 | 675 | 96.3 | 0.82 | 950  | 591 | 96.2 | 0.78 | 475 | 470 | 95.6 | 0.67 |
| 1RA6 560-8HP0. | 1470 | 675 | 96.7 | 0.84 | 980  | 591 | 96.8 | 0.82 | 490 | 470 | 96.6 | 0.73 |
| 1RA6 562-8HP0. | 1725 | 675 | 96.7 | 0.84 | 1150 | 591 | 96.8 | 0.81 | 575 | 470 | 96.5 | 0.72 |
| 1RA6 564-8HP0. | 1950 | 676 | 96.8 | 0.83 | 1300 | 592 | 96.8 | 0.79 | 650 | 470 | 96.4 | 0.69 |
| 1RA6 566-8HP0. | 2138 | 675 | 96.8 | 0.84 | 1425 | 591 | 96.9 | 0.82 | 713 | 470 | 96.6 | 0.74 |

3

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

### Selection and ordering data

| Rated power                   |                 | High voltage motor<br>H-compact PLUS | Operating values at rated output for utilization 155 (F) |                    |              |                          |                  |                   |                        |                                      |
|-------------------------------|-----------------|--------------------------------------|--|--------------------|--------------|--------------------------|------------------|-------------------|------------------------|--------------------------------------|
| IEC                           | Article No.     |                                      | Rated speed  | Efficiency         | Power factor | Rated current at 4.16 kV | Rated torque     | Break-down torque | Moment of inertia      | Mechanical speed limit <sup>2)</sup> |
| $P_{155(F)}^{rated}$<br>kW    |                 |                                      | $P_{130(B)}^{rated}$<br>kW                               | $n_{rated}$<br>rpm | $\eta$<br>%  | $\cos \varphi$<br>[-]    | $I_{rated}$<br>A | $T_{rated}$<br>Nm | $T_B/T_{rated}$<br>[-] | J<br>kgm <sup>2</sup>                |
| <b>3.4 ... 4.16 kV, 50 Hz</b> |                 |                                      |  |                    |              |                          |                  |                   |                        |                                      |
| 2-pole                        |                 |                                      |  |                    |              |                          |                  |                   |                        |                                      |
| 1380                          | – <sup>6)</sup> | <b>1RA6 450-2HS40</b>                | 2973   | 95.9               | 0.90         | 220                      | 4433             | 2.00              | 13                     | 3000                                 |
| 1570                          | – <sup>6)</sup> | <b>1RA6 452-2HS40</b>                | 2977   | 96.2               | 0.90         | 250                      | 5040             | 2.20              | 14                     | 3000                                 |
| 1750                          | – <sup>6)</sup> | <b>1RA6 454-2HS40</b>                | 2978   | 96.4               | 0.91         | 275                      | 5616             | 2.30              | 16                     | 3000                                 |
| 1950                          | – <sup>6)</sup> | <b>1RA6 456-2HS40</b>                | 2981   | 96.6               | 0.92         | 305                      | 6252             | 2.30              | 18                     | 3000                                 |
| 2550                          | 2244            | <b>1RA6 500-2HS40</b>                | 2967   | 96.2               | 0.88         | 420                      | 8207             | 1.85              | 19                     | 3000                                 |
| 2700                          | 2376            | <b>1RA6 502-2HS40</b>                | 2969   | 96.3               | 0.90         | 430                      | 8684             | 2.05              | 20                     | 3000                                 |
| 3200                          | 2816            | <b>1RA6 504-2HS40</b>                | 2974   | 96.6               | 0.91         | 510                      | 10275            | 2.35              | 24                     | 3000 <sup>5)</sup>                   |
| 3550                          | 3124            | <b>1RA6 506-2HS40</b>                | 2975   | 96.9               | 0.92         | 550                      | 11395            | 2.40              | 26                     | 3000 <sup>5)</sup>                   |
| 3700                          | 3367            | <b>1RA6 560-2HS40</b>                | 2977   | 96.7               | 0.90         | 590                      | 11868            | 1.90              | 39                     | 3000 <sup>5)</sup>                   |
| 4300                          | 3913            | <b>1RA6 562-2HS40</b>                | 2979   | 97.0               | 0.91         | 680                      | 13784            | 2.05              | 43                     | 3000 <sup>5)</sup>                   |
| 5000                          | 4550            | <b>1RA6 564-2HS40</b>                | 2981   | 97.1               | 0.92         | 780                      | 16017            | 2.25              | 49                     | 3000 <sup>5)</sup>                   |
| 5700                          | 5187            | <b>1RA6 566-2HS40</b>                | 2982   | 97.3               | 0.93         | 2x435                    | 18253            | 2.45              | 54                     | 3000 <sup>5)</sup>                   |
| 4-pole                        |                 |                                      |  |                    |              |                          |                  |                   |                        |                                      |
| 1370                          | – <sup>6)</sup> | <b>1RA6 450-4HS4</b>                 | 1484   | 95.6               | 0.88         | 225                      | 8824             | 2.60              | 20                     | 1800                                 |
| 1500                          | – <sup>6)</sup> | <b>1RA6 452-4HS4</b>                 | 1485   | 95.8               | 0.88         | 245                      | 9649             | 2.50              | 22                     | 1800                                 |
| 1640                          | – <sup>6)</sup> | <b>1RA6 454-4HS4</b>                 | 1485   | 96.0               | 0.89         | 265                      | 10549            | 2.50              | 25                     | 1800                                 |
| 1860                          | – <sup>6)</sup> | <b>1RA6 456-4HS4</b>                 | 1485   | 96.1               | 0.90         | 300                      | 11966            | 2.50              | 29                     | 1800                                 |
| 2500 <sup>4)</sup>            | 2200            | <b>1RA6 500-4HS40</b>                | 1485   | 96.4               | 0.90         | 400                      | 16076            | 2.25              | 42                     | 1800                                 |
| 2800 <sup>4)</sup>            | 2464            | <b>1RA6 502-4HS40</b>                | 1485   | 96.5               | 0.90         | 445                      | 18005            | 2.25              | 46                     | 1800                                 |
| 3150 <sup>4)</sup>            | 2772            | <b>1RA6 504-4HS40</b>                | 1485   | 96.6               | 0.91         | 495                      | 20256            | 2.25              | 52                     | 1800                                 |
| 3450 <sup>1)4)</sup>          | 3036            | <b>1RA6 506-4HS40</b>                | 1486   | 96.8               | 0.91         | 540                      | 22170            | 2.35              | 56                     | 1800                                 |
| 3900 <sup>4)</sup>            | 3549            | <b>1RA6 560-4HS40</b>                | 1489   | 97.0               | 0.89         | 630                      | 25012            | 1.95              | 84                     | 1800                                 |
| 4500 <sup>4)</sup>            | 4095            | <b>1RA6 562-4HS40</b>                | 1489   | 97.1               | 0.90         | 710                      | 28860            | 2.00              | 94                     | 1800                                 |
| 5000 <sup>4)</sup>            | 4550            | <b>1RA6 564-4HS40</b>                | 1490   | 97.2               | 0.91         | 780                      | 32045            | 2.10              | 105                    | 1800                                 |
| 5500 <sup>4)</sup>            | 5005            | <b>1RA6 566-4HS40</b>                | 1490   | 97.4               | 0.91         | 2x430                    | 35249            | 2.20              | 115                    | 1800                                 |
| 5880 <sup>1)</sup>            | – <sup>6)</sup> | <b>1RA4 632-4HV</b>                  | 1490   | 97.2               | 0.89         | 940                      | 37687            | 2.20              | 150                    | 1800                                 |
| 6470 <sup>1)</sup>            | – <sup>6)</sup> | <b>1RA4 634-4HV</b>                  | 1490   | 97.3               | 0.90         | 1020                     | 41469            | 2.20              | 168                    | 1800                                 |
| 6960 <sup>1)</sup>            | – <sup>6)</sup> | <b>1RA4 636-4HV</b>                  | 1491   | 97.4               | 0.90         | 1100                     | 44579            | 2.40              | 197                    | 1800                                 |

#### Voltage code:

4.16 kV, 50 Hz

4

Other voltage

9

#### Type of construction:

IM B3

0

IM V1 (without canopy)

8

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation.

Additional details see Page 3/2.

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

<sup>1)</sup> Rated voltage less than 4.16 kV on request.

<sup>2)</sup> For IM B3, anti-friction bearings.

<sup>3)</sup> On request.

<sup>4)</sup> Data of vertical motors (IM V1) on request.

<sup>5)</sup> There are speed exclusion ranges for this type. It must be ensured that the motors are not continuously operated in these speed ranges. The exclusion ranges must be clarified in advance in the factory.

<sup>6)</sup> Utilization 130 (B) on request.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

Motor type  
(repeated)

Partial load values for square-law torque drive

 $P/P_{\text{rated}}$  155 (F) = 75 % $P/P_{\text{rated}}$  155 (F) = 50 % $P/P_{\text{rated}}$  155 (F) = 25 % $P$   $n$   $\eta$   $\cos \varphi$  $P$   $n$   $\eta$   $\cos \varphi$  $P$   $n$   $\eta$   $\cos \varphi$ 

kW rpm % [-]

kW rpm % [-]

kW rpm % [-]

## Square-law torque drive

2-pole

|               |      |      |      |      |      |      |      |      |      |      |      |      |
|---------------|------|------|------|------|------|------|------|------|------|------|------|------|
| 1RA6 450-2... | 1035 | 2704 | 96.1 | 0.91 | 690  | 2368 | 96.3 | 0.91 | 345  | 1882 | 96.4 | 0.87 |
| 1RA6 452-2... | 1178 | 2707 | 96.4 | 0.91 | 785  | 2370 | 96.5 | 0.90 | 393  | 1883 | 96.4 | 0.87 |
| 1RA6 454-2... | 1313 | 2707 | 96.6 | 0.92 | 875  | 2370 | 96.7 | 0.91 | 438  | 1883 | 96.6 | 0.88 |
| 1RA6 456-2... | 1464 | 2709 | 96.8 | 0.92 | 975  | 2371 | 96.9 | 0.91 | 488  | 1884 | 96.8 | 0.88 |
| 1RA6 500-2... | 1914 | 2704 | 96.5 | 0.88 | 1276 | 2366 | 96.6 | 0.87 | 638  | 1881 | 96.7 | 0.81 |
| 1RA6 502-2... | 2026 | 2705 | 96.5 | 0.90 | 1350 | 2367 | 96.7 | 0.88 | 675  | 1882 | 96.7 | 0.83 |
| 1RA6 504-2... | 2401 | 2708 | 96.8 | 0.90 | 1600 | 2369 | 96.9 | 0.89 | 801  | 1883 | 96.8 | 0.81 |
| 1RA6 506-2... | 2663 | 2708 | 97.0 | 0.91 | 1775 | 2369 | 97.1 | 0.90 | 888  | 1883 | 97.1 | 0.83 |
| 1RA6 560-2... | 2777 | 2709 | 96.9 | 0.90 | 1851 | 2370 | 97.0 | 0.89 | 925  | 1883 | 97.0 | 0.84 |
| 1RA6 562-2... | 3226 | 2711 | 97.1 | 0.90 | 2151 | 2371 | 97.2 | 0.89 | 1076 | 1884 | 97.2 | 0.84 |
| 1RA6 564-2... | 3751 | 2712 | 97.3 | 0.91 | 2500 | 2371 | 97.3 | 0.90 | 1251 | 1884 | 97.3 | 0.85 |
| 1RA6 566-2... | 4276 | 2713 | 97.4 | 0.92 | 2850 | 2372 | 97.5 | 0.91 | 1426 | 1885 | 97.4 | 0.85 |

4-pole

|               |                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |
|---------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| 1RA6 450-4... | 1028                 | 1350                 | 95.8                 | 0.87                 | 685                  | 1183                 | 96.0                 | 0.85                 | 343                  | 940                  | 95.8                 | 0.78                 |
| 1RA6 452-4... | 1125                 | 1351                 | 96.0                 | 0.87                 | 750                  | 1183                 | 96.1                 | 0.85                 | 375                  | 941                  | 95.9                 | 0.77                 |
| 1RA6 454-4... | 1230                 | 1351                 | 96.2                 | 0.89                 | 820                  | 1183                 | 96.3                 | 0.87                 | 410                  | 941                  | 96.2                 | 0.80                 |
| 1RA6 456-4... | 1395                 | 1351                 | 96.3                 | 0.90                 | 930                  | 1183                 | 96.5                 | 0.88                 | 465                  | 941                  | 96.4                 | 0.83                 |
| 1RA6 500-4... | 1876                 | 1352                 | 96.6                 | 0.89                 | 1250                 | 1183                 | 96.7                 | 0.86                 | 625                  | 941                  | 96.5                 | 0.77                 |
| 1RA6 502-4... | 2101                 | 1352                 | 96.7                 | 0.89                 | 1400                 | 1183                 | 96.8                 | 0.86                 | 700                  | 941                  | 96.6                 | 0.77                 |
| 1RA6 504-4... | 2363                 | 1353                 | 96.8                 | 0.90                 | 1575                 | 1183                 | 96.9                 | 0.88                 | 788                  | 941                  | 96.8                 | 0.79                 |
| 1RA6 506-4... | 2588                 | 1353                 | 96.9                 | 0.90                 | 1725                 | 1184                 | 97.0                 | 0.88                 | 863                  | 941                  | 96.9                 | 0.79                 |
| 1RA6 560-4... | 2927                 | 1355                 | 97.1                 | 0.89                 | 1950                 | 1185                 | 97.2                 | 0.87                 | 976                  | 942                  | 97.1                 | 0.80                 |
| 1RA6 562-4... | 3377                 | 1355                 | 97.2                 | 0.90                 | 2250                 | 1185                 | 97.4                 | 0.88                 | 1126                 | 942                  | 97.3                 | 0.82                 |
| 1RA6 564-4... | 3752                 | 1356                 | 97.4                 | 0.90                 | 2500                 | 1185                 | 97.5                 | 0.89                 | 1251                 | 942                  | 97.4                 | 0.82                 |
| 1RA6 566-4... | 4126                 | 1356                 | 97.5                 | 0.90                 | 2750                 | 1186                 | 97.6                 | 0.88                 | 1376                 | 942                  | 97.4                 | 0.81                 |
| 1RA4 632-4... | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> |
| 1RA4 634-4... | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> |
| 1RA4 636-4... | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> |

3

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

### Selection and ordering data

| Rated power<br>IEC            |                              | High voltage motor<br>H-compact PLUS<br><br>Article No. | Operating values at rated output for utilization 155 (F) |                           |                                       |   |                                   |   |  |  |
|-------------------------------|------------------------------|---|--|---------------------------|---------------------------------------|---|-----------------------------------|---|--|--|
| $P_{rated}$<br>155 (F)<br>kW  | $P_{rated}$<br>130 (B)<br>kW |   | Rated speed<br>$n_{rated}$<br>rpm                        | Efficiency<br>$\eta$<br>% | Power factor<br>$\cos \varphi$<br>[-] | Rated current at<br>4.16 kV<br>$I_{rated}$<br>A | Rated torque<br>$T_{rated}$<br>Nm | Break-down torque<br>$T_B/T_{rated}$<br>[-] | Moment of inertia<br>J<br>kgm <sup>2</sup> | Mechanical speed limit <sup>2)</sup><br>$n_{max}$<br>rpm |
| <b>3.4 ... 4.16 kV, 50 Hz</b> |                              |   |  |                           |                                       |   |                                   |   |  |  |
| 6-pole                        |                              |   |  |                           |                                       |   |                                   |   |  |  |
| 940                           | - <sup>4)</sup>              | <b>1RA6 450-6HS4</b>                                    | 990  | 95.7                      | 0.85                                  | 160   | 9071                              | 2.40  | 26   | 1200   |
| 1040                          | - <sup>4)</sup>              | <b>1RA6 452-6HS4</b>                                    | 991  | 95.9                      | 0.85                                  | 178   | 10026                             | 2.50  | 29   | 1200   |
| 1180                          | - <sup>4)</sup>              | <b>1RA6 454-6HS4</b>                                    | 991  | 96.1                      | 0.86                                  | 198   | 11381                             | 2.50  | 32   | 1200   |
| 1330                          | - <sup>4)</sup>              | <b>1RA6 456-6HS4</b>                                    | 992  | 96.2                      | 0.85                                  | 225   | 12811                             | 2.50  | 37   | 1200   |
| 2000                          | 1800                         | <b>1RA6 500-6HS4</b>                                    | 987  | 95.8                      | 0.84                                  | 345   | 19352                             | 1.75  | 56   | 1500   |
| 2200                          | 2000                         | <b>1RA6 502-6HS4</b>                                    | 986  | 95.8                      | 0.85                                  | 375   | 21308                             | 1.65  | 62   | 1500   |
| 2450                          | 2200                         | <b>1RA6 504-6HS4</b>                                    | 987  | 96.0                      | 0.85                                  | 415   | 23706                             | 1.70  | 69   | 1500   |
| 2650                          | 2400                         | <b>1RA6 506-6HS4</b>                                    | 988  | 96.2                      | 0.86                                  | 445   | 25615                             | 1.80  | 77   | 1500   |
| 3150                          | 2750                         | <b>1RA6 560-6HS4</b>                                    | 989  | 96.5                      | 0.86                                  | 530   | 30417                             | 2.05  | 108  | 1500   |
| 3500                          | 3100                         | <b>1RA6 562-6HS4</b>                                    | 989  | 96.5                      | 0.87                                  | 580   | 33797                             | 2.05  | 119  | 1500   |
| 3900                          | 3450                         | <b>1RA6 564-6HS4</b>                                    | 989  | 96.6                      | 0.87                                  | 640   | 37659                             | 2.10  | 132  | 1500   |
| 4250                          | 3750                         | <b>1RA6 566-6HS4</b>                                    | 989  | 96.7                      | 0.87                                  | 700   | 41039                             | 2.05  | 146  | 1500   |
| 4610 <sup>1)</sup>            | - <sup>4)</sup>              | <b>1RA4 632-6HV</b>                                     | 993  | 97.0                      | 0.86                                  | 770   | 44336                             | 2.10  | 202  | 1200   |
| 5000 <sup>1)</sup>            | - <sup>4)</sup>              | <b>1RA4 634-6HV</b>                                     | 993  | 97.1                      | 0.86                                  | 830   | 48087                             | 2.30  | 223  | 1200   |
| 5490 <sup>1)</sup>            | - <sup>4)</sup>              | <b>1RA4 636-6HV</b>                                     | 994  | 97.2                      | 0.86                                  | 910   | 52746                             | 2.30  | 246  | 1200   |
| 8-pole                        |                              |   |  |                           |                                       |   |                                   |   |  |  |
| 680                           | - <sup>4)</sup>              | <b>1RA6 450-8HS4</b>                                    | 743  | 94.7                      | 0.82                                  | 122   | 8743                              | 2.50  | 32   | 1200   |
| 750                           | - <sup>4)</sup>              | <b>1RA6 452-8HS4</b>                                    | 744  | 95.0                      | 0.82                                  | 134   | 9638                              | 2.50  | 36   | 1200   |
| 880                           | - <sup>4)</sup>              | <b>1RA6 454-8HS4</b>                                    | 743  | 95.1                      | 0.83                                  | 154   | 11318                             | 2.50  | 40   | 1200   |
| 970                           | - <sup>4)</sup>              | <b>1RA6 456-8HS4</b>                                    | 743  | 95.3                      | 0.85                                  | 166   | 12477                             | 2.40  | 46   | 1200   |
| 1360                          | 1220                         | <b>1RA6 500-8HS4</b>                                    | 741  | 95.4                      | 0.83                                  | 240   | 17528                             | 1.75  | 69   | 1125   |
| 1540                          | 1380                         | <b>1RA6 502-8HS4</b>                                    | 741  | 95.6                      | 0.83                                  | 270   | 19848                             | 1.80  | 76   | 1125   |
| 1740                          | 1560                         | <b>1RA6 504-8HS4</b>                                    | 742  | 95.8                      | 0.83                                  | 305   | 22395                             | 1.90  | 85   | 1125   |
| 1880                          | 1700                         | <b>1RA6 506-8HS4</b>                                    | 743  | 95.8                      | 0.84                                  | 325   | 24164                             | 2.00  | 94   | 1125   |
| 2200                          | 1940                         | <b>1RA6 560-8HS4</b>                                    | 741  | 96.1                      | 0.84                                  | 380   | 28354                             | 1.90  | 128  | 1125   |
| 2500                          | 2200                         | <b>1RA6 562-8HS4</b>                                    | 741  | 96.2                      | 0.84                                  | 430   | 32220                             | 1.95  | 141  | 1125   |
| 2750                          | 2400                         | <b>1RA6 564-8HS4</b>                                    | 742  | 96.4                      | 0.84                                  | 470   | 35394                             | 2.05  | 156  | 1125   |
| 3000                          | 2640                         | <b>1RA6 566-8HS4</b>                                    | 742  | 96.5                      | 0.85                                  | 510   | 38612                             | 2.10  | 173  | 1125   |
| 3140 <sup>1)</sup>            | - <sup>4)</sup>              | <b>1RA4 630-8HV</b>                                     | 743  | 96.5                      | 0.85                                  | 530   | 40359                             | 1.90  | 239  | 1200   |
| 3430 <sup>1)</sup>            | - <sup>4)</sup>              | <b>1RA4 632-8HV</b>                                     | 743  | 96.7                      | 0.85                                  | 580   | 44087                             | 2.10  | 265  | 1200   |
| 3680 <sup>1)</sup>            | - <sup>4)</sup>              | <b>1RA4 634-8HV</b>                                     | 743  | 96.7                      | 0.85                                  | 620   | 47300                             | 2.00  | 293  | 1200   |
| 4020 <sup>1)</sup>            | - <sup>4)</sup>              | <b>1RA4 636-8HV</b>                                     | 744  | 96.9                      | 0.84                                  | 690   | 51601                             | 2.30  | 324  | 1200   |

#### Voltage code:

4.16 kV, 50 Hz

Other voltage

4  
9

#### Type of construction:

IM B3

IM V1 (without canopy)

0  
8

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see Page 3/2.

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> Rated voltage less than 4.16 kV on request.

<sup>2)</sup> For IM B3, anti-friction bearings.

<sup>3)</sup> On request.

<sup>4)</sup> Utilization 130 (B) on request.



## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors - H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

| Motor type<br>(repeated)       | Partial load values for square-law torque drive |                      |                      |                      |                                     |                      |                      |                      |                                     |                      |                      |                      |
|--------------------------------|---|----------------------|----------------------|----------------------|-------------------------------------|----------------------|----------------------|----------------------|-------------------------------------|----------------------|----------------------|----------------------|
|                                | $P/P_{\text{rated}}$ 155 (F) = 75 %             |                      |                      |                      | $P/P_{\text{rated}}$ 155 (F) = 50 % |                      |                      |                      | $P/P_{\text{rated}}$ 155 (F) = 25 % |                      |                      |                      |
|                                | $P$   | $n$                  | $\eta$               | $\cos \varphi$       | $P$                                 | $n$                  | $\eta$               | $\cos \varphi$       | $P$                                 | $n$                  | $\eta$               | $\cos \varphi$       |
|                                | kW  | rpm                  | %                    | [-]                  | kW                                  | rpm                  | %                    | [-]                  | kW                                  | rpm                  | %                    | [-]                  |
| <b>Square-law torque drive</b> |   |                      |                      |                      |                                     |                      |                      |                      |                                     |                      |                      |                      |
| <b>6-pole</b>                  |   |                      |                      |                      |                                     |                      |                      |                      |                                     |                      |                      |                      |
| 1RA6 450-6...                  | 705   | 901                  | 96.0                 | 0.84                 | 470                                 | 789                  | 96.1                 | 0.81                 | 235                                 | 627                  | 96.0                 | 0.71                 |
| 1RA6 452-6...                  | 780   | 901                  | 96.1                 | 0.84                 | 520                                 | 789                  | 96.2                 | 0.80                 | 260                                 | 627                  | 96.0                 | 0.70                 |
| 1RA6 454-6...                  | 885   | 901                  | 96.3                 | 0.85                 | 590                                 | 789                  | 96.4                 | 0.82                 | 295                                 | 627                  | 96.3                 | 0.73                 |
| 1RA6 456-6...                  | 998   | 902                  | 96.4                 | 0.83                 | 665                                 | 790                  | 96.5                 | 0.80                 | 333                                 | 627                  | 96.2                 | 0.69                 |
| 1RA6 500-6...                  | 1500  | 898                  | 96.1                 | 0.84                 | 1000                                | 786                  | 96.2                 | 0.83                 | 500                                 | 625                  | 96.1                 | 0.75                 |
| 1RA6 502-6...                  | 1650  | 897                  | 96.1                 | 0.85                 | 1100                                | 786                  | 96.3                 | 0.84                 | 550                                 | 625                  | 96.3                 | 0.78                 |
| 1RA6 504-6...                  | 1838  | 897                  | 96.3                 | 0.85                 | 1225                                | 786                  | 96.5                 | 0.85                 | 613                                 | 625                  | 96.4                 | 0.79                 |
| 1RA6 506-6...                  | 1988  | 898                  | 96.4                 | 0.86                 | 1325                                | 787                  | 96.6                 | 0.85                 | 663                                 | 626                  | 96.5                 | 0.78                 |
| 1RA6 560-6...                  | 2363  | 899                  | 96.7                 | 0.87                 | 1575                                | 788                  | 96.8                 | 0.86                 | 788                                 | 626                  | 96.8                 | 0.81                 |
| 1RA6 562-6...                  | 2625  | 899                  | 96.7                 | 0.87                 | 1750                                | 788                  | 96.9                 | 0.87                 | 875                                 | 626                  | 96.8                 | 0.82                 |
| 1RA6 564-6...                  | 2925  | 900                  | 96.8                 | 0.87                 | 1950                                | 788                  | 97.0                 | 0.86                 | 975                                 | 626                  | 96.9                 | 0.81                 |
| 1RA6 566-6...                  | 3188  | 899                  | 96.9                 | 0.88                 | 2125                                | 788                  | 97.1                 | 0.87                 | 1063                                | 626                  | 97.0                 | 0.82                 |
| 1RA4 632-6...                  | O. R. <sup>(3)</sup>                            | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> |
| 1RA4 634-6...                  | O. R. <sup>(3)</sup>                            | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> |
| 1RA4 636-6...                  | O. R. <sup>(3)</sup>                            | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> |
| <b>8-pole</b>                  |   |                      |                      |                      |                                     |                      |                      |                      |                                     |                      |                      |                      |
| 1RA6 450-8...                  | 510   | 676                  | 94.8                 | 0.80                 | 340                                 | 592                  | 94.7                 | 0.75                 | 170                                 | 470                  | 94.0                 | 0.63                 |
| 1RA6 452-8...                  | 563   | 676                  | 95.1                 | 0.80                 | 375                                 | 592                  | 95.1                 | 0.75                 | 188                                 | 470                  | 94.4                 | 0.62                 |
| 1RA6 454-8...                  | 660   | 676                  | 95.3                 | 0.82                 | 440                                 | 592                  | 95.3                 | 0.78                 | 220                                 | 470                  | 94.8                 | 0.66                 |
| 1RA6 456-8...                  | 728   | 676                  | 95.5                 | 0.83                 | 485                                 | 592                  | 95.5                 | 0.80                 | 243                                 | 470                  | 95.1                 | 0.69                 |
| 1RA6 500-8...                  | 1020  | 674                  | 95.7                 | 0.83                 | 680                                 | 590                  | 95.8                 | 0.81                 | 340                                 | 469                  | 95.4                 | 0.72                 |
| 1RA6 502-8...                  | 1155  | 674                  | 95.8                 | 0.83                 | 770                                 | 590                  | 95.9                 | 0.81                 | 385                                 | 469                  | 95.5                 | 0.72                 |
| 1RA6 504-8...                  | 1305  | 674                  | 96.0                 | 0.83                 | 870                                 | 591                  | 96.0                 | 0.80                 | 435                                 | 470                  | 95.6                 | 0.71                 |
| 1RA6 506-8...                  | 1410  | 675                  | 95.9                 | 0.82                 | 940                                 | 591                  | 95.9                 | 0.79                 | 470                                 | 470                  | 95.4                 | 0.69                 |
| 1RA6 560-8...                  | 1650  | 674                  | 96.3                 | 0.84                 | 1100                                | 590                  | 96.5                 | 0.83                 | 550                                 | 469                  | 96.5                 | 0.76                 |
| 1RA6 562-8...                  | 1875  | 674                  | 96.4                 | 0.84                 | 1250                                | 590                  | 96.6                 | 0.83                 | 625                                 | 469                  | 96.5                 | 0.76                 |
| 1RA6 564-8...                  | 2063  | 674                  | 96.6                 | 0.84                 | 1375                                | 591                  | 96.7                 | 0.82                 | 688                                 | 470                  | 96.6                 | 0.75                 |
| 1RA6 566-8...                  | 2250  | 675                  | 96.7                 | 0.85                 | 1500                                | 591                  | 96.8                 | 0.83                 | 750                                 | 470                  | 96.7                 | 0.75                 |
| 1RA4 630-8...                  | O. R. <sup>(3)</sup>                            | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> |
| 1RA4 632-8...                  | O. R. <sup>(3)</sup>                            | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> |
| 1RA4 634-8...                  | O. R. <sup>(3)</sup>                            | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> |
| 1RA4 636-8...                  | O. R. <sup>(3)</sup>                            | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> |

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

### Selection and ordering data

| Rated power                   |                        | High voltage motor<br>SIMOTICS HV M (modular) | Operating values at rated output for utilization 130 (B) |            |                |                          |              |                   |                   |                                      |
|-------------------------------|------------------------|---|--|------------|----------------|--------------------------|--------------|-------------------|-------------------|--------------------------------------|
| IEC                           |                        |   | Rated speed  | Efficiency | Power factor   | Rated current at 4.16 kV | Rated torque | Break-down torque | Moment of inertia | Mechanical speed limit <sup>1)</sup> |
| $P_{rated}$<br>155 (F)        | $P_{rated}$<br>130 (B) | Article No.                                   | $n_{rated}$  | $\eta$     | $\cos \varphi$ | $I_{rated}$              | $T_{rated}$  | $T_B/T_{rated}$   | J                 | $n_{max}$                            |
| kW                            | kW                     |   | rpm  | %          | [-]            | A                        | Nm           | [-]               | kgm <sup>2</sup>  | rpm                                  |
| <b>3.4 ... 4.16 kV, 50 Hz</b> |                        |   |  |            |                |                          |              |                   |                   |                                      |
| 2-pole                        |                        |   |  |            |                |                          |              |                   |                   |                                      |
| 9900                          | 9000                   | <b>1RA7 710-2 ■ ■ 40-0CJ0</b>                 | 2986   | 97.4       | 0.91           | 1400                     | 28782        | 2.00              | 148               | 3600                                 |
| 11000                         | 10000                  | <b>1RA7 712-2 ■ ■ 40-0CJ0</b>                 | 2985   | 97.5       | 0.91           | 1560                     | 31991        | 2.00              | 160               | 3600                                 |
| 12320                         | 11200                  | <b>1RA7 714-2 ■ ■ 40-0CJ0</b>                 | 2987   | 97.6       | 0.92           | 1740                     | 35806        | 2.25              | 175               | 3600                                 |
| 13750                         | 12500                  | <b>1RA7 716-2 ■ ■ 40-0CJ0</b>                 | 2986   | 97.7       | 0.92           | 1940                     | 39975        | 2.25              | 190               | 3600                                 |
| 4-pole                        |                        |   |  |            |                |                          |              |                   |                   |                                      |
| 9744                          | 8700                   | <b>1RA7 710-4 ■ ■ 40-0C ■ 0</b>               | 1491   | 97.5       | 0.90           | 1380                     | 55720        | 2.15              | 262               | 1800                                 |
| 10864                         | 9700                   | <b>1RA7 712-4 ■ ■ 40-0C ■ 0</b>               | 1491   | 97.6       | 0.90           | 1540                     | 62125        | 2.15              | 286               | 1800                                 |
| 12096                         | 10800                  | <b>1RA7 714-4 ■ ■ 40-0C ■ 0</b>               | 1492   | 97.7       | 0.91           | 1680                     | 69124        | 2.35              | 321               | 1800                                 |
| 13440                         | 12000                  | <b>1RA7 716-4 ■ ■ 40-0C ■ 0</b>               | 1492   | 97.8       | 0.91           | 1880                     | 76804        | 2.35              | 361               | 1800                                 |
| 6-pole                        |                        |   |  |            |                |                          |              |                   |                   |                                      |
| 7056                          | 6300                   | <b>1RA7 710-6 ■ ■ 4-0C ■ 0</b>                | 994  | 97.2       | 0.86           | 1040                     | 60524        | 2.10              | 350               | 1800                                 |
| 7840                          | 7000                   | <b>1RA7 712-6 ■ ■ 4-0C ■ 0</b>                | 994  | 97.3       | 0.86           | 1160                     | 67249        | 2.15              | 398               | 1800                                 |
| 8624                          | 7700                   | <b>1RA7 714-6 ■ ■ 4-0C ■ 0</b>                | 995  | 97.5       | 0.87           | 1260                     | 73899        | 2.30              | 450               | 1800                                 |
| 9632                          | 8600                   | <b>1RA7 716-6 ■ ■ 4-0C ■ 0</b>                | 995  | 97.5       | 0.86           | 1420                     | 82537        | 2.30              | 496               | 1800                                 |
| 8-pole                        |                        |   |  |            |                |                          |              |                   |                   |                                      |
| 5040                          | 4500                   | <b>1RA7 710-8 ■ ■ 4-0C ■ 0</b>                | 745  | 96.9       | 0.85           | 760                      | 57680        | 1.90              | 433               | 1000                                 |
| 5600                          | 5000                   | <b>1RA7 712-8 ■ ■ 4-0C ■ 0</b>                | 745  | 97.0       | 0.85           | 840                      | 64089        | 1.95              | 493               | 1000                                 |
| 6272                          | 5600                   | <b>1RA7 714-8 ■ ■ 4-0C ■ 0</b>                | 745  | 97.1       | 0.86           | 930                      | 71780        | 2.00              | 558               | 1000                                 |
| 7056                          | 6300                   | <b>1RA7 716-8 ■ ■ 4-0C ■ 0</b>                | 745  | 97.2       | 0.86           | 1040                     | 80752        | 2.15              | 617               | 1000                                 |
| 10-pole                       |                        |   |  |            |                |                          |              |                   |                   |                                      |
| 3920                          | 3500                   | <b>1RA7 710-3 ■ ■ 4-0C ■ 0</b>                | 595  | 96.6       | 0.84           | 600                      | 56172        | 2.20              | 429               | 900                                  |
| 4312                          | 3850                   | <b>1RA7 712-3 ■ ■ 4-0C ■ 0</b>                | 595  | 96.7       | 0.85           | 650                      | 61790        | 2.20              | 489               | 900                                  |
| 4816                          | 4300                   | <b>1RA7 714-3 ■ ■ 4-0C ■ 0</b>                | 595  | 96.8       | 0.84           | 730                      | 69012        | 2.20              | 551               | 900                                  |
| 5320                          | 4750                   | <b>1RA7 716-3 ■ ■ 4-0C ■ 0</b>                | 595  | 96.9       | 0.85           | 800                      | 76234        | 2.20              | 613               | 900                                  |

#### Cooling method

See page 1/8

#### Motor for line operation or for converter operation

See page 1/9

#### Type of construction

See page 1/9

#### Housing and bearing version

See page 1/9

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

| Motor type<br>(repeated) | Partial load values for square-law torque drive |      |        |                |                                     |      |        |                |                                     |      |        |                |
|--------------------------|---|------|--------|----------------|-------------------------------------|------|--------|----------------|-------------------------------------|------|--------|----------------|
|                          | $P/P_{\text{rated}}$ 130 (B) = 75 %             |      |        |                | $P/P_{\text{rated}}$ 130 (B) = 50 % |      |        |                | $P/P_{\text{rated}}$ 130 (B) = 25 % |      |        |                |
|                          | $P$   | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$  | $\eta$ | $\cos \varphi$ |
|                          | kW  | rpm  | %      | [-]            | kW                                  | rpm  | %      | [-]            | kW                                  | rpm  | %      | [-]            |
|                          | <b>Square-law torque drive</b>                  |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 2-pole                   |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RA7 710-2...            | 6749  | 2713 | 97.4   | 0.92           | 4499                                | 2374 | 97.3   | 0.92           | 2249                                | 1885 | 97.0   | 0.89           |
| 1RA7 712-2...            | 7500  | 2712 | 97.5   | 0.92           | 5000                                | 2373 | 97.4   | 0.93           | 2499                                | 1885 | 97.2   | 0.91           |
| 1RA7 714-2...            | 8404  | 2713 | 97.6   | 0.93           | 5603                                | 2374 | 97.5   | 0.93           | 2802                                | 1885 | 97.2   | 0.90           |
| 1RA7 716-2...            | 9375  | 2713 | 97.7   | 0.93           | 6250                                | 2374 | 97.6   | 0.93           | 3124                                | 1885 | 97.3   | 0.91           |
| 4-pole                   |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RA7 710-4...            | 6527  | 1355 | 97.5   | 0.91           | 4359                                | 1186 | 97.5   | 0.91           | 2181                                | 942  | 97.2   | 0.89           |
| 1RA7 712-4...            | 7277  | 1355 | 97.6   | 0.91           | 4860                                | 1186 | 97.6   | 0.91           | 2431                                | 942  | 97.3   | 0.88           |
| 1RA7 714-4...            | 8105  | 1356 | 97.7   | 0.91           | 5412                                | 1186 | 97.6   | 0.91           | 2708                                | 942  | 97.3   | 0.88           |
| 1RA7 716-4...            | 9006  | 1356 | 97.8   | 0.92           | 6014                                | 1186 | 97.7   | 0.92           | 3009                                | 942  | 97.5   | 0.89           |
| 6-pole                   |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RA7 710-6...            | 4728  | 903  | 97.2   | 0.85           | 3157                                | 790  | 97.0   | 0.84           | 1580                                | 628  | 96.5   | 0.77           |
| 1RA7 712-6...            | 5254  | 903  | 97.3   | 0.86           | 3508                                | 791  | 97.1   | 0.85           | 1756                                | 628  | 96.7   | 0.78           |
| 1RA7 714-6...            | 5778  | 904  | 97.4   | 0.86           | 3859                                | 791  | 97.2   | 0.84           | 1930                                | 628  | 96.7   | 0.77           |
| 1RA7 716-6...            | 6453  | 904  | 97.4   | 0.86           | 4309                                | 791  | 97.2   | 0.83           | 2155                                | 628  | 96.7   | 0.75           |
| 8-pole                   |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RA7 710-8...            | 3379  | 677  | 96.8   | 0.85           | 2257                                | 592  | 96.7   | 0.84           | 1130                                | 471  | 96.2   | 0.77           |
| 1RA7 712-8...            | 3754  | 677  | 97.0   | 0.85           | 2507                                | 593  | 96.8   | 0.84           | 1255                                | 471  | 96.3   | 0.77           |
| 1RA7 714-8...            | 4204  | 677  | 97.1   | 0.86           | 2808                                | 593  | 96.9   | 0.84           | 1405                                | 471  | 96.4   | 0.78           |
| 1RA7 716-8...            | 4729  | 677  | 97.1   | 0.85           | 3158                                | 593  | 96.9   | 0.83           | 1580                                | 471  | 96.4   | 0.76           |
| 10-pole                  |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RA7 710-3...            | 2627  | 541  | 96.5   | 0.83           | 1755                                | 473  | 96.3   | 0.79           | 878                                 | 376  | 95.7   | 0.68           |
| 1RA7 712-3...            | 2890  | 541  | 96.7   | 0.84           | 1930                                | 473  | 96.5   | 0.81           | 966                                 | 376  | 95.9   | 0.71           |
| 1RA7 714-3...            | 3227  | 541  | 96.7   | 0.83           | 2156                                | 474  | 96.5   | 0.80           | 1079                                | 376  | 95.8   | 0.69           |
| 1RA7 716-3...            | 3565  | 541  | 96.8   | 0.84           | 2381                                | 473  | 96.6   | 0.81           | 1192                                | 376  | 96.0   | 0.71           |

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

### Selection and ordering data

| Rated power<br><b>IEC</b><br>$P_{\text{rated}}$ 155 (F)<br>kW | <b>Low voltage motor<br/>H-compact PLUS</b><br><br>Article No. | Operating values at rated output for utilization 155 (F) |             |                       |                         |                          |                               |                       |                                      |
|---|--|--|-------------|-----------------------|-------------------------|--------------------------|-------------------------------|-----------------------|--------------------------------------|
|   |  | Rated speed  | Efficiency  | Power factor          | Rated current<br>690 V  | Rated torque             | Break-down torque             | Moment of inertia     | Mechanical speed limit <sup>1)</sup> |
|   |  | $n_{\text{rated}}$<br>rpm                                | $\eta$<br>% | $\cos \varphi$<br>[-] | $I_{\text{rated}}$<br>A | $T_{\text{rated}}$<br>Nm | $T_B/T_{\text{rated}}$<br>[-] | J<br>kgm <sup>2</sup> | $n_{\text{max}}$<br>rpm              |
| <b>690 V, 60 Hz</b>   |  |  |             |                       |                         |                          |                               |                       |                                      |
| 2-pole  |  |  |             |                       |                         |                          |                               |                       |                                      |
| 1550  | <b>1RA6 450-2HP10</b>  | 3578   | 95.9        | 0.90                  | 2x750                   | 4140                     | 1.90                          | 13                    | 3600 <sup>2)</sup>                   |
| 1650  | <b>1RA6 452-2HP10</b>  | 3581   | 96.0        | 0.91                  | 2x790                   | 4403                     | 2.20                          | 14                    | 3600 <sup>2)</sup>                   |
| 1720  | <b>1RA6 454-2HP10</b>  | 3584   | 96.1        | 0.91                  | 2x820                   | 4586                     | 2.40                          | 16                    | 3600 <sup>2)</sup>                   |
| 2180  | <b>1RA6 456-2HP10</b>  | 3584   | 96.7        | 0.92                  | 2x1020                  | 5814                     | 2.40                          | 18                    | 3600 <sup>2)</sup>                   |
| 2500  | <b>1RA6 500-2HP10</b>  | 3579   | 96.7        | 0.90                  | 2x1200                  | 6670                     | 2.55                          | 20                    | 3600 <sup>2)</sup>                   |
| 2750  | <b>1RA6 502-2HP10</b>  | 3577   | 96.6        | 0.91                  | 4x650                   | 7342                     | 2.35                          | 22                    | 3600 <sup>2)</sup>                   |
| 3100  | <b>1RA6 504-2HP10</b>  | 3581   | 97.0        | 0.92                  | 4x730                   | 8267                     | 2.55                          | 25                    | 3600 <sup>2)</sup>                   |
| 4-pole  |  |  |             |                       |                         |                          |                               |                       |                                      |
| 1630  | <b>1RA6 450-4HP1</b>   | 1784   | 95.9        | 0.88                  | 2x810                   | 8740                     | 2.30                          | 20                    | 1800                                 |
| 1750  | <b>1RA6 452-4HP1</b>   | 1783   | 96.0        | 0.90                  | 2x850                   | 9385                     | 2.30                          | 22                    | 1800                                 |
| 2070  | <b>1RA6 454-4HP1</b>   | 1783   | 96.2        | 0.90                  | 2x1000                  | 11104                    | 2.30                          | 25                    | 1800                                 |
| 2310  | <b>1RA6 456-4HP1</b>   | 1786   | 96.4        | 0.89                  | 2x1120                  | 12364                    | 2.50                          | 29                    | 1800                                 |
| 2700 <sup>4)</sup>  | <b>1RA6 500-4HP10</b>  | 1788   | 96.9        | 0.90                  | 4x650                   | 14420                    | 2.80                          | 42                    | 1800 <sup>3)</sup>                   |
| 2850 <sup>4)</sup>  | <b>1RA6 502-4HP10</b>  | 1786   | 96.9        | 0.91                  | 4x680                   | 15238                    | 2.50                          | 46                    | 1800 <sup>3)</sup>                   |
| 3000 <sup>4)</sup>  | <b>1RA6 504-4HP10</b>  | 1786   | 97.0        | 0.92                  | 4x700                   | 16040                    | 2.40                          | 52                    | 1800 <sup>3)</sup>                   |

#### Type of construction:

|                        |          |
|------------------------|----------|
| IM B3                  | <b>0</b> |
| IM V1 (without canopy) | <b>8</b> |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation.

Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> There are speed exclusion ranges for this type. It must be ensured that the motors are not continuously operated in these speed ranges. The exclusion ranges must be clarified in advance in the factory.

<sup>3)</sup> Higher speed limit on request.

<sup>4)</sup> Data of vertical motors (IM V1) on request.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

| Motor type<br>(repeated)       | Partial load values for square-law torque drive |      |        |                |                                     |      |        |                |                                     |      |        |                |
|--------------------------------|---|------|--------|----------------|-------------------------------------|------|--------|----------------|-------------------------------------|------|--------|----------------|
|                                | $P/P_{\text{rated}}$ 155 (F) = 75 %             |      |        |                | $P/P_{\text{rated}}$ 155 (F) = 50 % |      |        |                | $P/P_{\text{rated}}$ 155 (F) = 25 % |      |        |                |
|                                | $P$   | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$  | $\eta$ | $\cos \varphi$ |
|                                | kW  | rpm  | %      | [-]            | kW                                  | rpm  | %      | [-]            | kW                                  | rpm  | %      | [-]            |
| <b>Square-law torque drive</b> |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| <b>2-pole</b>                  |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RA6 450-2HP1.                 | 1164  | 3253 | 96.2   | 0.90           | 775                                 | 2844 | 96.3   | 0.90           | 388                                 | 2261 | 96.2   | 0.86           |
| 1RA6 452-2HP1.                 | 1239  | 3255 | 96.3   | 0.92           | 825                                 | 2845 | 96.4   | 0.91           | 413                                 | 2262 | 96.3   | 0.87           |
| 1RA6 454-2HP1.                 | 1291  | 3257 | 96.3   | 0.92           | 860                                 | 2847 | 96.4   | 0.91           | 430                                 | 2262 | 96.2   | 0.86           |
| 1RA6 456-2HP1.                 | 1636  | 3258 | 96.9   | 0.92           | 1090                                | 2847 | 96.9   | 0.91           | 545                                 | 2263 | 96.7   | 0.87           |
| 1RA6 500-2HP1.                 | 1876  | 3256 | 96.8   | 0.89           | 1250                                | 2846 | 96.8   | 0.87           | 626                                 | 2261 | 96.6   | 0.77           |
| 1RA6 502-2HP1.                 | 2064  | 3254 | 96.8   | 0.90           | 1375                                | 2846 | 96.9   | 0.89           | 688                                 | 2261 | 96.8   | 0.82           |
| 1RA6 504-2HP1.                 | 2325  | 3257 | 97.1   | 0.91           | 1550                                | 2847 | 97.1   | 0.89           | 776                                 | 2262 | 97.0   | 0.82           |
| <b>4-pole</b>                  |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RA6 450-4HP1.                 | 1223  | 1623 | 96.1   | 0.88           | 815                                 | 1420 | 96.2   | 0.86           | 408                                 | 1129 | 95.9   | 0.78           |
| 1RA6 452-4HP1.                 | 1313  | 1623 | 96.3   | 0.90           | 875                                 | 1419 | 96.4   | 0.89           | 438                                 | 1129 | 96.3   | 0.84           |
| 1RA6 454-4HP1.                 | 1553  | 1623 | 96.5   | 0.90           | 1035                                | 1419 | 96.6   | 0.89           | 518                                 | 1129 | 96.5   | 0.85           |
| 1RA6 456-4HP1.                 | 1733  | 1625 | 96.6   | 0.89           | 1155                                | 1421 | 96.6   | 0.87           | 578                                 | 1130 | 96.3   | 0.79           |
| 1RA6 500-4HP1.                 | 2025  | 1627 | 97.0   | 0.88           | 1351                                | 1422 | 97.0   | 0.83           | 675                                 | 1130 | 96.6   | 0.70           |
| 1RA6 502-4HP1.                 | 2138  | 1626 | 97.0   | 0.90           | 1425                                | 1422 | 97.1   | 0.87           | 713                                 | 1130 | 96.9   | 0.78           |
| 1RA6 504-4HP1.                 | 2251  | 1625 | 97.1   | 0.91           | 1500                                | 1421 | 97.2   | 0.90           | 750                                 | 1130 | 97.2   | 0.83           |

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

### Selection and ordering data

| Rated power<br><br>IEC<br><br>$P_{\text{rated}}$ 155 (F)<br>kW | Low voltage motor<br>H-compact PLUS<br><br>Article No. | Operating values at rated output for utilization 155 (F) |             |                       |                         |                          |  |                       |                                      |
|--|--|--|-------------|-----------------------|-------------------------|--------------------------|--|-----------------------|--------------------------------------|
|  |  | Rated speed  | Efficiency  | Power factor          | Rated current<br>690 V  | Rated torque             | Break-down torque                      | Moment of inertia     | Mechanical speed limit <sup>1)</sup> |
|  |  | $n_{\text{rated}}$<br>rpm                                | $\eta$<br>% | $\cos \varphi$<br>[-] | $I_{\text{rated}}$<br>A | $T_{\text{rated}}$<br>Nm | $T_{\text{B}}/T_{\text{rated}}$<br>[-] | J<br>kgm <sup>2</sup> | $n_{\text{max}}$<br>rpm              |
| <b>690 V, 60 Hz</b>  |  |  |             |                       |                         |                          |  |                       |                                      |
| 6-pole   |  |  |             |                       |                         |                          |  |                       |                                      |
| 1210   | <b>1RA6 450-6HP1</b>                                   | 1191   | 96.1        | 0.85                  | 2x620                   | 9718                     | 2.40                                   | 26                    | 1200                                 |
| 1350   | <b>1RA6 452-6HP1</b>                                   | 1191   | 96.3        | 0.84                  | 2x700                   | 10837                    | 2.40                                   | 29                    | 1200                                 |
| 1480   | <b>1RA6 454-6HP1</b>                                   | 1191   | 96.3        | 0.86                  | 2x750                   | 11883                    | 2.30                                   | 32                    | 1200                                 |
| 1620   | <b>1RA6 456-6HP1</b>                                   | 1192   | 96.6        | 0.86                  | 2x820                   | 12995                    | 2.40                                   | 37                    | 1200                                 |
| 2150   | <b>1RA6 500-6HP1</b>                                   | 1190   | 96.5        | 0.84                  | 2x1100                  | 17254                    | 2.10                                   | 56                    | 1500                                 |
| 2400   | <b>1RA6 502-6HP1</b>                                   | 1188   | 96.5        | 0.85                  | 2x1220                  | 19293                    | 1.85                                   | 62                    | 1500                                 |
| 2700   | <b>1RA6 504-6HP1</b>                                   | 1190   | 96.7        | 0.84                  | 3x930                   | 21668                    | 2.15                                   | 69                    | 1500                                 |
| 2950   | <b>1RA6 506-6HP1</b>                                   | 1189   | 96.7        | 0.86                  | 3x990                   | 23694                    | 1.90                                   | 77                    | 1500                                 |
| 3300   | <b>1RA6 560-6HP1</b>                                   | 1191   | 96.9        | 0.87                  | 3x1100                  | 26461                    | 2.30                                   | 108                   | 1500                                 |
| 3650   | <b>1RA6 562-6HP1</b>                                   | 1190   | 96.8        | 0.87                  | 3x1200                  | 29292                    | 2.10                                   | 119                   | 1500                                 |
| 8-pole   |  |  |             |                       |                         |                          |  |                       |                                      |
| 870  | <b>1RA6 450-8HP1</b>                                   | 893  | 95.3        | 0.84                  | 910                     | 9323                     | 2.30                                   | 32                    | 1200                                 |
| 960  | <b>1RA6 452-8HP1</b>                                   | 892  | 95.4        | 0.84                  | 1000                    | 10290                    | 2.20                                   | 36                    | 1200                                 |
| 1050   | <b>1RA6 454-8HP1</b>                                   | 893  | 95.5        | 0.84                  | 1100                    | 11239                    | 2.40                                   | 40                    | 1200                                 |
| 1180   | <b>1RA6 456-8HP1</b>                                   | 893  | 95.7        | 0.85                  | 1220                    | 12636                    | 2.30                                   | 46                    | 1200                                 |
| 1600   | <b>1RA6 500-8HP1</b>                                   | 892  | 96.0        | 0.83                  | 2x840                   | 17130                    | 1.85                                   | 69                    | 1125                                 |
| 1800   | <b>1RA6 502-8HP1</b>                                   | 892  | 96.1        | 0.83                  | 2x940                   | 19271                    | 1.90                                   | 76                    | 1125                                 |
| 2000   | <b>1RA6 504-8HP1</b>                                   | 893  | 96.3        | 0.83                  | 2x1040                  | 21389                    | 2.05                                   | 85                    | 1125                                 |
| 2200   | <b>1RA6 506-8HP1</b>                                   | 893  | 96.4        | 0.83                  | 2x1160                  | 23527                    | 2.05                                   | 94                    | 1125                                 |
| 2250   | <b>1RA6 560-8HP1</b>                                   | 893  | 96.7        | 0.84                  | 2x1160                  | 24062                    | 2.30                                   | 128                   | 1125                                 |
| 2600   | <b>1RA6 562-8HP1</b>                                   | 893  | 96.8        | 0.84                  | 4x670                   | 27805                    | 2.25                                   | 141                   | 1125                                 |
| 2900   | <b>1RA6 564-8HP1</b>                                   | 894  | 96.9        | 0.83                  | 4x750                   | 30979                    | 2.65                                   | 156                   | 1125                                 |
| 3250   | <b>1RA6 566-8HP1</b>                                   | 893  | 97.0        | 0.85                  | 4x820                   | 34756                    | 2.35                                   | 173                   | 1125                                 |

#### Type of construction:

|                        |   |
|------------------------|---|
| IM B3                  | 0 |
| IM V1 (without canopy) | 8 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation.

Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

Motor type  
(repeated)

Partial load values for square-law torque drive

 $P/P_{\text{rated}}$  155 (F) = 75 % $P/P_{\text{rated}}$  155 (F) = 50 % $P/P_{\text{rated}}$  155 (F) = 25 %

| $P$ | $n$ | $\eta$ | $\cos \varphi$ | $P$ | $n$ | $\eta$ | $\cos \varphi$ | $P$ | $n$ | $\eta$ | $\cos \varphi$ |
|-----|-----|--------|----------------|-----|-----|--------|----------------|-----|-----|--------|----------------|
| kW  | rpm | %      | [-]            | kW  | rpm | %      | [-]            | kW  | rpm | %      | [-]            |

#### Square-law torque drive

6-pole

|                |      |      |      |      |      |     |      |      |     |     |      |      |
|----------------|------|------|------|------|------|-----|------|------|-----|-----|------|------|
| 1RA6 450-6HP1. | 908  | 1083 | 96.3 | 0.82 | 605  | 947 | 96.4 | 0.79 | 303 | 753 | 96.0 | 0.67 |
| 1RA6 452-6HP1. | 1013 | 1083 | 96.5 | 0.82 | 675  | 947 | 96.5 | 0.78 | 338 | 753 | 96.2 | 0.67 |
| 1RA6 454-6HP1. | 1110 | 1083 | 96.5 | 0.84 | 740  | 947 | 96.6 | 0.81 | 370 | 753 | 96.3 | 0.71 |
| 1RA6 456-6HP1. | 1215 | 1084 | 96.8 | 0.84 | 810  | 947 | 96.8 | 0.81 | 405 | 753 | 96.5 | 0.71 |
| 1RA6 500-6HP1. | 1613 | 1082 | 96.5 | 0.83 | 1075 | 946 | 96.5 | 0.79 | 538 | 752 | 96.0 | 0.69 |
| 1RA6 502-6HP1. | 1800 | 1081 | 96.6 | 0.86 | 1200 | 945 | 96.7 | 0.84 | 600 | 752 | 96.5 | 0.78 |
| 1RA6 504-6HP1. | 2025 | 1082 | 96.7 | 0.83 | 1350 | 946 | 96.7 | 0.80 | 675 | 752 | 96.2 | 0.69 |
| 1RA6 506-6HP1. | 2213 | 1081 | 96.8 | 0.86 | 1475 | 946 | 96.9 | 0.85 | 738 | 752 | 96.7 | 0.78 |
| 1RA6 560-6HP1. | 2475 | 1083 | 97.0 | 0.87 | 1650 | 947 | 97.0 | 0.86 | 825 | 753 | 96.7 | 0.79 |
| 1RA6 562-6HP1. | 2738 | 1082 | 97.0 | 0.88 | 1825 | 946 | 97.1 | 0.87 | 913 | 752 | 97.0 | 0.83 |

8-pole

|                |      |     |      |      |      |     |      |      |     |     |      |      |
|----------------|------|-----|------|------|------|-----|------|------|-----|-----|------|------|
| 1RA6 450-8HP1. | 653  | 812 | 95.5 | 0.81 | 435  | 710 | 95.4 | 0.77 | 218 | 565 | 94.9 | 0.66 |
| 1RA6 452-8HP1. | 720  | 812 | 95.7 | 0.83 | 480  | 710 | 95.6 | 0.79 | 240 | 565 | 95.2 | 0.68 |
| 1RA6 454-8HP1. | 788  | 812 | 95.6 | 0.81 | 525  | 710 | 95.6 | 0.77 | 263 | 565 | 95.0 | 0.65 |
| 1RA6 456-8HP1. | 885  | 812 | 95.9 | 0.83 | 590  | 710 | 95.8 | 0.79 | 295 | 565 | 95.3 | 0.69 |
| 1RA6 500-8HP1. | 1200 | 811 | 96.1 | 0.83 | 800  | 709 | 96.1 | 0.80 | 400 | 564 | 95.7 | 0.71 |
| 1RA6 502-8HP1. | 1350 | 811 | 96.2 | 0.83 | 900  | 709 | 96.2 | 0.80 | 450 | 564 | 95.7 | 0.71 |
| 1RA6 504-8HP1. | 1500 | 812 | 96.3 | 0.82 | 1000 | 710 | 96.3 | 0.79 | 500 | 564 | 95.7 | 0.69 |
| 1RA6 506-8HP1. | 1650 | 812 | 96.4 | 0.82 | 1100 | 710 | 96.3 | 0.79 | 550 | 564 | 95.7 | 0.69 |
| 1RA6 560-8HP1. | 1688 | 812 | 96.8 | 0.84 | 1125 | 710 | 96.8 | 0.81 | 563 | 564 | 96.5 | 0.72 |
| 1RA6 562-8HP1. | 1950 | 812 | 96.9 | 0.84 | 1300 | 710 | 96.9 | 0.82 | 650 | 564 | 96.6 | 0.73 |
| 1RA6 564-8HP1. | 2175 | 813 | 96.9 | 0.82 | 1450 | 710 | 96.8 | 0.78 | 725 | 565 | 96.3 | 0.67 |
| 1RA6 566-8HP1. | 2438 | 812 | 97.1 | 0.84 | 1625 | 710 | 97.0 | 0.81 | 813 | 565 | 96.7 | 0.72 |

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

### Selection and ordering data

| Rated power                        |             | High voltage motor<br>H-compact PLUS | Operating values at rated output for utilization 155 (F) |                           |              |                          |                         |                          |                               |                                      |
|------------------------------------|-------------|--------------------------------------|--|---------------------------|--------------|--------------------------|-------------------------|--------------------------|-------------------------------|--------------------------------------|
| IEC                                | Article No. |                                      | Rated speed  | Efficiency                | Power factor | Rated current at 4.16 kV | Rated torque            | Break-down torque        | Moment of inertia             | Mechanical speed limit <sup>1)</sup> |
| $P_{155}^{\text{rated}}$ (F)<br>kW |             |                                      | $P_{130}^{\text{rated}}$ (B)<br>kW                       | $n_{\text{rated}}$<br>rpm | $\eta$<br>%  | $\cos \varphi$<br>[-]    | $I_{\text{rated}}$<br>A | $T_{\text{rated}}$<br>Nm | $T_B/T_{\text{rated}}$<br>[-] | J<br>kgm <sup>2</sup>                |

#### 3.4 ... 4.16 kV, 60 Hz

| 2-pole             |                |                       |      |      |      |       |       |      |     |                    |
|--------------------|----------------|-----------------------|------|------|------|-------|-------|------|-----|--------------------|
| 1600               | <sup>-5)</sup> | <b>1RA6 450-2HS30</b> | 3576 | 96.0 | 0.89 | 260   | 4274  | 2.10 | 13  | 3600 <sup>3)</sup> |
| 1850               | <sup>-5)</sup> | <b>1RA6 452-2HS30</b> | 3578 | 96.3 | 0.91 | 295   | 4941  | 2.30 | 14  | 3600 <sup>3)</sup> |
| 2060               | <sup>-5)</sup> | <b>1RA6 454-2HS30</b> | 3579 | 96.6 | 0.91 | 325   | 5500  | 2.30 | 16  | 3600 <sup>3)</sup> |
| 2300               | <sup>-5)</sup> | <b>1RA6 456-2HS30</b> | 3581 | 96.8 | 0.92 | 360   | 6137  | 2.40 | 18  | 3600 <sup>3)</sup> |
| 3000               | 2640           | <b>1RA6 500-2HS30</b> | 3572 | 96.5 | 0.89 | 485   | 8020  | 2.05 | 20  | 3600 <sup>3)</sup> |
| 3250               | 2860           | <b>1RA6 502-2HS30</b> | 3570 | 96.5 | 0.89 | 530   | 8693  | 1.95 | 22  | 3600 <sup>3)</sup> |
| 3700               | 3256           | <b>1RA6 504-2HS30</b> | 3576 | 96.8 | 0.91 | 580   | 9880  | 2.30 | 25  | 3600 <sup>3)</sup> |
| 4200               | 3696           | <b>1RA6 506-2HS30</b> | 3577 | 97.1 | 0.92 | 650   | 11212 | 2.45 | 27  | 3600 <sup>3)</sup> |
| 4600               | 4186           | <b>1RA6 560-2HS30</b> | 3577 | 96.8 | 0.90 | 730   | 12280 | 1.90 | 39  | 3600 <sup>3)</sup> |
| 5100               | 4641           | <b>1RA6 562-2HS30</b> | 3579 | 96.9 | 0.91 | 2x400 | 13608 | 2.05 | 43  | 3600 <sup>3)</sup> |
| 5900               | 5369           | <b>1RA6 564-2HS30</b> | 3580 | 97.1 | 0.92 | 2x460 | 15738 | 2.15 | 49  | 3600 <sup>3)</sup> |
| 6700               | 6097           | <b>1RA6 566-2HS30</b> | 3582 | 97.3 | 0.92 | 2x520 | 17862 | 2.45 | 54  | 3600 <sup>3)</sup> |
| 4-pole             |                |                       |      |      |      |       |       |      |     |                    |
| 1630               | <sup>-5)</sup> | <b>1RA6 450-4HS3</b>  | 1782 | 95.7 | 0.89 | 265   | 8742  | 2.30 | 20  | 1800               |
| 1750               | <sup>-5)</sup> | <b>1RA6 452-4HS3</b>  | 1783 | 95.9 | 0.89 | 285   | 9375  | 2.40 | 22  | 1800               |
| 2070               | <sup>-5)</sup> | <b>1RA6 454-4HS3</b>  | 1784 | 96.1 | 0.90 | 330   | 11088 | 2.50 | 25  | 1800               |
| 2310               | <sup>-5)</sup> | <b>1RA6 456-4HS3</b>  | 1786 | 96.3 | 0.89 | 375   | 12358 | 2.50 | 29  | 1800               |
| 3100 <sup>4)</sup> | 2728           | <b>1RA6 500-4HS30</b> | 1785 | 96.7 | 0.90 | 495   | 16584 | 2.30 | 42  | 1800               |
| 3450 <sup>4)</sup> | 3036           | <b>1RA6 502-4HS30</b> | 1785 | 96.8 | 0.90 | 550   | 18457 | 2.20 | 46  | 1800               |
| 3800 <sup>4)</sup> | 3344           | <b>1RA6 504-4HS30</b> | 1786 | 97.0 | 0.91 | 600   | 20318 | 2.35 | 52  | 1800               |
| 4100 <sup>4)</sup> | 3608           | <b>1RA6 506-4HS30</b> | 1787 | 97.0 | 0.91 | 640   | 21909 | 2.40 | 56  | 1800               |
| 4700 <sup>4)</sup> | 4277           | <b>1RA6 560-4HS30</b> | 1789 | 97.2 | 0.90 | 750   | 25088 | 1.95 | 84  | 1800               |
| 5400 <sup>4)</sup> | 4914           | <b>1RA6 562-4HS30</b> | 1789 | 97.3 | 0.90 | 2x430 | 28824 | 1.95 | 94  | 1800               |
| 6000 <sup>4)</sup> | 5460           | <b>1RA6 564-4HS30</b> | 1789 | 97.4 | 0.91 | 2x470 | 32027 | 2.05 | 105 | 1800               |
| 6600 <sup>4)</sup> | 6006           | <b>1RA6 566-4HS30</b> | 1790 | 97.5 | 0.91 | 2x520 | 35210 | 2.10 | 115 | 1800               |
| 7400 <sup>2)</sup> | <sup>-5)</sup> | <b>1RA4 632-4HV5</b>  | 1790 | 97.3 | 0.89 | 1180  | 39480 | 1.90 | 150 | 1800               |

#### Type of construction:

|                        |   |
|------------------------|---|
| IM B3                  | 0 |
| IM V1 (without canopy) | 8 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see Page 3/2.

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> Rated voltage less than 4.16 kV on request.

<sup>3)</sup> There are speed exclusion ranges for this type. It must be ensured that the motors are not continuously operated in these speed ranges. The exclusion ranges must be clarified in advance in the factory.

<sup>4)</sup> Data of vertical motors (IM V1) on request.

<sup>5)</sup> Utilization 130 (B) on request.



## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

| Motor type<br>(repeated) | Partial load values for square-law torque drive |      |        |                |                                     |      |        |                |                                     |      |        |                |
|--------------------------|---|------|--------|----------------|-------------------------------------|------|--------|----------------|-------------------------------------|------|--------|----------------|
|                          | $P/P_{\text{rated}}$ 155 (F) = 75 %             |      |        |                | $P/P_{\text{rated}}$ 155 (F) = 50 % |      |        |                | $P/P_{\text{rated}}$ 155 (F) = 25 % |      |        |                |
|                          | $P$   | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$  | $\eta$ | $\cos \varphi$ |
|                          | kW  | rpm  | %      | [-]            | kW                                  | rpm  | %      | [-]            | kW                                  | rpm  | %      | [-]            |
|                          | <b>Square-law torque drive</b>                  |      |        |                |                                     |      |        |                |                                     |      |        |                |
| <b>2-pole</b>            |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RA6 450-2...            | 1201  | 3251 | 96.1   | 0.90           | 800                                 | 2843 | 96.2   | 0.90           | 400                                 | 2260 | 96.1   | 0.85           |
| 1RA6 452-2...            | 1389  | 3253 | 96.4   | 0.91           | 925                                 | 2844 | 96.5   | 0.91           | 463                                 | 2261 | 96.3   | 0.87           |
| 1RA6 454-2...            | 1545  | 3254 | 96.7   | 0.91           | 1030                                | 2845 | 96.7   | 0.90           | 515                                 | 2261 | 96.5   | 0.86           |
| 1RA6 456-2...            | 1725  | 3256 | 96.9   | 0.92           | 1150                                | 2846 | 96.9   | 0.91           | 575                                 | 2262 | 96.7   | 0.87           |
| 1RA6 500-2...            | 2251  | 3251 | 96.7   | 0.89           | 1500                                | 2844 | 96.8   | 0.87           | 750                                 | 2260 | 96.6   | 0.79           |
| 1RA6 502-2...            | 2439  | 3250 | 96.7   | 0.89           | 1626                                | 2843 | 96.8   | 0.88           | 813                                 | 2259 | 96.8   | 0.83           |
| 1RA6 504-2...            | 2776  | 3254 | 97.0   | 0.91           | 1850                                | 2845 | 97.0   | 0.89           | 926                                 | 2261 | 96.9   | 0.83           |
| 1RA6 506-2...            | 3151  | 3254 | 97.2   | 0.91           | 2100                                | 2846 | 97.2   | 0.89           | 1051                                | 2261 | 97.1   | 0.83           |
| 1RA6 560-2...            | 3452  | 3255 | 96.9   | 0.90           | 2301                                | 2846 | 97.0   | 0.88           | 1150                                | 2262 | 96.9   | 0.83           |
| 1RA6 562-2...            | 3827  | 3256 | 97.0   | 0.90           | 2551                                | 2847 | 97.1   | 0.89           | 1275                                | 2262 | 97.0   | 0.84           |
| 1RA6 564-2...            | 4427  | 3257 | 97.3   | 0.91           | 2951                                | 2848 | 97.3   | 0.90           | 1476                                | 2262 | 97.2   | 0.85           |
| 1RA6 566-2...            | 5026  | 3258 | 97.4   | 0.92           | 3350                                | 2849 | 97.4   | 0.90           | 1676                                | 2263 | 97.2   | 0.83           |
| <b>4-pole</b>            |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RA6 450-4...            | 1224  | 1622 | 96.0   | 0.89           | 815                                 | 1419 | 96.1   | 0.88           | 408                                 | 1129 | 96.0   | 0.83           |
| 1RA6 452-4...            | 1313  | 1623 | 96.1   | 0.89           | 875                                 | 1420 | 96.2   | 0.88           | 438                                 | 1129 | 96.1   | 0.82           |
| 1RA6 454-4...            | 1553  | 1623 | 96.3   | 0.90           | 1035                                | 1420 | 96.4   | 0.89           | 518                                 | 1129 | 96.3   | 0.83           |
| 1RA6 456-4...            | 1733  | 1624 | 96.5   | 0.89           | 1155                                | 1421 | 96.5   | 0.87           | 578                                 | 1130 | 96.2   | 0.80           |
| 1RA6 500-4...            | 2326  | 1625 | 96.8   | 0.89           | 1550                                | 1421 | 96.8   | 0.86           | 775                                 | 1130 | 96.6   | 0.75           |
| 1RA6 502-4...            | 2589  | 1625 | 96.9   | 0.89           | 1725                                | 1421 | 96.9   | 0.86           | 863                                 | 1130 | 96.8   | 0.77           |
| 1RA6 504-4...            | 2851  | 1626 | 97.1   | 0.90           | 1900                                | 1422 | 97.1   | 0.87           | 950                                 | 1130 | 96.8   | 0.78           |
| 1RA6 506-4...            | 3076  | 1626 | 97.1   | 0.90           | 2050                                | 1422 | 97.1   | 0.87           | 1025                                | 1130 | 96.8   | 0.77           |
| 1RA6 560-4...            | 3527  | 1628 | 97.3   | 0.89           | 2350                                | 1423 | 97.3   | 0.87           | 1176                                | 1131 | 97.2   | 0.80           |
| 1RA6 562-4...            | 4052  | 1628 | 97.4   | 0.90           | 2701                                | 1423 | 97.5   | 0.89           | 1351                                | 1131 | 97.4   | 0.83           |
| 1RA6 564-4...            | 4502  | 1628 | 97.5   | 0.90           | 3000                                | 1423 | 97.5   | 0.89           | 1501                                | 1131 | 97.4   | 0.82           |
| 1RA6 566-4...            | 4952  | 1628 | 97.6   | 0.91           | 3300                                | 1423 | 97.7   | 0.90           | 1651                                | 1131 | 97.5   | 0.84           |
| 1RA4 632-4...            | 5550  | 1626 | 97.5   | 0.90           | 3700                                | 1421 | 97.1   | 0.87           | 1850                                | 1128 | 96.5   | 0.75           |

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

### Selection and ordering data

| Rated power                   |                 | High voltage motor<br>H-compact PLUS | Operating values at rated output for utilization 155 (F) |                    |              |                          |                  |                   |                        |                                      |
|-------------------------------|-----------------|--------------------------------------|--|--------------------|--------------|--------------------------|------------------|-------------------|------------------------|--------------------------------------|
| IEC                           | Article No.     |                                      | Rated speed  | Efficiency         | Power factor | Rated current at 4.16 kV | Rated torque     | Break-down torque | Moment of inertia      | Mechanical speed limit <sup>1)</sup> |
| $P_{155(F)}^{rated}$<br>kW    |                 |                                      | $P_{130(B)}^{rated}$<br>kW                               | $n_{rated}$<br>rpm | $\eta$<br>%  | $\cos \varphi$<br>[-]    | $I_{rated}$<br>A | $T_{rated}$<br>Nm | $T_B/T_{rated}$<br>[-] | J<br>kgm <sup>2</sup>                |
| <b>3.4 ... 4.16 kV, 60 Hz</b> |                 |                                      |  |                    |              |                          |                  |                   |                        |                                      |
| 6-pole                        |                 |                                      |  |                    |              |                          |                  |                   |                        |                                      |
| 1210                          | — <sup>2)</sup> | <b>1RA6 450-6HS3</b>                 | 1190   | 96.0               | 0.84         | 210                      | 9715             | 2.40              | 26                     | 1200                                 |
| 1350                          | — <sup>2)</sup> | <b>1RA6 452-6HS3</b>                 | 1191   | 96.2               | 0.85         | 230                      | 10833            | 2.40              | 29                     | 1200                                 |
| 1480                          | — <sup>2)</sup> | <b>1RA6 454-6HS3</b>                 | 1191   | 96.3               | 0.85         | 250                      | 11875            | 2.50              | 32                     | 1200                                 |
| 1620                          | — <sup>2)</sup> | <b>1RA6 456-6HS3</b>                 | 1191   | 96.4               | 0.87         | 270                      | 12995            | 2.50              | 37                     | 1200                                 |
| 2350                          | 2100            | <b>1RA6 500-6HS3</b>                 | 1187   | 96.0               | 0.85         | 400                      | 18907            | 1.65              | 56                     | 1500                                 |
| 2600                          | 2350            | <b>1RA6 502-6HS3</b>                 | 1188   | 96.4               | 0.84         | 445                      | 20901            | 1.85              | 62                     | 1500                                 |
| 2900                          | 2600            | <b>1RA6 504-6HS3</b>                 | 1187   | 96.3               | 0.85         | 490                      | 23332            | 1.70              | 69                     | 1500                                 |
| 3100                          | 2800            | <b>1RA6 506-6HS3</b>                 | 1188   | 96.4               | 0.86         | 520                      | 24920            | 1.75              | 77                     | 1500                                 |
| 3750                          | 3300            | <b>1RA6 560-6HS3</b>                 | 1189   | 96.6               | 0.86         | 630                      | 30120            | 2.00              | 108                    | 1500                                 |
| 4250                          | 3750            | <b>1RA6 562-6HS3</b>                 | 1189   | 96.8               | 0.86         | 710                      | 34136            | 2.05              | 119                    | 1500                                 |
| 4700                          | 4150            | <b>1RA6 564-6HS3</b>                 | 1190   | 96.9               | 0.87         | 770                      | 37718            | 2.15              | 132                    | 1500                                 |
| 5100                          | 4500            | <b>1RA6 566-6HS3</b>                 | 1190   | 97.0               | 0.87         | 840                      | 40929            | 2.20              | 146                    | 1500                                 |
| 8-pole                        |                 |                                      |  |                    |              |                          |                  |                   |                        |                                      |
| 870                           | — <sup>2)</sup> | <b>1RA6 450-8HS3</b>                 | 893  | 95.2               | 0.81         | 156                      | 9308             | 2.50              | 32                     | 1200                                 |
| 960                           | — <sup>2)</sup> | <b>1RA6 452-8HS3</b>                 | 893  | 95.3               | 0.82         | 170                      | 10269            | 2.50              | 36                     | 1200                                 |
| 1050                          | — <sup>2)</sup> | <b>1RA6 454-8HS3</b>                 | 893  | 95.4               | 0.84         | 182                      | 11239            | 2.40              | 40                     | 1200                                 |
| 1180                          | — <sup>2)</sup> | <b>1RA6 456-8HS3</b>                 | 894  | 95.6               | 0.82         | 210                      | 12613            | 2.50              | 46                     | 1200                                 |
| 1640                          | 1480            | <b>1RA6 500-8HS3</b>                 | 891  | 95.7               | 0.83         | 285                      | 17578            | 1.75              | 69                     | 1125                                 |
| 1840                          | 1660            | <b>1RA6 502-8HS3</b>                 | 892  | 96.0               | 0.83         | 320                      | 19700            | 1.90              | 76                     | 1125                                 |
| 2050                          | 1860            | <b>1RA6 504-8HS3</b>                 | 892  | 96.0               | 0.84         | 355                      | 21948            | 1.80              | 85                     | 1125                                 |
| 2300                          | 2050            | <b>1RA6 506-8HS3</b>                 | 892  | 96.1               | 0.84         | 395                      | 24624            | 1.95              | 94                     | 1125                                 |
| 2650                          | 2350            | <b>1RA6 560-8HS3</b>                 | 892  | 96.4               | 0.84         | 455                      | 28372            | 1.95              | 128                    | 1125                                 |
| 3000                          | 2650            | <b>1RA6 562-8HS3</b>                 | 891  | 96.5               | 0.84         | 510                      | 32155            | 1.90              | 141                    | 1125                                 |
| 3300                          | 2900            | <b>1RA6 564-8HS3</b>                 | 891  | 96.6               | 0.84         | 560                      | 35370            | 1.90              | 156                    | 1125                                 |
| 3500                          | 3100            | <b>1RA6 566-8HS3</b>                 | 892  | 96.8               | 0.85         | 590                      | 37472            | 2.05              | 173                    | 1125                                 |

#### Type of construction:

|                        |   |
|------------------------|---|
| IM B3                  | 0 |
| IM V1 (without canopy) | 8 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> Utilization 130 (B) on request.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

| Motor type<br>(repeated)       | Partial load values for square-law torque drive |      |        |                |                              |     |        |                |                              |     |        |                |
|--------------------------------|---|------|--------|----------------|------------------------------|-----|--------|----------------|------------------------------|-----|--------|----------------|
|                                | $P/P_{rated}$ 155 (F) = 75 %                    |      |        |                | $P/P_{rated}$ 155 (F) = 50 % |     |        |                | $P/P_{rated}$ 155 (F) = 25 % |     |        |                |
|                                | $P$   | $n$  | $\eta$ | $\cos \varphi$ | $P$                          | $n$ | $\eta$ | $\cos \varphi$ | $P$                          | $n$ | $\eta$ | $\cos \varphi$ |
|                                | kW  | rpm  | %      | [-]            | kW                           | rpm | %      | [-]            | kW                           | rpm | %      | [-]            |
| <b>Square-law torque drive</b> |   |      |        |                |                              |     |        |                |                              |     |        |                |
| <b>6-pole</b>                  |   |      |        |                |                              |     |        |                |                              |     |        |                |
| 1RA6 450-6...                  | 908   | 1083 | 96.2   | 0.83           | 605                          | 947 | 96.2   | 0.80           | 303                          | 753 | 96.0   | 0.69           |
| 1RA6 452-6...                  | 1013  | 1083 | 96.3   | 0.84           | 675                          | 947 | 96.4   | 0.80           | 338                          | 753 | 96.1   | 0.70           |
| 1RA6 454-6...                  | 1110  | 1083 | 96.5   | 0.84           | 740                          | 947 | 96.5   | 0.81           | 370                          | 753 | 96.3   | 0.71           |
| 1RA6 456-6...                  | 1215  | 1083 | 96.6   | 0.86           | 810                          | 947 | 96.7   | 0.83           | 405                          | 753 | 96.5   | 0.74           |
| 1RA6 500-6...                  | 1763  | 1079 | 96.3   | 0.85           | 1175                         | 944 | 96.4   | 0.84           | 588                          | 751 | 96.3   | 0.78           |
| 1RA6 502-6...                  | 1950  | 1081 | 96.5   | 0.84           | 1300                         | 945 | 96.6   | 0.82           | 650                          | 752 | 96.3   | 0.74           |
| 1RA6 504-6...                  | 2175  | 1080 | 96.5   | 0.85           | 1450                         | 945 | 96.6   | 0.85           | 725                          | 751 | 96.5   | 0.79           |
| 1RA6 506-6...                  | 2325  | 1081 | 96.6   | 0.86           | 1550                         | 945 | 96.7   | 0.85           | 775                          | 752 | 96.6   | 0.79           |
| 1RA6 560-6...                  | 2813  | 1081 | 96.8   | 0.87           | 1875                         | 946 | 96.9   | 0.87           | 938                          | 752 | 96.8   | 0.82           |
| 1RA6 562-6...                  | 3188  | 1082 | 97.0   | 0.87           | 2125                         | 946 | 97.0   | 0.86           | 1063                         | 752 | 96.9   | 0.81           |
| 1RA6 564-6...                  | 3525  | 1082 | 97.0   | 0.87           | 2350                         | 946 | 97.1   | 0.86           | 1175                         | 752 | 96.9   | 0.80           |
| 1RA6 566-6...                  | 3825  | 1082 | 97.1   | 0.88           | 2550                         | 946 | 97.2   | 0.87           | 1275                         | 753 | 97.0   | 0.81           |
| <b>8-pole</b>                  |   |      |        |                |                              |     |        |                |                              |     |        |                |
| 1RA6 450-8...                  | 653   | 812  | 95.2   | 0.79           | 435                          | 710 | 95.1   | 0.74           | 218                          | 565 | 94.3   | 0.61           |
| 1RA6 452-8...                  | 720   | 812  | 95.4   | 0.80           | 480                          | 710 | 95.3   | 0.75           | 240                          | 565 | 94.5   | 0.62           |
| 1RA6 454-8...                  | 788   | 812  | 95.5   | 0.83           | 525                          | 710 | 95.5   | 0.79           | 263                          | 565 | 95.0   | 0.69           |
| 1RA6 456-8...                  | 885   | 813  | 95.6   | 0.79           | 590                          | 711 | 95.5   | 0.75           | 295                          | 565 | 94.8   | 0.62           |
| 1RA6 500-8...                  | 1230  | 810  | 95.9   | 0.83           | 820                          | 709 | 95.9   | 0.81           | 410                          | 564 | 95.5   | 0.72           |
| 1RA6 502-8...                  | 1380  | 811  | 96.0   | 0.82           | 920                          | 709 | 96.0   | 0.79           | 460                          | 564 | 95.5   | 0.70           |
| 1RA6 504-8...                  | 1538  | 811  | 96.1   | 0.83           | 1025                         | 709 | 96.1   | 0.81           | 513                          | 564 | 95.7   | 0.72           |
| 1RA6 506-8...                  | 1725  | 811  | 96.2   | 0.83           | 1150                         | 709 | 96.1   | 0.80           | 575                          | 564 | 95.6   | 0.71           |
| 1RA6 560-8...                  | 1988  | 811  | 96.6   | 0.84           | 1325                         | 709 | 96.7   | 0.83           | 663                          | 564 | 96.5   | 0.75           |
| 1RA6 562-8...                  | 2250  | 810  | 96.7   | 0.85           | 1500                         | 709 | 96.8   | 0.83           | 750                          | 564 | 96.7   | 0.77           |
| 1RA6 564-8...                  | 2475  | 811  | 96.8   | 0.85           | 1650                         | 709 | 96.9   | 0.84           | 825                          | 564 | 96.8   | 0.77           |
| 1RA6 566-8...                  | 2625  | 811  | 96.9   | 0.85           | 1750                         | 709 | 97.0   | 0.83           | 875                          | 564 | 96.8   | 0.76           |

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

### Selection and ordering data

| Rated power                   |             | High voltage motor<br>SIMOTICS HV M (modular) | Operating values at rated output for utilization 130 (B) |                    |              |                          |                  |                   |                        |                                      |
|-------------------------------|-------------|---|--|--------------------|--------------|--------------------------|------------------|-------------------|------------------------|--------------------------------------|
| IEC                           | Article No. |   | Rated speed  | Efficiency         | Power factor | Rated current at 4.16 kV | Rated torque     | Break-down torque | Moment of inertia      | Mechanical speed limit <sup>1)</sup> |
| $P_{rated}$<br>155 (F)<br>kW  |             |   | $P_{rated}$<br>130 (B)<br>kW                             | $n_{rated}$<br>rpm | $\eta$<br>%  | $\cos \varphi$<br>[-]    | $I_{rated}$<br>A | $T_{rated}$<br>Nm | $T_B/T_{rated}$<br>[-] | J<br>kgm <sup>2</sup>                |
| <b>3.4 ... 4.16 kV, 60 Hz</b> |             |   |  |                    |              |                          |                  |                   |                        |                                      |
| 2-pole                        |             |   |  |                    |              |                          |                  |                   |                        |                                      |
| 11660                         | 10600       | <b>1RA7 710-2 ■ ■ 30-0CJ0</b>                 | 3585   | 97.3               | 0.91         | 1660                     | 28235            | 2.05              | 148                    | 3600                                 |
| 12980                         | 11800       | <b>1RA7 712-2 ■ ■ 30-0CJ0</b>                 | 3586   | 97.4               | 0.91         | 1840                     | 31423            | 2.05              | 158                    | 3600                                 |
| 14300                         | 13000       | <b>1RA7 714-2 ■ ■ 30-0CJ0</b>                 | 3586   | 97.5               | 0.93         | 1980                     | 34618            | 2.25              | 175                    | 3600                                 |
| 15070                         | 13700       | <b>1RA7 716-2 ■ ■ 30-0CJ0</b>                 | 3586   | 97.5               | 0.93         | 2100                     | 36482            | 2.25              | 189                    | 3600                                 |
| 4-pole                        |             |   |  |                    |              |                          |                  |                   |                        |                                      |
| 10976                         | 9800        | <b>1RA7 710-4 ■ ■ 30-0CJ0</b>                 | 1791   | 97.6               | 0.90         | 1540                     | 52252            | 2.15              | 262                    | 1800                                 |
| 12208                         | 10900       | <b>1RA7 712-4 ■ ■ 30-0CJ0</b>                 | 1792   | 97.6               | 0.90         | 1720                     | 58084            | 2.15              | 286                    | 1800                                 |
| 13552                         | 12100       | <b>1RA7 714-4 ■ ■ 30-0CJ0</b>                 | 1792   | 97.7               | 0.91         | 1880                     | 64479            | 2.35              | 321                    | 1800                                 |
| 15120                         | 13500       | <b>1RA7 716-4 ■ ■ 30-0CJ0</b>                 | 1792   | 97.8               | 0.91         | 2100                     | 71939            | 2.35              | 362                    | 1800                                 |
| 6-pole                        |             |   |  |                    |              |                          |                  |                   |                        |                                      |
| 8400                          | 7500        | <b>1RA7 710-6 ■ ■ 3-0CJ0</b>                  | 1194   | 97.4               | 0.86         | 1240                     | 59983            | 2.15              | 350                    | 1800                                 |
| 9296                          | 8300        | <b>1RA7 712-6 ■ ■ 3-0CJ0</b>                  | 1195   | 97.4               | 0.86         | 1380                     | 66326            | 2.20              | 396                    | 1800                                 |
| 10304                         | 9200        | <b>1RA7 714-6 ■ ■ 3-0CJ0</b>                  | 1195   | 97.5               | 0.85         | 1540                     | 73518            | 2.35              | 448                    | 1800                                 |
| 11480                         | 10250       | <b>1RA7 716-6 ■ ■ 3-0CJ0</b>                  | 1195   | 97.6               | 0.86         | 1700                     | 81908            | 2.35              | 496                    | 1800                                 |
| 8-pole                        |             |   |  |                    |              |                          |                  |                   |                        |                                      |
| 5936                          | 5300        | <b>1RA7 710-8 ■ ■ 3-0CJ0</b>                  | 895  | 97.0               | 0.84         | 900                      | 56549            | 2.05              | 433                    | 1000                                 |
| 6720                          | 6000        | <b>1RA7 712-8 ■ ■ 3-0CJ0</b>                  | 895  | 97.1               | 0.85         | 1000                     | 64018            | 2.10              | 493                    | 1000                                 |
| 7504                          | 6700        | <b>1RA7 714-8 ■ ■ 3-0CJ0</b>                  | 895  | 97.3               | 0.86         | 1120                     | 71486            | 2.10              | 558                    | 1000                                 |
| 8400                          | 7500        | <b>1RA7 716-8 ■ ■ 3-0CJ0</b>                  | 896  | 97.3               | 0.86         | 1240                     | 79933            | 2.10              | 616                    | 1000                                 |
| 10-pole                       |             |   |  |                    |              |                          |                  |                   |                        |                                      |
| 4536                          | 4050        | <b>1RA7 710-3 ■ ■ 3-0CJ0</b>                  | 715  | 96.8               | 0.85         | 680                      | 54090            | 2.20              | 430                    | 900                                  |
| 4984                          | 4450        | <b>1RA7 712-3 ■ ■ 3-0CJ0</b>                  | 715  | 96.9               | 0.85         | 750                      | 59433            | 2.20              | 488                    | 900                                  |
| 5488                          | 4900        | <b>1RA7 714-3 ■ ■ 3-0CJ0</b>                  | 715  | 96.9               | 0.85         | 830                      | 65443            | 2.20              | 552                    | 900                                  |
| 6048                          | 5400        | <b>1RA7 716-3 ■ ■ 3-0CJ0</b>                  | 715  | 97.0               | 0.86         | 900                      | 72121            | 2.20              | 613                    | 900                                  |

#### Cooling method

See page 1/8

#### Motor for line operation or for converter operation

See page 1/9

#### Type of construction

See page 1/9

#### Housing and bearing version

See page 1/9

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7


| Motor type<br>(repeated) | Partial load values for square-law torque drive |      |        |                |                                     |      |        |                |                                     |      |        |                |
|--------------------------|---|------|--------|----------------|-------------------------------------|------|--------|----------------|-------------------------------------|------|--------|----------------|
|                          | $P/P_{\text{rated}}$ 130 (B) = 75 %             |      |        |                | $P/P_{\text{rated}}$ 130 (B) = 50 % |      |        |                | $P/P_{\text{rated}}$ 130 (B) = 25 % |      |        |                |
|                          | $P$   | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$  | $\eta$ | $\cos \varphi$ |
|                          | kW  | rpm  | %      | [-]            | kW                                  | rpm  | %      | [-]            | kW                                  | rpm  | %      | [-]            |
|                          | <b>Square-law torque drive</b>                  |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 2-pole                   |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RA7 710-2...            | 7947  | 3258 | 97.2   | 0.92           | 5298                                | 2847 | 97.1   | 0.92           | 2649                                | 2263 | 96.8   | 0.90           |
| 1RA7 712-2...            | 8850  | 3258 | 97.4   | 0.92           | 5900                                | 2847 | 97.3   | 0.92           | 2949                                | 2263 | 96.9   | 0.90           |
| 1RA7 714-2...            | 9755  | 3259 | 97.5   | 0.93           | 6503                                | 2848 | 97.3   | 0.93           | 3251                                | 2263 | 97.0   | 0.91           |
| 1RA7 716-2...            | 10275   | 3259 | 97.5   | 0.94           | 6850                                | 2848 | 97.4   | 0.94           | 3425                                | 2263 | 97.1   | 0.92           |
| 4-pole                   |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RA7 710-4...            | 7353  | 1628 | 97.6   | 0.91           | 4904                                | 1423 | 97.5   | 0.91           | 2455                                | 1131 | 97.2   | 0.88           |
| 1RA7 712-4...            | 8179  | 1628 | 97.6   | 0.91           | 5454                                | 1423 | 97.5   | 0.91           | 2731                                | 1131 | 97.2   | 0.89           |
| 1RA7 714-4...            | 9083  | 1629 | 97.7   | 0.91           | 6058                                | 1423 | 97.6   | 0.91           | 3033                                | 1131 | 97.2   | 0.88           |
| 1RA7 716-4...            | 10135   | 1629 | 97.8   | 0.92           | 6758                                | 1423 | 97.7   | 0.92           | 3384                                | 1131 | 97.3   | 0.89           |
| 6-pole                   |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RA7 710-6...            | 5631  | 1085 | 97.3   | 0.85           | 3756                                | 948  | 97.1   | 0.84           | 1880                                | 754  | 96.6   | 0.77           |
| 1RA7 712-6...            | 6229  | 1086 | 97.3   | 0.85           | 4154                                | 949  | 97.1   | 0.83           | 2080                                | 754  | 96.5   | 0.75           |
| 1RA7 714-6...            | 6904  | 1086 | 97.4   | 0.85           | 4604                                | 949  | 97.1   | 0.82           | 2305                                | 754  | 96.5   | 0.74           |
| 1RA7 716-6...            | 7693  | 1086 | 97.5   | 0.85           | 5130                                | 949  | 97.2   | 0.83           | 2568                                | 754  | 96.7   | 0.75           |
| 8-pole                   |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RA7 710-8...            | 3980  | 814  | 96.9   | 0.84           | 2654                                | 711  | 96.7   | 0.82           | 1329                                | 565  | 96.0   | 0.74           |
| 1RA7 712-8...            | 4505  | 814  | 97.0   | 0.85           | 3005                                | 711  | 96.8   | 0.83           | 1504                                | 565  | 96.2   | 0.75           |
| 1RA7 714-8...            | 5031  | 814  | 97.1   | 0.85           | 3356                                | 711  | 97.0   | 0.84           | 1680                                | 565  | 96.4   | 0.76           |
| 1RA7 716-8...            | 5631  | 814  | 97.2   | 0.85           | 3756                                | 711  | 97.0   | 0.83           | 1880                                | 565  | 96.4   | 0.76           |
| 10-pole                  |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RA7 710-3...            | 3040  | 650  | 96.6   | 0.83           | 2028                                | 568  | 96.4   | 0.80           | 1016                                | 452  | 95.7   | 0.69           |
| 1RA7 712-3...            | 3341  | 650  | 96.8   | 0.84           | 2228                                | 568  | 96.5   | 0.80           | 1116                                | 452  | 95.9   | 0.70           |
| 1RA7 714-3...            | 3678  | 650  | 96.8   | 0.84           | 2454                                | 568  | 96.6   | 0.81           | 1229                                | 452  | 95.9   | 0.71           |
| 1RA7 716-3...            | 4054  | 650  | 96.9   | 0.85           | 2704                                | 568  | 96.7   | 0.82           | 1355                                | 452  | 96.1   | 0.73           |

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

### Dimension drawings

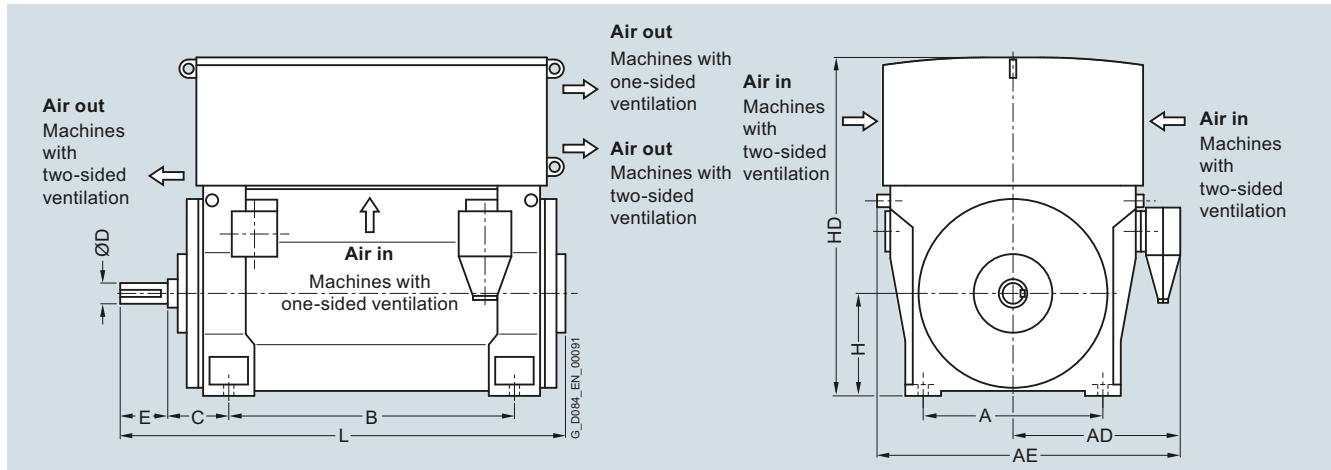

| Motor type | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |                        |         |
|------------|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|------------------------|---------|
|            |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>3)</sup><br>mm | L<br>mm |

#### Up to 6.6 kV, anti-friction bearings, IM B3 type of construction

##### 2-pole

|                             |      |     |      |      |      |     |     |     |     |      |      |
|-----------------------------|------|-----|------|------|------|-----|-----|-----|-----|------|------|
| 1RA6450-2H..0 <sup>2)</sup> | 3700 | 850 | 930  | 1620 | 1180 | 280 | 95  | 130 | 450 | 1628 | 1843 |
| 1RA6452-2H..0 <sup>2)</sup> | 3900 | 850 | 930  | 1620 | 1180 | 280 | 95  | 130 | 450 | 1628 | 1843 |
| 1RA6454-2H..0 <sup>2)</sup> | 4300 | 850 | 930  | 1620 | 1400 | 280 | 95  | 130 | 450 | 1628 | 2053 |
| 1RA6456-2H..0 <sup>2)</sup> | 4550 | 850 | 930  | 1620 | 1400 | 280 | 95  | 130 | 450 | 1628 | 2053 |
| 1RA6500-2H..0 <sup>2)</sup> | 5450 | 950 | 1135 | 1835 | 1320 | 315 | 110 | 165 | 500 | 1850 | 2150 |
| 1RA6502-2H..0 <sup>2)</sup> | 5600 | 950 | 1135 | 1835 | 1320 | 315 | 110 | 165 | 500 | 1850 | 2150 |

##### 4-pole

|                             |       |      |      |      |      |     |     |     |     |      |      |
|-----------------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RA6450-4H..0               | 4050  | 850  | 930  | 1620 | 1180 | 250 | 130 | 200 | 450 | 1408 | 1896 |
| 1RA6452-4H..0               | 4250  | 850  | 930  | 1620 | 1180 | 250 | 130 | 200 | 450 | 1408 | 1896 |
| 1RA6454-4H..0               | 4650  | 850  | 930  | 1620 | 1400 | 250 | 130 | 200 | 450 | 1408 | 2106 |
| 1RA6456-4H..0               | 4950  | 850  | 930  | 1620 | 1400 | 250 | 130 | 200 | 450 | 1408 | 2106 |
| 1RA6500-4H..0               | 5950  | 950  | 1135 | 1835 | 1320 | 280 | 150 | 200 | 500 | 1850 | 2150 |
| 1RA6502-4H..0               | 6150  | 950  | 1135 | 1835 | 1320 | 280 | 150 | 200 | 500 | 1850 | 2150 |
| 1RA6504-4H..0               | 6800  | 950  | 1135 | 1835 | 1500 | 280 | 150 | 200 | 500 | 1850 | 2300 |
| 1RA6506-4H..0               | 7150  | 950  | 1135 | 1835 | 1500 | 280 | 150 | 200 | 500 | 1850 | 2300 |
| 1RA6560-4H..0               | 7450  | 1060 | 1205 | 1975 | 1400 | 315 | 170 | 240 | 560 | 2100 | 2300 |
| 1RA6562-4H..0               | 7850  | 1060 | 1205 | 1975 | 1400 | 315 | 170 | 240 | 560 | 2100 | 2300 |
| 1RA6564-4H..0               | 8700  | 1060 | 1205 | 1975 | 1600 | 315 | 170 | 240 | 560 | 2100 | 2550 |
| 1RA6566-4H..0               | 9250  | 1060 | 1205 | 1975 | 1600 | 315 | 170 | 240 | 560 | 2100 | 2550 |
| 1RA4630-4H..0 <sup>2)</sup> | 9950  | 1320 | 1330 | 2210 | 1600 | 335 | 200 | 280 | 630 | 2400 | 2500 |
| 1RA4632-4H..0 <sup>2)</sup> | 10650 | 1320 | 1330 | 2210 | 1600 | 335 | 200 | 280 | 630 | 2400 | 2500 |
| 1RA4634-4H..0 <sup>2)</sup> | 11700 | 1320 | 1330 | 2210 | 1800 | 335 | 220 | 280 | 630 | 2400 | 2740 |
| 1RA4636-4H..0 <sup>2)</sup> | 12250 | 1320 | 1330 | 2210 | 1800 | 335 | 220 | 280 | 630 | 2400 | 2740 |

##### 6-pole

|               |      |     |     |      |      |     |     |     |     |      |      |
|---------------|------|-----|-----|------|------|-----|-----|-----|-----|------|------|
| 1RA6450-6H..0 | 4150 | 850 | 930 | 1620 | 1180 | 250 | 140 | 200 | 450 | 1408 | 1896 |
| 1RA6452-6H..0 | 4400 | 850 | 930 | 1620 | 1180 | 250 | 140 | 200 | 450 | 1408 | 1896 |
| 1RA6454-6H..0 | 4750 | 850 | 930 | 1620 | 1400 | 280 | 140 | 200 | 450 | 1408 | 2136 |
| 1RA6456-6H..0 | 5100 | 850 | 930 | 1620 | 1400 | 280 | 140 | 200 | 450 | 1408 | 2136 |

<sup>1)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.

<sup>2)</sup> Anti-friction bearings only for 50 Hz version.


<sup>3)</sup> Dimension HD for 1RP6 on request.

## Motors for converter operation

### Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Dimension drawings (continued)

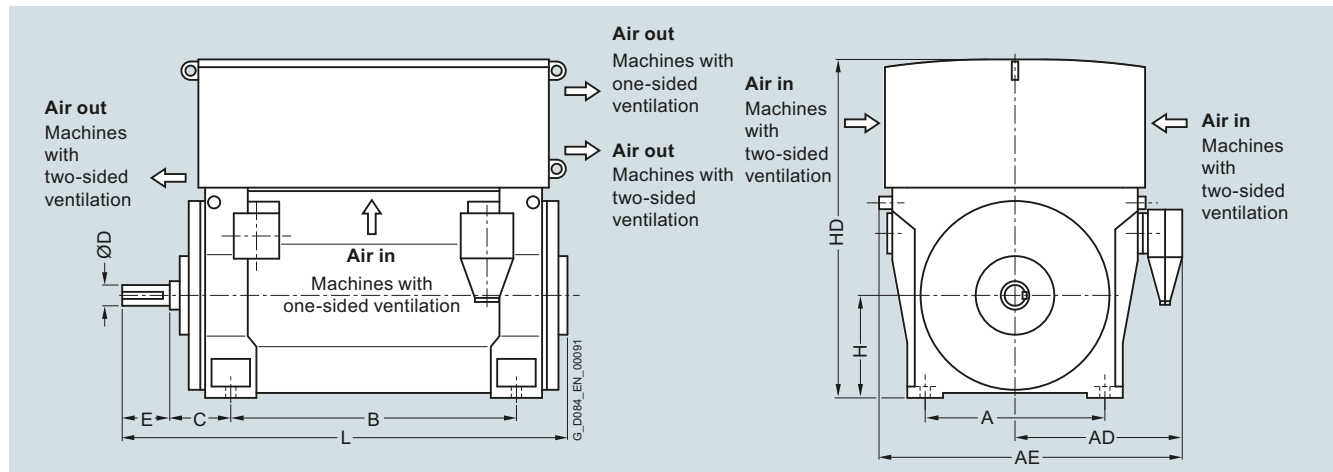

| Motor type  | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |                        |         |
|---|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|------------------------|---------|
|   |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>3)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, anti-friction bearings, IM B3 type of construction</b> |              |            |                        |                        |         |         |         |         |         |                        |         |
| <b>6-pole</b>   |              |            |                        |                        |         |         |         |         |         |                        |         |
| 1RA6500-6H..0   | 6050         | 950        | 1135                   | 1835                   | 1320    | 315     | 160     | 240     | 500     | 1610                   | 2150    |
| 1RA6502-6H..0   | 6350         | 950        | 1135                   | 1835                   | 1320    | 315     | 160     | 240     | 500     | 1610                   | 2150    |
| 1RA6504-6H..0   | 6900         | 950        | 1135                   | 1835                   | 1500    | 315     | 160     | 240     | 500     | 1610                   | 2360    |
| 1RA6506-6H..0   | 7300         | 950        | 1135                   | 1835                   | 1500    | 315     | 160     | 240     | 500     | 1610                   | 2360    |
| 1RA6560-6H..0   | 8200         | 1060       | 1205                   | 1975                   | 1400    | 315     | 180     | 240     | 560     | 1760                   | 2300    |
| 1RA6562-6H..0   | 8600         | 1060       | 1205                   | 1975                   | 1400    | 315     | 180     | 240     | 560     | 1760                   | 2300    |
| 1RA6564-6H..0   | 9450         | 1060       | 1205                   | 1975                   | 1600    | 315     | 180     | 240     | 560     | 1760                   | 2550    |
| 1RA6566-6H..0   | 10000        | 1060       | 1205                   | 1975                   | 1600    | 315     | 180     | 240     | 560     | 1760                   | 2550    |
| 1RA4630-6H..0   | 10250        | 1320       | 1330                   | 2210                   | 1600    | 335     | 220     | 280     | 630     | 2400                   | 2500    |
| 1RA4632-6H..0   | 10800        | 1320       | 1330                   | 2210                   | 1600    | 335     | 220     | 280     | 630     | 2400                   | 2500    |
| 1RA4634-6H..0   | 11800        | 1320       | 1330                   | 2210                   | 1800    | 335     | 220     | 280     | 630     | 2400                   | 2740    |
| 1RA4636-6H..0   | 12550        | 1320       | 1330                   | 2210                   | 1800    | 335     | 220     | 280     | 630     | 2400                   | 2740    |
| <b>8-pole</b>   |              |            |                        |                        |         |         |         |         |         |                        |         |
| 1RA6450-8H..0   | 4150         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1408                   | 1896    |
| 1RA6452-8H..0   | 4450         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1408                   | 1896    |
| 1RA6454-8H..0   | 4800         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1408                   | 2136    |
| 1RA6456-8H..0   | 5150         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1408                   | 2136    |
| 1RA6500-8HJ.0   | 6000         | 950        | 1135                   | 1835                   | 1320    | 315     | 160     | 240     | 500     | 1610                   | 2150    |
| 1RA6502-8HJ.0   | 6300         | 950        | 1135                   | 1835                   | 1320    | 315     | 160     | 240     | 500     | 1610                   | 2150    |
| 1RA6504-8HJ.0   | 6900         | 950        | 1135                   | 1835                   | 1500    | 315     | 160     | 240     | 500     | 1610                   | 2360    |
| 1RA6506-8HJ.0   | 7250         | 950        | 1135                   | 1835                   | 1500    | 315     | 160     | 240     | 500     | 1610                   | 2360    |
| 1RA6560-8HJ.0   | 8150         | 1060       | 1205                   | 1975                   | 1400    | 315     | 180     | 240     | 560     | 1760                   | 2300    |
| 1RA6562-8HJ.0   | 8600         | 1060       | 1205                   | 1975                   | 1400    | 315     | 180     | 240     | 560     | 1760                   | 2300    |
| 1RA6564-8HJ.0   | 9400         | 1060       | 1205                   | 1975                   | 1600    | 315     | 180     | 240     | 560     | 1760                   | 2550    |
| 1RA6566-8HJ.0   | 9950         | 1060       | 1205                   | 1975                   | 1600    | 315     | 180     | 240     | 560     | 1760                   | 2550    |
| 1RA4630-8H..0 <sup>2)</sup>   | 10150        | 1320       | 1330                   | 2210                   | 1600    | 335     | 220     | 280     | 630     | 2400                   | 2500    |
| 1RA4632-8H..0 <sup>2)</sup>   | 10800        | 1320       | 1330                   | 2210                   | 1600    | 335     | 220     | 280     | 630     | 2400                   | 2500    |
| 1RA4634-8H..0 <sup>2)</sup>   | 11700        | 1320       | 1330                   | 2210                   | 1800    | 335     | 220     | 280     | 630     | 2400                   | 2740    |
| 1RA4636-8H..0 <sup>2)</sup>   | 12450        | 1320       | 1330                   | 2210                   | 1800    | 335     | 220     | 280     | 630     | 2400                   | 2740    |

#### Note:

Higher pole numbers are available on request.

<sup>1)</sup> For  $V_{rated} \geq 2.0$  kV and current  $I_{rated} > 315$  A, the dimension changes by + 140 mm.

<sup>2)</sup> Anti-friction bearings only for 50 Hz version.


<sup>3)</sup> Dimension HD for 1RP6 on request.

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

### Dimension drawings

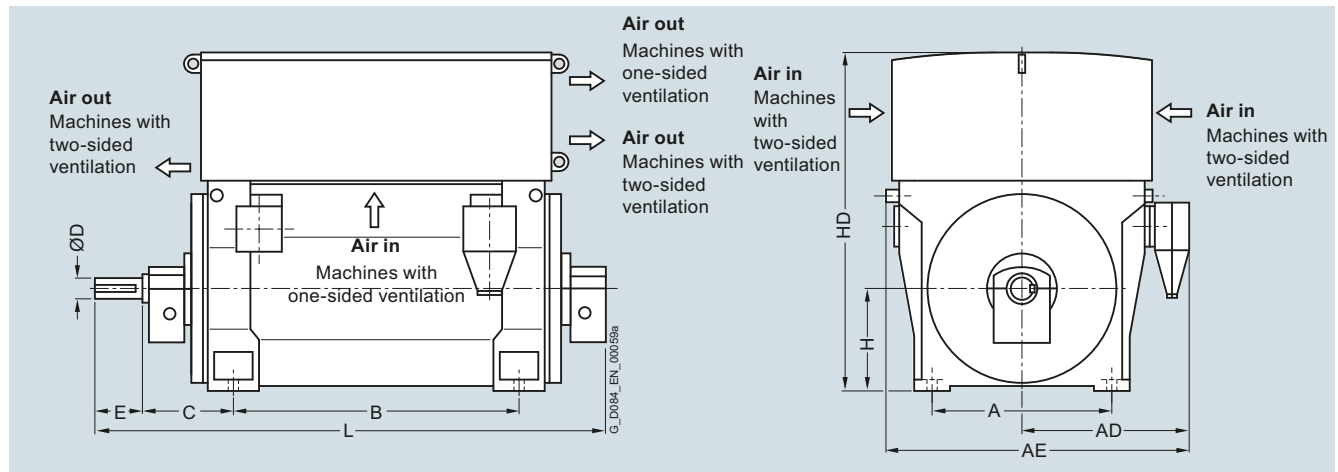

| Motor type   | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |                        |         |
|--|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|------------------------|---------|
|  |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>3)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, sleeve bearings, IM B3 type of construction</b> |              |            |                        |                        |         |         |         |         |         |                        |         |
| <b>2-pole</b>  |              |            |                        |                        |         |         |         |         |         |                        |         |
| 1RA6450-2H..0-Z K96  | 3750         | 850        | 930                    | 1620                   | 1180    | 425     | 95      | 130     | 450     | 1628                   | 2218    |
| 1RA6452-2H..0-Z K96  | 3950         | 850        | 930                    | 1620                   | 1180    | 425     | 95      | 130     | 450     | 1628                   | 2218    |
| 1RA6454-2H..0-Z K96  | 4300         | 850        | 930                    | 1620                   | 1400    | 425     | 95      | 130     | 450     | 1628                   | 2428    |
| 1RA6456-2H..0-Z K96  | 4550         | 850        | 930                    | 1620                   | 1400    | 425     | 95      | 130     | 450     | 1628                   | 2428    |
| 1RA6500-2H..0-Z K96 <sup>2)</sup>                                | 5500         | 950        | 1135                   | 1835                   | 1320    | 450     | 110     | 165     | 500     | 1850                   | 2500    |
| 1RA6502-2H..0-Z K96 <sup>2)</sup>                                | 5650         | 950        | 1135                   | 1835                   | 1320    | 450     | 110     | 165     | 500     | 1850                   | 2500    |
| 1RA6504-2H..0  | 6450         | 950        | 1135                   | 1835                   | 1500    | 450     | 110     | 165     | 500     | 1850                   | 2650    |
| 1RA6506-2H..0  | 6700         | 950        | 1135                   | 1835                   | 1500    | 450     | 110     | 165     | 500     | 1850                   | 2650    |
| 1RA6560-2H..0  | 7450         | 1060       | 1205                   | 1975                   | 1400    | 600     | 130     | 200     | 560     | 2100                   | 2850    |
| 1RA6562-2H..0  | 7850         | 1060       | 1205                   | 1975                   | 1400    | 600     | 130     | 200     | 560     | 2100                   | 2850    |
| 1RA6564-2H..0  | 8750         | 1060       | 1205                   | 1975                   | 1600    | 600     | 130     | 200     | 560     | 2100                   | 3100    |
| 1RA6566-2H..0  | 9200         | 1060       | 1205                   | 1975                   | 1600    | 600     | 130     | 200     | 560     | 2100                   | 3100    |
| <b>4-pole</b>  |              |            |                        |                        |         |         |         |         |         |                        |         |
| 1RA6450-4H..0-Z K96  | 4100         | 850        | 930                    | 1620                   | 1180    | 500     | 130     | 200     | 450     | 1408                   | 2438    |
| 1RA6452-4H..0-Z K96  | 4350         | 850        | 930                    | 1620                   | 1180    | 500     | 130     | 200     | 450     | 1408                   | 2438    |
| 1RA6454-4H..0-Z K96  | 4750         | 850        | 930                    | 1620                   | 1400    | 500     | 130     | 200     | 450     | 1408                   | 2648    |
| 1RA6456-4H..0-Z K96  | 5000         | 850        | 930                    | 1620                   | 1400    | 500     | 130     | 200     | 450     | 1408                   | 2648    |
| 1RA6500-4H..0-Z K96  | 6250         | 950        | 1135                   | 1835                   | 1320    | 560     | 150     | 200     | 500     | 1850                   | 2700    |
| 1RA6502-4H..0-Z K96  | 6500         | 950        | 1135                   | 1835                   | 1320    | 560     | 150     | 200     | 500     | 1850                   | 2700    |
| 1RA6504-4H..0-Z K96  | 7150         | 950        | 1135                   | 1835                   | 1500    | 560     | 150     | 200     | 500     | 1850                   | 2880    |
| 1RA6506-4H..0-Z K96  | 7450         | 950        | 1135                   | 1835                   | 1500    | 560     | 150     | 200     | 500     | 1850                   | 2880    |
| 1RA6560-4H..0-Z K96  | 7650         | 1060       | 1205                   | 1975                   | 1400    | 600     | 170     | 240     | 560     | 2100                   | 2900    |
| 1RA6562-4H..0-Z K96  | 8000         | 1060       | 1205                   | 1975                   | 1400    | 600     | 170     | 240     | 560     | 2100                   | 2900    |
| 1RA6564-4H..0-Z K96  | 8900         | 1060       | 1205                   | 1975                   | 1600    | 600     | 170     | 240     | 560     | 2100                   | 3100    |
| 1RA6566-4H..0-Z K96  | 9400         | 1060       | 1205                   | 1975                   | 1600    | 600     | 170     | 240     | 560     | 2100                   | 3100    |
| 1RA4630-4H..0-Z K96 <sup>2)</sup>                                | 10250        | 1320       | 1330                   | 2210                   | 1600    | 600     | 200     | 280     | 630     | 2400                   | 2970    |
| 1RA4632-4H..0-Z K96 <sup>2)</sup>                                | 10950        | 1320       | 1330                   | 2210                   | 1600    | 600     | 200     | 280     | 630     | 2400                   | 2970    |
| 1RA4634-4H..0-Z K96 <sup>2)</sup>                                | 11950        | 1320       | 1330                   | 2210                   | 1800    | 600     | 220     | 280     | 630     | 2400                   | 3210    |
| 1RA4636-4H..0-Z K96 <sup>2)</sup>                                | 12500        | 1320       | 1330                   | 2210                   | 1800    | 600     | 220     | 280     | 630     | 2400                   | 3210    |

<sup>1)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.

<sup>2)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.

<sup>3)</sup> Dimension HD for 1RP6 on request.




## Motors for converter operation

### Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Dimension drawings (continued)

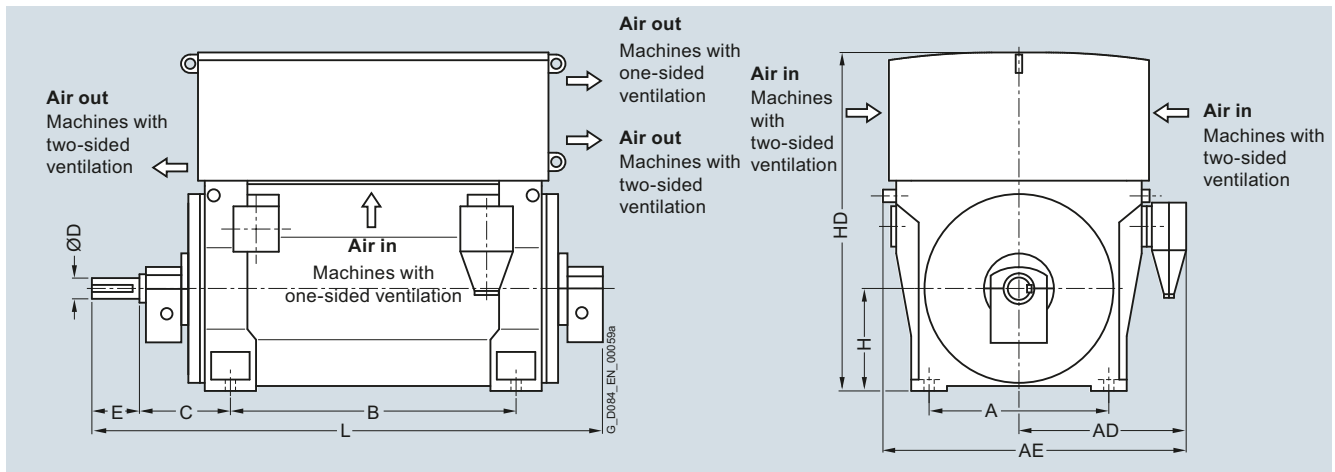

| Motor type   | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |                        |         |
|--|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|------------------------|---------|
|  |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>2)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, sleeve bearings, IM B3 type of construction</b> |              |            |                        |                        |         |         |         |         |         |                        |         |
| <b>6-pole</b>  |              |            |                        |                        |         |         |         |         |         |                        |         |
| 1RA6450-6H..0-Z K96  | 4200         | 850        | 930                    | 1620                   | 1180    | 500     | 140     | 200     | 450     | 1408                   | 2438    |
| 1RA6452-6H..0-Z K96  | 4500         | 850        | 930                    | 1620                   | 1180    | 500     | 140     | 200     | 450     | 1408                   | 2438    |
| 1RA6454-6H..0-Z K96  | 4850         | 850        | 930                    | 1620                   | 1400    | 500     | 140     | 200     | 450     | 1408                   | 2648    |
| 1RA6456-6H..0-Z K96  | 5200         | 850        | 930                    | 1620                   | 1400    | 500     | 140     | 200     | 450     | 1408                   | 2648    |
| 1RA6500-6H..0-Z K96  | 6250         | 950        | 1135                   | 1835                   | 1320    | 560     | 170     | 240     | 500     | 1610                   | 2700    |
| 1RA6502-6H..0-Z K96  | 6500         | 950        | 1135                   | 1835                   | 1320    | 560     | 170     | 240     | 500     | 1610                   | 2700    |
| 1RA6504-6H..0-Z K96  | 7100         | 950        | 1135                   | 1835                   | 1500    | 560     | 170     | 240     | 500     | 1610                   | 2900    |
| 1RA6506-6H..0-Z K96  | 7500         | 950        | 1135                   | 1835                   | 1500    | 560     | 170     | 240     | 500     | 1610                   | 2900    |
| 1RA6560-6H..0-Z K96  | 8450         | 1060       | 1205                   | 1975                   | 1400    | 600     | 170     | 240     | 560     | 1760                   | 2950    |
| 1RA6562-6H..0-Z K96  | 8850         | 1060       | 1205                   | 1975                   | 1400    | 600     | 170     | 240     | 560     | 1760                   | 2950    |
| 1RA6564-6H..0-Z K96  | 9700         | 1060       | 1205                   | 1975                   | 1600    | 600     | 170     | 240     | 560     | 1760                   | 3150    |
| 1RA6566-6H..0-Z K96  | 10250        | 1060       | 1205                   | 1975                   | 1600    | 600     | 170     | 240     | 560     | 1760                   | 3150    |
| 1RA4630-6H..0-Z K96  | 10500        | 1320       | 1330                   | 2210                   | 1600    | 600     | 220     | 280     | 630     | 2400                   | 2970    |
| 1RA4632-6H..0-Z K96  | 11050        | 1320       | 1330                   | 2210                   | 1600    | 600     | 220     | 280     | 630     | 2400                   | 2970    |
| 1RA4634-6H..0-Z K96  | 12100        | 1320       | 1330                   | 2210                   | 1800    | 600     | 220     | 280     | 630     | 2400                   | 3210    |
| 1RA4636-6H..0-Z K96  | 12850        | 1320       | 1330                   | 2210                   | 1800    | 600     | 220     | 280     | 630     | 2400                   | 3210    |

<sup>1)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.


<sup>2)</sup> Dimension HD for 1RP6 on request.

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

### Dimension drawings (continued)

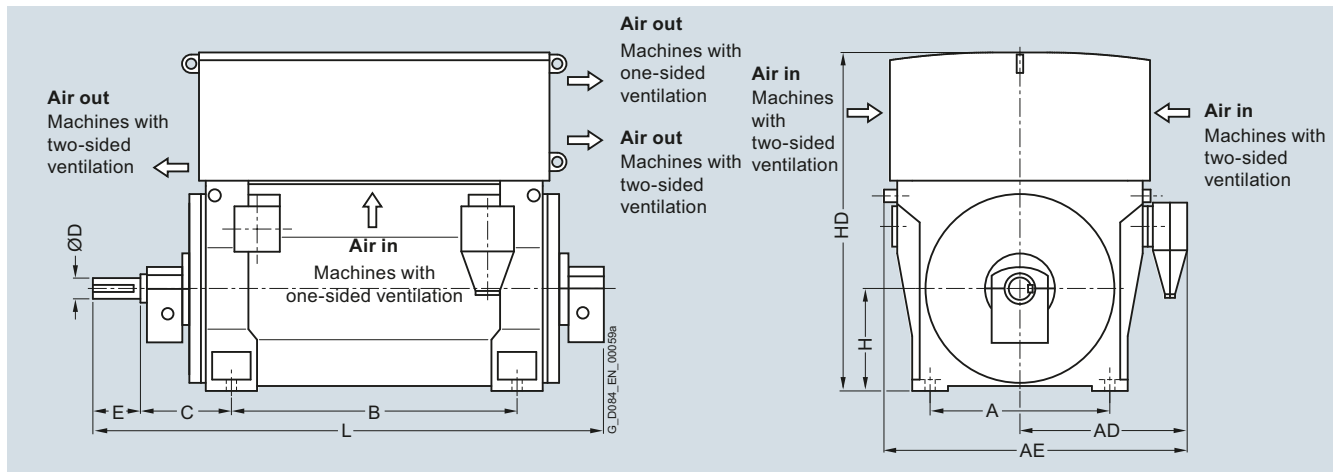

| Motor type   | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |                        |         |
|--|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|------------------------|---------|
|  |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>2)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, sleeve bearings, IM B3 type of construction</b> |              |            |                        |                        |         |         |         |         |         |                        |         |
| <b>8-pole</b>  |              |            |                        |                        |         |         |         |         |         |                        |         |
| 1RA6450-8H..0-Z K96  | 4250         | 850        | 930                    | 1620                   | 1180    | 500     | 140     | 200     | 450     | 1408                   | 2438    |
| 1RA6452-8H..0-Z K96  | 4550         | 850        | 930                    | 1620                   | 1180    | 500     | 140     | 200     | 450     | 1408                   | 2438    |
| 1RA6454-8H..0-Z K96  | 4900         | 850        | 930                    | 1620                   | 1400    | 500     | 140     | 200     | 450     | 1408                   | 2648    |
| 1RA6456-8H..0-Z K96  | 5250         | 850        | 930                    | 1620                   | 1400    | 500     | 140     | 200     | 450     | 1408                   | 2648    |
| 1RA6500-8H..0-Z K96  | 6200         | 950        | 1135                   | 1835                   | 1320    | 560     | 170     | 240     | 500     | 1610                   | 2700    |
| 1RA6502-8H..0-Z K96  | 6450         | 950        | 1135                   | 1835                   | 1320    | 560     | 170     | 240     | 500     | 1610                   | 2700    |
| 1RA6504-8H..0-Z K96  | 7100         | 950        | 1135                   | 1835                   | 1500    | 560     | 170     | 240     | 500     | 1610                   | 2900    |
| 1RA6506-8H..0-Z K96  | 7450         | 950        | 1135                   | 1835                   | 1500    | 560     | 170     | 240     | 500     | 1610                   | 2900    |
| 1RA6560-8H..0-Z K96  | 8400         | 1060       | 1205                   | 1975                   | 1400    | 600     | 170     | 240     | 560     | 1760                   | 2950    |
| 1RA6562-8H..0-Z K96  | 8800         | 1060       | 1205                   | 1975                   | 1400    | 600     | 170     | 240     | 560     | 1760                   | 2950    |
| 1RA6564-8H..0-Z K96  | 9650         | 1060       | 1205                   | 1975                   | 1600    | 600     | 170     | 240     | 560     | 1760                   | 3150    |
| 1RA6566-8H..0-Z K96  | 10150        | 1060       | 1205                   | 1975                   | 1600    | 600     | 170     | 240     | 560     | 1760                   | 3150    |
| 1RA4630-8H..0-Z K96  | 10400        | 1320       | 1330                   | 2210                   | 1600    | 600     | 220     | 280     | 630     | 2400                   | 2970    |
| 1RA4632-8H..0-Z K96  | 11050        | 1320       | 1330                   | 2210                   | 1600    | 600     | 220     | 280     | 630     | 2400                   | 2970    |
| 1RA4634-8H..0-Z K96  | 12000        | 1320       | 1330                   | 2210                   | 1800    | 600     | 220     | 280     | 630     | 2400                   | 3210    |
| 1RA4636-8H..0-Z K96  | 12700        | 1320       | 1330                   | 2210                   | 1800    | 600     | 220     | 280     | 630     | 2400                   | 3210    |

#### Note:

Higher pole numbers are available on request.

<sup>1)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.


<sup>2)</sup> Dimension HD for 1RP6 on request.

## Motors for converter operation

### Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Dimension drawings

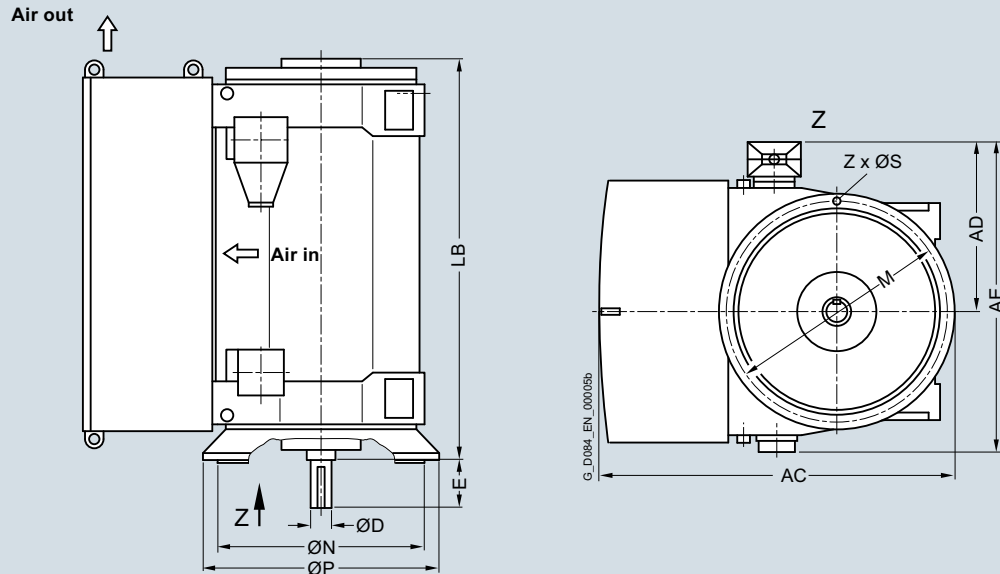

| Motor type  | Weight<br>kg | Dimensions             |                        |                        |         |         |          |         |         |         |         |               |
|---|--------------|------------------------|------------------------|------------------------|---------|---------|----------|---------|---------|---------|---------|---------------|
|   |              | AC <sup>3)</sup><br>mm | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |
| <b>Up to 6.6 kV, anti-friction bearings, IM V1 type of construction</b> |              |                        |                        |                        |         |         |          |         |         |         |         |               |
| 4-pole  |              |                        |                        |                        |         |         |          |         |         |         |         |               |
| 1RA6450-4H..8   | 4250         | 1533                   | 930                    | 1620                   | 130     | 200     | 1720     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RA6452-4H..8   | 4450         | 1533                   | 930                    | 1620                   | 130     | 200     | 1720     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RA6454-4H..8   | 4850         | 1533                   | 930                    | 1620                   | 140     | 200     | 1930     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RA6456-4H..8   | 5150         | 1533                   | 930                    | 1620                   | 140     | 200     | 1930     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RA6500-4H..8   | 5250         | 1640                   | 1000                   | 1810                   | 150     | 200     | 1910     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RA6502-4H..8   | 5450         | 1640                   | 1000                   | 1810                   | 150     | 200     | 1910     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RA6504-4H..8   | 6150         | 1640                   | 1000                   | 1810                   | 160     | 240     | 2120     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RA6506-4H..8   | 6550         | 1640                   | 1000                   | 1810                   | 160     | 240     | 2120     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RA6560-4H..8   | 7250         | 1890                   | 1210                   | 2100                   | 180     | 240     | 2090     | 1400    | 1250    | 1320    | 26      | 16            |
| 1RA6562-4H..8 <sup>2)</sup>   | 7700         | 1890                   | 1210                   | 2100                   | 180     | 240     | 2090     | 1400    | 1250    | 1320    | 26      | 16            |
| 1RA6564-4H..8 <sup>2)</sup>   | 8600         | 1890                   | 1210                   | 2100                   | 190     | 280     | 2320     | 1400    | 1250    | 1320    | 26      | 16            |
| 1RA6566-4H..8 <sup>2)</sup>   | 9050         | 1890                   | 1210                   | 2100                   | 190     | 280     | 2320     | 1400    | 1250    | 1320    | 26      | 16            |
| 1RA4630-4H..8 <sup>2)</sup>   | 11600        | 2430                   | 1330                   | 2300                   | 200     | 280     | 2470     | 2000    | 1800    | 1900    | 33      | 16            |
| 1RA4632-4H..8 <sup>2)</sup>   | 12300        | 2430                   | 1330                   | 2300                   | 200     | 280     | 2470     | 2000    | 1800    | 1900    | 33      | 16            |
| 1RA4634-4H..8 <sup>2)</sup>   | 13350        | 2430                   | 1330                   | 2300                   | 220     | 280     | 2710     | 2000    | 1800    | 1900    | 33      | 16            |
| 1RA4636-4H..8 <sup>2)</sup>   | 13900        | 2430                   | 1330                   | 2300                   | 220     | 280     | 2710     | 2000    | 1800    | 1900    | 33      | 16            |

<sup>1)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.

<sup>2)</sup> Only in the 50 Hz version.


<sup>3)</sup> Dimension AC for 1RP6 on request.

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

### Dimension drawings (continued)

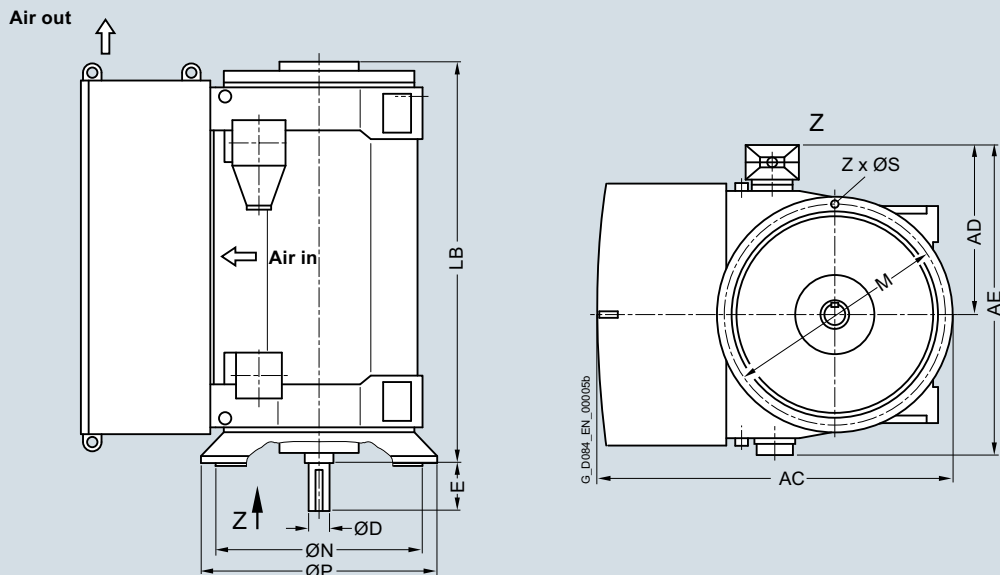

| Motor type | Weight<br>kg | Dimensions             |                        |                        |         |         |          |         |         |         |         |               |
|------------|--------------|------------------------|------------------------|------------------------|---------|---------|----------|---------|---------|---------|---------|---------------|
|            |              | AC <sup>2)</sup><br>mm | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |

#### Up to 6.6 kV, anti-friction bearings, IM V1 type of construction

6-pole

|               |       |      |      |      |     |     |      |      |      |      |    |    |
|---------------|-------|------|------|------|-----|-----|------|------|------|------|----|----|
| 1RA6450-6H..8 | 4350  | 1533 | 930  | 1620 | 130 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6452-6H..8 | 4600  | 1533 | 930  | 1620 | 130 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6454-6H..8 | 4950  | 1533 | 930  | 1620 | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6456-6H..8 | 5300  | 1533 | 930  | 1620 | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RA6500-6H..8 | 5400  | 1640 | 1000 | 1810 | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 8  |
| 1RA6502-6H..8 | 5750  | 1640 | 1000 | 1810 | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 8  |
| 1RA6504-6H..8 | 6300  | 1640 | 1000 | 1810 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8  |
| 1RA6506-6H..8 | 6700  | 1640 | 1000 | 1810 | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8  |
| 1RA6560-6H..8 | 7400  | 1890 | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6562-6H..8 | 8000  | 1890 | 1210 | 2100 | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6564-6H..8 | 8800  | 1890 | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA6566-6H..8 | 9300  | 1890 | 1210 | 2100 | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RA4630-6H..8 | 11900 | 2430 | 1330 | 2300 | 220 | 280 | 2470 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4632-6H..8 | 12450 | 2430 | 1330 | 2300 | 220 | 280 | 2470 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4634-6H..8 | 13450 | 2430 | 1330 | 2300 | 220 | 280 | 2710 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RA4636-6H..8 | 14200 | 2430 | 1330 | 2300 | 220 | 280 | 2710 | 2000 | 1800 | 1900 | 33 | 16 |

<sup>1)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.


<sup>2)</sup> Dimension AC for 1RP6 on request.

## Motors for converter operation

### Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Dimension drawings (continued)

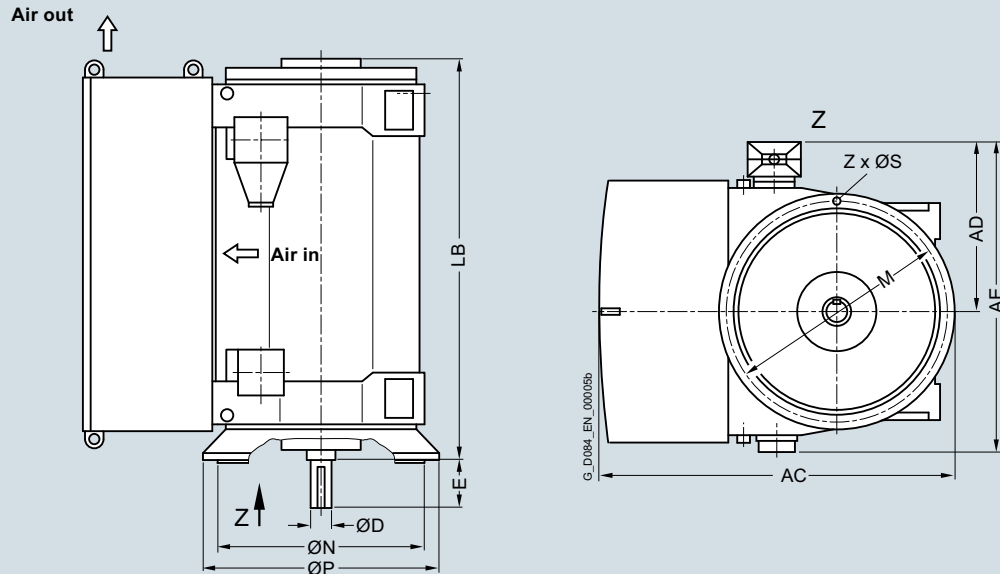

| Motor type  | Weight<br>kg | Dimensions             |                        |                        |         |         |          |         |         |         |         |               |
|---|--------------|------------------------|------------------------|------------------------|---------|---------|----------|---------|---------|---------|---------|---------------|
|   |              | AC <sup>2)</sup><br>mm | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |
| <b>Up to 6.6 kV, anti-friction bearings, IM V1 type of construction</b> |              |                        |                        |                        |         |         |          |         |         |         |         |               |
| <b>8-pole</b>   |              |                        |                        |                        |         |         |          |         |         |         |         |               |
| 1RA6450-8H..8   | 4350         | 1533                   | 930                    | 1620                   | 140     | 200     | 1720     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RA6452-8H..8   | 4650         | 1533                   | 930                    | 1620                   | 140     | 200     | 1720     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RA6454-8H..8   | 5000         | 1533                   | 930                    | 1620                   | 140     | 200     | 1930     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RA6456-8H..8   | 5350         | 1533                   | 930                    | 1620                   | 140     | 200     | 1930     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RA6500-8H..8   | 5450         | 1640                   | 1000                   | 1810                   | 160     | 240     | 1910     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RA6502-8H..8   | 5800         | 1640                   | 1000                   | 1810                   | 160     | 240     | 1910     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RA6504-8H..8   | 6300         | 1640                   | 1000                   | 1810                   | 170     | 240     | 2120     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RA6506-8H..8   | 6700         | 1640                   | 1000                   | 1810                   | 170     | 240     | 2120     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RA6560-8H..8   | 7350         | 1890                   | 1070                   | 1960                   | 180     | 240     | 2090     | 1400    | 1250    | 1320    | 26      | 16            |
| 1RA6562-8H..8   | 7900         | 1890                   | 1070                   | 1960                   | 180     | 240     | 2090     | 1400    | 1250    | 1320    | 26      | 16            |
| 1RA6564-8H..8   | 8700         | 1890                   | 1070                   | 1960                   | 190     | 280     | 2320     | 1400    | 1250    | 1320    | 26      | 16            |
| 1RA6566-8H..8   | 9200         | 1890                   | 1070                   | 1960                   | 190     | 280     | 2320     | 1400    | 1250    | 1320    | 26      | 16            |
| 1RA4630-8H..8   | 11800        | 2430                   | 1330                   | 2300                   | 220     | 280     | 2470     | 2000    | 1800    | 1900    | 33      | 16            |
| 1RA4632-8H..8   | 12450        | 2430                   | 1330                   | 2300                   | 220     | 280     | 2470     | 2000    | 1800    | 1900    | 33      | 16            |
| 1RA4634-8H..8   | 13350        | 2430                   | 1330                   | 2300                   | 220     | 280     | 2710     | 2000    | 1800    | 1900    | 33      | 16            |
| 1RA4636-8H..8   | 14100        | 2430                   | 1330                   | 2300                   | 220     | 280     | 2710     | 2000    | 1800    | 1900    | 33      | 16            |

#### Note:

Higher pole numbers are available on request.

<sup>1)</sup> For  $V_{\text{rated}} \geq 2.0 \text{ kV}$  and current  $I_{\text{rated}} > 315 \text{ A}$ , the dimension changes by + 140 mm.


<sup>2)</sup> Dimension AC for 1RP6 on request.

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

### Dimension drawings

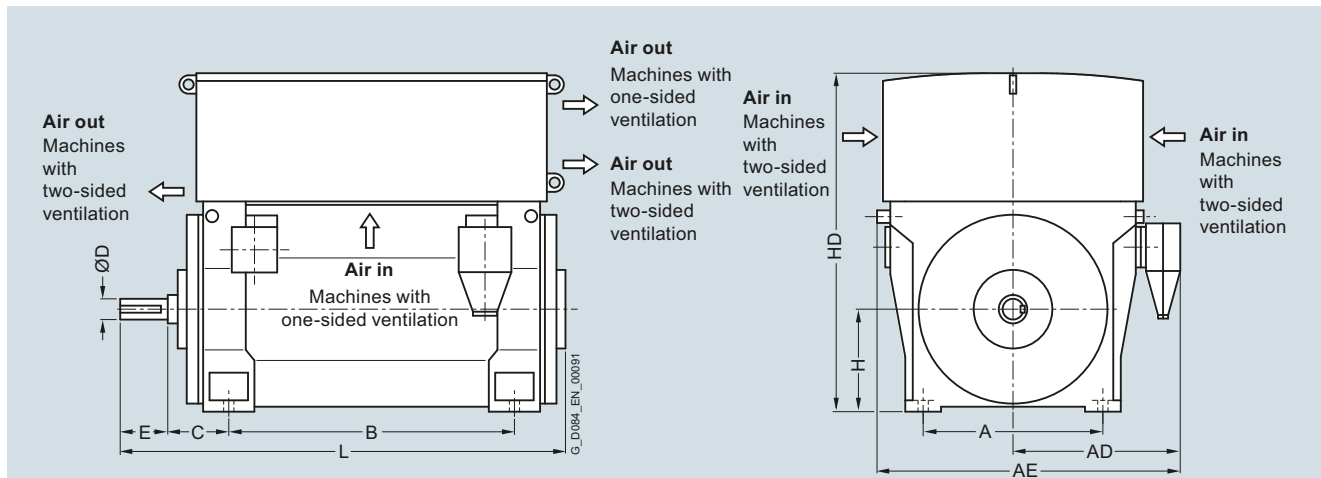

| Motor type  | Weight<br>kg | Dimensions |      |      |      |     |     |     |     |       |      |
|---|--------------|------------|------|------|------|-----|-----|-----|-----|-------|------|
|   |              | A          | AD   | AE   | B    | C   | D   | E   | H   | HD    | L    |
| <b>Up to 6.6 kV, IM B3 type of construction, anti-friction bearings – 1RA7 series</b> |              |            |      |      |      |     |     |     |     |       |      |
| <b>4-pole</b>   |              |            |      |      |      |     |     |     |     |       |      |
| 1RA7 710-4  | 15700        | 1500       | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | O. R. | 3070 |
| 1RA7 712-4  | 16300        | 1500       | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | O. R. | 3070 |
| 1RA7 714-4  | 17700        | 1500       | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | O. R. | 3310 |
| 1RA7 716-4  | 18900        | 1500       | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | O. R. | 3310 |
| <b>6-pole</b>   |              |            |      |      |      |     |     |     |     |       |      |
| 1RA7 710-6  | 16000        | 1500       | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | O. R. | 3070 |
| 1RA7 712-6  | 17000        | 1500       | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | O. R. | 3070 |
| 1RA7 714-6  | 18500        | 1500       | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | O. R. | 3310 |
| 1RA7 716-6  | 19600        | 1500       | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | O. R. | 3310 |
| <b>8-pole</b>   |              |            |      |      |      |     |     |     |     |       |      |
| 1RA7 710-8  | 15600        | 1500       | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | O. R. | 3070 |
| 1RA7 712-8  | 16500        | 1500       | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | O. R. | 3070 |
| 1RA7 714-8  | 18000        | 1500       | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | O. R. | 3310 |
| 1RA7 716-8  | 19000        | 1500       | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | O. R. | 3310 |
| <b>10-pole</b>  |              |            |      |      |      |     |     |     |     |       |      |
| 1RA7 710-3  | 15600        | 1500       | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | O. R. | 3070 |
| 1RA7 712-3  | 16500        | 1500       | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | O. R. | 3070 |
| 1RA7 714-3  | 18000        | 1500       | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | O. R. | 3310 |
| 1RA7 716-3  | 19000        | 1500       | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | O. R. | 3310 |

**Note:**


Higher pole numbers are available on request.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors - H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

#### Dimension drawings

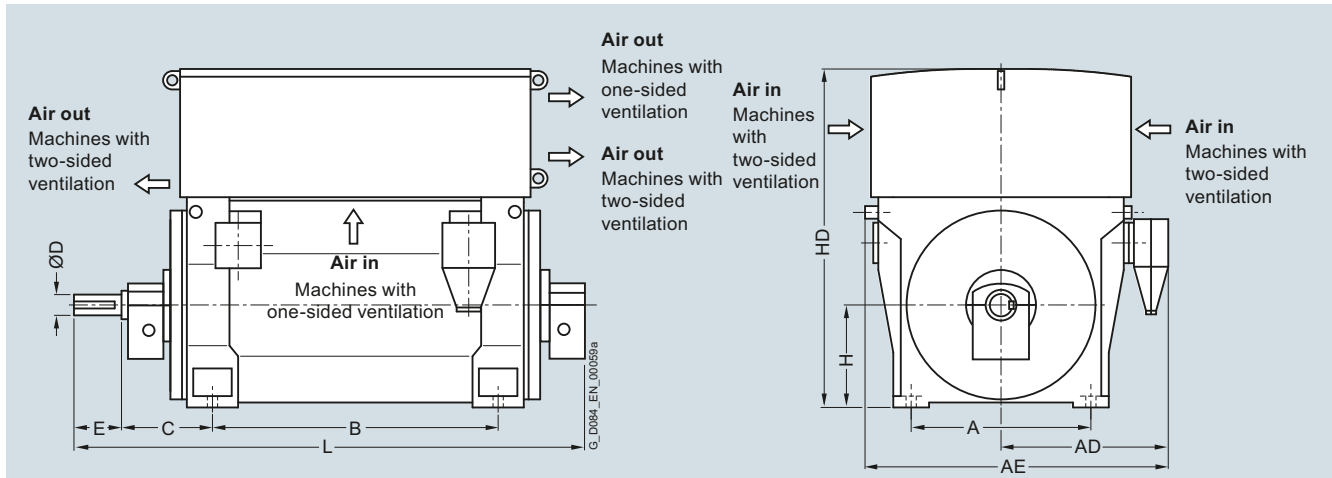

| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|--|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, sleeve bearings – 1RA7 series</b> |              |            |          |          |         |         |         |         |         |          |         |
| <b>2-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RA7 710-2   | 14900        | 1500       | 1800     | 2900     | 2000    | 560     | 200     | 280     | 710     | O. R.    | 3320    |
| 1RA7 712-2   | 15500        | 1500       | 1800     | 2900     | 2000    | 560     | 200     | 280     | 710     | O. R.    | 3320    |
| 1RA7 714-2   | 16700        | 1500       | 1800     | 2900     | 2240    | 560     | 200     | 280     | 710     | O. R.    | 3560    |
| 1RA7 716-2   | 17500        | 1500       | 1800     | 2900     | 2240    | 560     | 200     | 280     | 710     | O. R.    | 3560    |
| <b>4-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RA7 710-4   | 16100        | 1500       | 1800     | 2900     | 2000    | 710     | 220     | 350     | 710     | O. R.    | 3650    |
| 1RA7 712-4   | 16700        | 1500       | 1800     | 2900     | 2000    | 710     | 220     | 350     | 710     | O. R.    | 3650    |
| 1RA7 714-4   | 18000        | 1500       | 1800     | 2900     | 2240    | 710     | 220     | 350     | 710     | O. R.    | 3890    |
| 1RA7 716-4   | 19300        | 1500       | 1800     | 2900     | 2240    | 710     | 220     | 350     | 710     | O. R.    | 3890    |
| <b>6-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RA7 710-6   | 16100        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | O. R.    | 3570    |
| 1RA7 712-6   | 17100        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | O. R.    | 3570    |
| 1RA7 714-6   | 18600        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | O. R.    | 3810    |
| 1RA7 716-6   | 19700        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | O. R.    | 3810    |
| <b>8-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RA7 710-8   | 15700        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | O. R.    | 3570    |
| 1RA7 712-8   | 16600        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | O. R.    | 3570    |
| 1RA7 714-8   | 18000        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | O. R.    | 3810    |
| 1RA7 716-8   | 19000        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | O. R.    | 3810    |
| <b>10-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RA7 710-3   | 15600        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | O. R.    | 3570    |
| 1RA7 712-3   | 16600        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | O. R.    | 3570    |
| 1RA7 714-3   | 18100        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | O. R.    | 3810    |
| 1RA7 716-3   | 19000        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | O. R.    | 3810    |

#### Note:


Higher pole numbers are available on request.

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7

### Dimension drawings

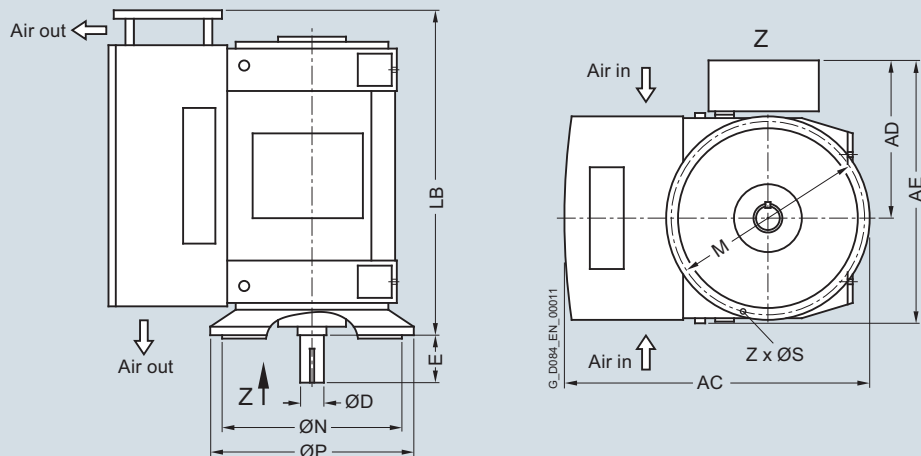

| Motor type | Weight<br>kg | Dimensions |          |          |         |         |          |         |         |         |         |               |
|------------|--------------|------------|----------|----------|---------|---------|----------|---------|---------|---------|---------|---------------|
|            |              | AC<br>mm   | AD<br>mm | AE<br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |

#### Up to 6.6 kV, IM V1 type of construction, anti-friction bearings, Z ventilation – 1RP7 series

##### 6-pole

|            |       |       |      |      |     |     |      |      |      |      |    |    |
|------------|-------|-------|------|------|-----|-----|------|------|------|------|----|----|
| 1RA7 710-6 | 16700 | O. R. | 1800 | 2900 | 220 | 350 | 3140 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RA7 712-6 | 17700 | O. R. | 1800 | 2900 | 220 | 350 | 3140 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RA7 714-6 | 19200 | O. R. | 1800 | 2900 | 220 | 350 | 3380 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RA7 716-6 | 20300 | O. R. | 1800 | 2900 | 220 | 350 | 3380 | 2000 | 1800 | 1900 | 35 | 24 |

##### 8-pole

|            |       |       |      |      |     |     |      |      |      |      |    |    |
|------------|-------|-------|------|------|-----|-----|------|------|------|------|----|----|
| 1RA7 710-8 | 16600 | O. R. | 1800 | 2900 | 220 | 350 | 3140 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RA7 712-8 | 17600 | O. R. | 1800 | 2900 | 220 | 350 | 3140 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RA7 714-8 | 19100 | O. R. | 1800 | 2900 | 220 | 350 | 3380 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RA7 716-8 | 20100 | O. R. | 1800 | 2900 | 220 | 350 | 3380 | 2000 | 1800 | 1900 | 35 | 24 |

##### 10-pole

|            |       |       |      |      |     |     |      |      |      |      |    |    |
|------------|-------|-------|------|------|-----|-----|------|------|------|------|----|----|
| 1RA7 710-3 | 16400 | O. R. | 1800 | 2900 | 220 | 350 | 3140 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RA7 712-3 | 17300 | O. R. | 1800 | 2900 | 220 | 350 | 3140 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RA7 714-3 | 18900 | O. R. | 1800 | 2900 | 220 | 350 | 3380 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RA7 716-3 | 19800 | O. R. | 1800 | 2900 | 220 | 350 | 3380 | 2000 | 1800 | 1900 | 35 | 24 |

#### Note:

Higher pole numbers are available on request.




## Motors for converter operation

### Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Overview

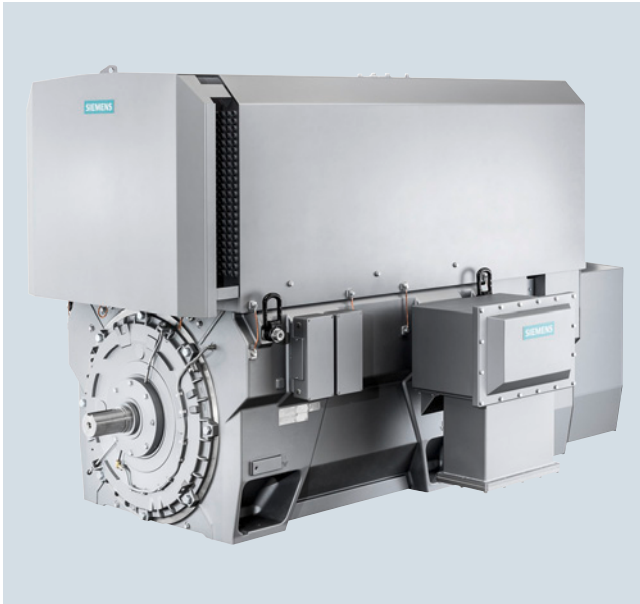

#### Technical data

##### Overview of technical data

| H-compact PLUS 1RQ4, 1RQ6, SIMOTICS HV M 1RQ7 |  |
|---|--|
| Rated voltage                                 | 690 V ... 4.16 kV                              |
| Rated frequency                               | 50/60 Hz                                       |
| Motor type                                    | Induction motor with squirrel-cage rotor       |
| Type of construction                          | IM B3, IM V1                                   |
| Degree of protection                          | IP55   |
| Cooling method                                | IC611/IC616                                    |
| Stator winding insulation                     | Insulation system, thermal class 155 (F)       |
| Shaft height                                  | 450 ... 710 mm                                 |
| Bearings                                      | Anti-friction bearings, sleeve bearings        |
| Cage material                                 | Copper   |
| Standards                                     | IEC, EN  |
| Frame design for shaft heights 450 ... 560 mm | Housing: Cast iron<br>Cooling enclosure: Steel |
| Frame design for shaft heights 630 ... 710 mm | Housing: Steel<br>Cooling enclosure: Steel     |

The following versions can be offered on request:

- 2-pole up to 75 Hz
- 4-pole up to 100 Hz
- 6-pole up to 90 Hz

For individual motor types, it must be ensured that the motor does not run-through any critical speed in the required speed control range and that the maximum speed does not exceed the mechanical speed limit of the motor! Please contact your Siemens sales person regarding this check. The motor types are marked with footnotes in the following data tables.

<sup>1)</sup> Maximum and minimum power ratings can be different for specific voltage levels.

#### Technical data (continued)

##### Power ranges for IEC motors with reinforced insulation for SINAMICS drive converters without sine-wave filter


1RQ4/1RQ6, 1SG4/1SG6 (Ex ec) and 1SB4/1SB6 (Ex pxb) series

1RQ7 series


Insulation system, thermal class 155 (F)

The power data listed here apply for an ambient temperature of 40 °C and an installation altitude ≤ 1000 m.

690 V; 50 and 60 Hz

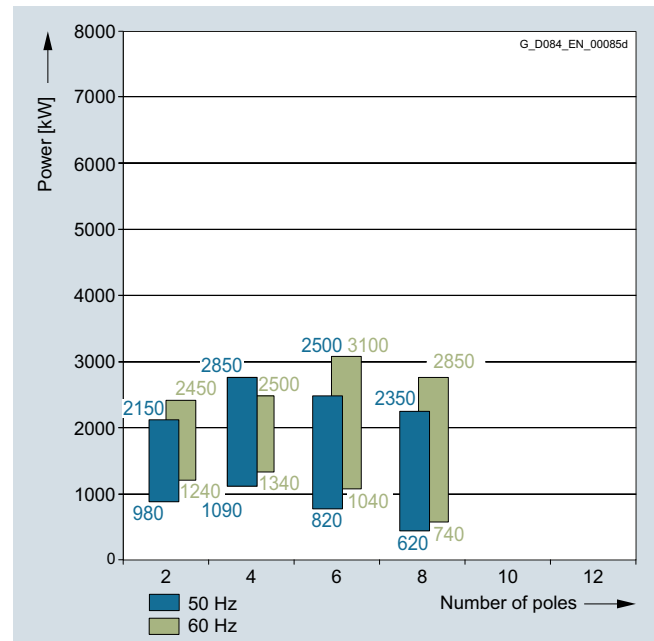

3.4 kV to 4.16 kV; 50 and 60 Hz<sup>1)</sup>

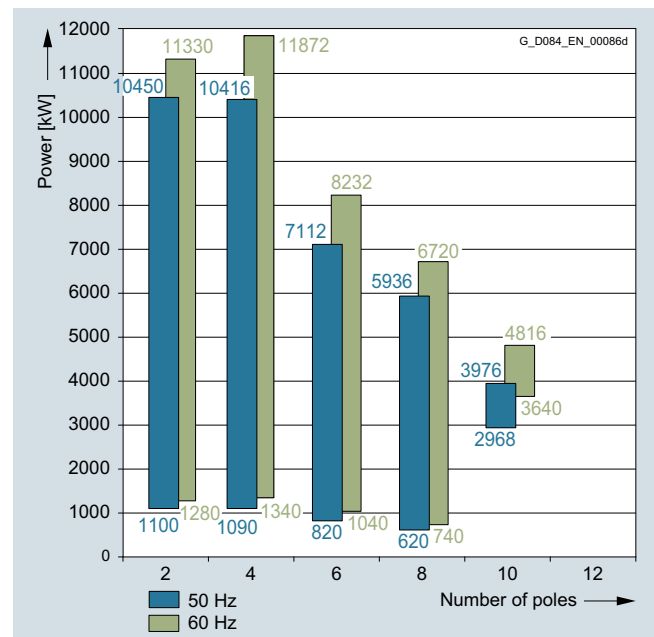

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Selection and ordering data

| Rated power<br><br>IEC<br><br>$P_{\text{rated}}$ 155 (F)<br>kW | Low voltage motor<br>H-compact PLUS<br><br>Article No. | Operating values at rated output for utilization 155 (F) |             |                       |                         |                          |                               |                       |                                      |
|--|--|--|-------------|-----------------------|-------------------------|--------------------------|-------------------------------|-----------------------|--------------------------------------|
|  |  | Rated speed  | Efficiency  | Power factor          | Rated current<br>690 V  | Rated torque             | Break-down torque             | Moment of inertia     | Mechanical speed limit <sup>1)</sup> |
|  |  | $n_{\text{rated}}$<br>rpm                                | $\eta$<br>% | $\cos \varphi$<br>[-] | $I_{\text{rated}}$<br>A | $T_{\text{rated}}$<br>Nm | $T_B/T_{\text{rated}}$<br>[-] | J<br>kgm <sup>2</sup> | $n_{\text{max}}$<br>rpm              |
| <b>690 V, 50 Hz</b>  |  |  |             |                       |                         |                          |                               |                       |                                      |
| 2-pole   |  |  |             |                       |                         |                          |                               |                       |                                      |
| 980  | <b>1RQ6 450-2JP00</b>                                  | 2983   | 95.1        | 0.91                  | 950                     | 3141                     | 2.40                          | 13                    | 3000                                 |
| 1040   | <b>1RQ6 452-2JP00</b>                                  | 2984   | 95.2        | 0.91                  | 1000                    | 3331                     | 2.40                          | 14                    | 3000                                 |
| 1320   | <b>1RQ6 454-2JP00</b>                                  | 2983   | 95.9        | 0.92                  | 2x630                   | 4232                     | 2.30                          | 16                    | 3000                                 |
| 1370   | <b>1RQ6 456-2JP00</b>                                  | 2982   | 95.9        | 0.93                  | 2x640                   | 4394                     | 2.40                          | 18                    | 3000                                 |
| 1740   | <b>1RQ6 500-2JP00</b>                                  | 2980   | 96.1        | 0.91                  | 2x830                   | 5576                     | 2.70                          | 19                    | 3000                                 |
| 1880   | <b>1RQ6 502-2JP00</b>                                  | 2978   | 96.2        | 0.91                  | 2x900                   | 6028                     | 2.60                          | 20                    | 3000                                 |
| 2150   | <b>1RQ6 504-2JP00</b>                                  | 2980   | 96.6        | 0.92                  | 2x1020                  | 6890                     | 2.60                          | 24                    | 3000 <sup>3)</sup>                   |
| 4-pole   |  |  |             |                       |                         |                          |                               |                       |                                      |
| 1090   | <b>1RQ6 450-4JP00</b>                                  | 1487   | 95.4        | 0.87                  | 1100                    | 7008                     | 2.60                          | 20                    | 1800                                 |
| 1200   | <b>1RQ6 452-4JP00</b>                                  | 1486   | 95.5        | 0.90                  | 1160                    | 7724                     | 2.50                          | 22                    | 1800                                 |
| 1290   | <b>1RQ6 454-4JP00</b>                                  | 1488   | 95.9        | 0.89                  | 2x630                   | 8289                     | 2.60                          | 25                    | 1800                                 |
| 1420   | <b>1RQ6 456-4JP00</b>                                  | 1490   | 96.1        | 0.89                  | 2x690                   | 9113                     | 2.90                          | 29                    | 1800                                 |
| 1950 <sup>2)</sup>   | <b>1RQ6 500-4JP00</b>                                  | 1487   | 96.1        | 0.91                  | 2x930                   | 12523                    | 2.55                          | 42                    | 1800                                 |
| 2000 <sup>2)</sup>   | <b>1RQ6 502-4JP00</b>                                  | 1487   | 96.2        | 0.91                  | 2x960                   | 12844                    | 2.55                          | 46                    | 1800                                 |
| 2100 <sup>2)</sup>   | <b>1RQ6 504-4JP00</b>                                  | 1486   | 96.2        | 0.92                  | 2x990                   | 13495                    | 2.45                          | 52                    | 1800                                 |
| 2400 <sup>2)</sup>   | <b>1RQ6 506-4JP00</b>                                  | 1489   | 96.6        | 0.91                  | 2x1140                  | 15392                    | 2.70                          | 56                    | 1800                                 |
| 2700 <sup>2)</sup>   | <b>1RQ6 560-4JP00</b>                                  | 1486   | 96.5        | 0.91                  | 4x640                   | 17351                    | 2.10                          | 82                    | 1800                                 |
| 2850 <sup>2)</sup>   | <b>1RQ6 562-4JP00</b>                                  | 1490   | 96.7        | 0.92                  | 4x670                   | 18265                    | 2.65                          | 93                    | 1800                                 |

#### Type of construction:

|                     |   |
|---------------------|---|
| IM B3               | 0 |
| IM V1 (with canopy) | 4 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> Data of vertical motors (IM V1) on request.

<sup>3)</sup> There are speed exclusion ranges for this type. It must be ensured that the motors are not continuously operated in these speed ranges. The exclusion ranges must be clarified in advance in the factory.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

Motor type  
(repeated)

Partial load values for square-law torque drive

 $P/P_{rated}$  155 (F) = 75 % $P/P_{rated}$  155 (F) = 50 % $P/P_{rated}$  155 (F) = 25 % $P$  $n$  $\eta$  $\cos \varphi$  $P$  $n$  $\eta$  $\cos \varphi$  $P$  $n$  $\eta$  $\cos \varphi$ 

kW

rpm

%

[-]

kW

rpm

%

[-]

kW

rpm

%

[-]

#### Square-law torque drive

2-pole

|                |      |      |      |      |      |      |      |      |     |      |      |      |
|----------------|------|------|------|------|------|------|------|------|-----|------|------|------|
| 1RQ6 450-2JPO. | 735  | 2711 | 95.4 | 0.91 | 490  | 2372 | 95.5 | 0.90 | 245 | 1884 | 95.3 | 0.84 |
| 1RQ6 452-2JPO  | 780  | 2712 | 95.5 | 0.91 | 520  | 2373 | 95.6 | 0.90 | 260 | 1885 | 95.4 | 0.85 |
| 1RQ6 454-2JPO. | 991  | 2711 | 96.1 | 0.92 | 660  | 2372 | 96.2 | 0.91 | 330 | 1884 | 96.1 | 0.87 |
| 1RQ6 456-2JPO. | 1028 | 2710 | 96.2 | 0.94 | 685  | 2372 | 96.3 | 0.93 | 343 | 1884 | 96.4 | 0.90 |
| 1RQ6 500-2JPO. | 1305 | 2711 | 96.2 | 0.89 | 870  | 2371 | 96.3 | 0.86 | 435 | 1884 | 96.1 | 0.76 |
| 1RQ6 502-2JPO. | 1411 | 2710 | 96.4 | 0.90 | 940  | 2370 | 96.4 | 0.88 | 470 | 1884 | 96.3 | 0.81 |
| 1RQ6 504-2JPO. | 1613 | 2712 | 96.7 | 0.91 | 1075 | 2371 | 96.8 | 0.90 | 538 | 1884 | 96.7 | 0.83 |
| 4-pole         |      |      |      |      |      |      |      |      |     |      |      |      |
| 1RQ6 450-4JPO. | 818  | 1352 | 95.6 | 0.85 | 545  | 1184 | 95.6 | 0.82 | 273 | 941  | 95.1 | 0.72 |
| 1RQ6 452-4JPO. | 900  | 1351 | 95.8 | 0.89 | 600  | 1184 | 95.9 | 0.87 | 300 | 941  | 95.7 | 0.81 |
| 1RQ6 454-4JPO. | 968  | 1353 | 96.1 | 0.88 | 645  | 1185 | 96.1 | 0.86 | 323 | 941  | 95.8 | 0.78 |
| 1RQ6 456-4JPO. | 1065 | 1354 | 96.2 | 0.88 | 711  | 1185 | 96.2 | 0.85 | 355 | 941  | 95.8 | 0.76 |
| 1RQ6 500-4JPO. | 1463 | 1353 | 96.3 | 0.90 | 975  | 1184 | 96.3 | 0.87 | 488 | 941  | 96.2 | 0.77 |
| 1RQ6 502-4JPO. | 1500 | 1354 | 96.3 | 0.90 | 1000 | 1184 | 96.4 | 0.88 | 500 | 941  | 96.3 | 0.79 |
| 1RQ6 504-4JPO. | 1575 | 1353 | 96.4 | 0.92 | 1050 | 1184 | 96.5 | 0.90 | 526 | 941  | 96.5 | 0.84 |
| 1RQ6 506-4JPO. | 1800 | 1355 | 96.7 | 0.90 | 1200 | 1185 | 96.7 | 0.87 | 600 | 942  | 96.5 | 0.76 |
| 1RQ6 560-4JPO. | 2026 | 1353 | 96.7 | 0.91 | 1350 | 1184 | 96.8 | 0.90 | 675 | 941  | 96.9 | 0.85 |
| 1RQ6 562-4JPO. | 2138 | 1355 | 96.8 | 0.91 | 1425 | 1185 | 96.9 | 0.89 | 713 | 942  | 96.8 | 0.81 |

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Selection and ordering data

| Rated power                      | Low voltage motor<br>H-compact PLUS | Operating values at rated output for utilization 155 (F) |             |                       |                         |                          |                               |                       |                                      |
|----------------------------------|-------------------------------------|--|-------------|-----------------------|-------------------------|--------------------------|-------------------------------|-----------------------|--------------------------------------|
| IEC                              |                                     | Rated speed  | Efficiency  | Power factor          | Rated current<br>690 V  | Rated torque             | Break-down torque             | Moment of inertia     | Mechanical speed limit <sup>1)</sup> |
| $P_{\text{rated}}$ 155 (F)<br>kW |                                     | $n_{\text{rated}}$<br>rpm                                | $\eta$<br>% | $\cos \varphi$<br>[-] | $I_{\text{rated}}$<br>A | $T_{\text{rated}}$<br>Nm | $T_B/T_{\text{rated}}$<br>[-] | J<br>kgm <sup>2</sup> | $n_{\text{max}}$<br>rpm              |
| <b>690 V, 50 Hz</b>              |                                     |  |             |                       |                         |                          |                               |                       |                                      |
| 6-pole                           |                                     |  |             |                       |                         |                          |                               |                       |                                      |
| 820                              | <b>1RQ6 450-6JP0</b>                | 991  | 95.6        | 0.85                  | 840                     | 7915                     | 2.30                          | 26                    | 1200                                 |
| 910                              | <b>1RQ6 452-6JP0</b>                | 992  | 95.9        | 0.85                  | 930                     | 8775                     | 2.40                          | 29                    | 1200                                 |
| 1020                             | <b>1RQ6 454-6JP0</b>                | 992  | 95.9        | 0.85                  | 1040                    | 9835                     | 2.40                          | 32                    | 1200                                 |
| 1130                             | <b>1RQ6 456-6JP0</b>                | 991  | 95.8        | 0.87                  | 1140                    | 10906                    | 2.30                          | 37                    | 1200                                 |
| 1560                             | <b>1RQ6 500-6JP0</b>                | 988  | 96.0        | 0.86                  | 2x790                   | 15079                    | 1.85                          | 56                    | 1500                                 |
| 1700                             | <b>1RQ6 502-6JP0</b>                | 989  | 96.2        | 0.86                  | 2x860                   | 16416                    | 2.00                          | 62                    | 1500                                 |
| 1820                             | <b>1RQ6 504-6JP0</b>                | 989  | 96.2        | 0.87                  | 2x910                   | 17574                    | 1.95                          | 69                    | 1500                                 |
| 1960                             | <b>1RQ6 506-6JP0</b>                | 991  | 96.5        | 0.87                  | 2x980                   | 18888                    | 2.20                          | 77                    | 1500                                 |
| 2250                             | <b>1RQ6 560-6JP0</b>                | 991  | 96.5        | 0.87                  | 2x1120                  | 21683                    | 2.40                          | 108                   | 1500                                 |
| 2500                             | <b>1RQ6 562-6JP0</b>                | 991  | 96.5        | 0.88                  | 3x820                   | 24092                    | 2.30                          | 119                   | 1500                                 |
| 8-pole                           |                                     |  |             |                       |                         |                          |                               |                       |                                      |
| 620                              | <b>1RQ6 450-8JP0</b>                | 744  | 94.9        | 0.82                  | 670                     | 7967                     | 2.70                          | 32                    | 1200                                 |
| 675                              | <b>1RQ6 452-8JP0</b>                | 744  | 95.1        | 0.82                  | 720                     | 8679                     | 2.40                          | 36                    | 1200                                 |
| 750                              | <b>1RQ6 454-8JP0</b>                | 744  | 95.1        | 0.82                  | 800                     | 9635                     | 2.50                          | 40                    | 1200                                 |
| 810                              | <b>1RQ6 456-8JP0</b>                | 745  | 95.4        | 0.82                  | 870                     | 10398                    | 2.70                          | 46                    | 1200                                 |
| 1160                             | <b>1RQ6 500-8JP0</b>                | 741  | 95.6        | 0.84                  | 1200                    | 14950                    | 1.80                          | 69                    | 1125                                 |
| 1280                             | <b>1RQ6 502-8JP0</b>                | 741  | 95.7        | 0.84                  | 2x670                   | 16497                    | 1.85                          | 76                    | 1125                                 |
| 1440                             | <b>1RQ6 504-8JP0</b>                | 741  | 95.8        | 0.84                  | 2x750                   | 18559                    | 1.85                          | 85                    | 1125                                 |
| 1600                             | <b>1RQ6 506-8JP0</b>                | 742  | 96.0        | 0.84                  | 2x830                   | 20593                    | 1.90                          | 94                    | 1125                                 |
| 1700                             | <b>1RQ6 560-8JP0</b>                | 742  | 96.3        | 0.85                  | 2x870                   | 21880                    | 2.20                          | 128                   | 1125                                 |
| 1960                             | <b>1RQ6 562-8JP0</b>                | 742  | 96.5        | 0.85                  | 2x1000                  | 25226                    | 2.20                          | 141                   | 1125                                 |
| 2150                             | <b>1RQ6 564-8JP0</b>                | 743  | 96.6        | 0.85                  | 2x1100                  | 27635                    | 2.35                          | 156                   | 1125                                 |
| 2350                             | <b>1RQ6 566-8JP0</b>                | 743  | 96.7        | 0.85                  | 2x1200                  | 30205                    | 2.45                          | 173                   | 1125                                 |

#### Type of construction:

|                     |   |
|---------------------|---|
| IM B3               | 0 |
| IM V1 (with canopy) | 4 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation.

Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

| Motor type<br>(repeated)       | Partial load values for square-law torque drive |     |        |                |                                     |     |        |                |                                     |     |        |                |
|--------------------------------|---|-----|--------|----------------|-------------------------------------|-----|--------|----------------|-------------------------------------|-----|--------|----------------|
|                                | $P/P_{\text{rated}}$ 155 (F) = 75 %             |     |        |                | $P/P_{\text{rated}}$ 155 (F) = 50 % |     |        |                | $P/P_{\text{rated}}$ 155 (F) = 25 % |     |        |                |
|                                | $P$   | $n$ | $\eta$ | $\cos \varphi$ | $P$                                 | $n$ | $\eta$ | $\cos \varphi$ | $P$                                 | $n$ | $\eta$ | $\cos \varphi$ |
|                                | kW  | rpm | %      | [-]            | kW                                  | rpm | %      | [-]            | kW                                  | rpm | %      | [-]            |
| <b>Square-law torque drive</b> |   |     |        |                |                                     |     |        |                |                                     |     |        |                |
| <b>6-pole</b>                  |   |     |        |                |                                     |     |        |                |                                     |     |        |                |
| 1RQ6 450-6JPO.                 | 615   | 901 | 96.0   | 0.84           | 410                                 | 789 | 96.0   | 0.81           | 205                                 | 627 | 95.8   | 0.71           |
| 1RQ6 452-6JPO.                 | 683   | 902 | 96.1   | 0.83           | 455                                 | 789 | 96.1   | 0.80           | 228                                 | 627 | 95.8   | 0.69           |
| 1RQ6 454-6JPO.                 | 765   | 902 | 96.2   | 0.84           | 510                                 | 789 | 96.2   | 0.80           | 255                                 | 627 | 95.9   | 0.70           |
| 1RQ6 456-6JPO.                 | 848   | 901 | 96.2   | 0.87           | 565                                 | 789 | 96.3   | 0.84           | 283                                 | 627 | 96.2   | 0.76           |
| 1RQ6 500-6JPO.                 | 1170  | 898 | 96.2   | 0.86           | 780                                 | 787 | 96.3   | 0.85           | 390                                 | 626 | 96.2   | 0.78           |
| 1RQ6 502-6JPO.                 | 1275  | 899 | 96.3   | 0.85           | 850                                 | 788 | 96.4   | 0.84           | 425                                 | 626 | 96.2   | 0.76           |
| 1RQ6 504-6JPO.                 | 1365  | 899 | 96.4   | 0.87           | 910                                 | 788 | 96.5   | 0.85           | 455                                 | 626 | 96.3   | 0.79           |
| 1RQ6 506-6JPO.                 | 1470  | 901 | 96.6   | 0.86           | 980                                 | 788 | 96.6   | 0.84           | 490                                 | 627 | 96.3   | 0.76           |
| 1RQ6 560-6JPO.                 | 1688  | 901 | 96.6   | 0.87           | 1125                                | 789 | 96.7   | 0.86           | 563                                 | 627 | 96.4   | 0.79           |
| 1RQ6 562-6JPO.                 | 1875  | 901 | 96.7   | 0.88           | 1250                                | 789 | 96.7   | 0.87           | 625                                 | 627 | 96.6   | 0.82           |
| <b>8-pole</b>                  |   |     |        |                |                                     |     |        |                |                                     |     |        |                |
| 1RQ6 450-8JPO.                 | 465   | 676 | 95.0   | 0.77           | 310                                 | 592 | 94.8   | 0.71           | 155                                 | 471 | 93.8   | 0.57           |
| 1RQ6 452-8JPO.                 | 506   | 676 | 95.2   | 0.79           | 338                                 | 592 | 95.1   | 0.74           | 169                                 | 470 | 94.4   | 0.61           |
| 1RQ6 454-8JPO.                 | 563   | 677 | 95.2   | 0.79           | 375                                 | 592 | 95.0   | 0.73           | 188                                 | 471 | 94.2   | 0.60           |
| 1RQ6 456-8JPO.                 | 608   | 677 | 95.5   | 0.79           | 405                                 | 592 | 95.3   | 0.73           | 203                                 | 471 | 94.5   | 0.59           |
| 1RQ6 500-8JPO.                 | 870   | 674 | 95.8   | 0.83           | 580                                 | 590 | 95.8   | 0.81           | 290                                 | 469 | 95.5   | 0.73           |
| 1RQ6 502-8JPO.                 | 960   | 674 | 95.9   | 0.84           | 640                                 | 590 | 95.9   | 0.82           | 320                                 | 469 | 95.6   | 0.74           |
| 1RQ6 504-8JPO.                 | 1080  | 674 | 96.0   | 0.84           | 720                                 | 590 | 96.1   | 0.82           | 360                                 | 469 | 95.8   | 0.74           |
| 1RQ6 506-8JPO.                 | 1200  | 674 | 96.1   | 0.84           | 800                                 | 591 | 96.2   | 0.82           | 400                                 | 470 | 95.8   | 0.74           |
| 1RQ6 560-8JPO.                 | 1275  | 675 | 96.5   | 0.84           | 850                                 | 591 | 96.6   | 0.82           | 425                                 | 470 | 96.4   | 0.75           |
| 1RQ6 562-8JPO.                 | 1470  | 675 | 96.6   | 0.85           | 980                                 | 591 | 96.7   | 0.83           | 490                                 | 470 | 96.5   | 0.75           |
| 1RQ6 564-8JPO.                 | 1613  | 676 | 96.7   | 0.84           | 1075                                | 591 | 96.7   | 0.82           | 538                                 | 470 | 96.4   | 0.73           |
| 1RQ6 566-8JPO.                 | 1763  | 676 | 96.8   | 0.84           | 1175                                | 592 | 96.8   | 0.81           | 588                                 | 470 | 96.5   | 0.72           |

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Selection and ordering data

| Rated power                   |                        | High voltage motor<br>H-compact PLUS | Operating values at rated output for utilization 155 (F) |            |                |                          |              |                   |                   |                                      |
|-------------------------------|------------------------|--------------------------------------|--|------------|----------------|--------------------------|--------------|-------------------|-------------------|--------------------------------------|
| IEC                           |                        |                                      | Rated speed  | Efficiency | Power factor   | Rated current at 4.16 kV | Rated torque | Break-down torque | Moment of inertia | Mechanical speed limit <sup>2)</sup> |
| $P_{rated}$<br>155 (F)        | $P_{rated}$<br>130 (B) |                                      | $n_{rated}$  | $\eta$     | $\cos \varphi$ | $I_{rated}$              | $T_{rated}$  | $T_B/T_{rated}$   | J                 | $n_{max}$                            |
| kW                            | kW                     | Article No.                          | rpm  | %          | [-]            | A                        | Nm           | [-]               | kgm <sup>2</sup>  | rpm                                  |
| <b>3.4 ... 4.16 kV, 50 Hz</b> |                        |                                      |  |            |                |                          |              |                   |                   |                                      |
| 2-pole                        |                        |                                      |  |            |                |                          |              |                   |                   |                                      |
| 1100                          | – <sup>6)</sup>        | <b>1RQ6 450-2JS40</b>                | 2979   | 95.4       | 0.90           | 178                      | 3529         | 2.30              | 13                | 3000                                 |
| 1220                          | – <sup>6)</sup>        | <b>1RQ6 452-2JS40</b>                | 2981   | 95.8       | 0.91           | 194                      | 3910         | 2.60              | 14                | 3000                                 |
| 1350                          | – <sup>6)</sup>        | <b>1RQ6 454-2JS40</b>                | 2982   | 96.0       | 0.91           | 215                      | 4325         | 2.60              | 16                | 3000                                 |
| 1490                          | – <sup>6)</sup>        | <b>1RQ6 456-2JS40</b>                | 2984   | 96.3       | 0.92           | 235                      | 4771         | 2.70              | 18                | 3000                                 |
| 2000                          | 1760                   | <b>1RQ6 500-2JS40</b>                | 2973   | 96.2       | 0.91           | 315                      | 6424         | 2.30              | 19                | 3000                                 |
| 2100                          | 1848                   | <b>1RQ6 502-2JS40</b>                | 2972   | 96.2       | 0.91           | 335                      | 6747         | 2.20              | 20                | 3000                                 |
| 2450                          | 2156                   | <b>1RQ6 504-2JS40</b>                | 2976   | 96.5       | 0.92           | 385                      | 7861         | 2.45              | 24                | 3000 <sup>5)</sup>                   |
| 2550                          | 2244                   | <b>1RQ6 506-2JS40</b>                | 2977   | 96.6       | 0.92           | 400                      | 8180         | 2.55              | 26                | 3000 <sup>5)</sup>                   |
| 3100                          | 2790                   | <b>1RQ6 560-2JS40</b>                | 2978   | 96.5       | 0.90           | 495                      | 9941         | 1.95              | 39                | 3000 <sup>5)</sup>                   |
| 3500                          | 3150                   | <b>1RQ6 562-2JS40</b>                | 2982   | 96.8       | 0.91           | 550                      | 11208        | 2.30              | 43                | 3000 <sup>5)</sup>                   |
| 4000                          | 3600                   | <b>1RQ6 564-2JS40</b>                | 2983   | 97.0       | 0.92           | 620                      | 12805        | 2.40              | 49                | 3000 <sup>5)</sup>                   |
| 4500                          | 4050                   | <b>1RQ6 566-2JS40</b>                | 2984   | 97.1       | 0.93           | 690                      | 14401        | 2.65              | 54                | 3000 <sup>5)</sup>                   |
| 4-pole                        |                        |                                      |  |            |                |                          |              |                   |                   |                                      |
| 1090                          | – <sup>6)</sup>        | <b>1RQ6 450-4JS4</b>                 | 1486   | 95.3       | 0.88           | 180                      | 7007         | 2.70              | 20                | 1800                                 |
| 1200                          | – <sup>6)</sup>        | <b>1RQ6 452-4JS4</b>                 | 1486   | 95.5       | 0.89           | 196                      | 7716         | 2.60              | 22                | 1800                                 |
| 1290                          | – <sup>6)</sup>        | <b>1RQ6 454-4JS4</b>                 | 1488   | 95.8       | 0.89           | 210                      | 8281         | 2.80              | 25                | 1800                                 |
| 1420                          | – <sup>6)</sup>        | <b>1RQ6 456-4JS4</b>                 | 1489   | 96.0       | 0.89           | 230                      | 9114         | 2.90              | 29                | 1800                                 |
| 2100 <sup>4)</sup>            | 1848                   | <b>1RQ6 500-4JS40</b>                | 1486   | 96.0       | 0.91           | 335                      | 13495        | 2.50              | 42                | 1800                                 |
| 2300 <sup>4)</sup>            | 2024                   | <b>1RQ6 502-4JS40</b>                | 1487   | 96.2       | 0.90           | 370                      | 14770        | 2.55              | 46                | 1800                                 |
| 2600 <sup>4)</sup>            | 2288                   | <b>1RQ6 504-4JS40</b>                | 1487   | 96.4       | 0.91           | 410                      | 16697        | 2.45              | 52                | 1800                                 |
| 2800 <sup>4)</sup>            | 2464                   | <b>1RQ6 506-4JS40</b>                | 1487   | 96.5       | 0.91           | 445                      | 17981        | 2.55              | 56                | 1800                                 |
| 3200 <sup>4)</sup>            | 2880                   | <b>1RQ6 560-4JS40</b>                | 1491   | 96.8       | 0.90           | 510                      | 20495        | 2.40              | 84                | 1800                                 |
| 3500 <sup>4)</sup>            | 3150                   | <b>1RQ6 562-4JS40</b>                | 1492   | 96.9       | 0.91           | 550                      | 22401        | 2.55              | 94                | 1800                                 |
| 4000 <sup>4)</sup>            | 3600                   | <b>1RQ6 564-4JS40</b>                | 1491   | 97.1       | 0.91           | 630                      | 25619        | 2.45              | 105               | 1800                                 |
| 4400 <sup>4)</sup>            | 3960                   | <b>1RQ6 566-4JS40</b>                | 1492   | 97.2       | 0.91           | 690                      | 28161        | 2.75              | 115               | 1800                                 |
| 4800 <sup>1)</sup>            | – <sup>6)</sup>        | <b>1RQ4 632-4JV</b>                  | 1491   | 97.0       | 0.89           | 770                      | 30744        | 2.50              | 154               | 1800                                 |
| 5190 <sup>1)</sup>            | – <sup>6)</sup>        | <b>1RQ4 634-4JV</b>                  | 1492   | 97.2       | 0.89           | 830                      | 33220        | 2.40              | 174               | 1800                                 |
| 5680 <sup>1)</sup>            | – <sup>6)</sup>        | <b>1RQ4 636-4JV</b>                  | 1492   | 97.2       | 0.88           | 920                      | 36357        | 2.40              | 186               | 1800                                 |

#### Voltage code:

4.16 kV, 50 Hz **4**  
Other voltage **9**

#### Type of construction:

IM B3 **0**  
IM V1 (with canopy) **4**

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation.

Additional details see Page 3/2.

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

<sup>1)</sup> Rated voltage less than 4.16 kV on request.

<sup>2)</sup> For IM B3, anti-friction bearings.

<sup>3)</sup> On request.

<sup>4)</sup> Data of vertical motors (IM V1) on request.

<sup>5)</sup> There are speed exclusion ranges for this type. It must be ensured that the motors are not continuously operated in these speed ranges. The exclusion ranges must be clarified in advance in the factory.

<sup>6)</sup> Utilization 130 (B) on request.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

| Motor type<br>(repeated)       | Partial load values for square-law torque drive |                     |                     |                     |                              |                     |                     |                     |                              |                     |                     |                     |
|--------------------------------|---|---------------------|---------------------|---------------------|------------------------------|---------------------|---------------------|---------------------|------------------------------|---------------------|---------------------|---------------------|
|                                | $P/P_{rated}$ 155 (F) = 75 %                    |                     |                     |                     | $P/P_{rated}$ 155 (F) = 50 % |                     |                     |                     | $P/P_{rated}$ 155 (F) = 25 % |                     |                     |                     |
|                                | $P$   | $n$                 | $\eta$              | $\cos \varphi$      | $P$                          | $n$                 | $\eta$              | $\cos \varphi$      | $P$                          | $n$                 | $\eta$              | $\cos \varphi$      |
|                                | kW  | rpm                 | %                   | [-]                 | kW                           | rpm                 | %                   | [-]                 | kW                           | rpm                 | %                   | [-]                 |
| <b>Square-law torque drive</b> |   |                     |                     |                     |                              |                     |                     |                     |                              |                     |                     |                     |
| <b>2-pole</b>                  |   |                     |                     |                     |                              |                     |                     |                     |                              |                     |                     |                     |
| 1RQ6 450-2...                  | 825   | 2708                | 95.6                | 0.90                | 550                          | 2371                | 95.6                | 0.89                | 275                          | 1883                | 95.4                | 0.84                |
| 1RQ6 452-2...                  | 915   | 2709                | 95.9                | 0.92                | 610                          | 2372                | 96.0                | 0.91                | 305                          | 1884                | 95.7                | 0.86                |
| 1RQ6 454-2...                  | 1013  | 2710                | 96.1                | 0.91                | 675                          | 2372                | 96.2                | 0.90                | 338                          | 1884                | 95.9                | 0.85                |
| 1RQ6 456-2...                  | 1118  | 2711                | 96.4                | 0.92                | 745                          | 2373                | 96.4                | 0.91                | 373                          | 1885                | 96.2                | 0.87                |
| 1RQ6 500-2...                  | 1500  | 2707                | 96.3                | 0.90                | 1000                         | 2368                | 96.4                | 0.88                | 500                          | 1883                | 96.3                | 0.81                |
| 1RQ6 502-2...                  | 1576  | 2707                | 96.3                | 0.90                | 1050                         | 2368                | 96.4                | 0.89                | 525                          | 1882                | 96.4                | 0.84                |
| 1RQ6 504-2...                  | 1838  | 2709                | 96.7                | 0.92                | 1225                         | 2369                | 96.8                | 0.90                | 613                          | 1883                | 96.7                | 0.85                |
| 1RQ6 506-2...                  | 1913  | 2710                | 96.7                | 0.92                | 1275                         | 2370                | 96.8                | 0.90                | 638                          | 1883                | 96.7                | 0.85                |
| 1RQ6 560-2...                  | 2326  | 2710                | 96.6                | 0.90                | 1550                         | 2370                | 96.7                | 0.89                | 775                          | 1884                | 96.7                | 0.85                |
| 1RQ6 562-2...                  | 2626  | 2713                | 96.8                | 0.90                | 1750                         | 2372                | 96.9                | 0.89                | 875                          | 1885                | 96.7                | 0.82                |
| 1RQ6 564-2...                  | 3001  | 2713                | 97.1                | 0.91                | 2000                         | 2372                | 97.1                | 0.90                | 1001                         | 1885                | 97.0                | 0.84                |
| 1RQ6 566-2...                  | 3375  | 2714                | 97.2                | 0.92                | 2250                         | 2373                | 97.2                | 0.91                | 1126                         | 1885                | 97.1                | 0.84                |
| <b>4-pole</b>                  |   |                     |                     |                     |                              |                     |                     |                     |                              |                     |                     |                     |
| 1RQ6 450-4...                  | 818   | 1352                | 95.5                | 0.87                | 545                          | 1184                | 95.6                | 0.85                | 273                          | 941                 | 95.3                | 0.76                |
| 1RQ6 452-4...                  | 900   | 1352                | 95.7                | 0.89                | 600                          | 1184                | 95.8                | 0.87                | 300                          | 941                 | 95.6                | 0.80                |
| 1RQ6 454-4...                  | 968   | 1353                | 95.9                | 0.88                | 645                          | 1185                | 96.0                | 0.85                | 323                          | 941                 | 95.6                | 0.77                |
| 1RQ6 456-4...                  | 1065  | 1353                | 96.1                | 0.89                | 711                          | 1185                | 96.2                | 0.87                | 355                          | 941                 | 95.8                | 0.79                |
| 1RQ6 500-4...                  | 1575  | 1353                | 96.1                | 0.89                | 1050                         | 1184                | 96.2                | 0.86                | 525                          | 941                 | 95.9                | 0.76                |
| 1RQ6 502-4...                  | 1725  | 1354                | 96.3                | 0.88                | 1150                         | 1184                | 96.3                | 0.85                | 575                          | 941                 | 95.9                | 0.73                |
| 1RQ6 504-4...                  | 1951  | 1353                | 96.5                | 0.90                | 1300                         | 1184                | 96.5                | 0.88                | 650                          | 941                 | 96.3                | 0.79                |
| 1RQ6 506-4...                  | 2100  | 1354                | 96.6                | 0.90                | 1400                         | 1184                | 96.6                | 0.87                | 700                          | 941                 | 96.4                | 0.78                |
| 1RQ6 560-4...                  | 2401  | 1357                | 96.9                | 0.89                | 1600                         | 1186                | 96.8                | 0.86                | 801                          | 942                 | 96.6                | 0.76                |
| 1RQ6 562-4...                  | 2626  | 1357                | 97.0                | 0.89                | 1750                         | 1186                | 97.0                | 0.86                | 875                          | 943                 | 96.7                | 0.76                |
| 1RQ6 564-4...                  | 3001  | 1357                | 97.2                | 0.90                | 2000                         | 1186                | 97.2                | 0.88                | 1001                         | 942                 | 96.9                | 0.80                |
| 1RQ6 566-4...                  | 3300  | 1357                | 97.3                | 0.90                | 2202                         | 1187                | 97.2                | 0.86                | 1100                         | 943                 | 96.9                | 0.75                |
| 1RQ4 632-4...                  | O. R. <sup>3)</sup>                             | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup>          | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup>          | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> |
| 1RQ4 634-4...                  | O. R. <sup>3)</sup>                             | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup>          | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup>          | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> |
| 1RQ4 636-4...                  | O. R. <sup>3)</sup>                             | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup>          | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup>          | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> |

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Selection and ordering data (continued)

| Rated power                   |                              | High voltage motor<br>H-compact PLUS | Operating values at rated output for utilization 155 (F) |            |                |                          |                    |                                 |                   |                                      |
|-------------------------------|------------------------------|--------------------------------------|--|------------|----------------|--------------------------|--------------------|---------------------------------|-------------------|--------------------------------------|
| IEC                           |                              |                                      | Rated speed  | Efficiency | Power factor   | Rated current at 4.16 kV | Rated torque       | Break-down torque               | Moment of inertia | Mechanical speed limit <sup>2)</sup> |
| $P_{155}^{\text{rated}}$ (F)  | $P_{130}^{\text{rated}}$ (B) | Article No.                          | $n_{\text{rated}}$                                       | $\eta$     | $\cos \varphi$ | $I_{\text{rated}}$       | $T_{\text{rated}}$ | $T_{\text{B}}/T_{\text{rated}}$ | J                 | $n_{\text{max}}$                     |
| kW                            | kW                           |                                      | rpm  | %          | [-]            | A                        | Nm                 | [-]                             | kgm <sup>2</sup>  | rpm                                  |
| <b>3.4 ... 4.16 kV, 50 Hz</b> |                              |                                      |  |            |                |                          |                    |                                 |                   |                                      |
| 6-pole                        |                              |                                      |  |            |                |                          |                    |                                 |                   |                                      |
| 820                           | — <sup>3)</sup>              | <b>1RQ6 450-6JS4</b>                 | 991  | 95.5       | 0.85           | 140                      | 7905               | 2.50                            | 26                | 1200                                 |
| 910                           | — <sup>3)</sup>              | <b>1RQ6 452-6JS4</b>                 | 990  | 95.6       | 0.87           | 152                      | 8783               | 2.40                            | 29                | 1200                                 |
| 1020                          | — <sup>3)</sup>              | <b>1RQ6 454-6JS4</b>                 | 990  | 95.7       | 0.87           | 170                      | 9845               | 2.40                            | 32                | 1200                                 |
| 1130                          | — <sup>3)</sup>              | <b>1RQ6 456-6JS4</b>                 | 992  | 96.0       | 0.86           | 190                      | 10890              | 2.50                            | 37                | 1200                                 |
| 1560                          | 1400                         | <b>1RQ6 500-6JS4</b>                 | 989  | 95.8       | 0.86           | 265                      | 15064              | 1.90                            | 56                | 1500                                 |
| 1780                          | 1600                         | <b>1RQ6 502-6JS4</b>                 | 990  | 96.1       | 0.85           | 300                      | 17171              | 2.05                            | 62                | 1500                                 |
| 1980                          | 1780                         | <b>1RQ6 504-6JS4</b>                 | 990  | 96.2       | 0.85           | 335                      | 19100              | 2.10                            | 69                | 1500                                 |
| 2150                          | 1940                         | <b>1RQ6 506-6JS4</b>                 | 991  | 96.4       | 0.86           | 360                      | 20719              | 2.20                            | 77                | 1500                                 |
| 2550                          | 2250                         | <b>1RQ6 560-6JS4</b>                 | 988  | 96.2       | 0.87           | 425                      | 24648              | 2.00                            | 108               | 1500                                 |
| 2900                          | 2550                         | <b>1RQ6 562-6JS4</b>                 | 990  | 96.4       | 0.87           | 480                      | 27975              | 2.20                            | 119               | 1500                                 |
| 3200                          | 2800                         | <b>1RQ6 564-6JS4</b>                 | 991  | 96.6       | 0.88           | 520                      | 30838              | 2.35                            | 132               | 1500                                 |
| 3500                          | 3100                         | <b>1RQ6 566-6JS4</b>                 | 992  | 96.8       | 0.88           | 570                      | 33695              | 2.50                            | 146               | 1500                                 |
| 3480 <sup>1)</sup>            | — <sup>3)</sup>              | <b>1RQ4 630-6JV</b>                  | 993  | 96.8       | 0.86           | 580                      | 33468              | 2.20                            | 188               | 1200                                 |
| 3770 <sup>1)</sup>            | — <sup>3)</sup>              | <b>1RQ4 632-6JV</b>                  | 993  | 96.9       | 0.87           | 620                      | 36257              | 2.20                            | 207               | 1200                                 |
| 4020 <sup>1)</sup>            | — <sup>3)</sup>              | <b>1RQ4 634-6JV</b>                  | 994  | 96.9       | 0.86           | 670                      | 38623              | 2.30                            | 228               | 1200                                 |
| 4310 <sup>1)</sup>            | — <sup>3)</sup>              | <b>1RQ4 636-6JV</b>                  | 994  | 97.1       | 0.86           | 720                      | 41409              | 2.40                            | 251               | 1200                                 |
| 8-pole                        |                              |                                      |  |            |                |                          |                    |                                 |                   |                                      |
| 620                           | — <sup>3)</sup>              | <b>1RQ6 450-8JS4</b>                 | 743  | 94.6       | 0.83           | 110                      | 7976               | 2.40                            | 32                | 1200                                 |
| 675                           | — <sup>3)</sup>              | <b>1RQ6 452-8JS4</b>                 | 744  | 94.8       | 0.82           | 120                      | 8674               | 2.50                            | 36                | 1200                                 |
| 750                           | — <sup>3)</sup>              | <b>1RQ6 454-8JS4</b>                 | 743  | 95.0       | 0.83           | 132                      | 9640               | 2.50                            | 40                | 1200                                 |
| 810                           | — <sup>3)</sup>              | <b>1RQ6 456-8JS4</b>                 | 744  | 95.2       | 0.83           | 142                      | 10399              | 2.70                            | 46                | 1200                                 |
| 1160                          | 1040                         | <b>1RQ6 500-8JS4</b>                 | 741  | 95.3       | 0.84           | 200                      | 14950              | 1.80                            | 69                | 1125                                 |
| 1280                          | 1160                         | <b>1RQ6 502-8JS4</b>                 | 743  | 95.7       | 0.83           | 225                      | 16452              | 2.15                            | 76                | 1125                                 |
| 1400                          | 1260                         | <b>1RQ6 504-8JS4</b>                 | 742  | 95.6       | 0.84           | 240                      | 18019              | 1.95                            | 85                | 1125                                 |
| 1540                          | 1380                         | <b>1RQ6 506-8JS4</b>                 | 742  | 95.8       | 0.85           | 260                      | 19821              | 1.90                            | 94                | 1125                                 |
| 1880                          | 1660                         | <b>1RQ6 560-8JS4</b>                 | 743  | 96.3       | 0.84           | 325                      | 24164              | 2.20                            | 128               | 1125                                 |
| 2100                          | 1860                         | <b>1RQ6 562-8JS4</b>                 | 742  | 96.3       | 0.85           | 355                      | 27028              | 2.10                            | 141               | 1125                                 |
| 2250                          | 2000                         | <b>1RQ6 564-8JS4</b>                 | 742  | 96.3       | 0.85           | 380                      | 28959              | 2.10                            | 156               | 1125                                 |
| 2500                          | 2200                         | <b>1RQ6 566-8JS4</b>                 | 742  | 96.4       | 0.85           | 425                      | 32177              | 2.05                            | 173               | 1125                                 |
| 2600 <sup>1)</sup>            | — <sup>3)</sup>              | <b>1RQ4 630-8JV</b>                  | 744  | 96.5       | 0.84           | 445                      | 33374              | 2.40                            | 246               | 1200                                 |
| 2790 <sup>1)</sup>            | — <sup>3)</sup>              | <b>1RQ4 632-8JV</b>                  | 745  | 96.6       | 0.83           | 485                      | 35764              | 2.50                            | 272               | 1200                                 |
| 2940 <sup>1)</sup>            | — <sup>3)</sup>              | <b>1RQ4 634-8JV</b>                  | 745  | 96.6       | 0.84           | 500                      | 37687              | 2.50                            | 300               | 1200                                 |
| 3140 <sup>1)</sup>            | — <sup>3)</sup>              | <b>1RQ4 636-8JV</b>                  | 745  | 96.7       | 0.85           | 530                      | 40251              | 2.50                            | 331               | 1200                                 |
| <b>Voltage code:</b>          |                              |                                      |  |            |                |                          |                    |                                 |                   |                                      |
| 4.16 kV, 50 Hz                |                              |                                      |  |            |                |                          |                    |                                 |                   |                                      |
| Other voltage                 |                              |                                      |  |            |                |                          |                    |                                 |                   |                                      |
| <b>Type of construction:</b>  |                              |                                      |  |            |                |                          |                    |                                 |                   |                                      |
| IM B3                         |                              |                                      |  |            |                |                          |                    |                                 |                   |                                      |
| IM V1 (with canopy)           |                              |                                      |  |            |                |                          |                    |                                 |                   |                                      |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation.

Additional details see Page 3/2.

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007. The ratings for converter operation depend on the converter and its settings and cannot be predetermined. Higher pole numbers are available on request.

<sup>1)</sup> Rated voltage less than 4.16 kV on request.

<sup>3)</sup> Utilization 130 (B) on request.

<sup>2)</sup> For IM B3, anti-friction bearings.

<sup>4)</sup> On request.



## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

| Motor type<br>(repeated)       | Partial load values for square-law torque drive |                     |                     |                     |                                      |                     |                     |                     |                                      |                     |                     |                     |
|--------------------------------|---|---------------------|---------------------|---------------------|--------------------------------------|---------------------|---------------------|---------------------|--------------------------------------|---------------------|---------------------|---------------------|
|                                | $P/P_{\text{rated}} 155 (F) = 75 \%$            |                     |                     |                     | $P/P_{\text{rated}} 155 (F) = 50 \%$ |                     |                     |                     | $P/P_{\text{rated}} 155 (F) = 25 \%$ |                     |                     |                     |
|                                | $P$   | $n$                 | $\eta$              | $\cos \varphi$      | $P$                                  | $n$                 | $\eta$              | $\cos \varphi$      | $P$                                  | $n$                 | $\eta$              | $\cos \varphi$      |
|                                | kW  | rpm                 | %                   | [-]                 | kW                                   | rpm                 | %                   | [-]                 | kW                                   | rpm                 | %                   | [-]                 |
| <b>Square-law torque drive</b> |   |                     |                     |                     |                                      |                     |                     |                     |                                      |                     |                     |                     |
| <b>6-pole</b>                  |   |                     |                     |                     |                                      |                     |                     |                     |                                      |                     |                     |                     |
| 1RQ6 450-6...                  | 615   | 901                 | 95.7                | 0.84                | 410                                  | 789                 | 95.8                | 0.80                | 205                                  | 627                 | 95.5                | 0.70                |
| 1RQ6 452-6...                  | 683   | 900                 | 95.8                | 0.86                | 455                                  | 789                 | 96.0                | 0.84                | 228                                  | 627                 | 95.9                | 0.76                |
| 1RQ6 454-6...                  | 765   | 901                 | 95.9                | 0.87                | 510                                  | 789                 | 96.1                | 0.84                | 255                                  | 627                 | 96.1                | 0.76                |
| 1RQ6 456-6...                  | 848   | 902                 | 96.2                | 0.85                | 565                                  | 789                 | 96.3                | 0.83                | 283                                  | 627                 | 96.1                | 0.73                |
| 1RQ6 500-6...                  | 1170  | 899                 | 96.0                | 0.86                | 780                                  | 787                 | 96.1                | 0.84                | 390                                  | 626                 | 95.9                | 0.77                |
| 1RQ6 502-6...                  | 1335  | 900                 | 96.2                | 0.85                | 890                                  | 788                 | 96.2                | 0.82                | 445                                  | 626                 | 95.9                | 0.74                |
| 1RQ6 504-6...                  | 1485  | 900                 | 96.3                | 0.85                | 990                                  | 788                 | 96.4                | 0.83                | 495                                  | 626                 | 96.1                | 0.74                |
| 1RQ6 506-6...                  | 1613  | 901                 | 96.5                | 0.85                | 1075                                 | 788                 | 96.5                | 0.82                | 538                                  | 627                 | 96.1                | 0.73                |
| 1RQ6 560-6...                  | 1913  | 899                 | 96.4                | 0.87                | 1275                                 | 787                 | 96.6                | 0.87                | 638                                  | 626                 | 96.6                | 0.83                |
| 1RQ6 562-6...                  | 2175  | 900                 | 96.6                | 0.88                | 1450                                 | 788                 | 96.7                | 0.87                | 725                                  | 626                 | 96.7                | 0.82                |
| 1RQ6 564-6...                  | 2400  | 901                 | 96.7                | 0.88                | 1600                                 | 789                 | 96.8                | 0.87                | 800                                  | 627                 | 96.6                | 0.81                |
| 1RQ6 566-6...                  | 2625  | 901                 | 96.9                | 0.87                | 1750                                 | 789                 | 96.9                | 0.86                | 875                                  | 627                 | 96.7                | 0.79                |
| 1RQ4 630-6...                  | O. R. <sup>4)</sup>                             | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup>                  | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup>                  | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> |
| 1RQ4 632-6...                  | O. R. <sup>4)</sup>                             | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup>                  | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup>                  | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> |
| 1RQ4 634-6...                  | O. R. <sup>4)</sup>                             | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup>                  | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup>                  | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> |
| 1RQ4 636-6...                  | O. R. <sup>4)</sup>                             | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup>                  | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup>                  | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> |
| <b>8-pole</b>                  |   |                     |                     |                     |                                      |                     |                     |                     |                                      |                     |                     |                     |
| 1RQ6 450-8...                  | 465   | 676                 | 94.8                | 0.81                | 310                                  | 592                 | 94.7                | 0.77                | 155                                  | 470                 | 94.1                | 0.65                |
| 1RQ6 452-8...                  | 506   | 676                 | 94.9                | 0.80                | 338                                  | 592                 | 94.8                | 0.76                | 169                                  | 470                 | 94.1                | 0.63                |
| 1RQ6 454-8...                  | 563   | 676                 | 95.1                | 0.82                | 375                                  | 592                 | 95.1                | 0.77                | 188                                  | 470                 | 94.5                | 0.66                |
| 1RQ6 456-8...                  | 608   | 677                 | 95.3                | 0.81                | 405                                  | 592                 | 95.2                | 0.76                | 203                                  | 471                 | 94.5                | 0.63                |
| 1RQ6 500-8...                  | 870   | 674                 | 95.5                | 0.84                | 580                                  | 590                 | 95.6                | 0.81                | 290                                  | 469                 | 95.2                | 0.73                |
| 1RQ6 502-8...                  | 960   | 675                 | 95.7                | 0.82                | 640                                  | 591                 | 95.6                | 0.78                | 320                                  | 470                 | 95.0                | 0.67                |
| 1RQ6 504-8...                  | 1050  | 675                 | 95.8                | 0.84                | 700                                  | 591                 | 95.8                | 0.81                | 350                                  | 470                 | 95.4                | 0.72                |
| 1RQ6 506-8...                  | 1155  | 675                 | 96.0                | 0.84                | 770                                  | 591                 | 96.0                | 0.82                | 385                                  | 470                 | 95.7                | 0.73                |
| 1RQ6 560-8...                  | 1410  | 675                 | 96.4                | 0.84                | 940                                  | 591                 | 96.5                | 0.81                | 470                                  | 470                 | 96.2                | 0.73                |
| 1RQ6 562-8...                  | 1575  | 675                 | 96.4                | 0.84                | 1050                                 | 591                 | 96.6                | 0.83                | 525                                  | 470                 | 96.4                | 0.75                |
| 1RQ6 564-8...                  | 1688  | 675                 | 96.5                | 0.85                | 1125                                 | 591                 | 96.6                | 0.83                | 563                                  | 470                 | 96.5                | 0.76                |
| 1RQ6 566-8...                  | 1875  | 674                 | 96.6                | 0.85                | 1250                                 | 591                 | 96.7                | 0.84                | 625                                  | 470                 | 96.6                | 0.77                |
| 1RQ4 630-8...                  | O. R. <sup>4)</sup>                             | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup>                  | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup>                  | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> |
| 1RQ4 632-8...                  | O. R. <sup>4)</sup>                             | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup>                  | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup>                  | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> |
| 1RQ4 634-8...                  | O. R. <sup>4)</sup>                             | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup>                  | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup>                  | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> |
| 1RQ4 636-8...                  | O. R. <sup>4)</sup>                             | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup>                  | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup>                  | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> | O. R. <sup>4)</sup> |

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Selection and ordering data

| Rated power<br>IEC            |                              | High voltage motor<br>SIMOTICS HV M (modular)<br><br>Article No. | Operating values at rated output for utilization 130 (B) |                           |                                       |  |                                   |   |  |  |
|-------------------------------|------------------------------|--|--|---------------------------|---------------------------------------|--|-----------------------------------|---|--|--|
| $P_{rated}$<br>155 (F)<br>kW  | $P_{rated}$<br>130 (B)<br>kW |  | Rated speed<br>$n_{rated}$<br>rpm                        | Efficiency<br>$\eta$<br>% | Power factor<br>$\cos \varphi$<br>[-] | Rated current at 4.16 kV<br>$I_{rated}$<br>A | Rated torque<br>$T_{rated}$<br>Nm | Break-down torque<br>$T_B/T_{rated}$<br>[-] | Moment of inertia<br>J<br>kgm <sup>2</sup> | Mechanical speed limit <sup>1)</sup><br>$n_{max}$<br>rpm |
| <b>3.4 ... 4.16 kV, 50 Hz</b> |                              |  |  |                           |                                       |  |                                   |   |  |  |
| 2-pole                        |                              |  |  |                           |                                       |  |                                   |   |  |  |
| 7370                          | 6700                         | <b>1RQ7 710-2J 40-0CJ0</b>                                       | 2988   | 96.7                      | 0.92                                  | 1040   | 21412                             | 2.30  | 148  | 3600   |
| 8250                          | 7500                         | <b>1RQ7 712-2J 40-0CJ0</b>                                       | 2988   | 96.8                      | 0.92                                  | 1160   | 23969                             | 2.30  | 159  | 3600   |
| 9350                          | 8500                         | <b>1RQ7 714-2J 40-0CJ0</b>                                       | 2988   | 97.1                      | 0.93                                  | 1300   | 27165                             | 2.45  | 176  | 3600   |
| 10450                         | 9500                         | <b>1RQ7 716-2J 40-0CJ0</b>                                       | 2988   | 97.3                      | 0.93                                  | 1460   | 30361                             | 2.45  | 189  | 3600   |
| 4-pole                        |                              |  |  |                           |                                       |  |                                   |   |  |  |
| 7616                          | 6800                         | <b>1RQ7 710-4J 40-0C 0</b>                                       | 1493   | 97.4                      | 0.91                                  | 1060   | 43493                             | 2.45  | 260  | 1800   |
| 8456                          | 7550                         | <b>1RQ7 712-4J 40-0C 0</b>                                       | 1493   | 97.5                      | 0.91                                  | 1180   | 48290                             | 2.45  | 285  | 1800   |
| 9352                          | 8350                         | <b>1RQ7 714-4J 40-0C 0</b>                                       | 1493   | 97.6                      | 0.92                                  | 1300   | 53407                             | 2.70  | 320  | 1800   |
| 10416                         | 9300                         | <b>1RQ7 716-4J 40-0C 0</b>                                       | 1493   | 97.7                      | 0.92                                  | 1440   | 59483                             | 2.70  | 361  | 1800   |
| 6-pole                        |                              |  |  |                           |                                       |  |                                   |   |  |  |
| 5656                          | 5050                         | <b>1RQ7 710-6J 4 40-0C 0</b>                                     | 995  | 97.0                      | 0.85                                  | 850  | 48466                             | 2.65  | 350  | 1800   |
| 6104                          | 5450                         | <b>1RQ7 712-6J 4 40-0C 0</b>                                     | 996  | 97.1                      | 0.86                                  | 910  | 52253                             | 2.65  | 396  | 1800   |
| 6608                          | 5900                         | <b>1RQ7 714-6J 4 40-0C 0</b>                                     | 996  | 97.2                      | 0.86                                  | 980  | 56567                             | 2.85  | 448  | 1800   |
| 7112                          | 6350                         | <b>1RQ7 716-6J 4 40-0C 0</b>                                     | 996  | 97.3                      | 0.86                                  | 1060   | 60882                             | 2.85  | 496  | 1800   |
| 8-pole                        |                              |  |  |                           |                                       |  |                                   |   |  |  |
| 4200                          | 3750                         | <b>1RQ7 710-8J 4 40-0C 0</b>                                     | 746  | 96.8                      | 0.85                                  | 630  | 48002                             | 2.30  | 433  | 1000   |
| 4760                          | 4250                         | <b>1RQ7 712-8J 4 40-0C 0</b>                                     | 746  | 97.0                      | 0.85                                  | 720  | 54403                             | 2.50  | 493  | 1000   |
| 5320                          | 4750                         | <b>1RQ7 714-8J 4 40-0C 0</b>                                     | 746  | 97.0                      | 0.85                                  | 800  | 60803                             | 2.60  | 558  | 1000   |
| 5936                          | 5300                         | <b>1RQ7 716-8J 4 40-0C 0</b>                                     | 746  | 97.1                      | 0.84                                  | 900  | 67844                             | 2.60  | 602  | 1000   |
| 10-pole                       |                              |  |  |                           |                                       |  |                                   |   |  |  |
| 2968                          | 2650                         | <b>1RQ7 710-3J 4 40-0C 0</b>                                     | 595  | 96.5                      | 0.85                                  | 450  | 42530                             | 2.20  | 429  | 900  |
| 3304                          | 2950                         | <b>1RQ7 712-3J 4 40-0C 0</b>                                     | 595  | 96.6                      | 0.85                                  | 500  | 47345                             | 2.20  | 486  | 900  |
| 3640                          | 3250                         | <b>1RQ7 714-3J 4 40-0C 0</b>                                     | 595  | 96.6                      | 0.86                                  | 540  | 52160                             | 2.20  | 553  | 900  |
| 3976                          | 3550                         | <b>1RQ7 716-3J 4 40-0C 0</b>                                     | 595  | 96.7                      | 0.86                                  | 590  | 56975                             | 2.20  | 610  | 900  |

#### Cooling method

See page 1/8

#### Type of construction

See page 1/9

#### Housing and bearing version

See page 1/9

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

| Motor type<br>(repeated) | Partial load values for square-law torque drive |      |        |                |  |      |        |                |  |      |        |                |
|--------------------------|---|------|--------|----------------|--|------|--------|----------------|--|------|--------|----------------|
|                          | $P/P_{\text{rated}} 130 \text{ (B)} = 75 \%$    |      |        |                | $P/P_{\text{rated}} 130 \text{ (B)} = 50 \%$ |      |        |                | $P/P_{\text{rated}} 130 \text{ (B)} = 25 \%$ |      |        |                |
|                          | $P$   | $n$  | $\eta$ | $\cos \varphi$ | $P$  | $n$  | $\eta$ | $\cos \varphi$ | $P$  | $n$  | $\eta$ | $\cos \varphi$ |
|                          | kW  | rpm  | %      | [-]            | kW   | rpm  | %      | [-]            | kW   | rpm  | %      | [-]            |
|                          | <b>Square-law torque drive</b>                  |      |        |                |  |      |        |                |  |      |        |                |
| 2-pole                   |   |      |        |                |  |      |        |                |  |      |        |                |
| 1RQ7 710-2...            | 5027  | 2714 | 96.6   | 0.93           | 3351   | 2375 | 96.5   | 0.93           | 1675   | 1886 | 96.1   | 0.90           |
| 1RQ7 712-2...            | 5624  | 2714 | 96.8   | 0.93           | 3750   | 2375 | 96.6   | 0.93           | 1874   | 1885 | 96.3   | 0.91           |
| 1RQ7 714-2...            | 6375  | 2714 | 97.0   | 0.94           | 4251   | 2375 | 96.9   | 0.94           | 2125   | 1885 | 96.6   | 0.92           |
| 1RQ7 716-2...            | 7125  | 2714 | 97.2   | 0.94           | 4750   | 2375 | 97.1   | 0.94           | 2375   | 1886 | 96.8   | 0.92           |
| 4-pole                   |   |      |        |                |  |      |        |                |  |      |        |                |
| 1RQ7 710-4...            | 5102  | 1356 | 97.3   | 0.91           | 3407   | 1187 | 97.2   | 0.90           | 1704   | 942  | 96.8   | 0.86           |
| 1RQ7 712-4...            | 5664  | 1356 | 97.4   | 0.91           | 3783   | 1187 | 97.3   | 0.90           | 1892   | 942  | 96.9   | 0.86           |
| 1RQ7 714-4...            | 6263  | 1356 | 97.5   | 0.92           | 4183   | 1187 | 97.4   | 0.91           | 2092   | 942  | 97.1   | 0.87           |
| 1RQ7 716-4...            | 6977  | 1357 | 97.7   | 0.92           | 4658   | 1187 | 97.5   | 0.91           | 2330   | 943  | 97.2   | 0.87           |
| 6-pole                   |   |      |        |                |  |      |        |                |  |      |        |                |
| 1RQ7 710-6...            | 3788  | 904  | 96.9   | 0.84           | 2529   | 791  | 96.7   | 0.81           | 1265   | 628  | 96.0   | 0.71           |
| 1RQ7 712-6...            | 4088  | 904  | 97.0   | 0.85           | 2729   | 791  | 96.7   | 0.81           | 1365   | 628  | 96.0   | 0.72           |
| 1RQ7 714-6...            | 4425  | 905  | 97.0   | 0.84           | 2954   | 792  | 96.7   | 0.81           | 1478   | 629  | 96.0   | 0.70           |
| 1RQ7 716-6...            | 4762  | 905  | 97.2   | 0.85           | 3180   | 792  | 96.9   | 0.82           | 1590   | 628  | 96.2   | 0.72           |
| 8-pole                   |   |      |        |                |  |      |        |                |  |      |        |                |
| 1RQ7 710-8...            | 2814  | 678  | 96.7   | 0.84           | 1879   | 593  | 96.5   | 0.81           | 940  | 471  | 95.8   | 0.72           |
| 1RQ7 712-8...            | 3189  | 678  | 96.8   | 0.84           | 2129   | 593  | 96.5   | 0.81           | 1065   | 471  | 95.8   | 0.70           |
| 1RQ7 714-8...            | 3563  | 678  | 96.8   | 0.84           | 2379   | 593  | 96.6   | 0.80           | 1190   | 471  | 95.8   | 0.70           |
| 1RQ7 716-8...            | 3976  | 678  | 96.9   | 0.82           | 2655   | 593  | 96.7   | 0.78           | 1328   | 471  | 95.9   | 0.67           |
| 10-pole                  |   |      |        |                |  |      |        |                |  |      |        |                |
| 1RQ7 710-3...            | 1989  | 541  | 96.4   | 0.84           | 1328   | 474  | 96.2   | 0.81           | 665  | 376  | 95.5   | 0.71           |
| 1RQ7 712-3...            | 2214  | 541  | 96.4   | 0.84           | 1479   | 474  | 96.2   | 0.81           | 740  | 376  | 95.5   | 0.71           |
| 1RQ7 714-3...            | 2439  | 541  | 96.5   | 0.85           | 1629   | 474  | 96.3   | 0.82           | 816  | 376  | 95.6   | 0.73           |
| 1RQ7 716-3...            | 2664  | 541  | 96.6   | 0.85           | 1780   | 474  | 96.3   | 0.82           | 891  | 376  | 95.7   | 0.73           |

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Selection and ordering data

| Rated power<br><b>IEC</b><br>$P_{\text{rated}}$ 155 (F)<br>kW | <b>Low voltage motor<br/>H-compact PLUS</b><br><br>Article No. | Operating values at rated output for utilization 155 (F) |             |                       |                         |                          |                               |                       |                                      |
|---|--|--|-------------|-----------------------|-------------------------|--------------------------|-------------------------------|-----------------------|--------------------------------------|
|   |  | Rated speed  | Efficiency  | Power factor          | Rated current<br>690 V  | Rated torque             | Break-down torque             | Moment of inertia     | Mechanical speed limit <sup>1)</sup> |
|   |  | $n_{\text{rated}}$<br>rpm                                | $\eta$<br>% | $\cos \varphi$<br>[-] | $I_{\text{rated}}$<br>A | $T_{\text{rated}}$<br>Nm | $T_B/T_{\text{rated}}$<br>[-] | J<br>kgm <sup>2</sup> | $n_{\text{max}}$<br>rpm              |
| <b>690 V, 60 Hz</b>   |  |  |             |                       |                         |                          |                               |                       |                                      |
| 2-pole  |  |  |             |                       |                         |                          |                               |                       |                                      |
| 1240  | <b>1RQ6 450-2JP10</b>  | 3583   | 95.2        | 0.90                  | 1220                    | 3309                     | 2.40                          | 13                    | 3600 <sup>2)</sup>                   |
| 1300  | <b>1RQ6 452-2JP10</b>  | 3582   | 95.4        | 0.92                  | 2x620                   | 3470                     | 2.40                          | 14                    | 3600 <sup>2)</sup>                   |
| 1400  | <b>1RQ6 454-2JP10</b>  | 3582   | 95.4        | 0.92                  | 2x670                   | 3734                     | 2.40                          | 16                    | 3600 <sup>2)</sup>                   |
| 1700  | <b>1RQ6 456-2JP10</b>  | 3587   | 96.1        | 0.92                  | 2x800                   | 4530                     | 2.60                          | 18                    | 3600 <sup>2)</sup>                   |
| 1940  | <b>1RQ6 500-2JP10</b>  | 3581   | 96.1        | 0.91                  | 2x930                   | 5173                     | 2.65                          | 20                    | 3600 <sup>2)</sup>                   |
| 2050  | <b>1RQ6 502-2JP10</b>  | 3581   | 96.2        | 0.92                  | 2x970                   | 5467                     | 2.65                          | 22                    | 3600 <sup>2)</sup>                   |
| 2450  | <b>1RQ6 504-2JP10</b>  | 3583   | 96.5        | 0.92                  | 2x1160                  | 6530                     | 2.75                          | 25                    | 3600 <sup>2)</sup>                   |
| 4-pole  |  |  |             |                       |                         |                          |                               |                       |                                      |
| 1340  | <b>1RQ6 450-4JP1</b>   | 1786   | 95.5        | 0.88                  | 2x670                   | 7174                     | 2.40                          | 20                    | 1800                                 |
| 1410  | <b>1RQ6 452-4JP1</b>   | 1785   | 95.6        | 0.89                  | 2x690                   | 7553                     | 2.30                          | 22                    | 1800                                 |
| 1590  | <b>1RQ6 454-4JP1</b>   | 1787   | 95.9        | 0.89                  | 2x780                   | 8509                     | 2.40                          | 25                    | 1800                                 |
| 1740  | <b>1RQ6 456-4JP1</b>   | 1784   | 95.9        | 0.90                  | 2x840                   | 9329                     | 2.10                          | 29                    | 1800                                 |
| 2000 <sup>3)</sup>  | <b>1RQ6 500-4JP10</b>  | 1787   | 95.9        | 0.92                  | 2x950                   | 10688                    | 2.60                          | 42                    | 1800                                 |
| 2100 <sup>3)</sup>  | <b>1RQ6 502-4JP10</b>  | 1785   | 95.9        | 0.92                  | 2x1000                  | 11234                    | 2.30                          | 46                    | 1800                                 |
| 2500 <sup>3)</sup>  | <b>1RQ6 504-4JP10</b>  | 1787   | 96.3        | 0.92                  | 2x1180                  | 13359                    | 2.55                          | 52                    | 1800                                 |
| <b>Type of construction:</b>                                  |  |  |             |                       |                         |                          |                               |                       |                                      |
| IM B3 <b>0</b>  |  |  |             |                       |                         |                          |                               |                       |                                      |
| IM V1 (with canopy) <b>4</b>                                  |  |  |             |                       |                         |                          |                               |                       |                                      |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation.

Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> There are speed exclusion ranges for this type. It must be ensured that the motors are not continuously operated in these speed ranges. The exclusion ranges must be clarified in advance in the factory.

<sup>3)</sup> Data of vertical motors (IM V1) on request.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

Motor type  
(repeated)

Partial load values for square-law torque drive

$P/P_{\text{rated}}$  155 (F) = 75 %

$P/P_{\text{rated}}$  155 (F) = 50 %

$P/P_{\text{rated}}$  155 (F) = 25 %

$P$   $n$   $\eta$   $\cos \varphi$   $P$   $n$   $\eta$   $\cos \varphi$   $P$   $n$   $\eta$   $\cos \varphi$   
kW rpm % [-] kW rpm % [-] kW rpm % [-]

Square-law torque drive

2-pole

|                |      |      |      |      |      |      |      |      |     |      |      |      |
|----------------|------|------|------|------|------|------|------|------|-----|------|------|------|
| 1RQ6 450-2JP1. | 930  | 3257 | 95.4 | 0.90 | 620  | 2846 | 95.3 | 0.89 | 310 | 2262 | 95.0 | 0.83 |
| 1RQ6 452-2JP1. | 975  | 3256 | 95.6 | 0.92 | 650  | 2846 | 95.6 | 0.92 | 325 | 2262 | 95.4 | 0.88 |
| 1RQ6 454-2JP1. | 1050 | 3257 | 95.7 | 0.92 | 700  | 2846 | 95.7 | 0.92 | 350 | 2262 | 95.5 | 0.88 |
| 1RQ6 456-2JP1. | 1275 | 3260 | 96.2 | 0.91 | 850  | 2848 | 96.1 | 0.90 | 425 | 2263 | 95.8 | 0.83 |
| 1RQ6 500-2JP1. | 1455 | 3257 | 96.1 | 0.89 | 970  | 2847 | 96.1 | 0.87 | 485 | 2262 | 95.8 | 0.77 |
| 1RQ6 502-2JP1. | 1538 | 3257 | 96.2 | 0.91 | 1025 | 2847 | 96.2 | 0.89 | 513 | 2262 | 96.0 | 0.81 |
| 1RQ6 504-2JP1. | 1838 | 3258 | 96.6 | 0.91 | 1225 | 2848 | 96.5 | 0.88 | 613 | 2262 | 96.3 | 0.80 |

4-pole

|                |      |      |      |      |      |      |      |      |     |      |      |      |
|----------------|------|------|------|------|------|------|------|------|-----|------|------|------|
| 1RQ6 450-4JP1. | 1005 | 1624 | 95.6 | 0.86 | 670  | 1421 | 95.6 | 0.84 | 335 | 1130 | 95.2 | 0.75 |
| 1RQ6 452-4JP1. | 1058 | 1624 | 95.9 | 0.89 | 705  | 1420 | 95.9 | 0.88 | 353 | 1129 | 95.6 | 0.82 |
| 1RQ6 454-4JP1. | 1193 | 1625 | 96.1 | 0.89 | 795  | 1421 | 96.0 | 0.87 | 398 | 1130 | 95.7 | 0.81 |
| 1RQ6 456-4JP1. | 1306 | 1624 | 96.2 | 0.90 | 870  | 1420 | 96.3 | 0.90 | 435 | 1129 | 96.2 | 0.86 |
| 1RQ6 500-4JP1. | 1500 | 1626 | 96.0 | 0.91 | 1000 | 1422 | 96.1 | 0.89 | 500 | 1130 | 95.9 | 0.81 |
| 1RQ6 502-4JP1. | 1576 | 1625 | 96.0 | 0.91 | 1050 | 1421 | 96.1 | 0.90 | 525 | 1129 | 96.1 | 0.84 |
| 1RQ6 504-4JP1. | 1876 | 1626 | 96.4 | 0.91 | 1250 | 1422 | 96.5 | 0.89 | 625 | 1130 | 96.3 | 0.82 |

3

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Selection and ordering data

| Rated power<br><br>IEC<br><br>$P_{\text{rated}}$ 155 (F)<br>kW | Low voltage motor<br>H-compact PLUS<br><br>Article No. | Operating values at rated output for utilization 155 (F) |             |                       |                         |                          |  |                       |                                      |
|--|--|--|-------------|-----------------------|-------------------------|--------------------------|--|-----------------------|--------------------------------------|
|  |  | Rated speed  | Efficiency  | Power factor          | Rated current<br>690 V  | Rated torque             | Break-down torque                      | Moment of inertia     | Mechanical speed limit <sup>1)</sup> |
|  |  | $n_{\text{rated}}$<br>rpm                                | $\eta$<br>% | $\cos \varphi$<br>[-] | $I_{\text{rated}}$<br>A | $T_{\text{rated}}$<br>Nm | $T_{\text{B}}/T_{\text{rated}}$<br>[-] | J<br>kgm <sup>2</sup> | $n_{\text{max}}$<br>rpm              |
| <b>690 V, 60 Hz</b>  |  |  |             |                       |                         |                          |  |                       |                                      |
| 6-pole   |  |  |             |                       |                         |                          |  |                       |                                      |
| 1040   | <b>1RQ6 450-6JP1</b>                                   | 1190   | 95.7        | 0.86                  | 1060                    | 8350                     | 2.30                                   | 26                    | 1200                                 |
| 1130   | <b>1RQ6 452-6JP1</b>                                   | 1191   | 95.9        | 0.85                  | 1160                    | 9070                     | 2.20                                   | 29                    | 1200                                 |
| 1270   | <b>1RQ6 454-6JP1</b>                                   | 1191   | 96.1        | 0.86                  | 2x640                   | 10192                    | 2.30                                   | 32                    | 1200                                 |
| 1360   | <b>1RQ6 456-6JP1</b>                                   | 1193   | 96.3        | 0.84                  | 2x700                   | 10905                    | 2.30                                   | 37                    | 1200                                 |
| 1800   | <b>1RQ6 500-6JP1</b>                                   | 1188   | 96.1        | 0.86                  | 2x910                   | 14470                    | 1.85                                   | 56                    | 1500                                 |
| 2000   | <b>1RQ6 502-6JP1</b>                                   | 1190   | 96.3        | 0.86                  | 2x1020                  | 16050                    | 2.05                                   | 62                    | 1500                                 |
| 2100   | <b>1RQ6 504-6JP1</b>                                   | 1190   | 96.4        | 0.87                  | 2x1040                  | 16853                    | 2.05                                   | 69                    | 1500                                 |
| 2350   | <b>1RQ6 506-6JP1</b>                                   | 1191   | 96.6        | 0.86                  | 2x1180                  | 18843                    | 2.25                                   | 77                    | 1500                                 |
| 2850   | <b>1RQ6 560-6JP1</b>                                   | 1192   | 96.6        | 0.87                  | 3x950                   | 22833                    | 2.50                                   | 108                   | 1500                                 |
| 3100   | <b>1RQ6 562-6JP1</b>                                   | 1190   | 96.6        | 0.88                  | 3x1020                  | 24878                    | 2.25                                   | 119                   | 1500                                 |
| 8-pole   |  |  |             |                       |                         |                          |  |                       |                                      |
| 740  | <b>1RQ6 450-8JP1</b>                                   | 893  | 95.1        | 0.83                  | 780                     | 7922                     | 2.30                                   | 32                    | 1200                                 |
| 820  | <b>1RQ6 452-8JP1</b>                                   | 893  | 95.2        | 0.84                  | 860                     | 8783                     | 2.30                                   | 36                    | 1200                                 |
| 910  | <b>1RQ6 454-8JP1</b>                                   | 893  | 95.5        | 0.84                  | 950                     | 9739                     | 2.40                                   | 40                    | 1200                                 |
| 1000   | <b>1RQ6 456-8JP1</b>                                   | 893  | 95.6        | 0.85                  | 1020                    | 10704                    | 2.30                                   | 46                    | 1200                                 |
| 1300   | <b>1RQ6 500-8JP1</b>                                   | 892  | 95.7        | 0.84                  | 2x680                   | 13918                    | 1.80                                   | 69                    | 1125                                 |
| 1440   | <b>1RQ6 502-8JP1</b>                                   | 892  | 95.9        | 0.84                  | 2x750                   | 15417                    | 1.85                                   | 76                    | 1125                                 |
| 1600   | <b>1RQ6 504-8JP1</b>                                   | 892  | 96.0        | 0.84                  | 2x830                   | 17130                    | 1.90                                   | 85                    | 1125                                 |
| 1800   | <b>1RQ6 506-8JP1</b>                                   | 893  | 96.2        | 0.85                  | 2x920                   | 19250                    | 2.05                                   | 94                    | 1125                                 |
| 2000   | <b>1RQ6 560-8JP1</b>                                   | 893  | 96.6        | 0.84                  | 2x1040                  | 21389                    | 2.30                                   | 128                   | 1125                                 |
| 2350   | <b>1RQ6 562-8JP1</b>                                   | 893  | 96.7        | 0.84                  | 2x1220                  | 25132                    | 2.45                                   | 141                   | 1125                                 |
| 2600   | <b>1RQ6 564-8JP1</b>                                   | 893  | 96.7        | 0.85                  | 4x660                   | 27805                    | 2.25                                   | 156                   | 1125                                 |
| 2850   | <b>1RQ6 566-8JP1</b>                                   | 893  | 96.8        | 0.85                  | 4x720                   | 30479                    | 2.45                                   | 173                   | 1125                                 |

#### Type of construction:

|                     |   |
|---------------------|---|
| IM B3               | 0 |
| IM V1 (with canopy) | 4 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation.

Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

Motor type  
(repeated)

Partial load values for square-law torque drive

$P/P_{\text{rated}}$  155 (F) = 75 %

$P/P_{\text{rated}}$  155 (F) = 50 %

$P/P_{\text{rated}}$  155 (F) = 25 %

$P$   $n$   $\eta$   $\cos \varphi$   $P$   $n$   $\eta$   $\cos \varphi$   $P$   $n$   $\eta$   $\cos \varphi$   
kW rpm % [-] kW rpm % [-] kW rpm % [-]

#### Square-law torque drive

6-pole

|                |      |      |      |      |      |     |      |      |     |     |      |      |
|----------------|------|------|------|------|------|-----|------|------|-----|-----|------|------|
| 1RQ6 450-6JP1. | 780  | 1083 | 96.0 | 0.85 | 520  | 947 | 96.1 | 0.82 | 260 | 753 | 95.8 | 0.72 |
| 1RQ6 452-6JP1. | 848  | 1083 | 96.1 | 0.84 | 565  | 947 | 96.1 | 0.80 | 283 | 753 | 95.8 | 0.70 |
| 1RQ6 454-6JP1. | 953  | 1083 | 96.3 | 0.85 | 635  | 947 | 96.4 | 0.83 | 318 | 753 | 96.1 | 0.73 |
| 1RQ6 456-6JP1. | 1020 | 1084 | 96.5 | 0.82 | 680  | 948 | 96.4 | 0.79 | 340 | 754 | 96.1 | 0.68 |
| 1RQ6 500-6JP1. | 1350 | 1080 | 96.3 | 0.86 | 900  | 945 | 96.3 | 0.85 | 450 | 752 | 96.1 | 0.79 |
| 1RQ6 502-6JP1. | 1500 | 1082 | 96.4 | 0.85 | 1000 | 946 | 96.4 | 0.83 | 500 | 752 | 96.1 | 0.76 |
| 1RQ6 504-6JP1. | 1575 | 1082 | 96.5 | 0.86 | 1050 | 946 | 96.5 | 0.85 | 525 | 752 | 96.2 | 0.78 |
| 1RQ6 506-6JP1. | 1763 | 1083 | 96.6 | 0.86 | 1175 | 947 | 96.6 | 0.83 | 588 | 753 | 96.2 | 0.75 |
| 1RQ6 560-6JP1. | 2138 | 1083 | 96.7 | 0.87 | 1425 | 947 | 96.6 | 0.85 | 713 | 753 | 96.3 | 0.78 |
| 1RQ6 562-6JP1. | 2325 | 1082 | 96.7 | 0.88 | 1550 | 946 | 96.8 | 0.87 | 775 | 753 | 96.6 | 0.82 |

8-pole

|                |      |     |      |      |      |     |      |      |     |     |      |      |
|----------------|------|-----|------|------|------|-----|------|------|-----|-----|------|------|
| 1RQ6 450-8JP1. | 555  | 812 | 95.2 | 0.80 | 370  | 710 | 95.1 | 0.76 | 185 | 565 | 94.4 | 0.63 |
| 1RQ6 452-8JP1. | 615  | 812 | 95.4 | 0.82 | 410  | 710 | 95.4 | 0.79 | 205 | 565 | 94.8 | 0.67 |
| 1RQ6 454-8JP1. | 683  | 813 | 95.5 | 0.81 | 455  | 710 | 95.5 | 0.77 | 228 | 565 | 94.8 | 0.65 |
| 1RQ6 456-8JP1. | 750  | 813 | 95.8 | 0.83 | 500  | 710 | 95.7 | 0.79 | 250 | 565 | 95.1 | 0.68 |
| 1RQ6 500-8JP1. | 975  | 811 | 95.9 | 0.84 | 650  | 709 | 95.9 | 0.82 | 325 | 564 | 95.5 | 0.74 |
| 1RQ6 502-8JP1. | 1080 | 811 | 96.0 | 0.84 | 720  | 709 | 96.0 | 0.82 | 360 | 564 | 95.6 | 0.74 |
| 1RQ6 504-8JP1. | 1200 | 811 | 96.1 | 0.84 | 800  | 709 | 96.1 | 0.82 | 400 | 564 | 95.7 | 0.74 |
| 1RQ6 506-8JP1. | 1350 | 812 | 96.3 | 0.84 | 900  | 710 | 96.2 | 0.81 | 450 | 564 | 95.7 | 0.72 |
| 1RQ6 560-8JP1. | 1500 | 812 | 96.6 | 0.84 | 1000 | 710 | 96.6 | 0.81 | 500 | 564 | 96.3 | 0.72 |
| 1RQ6 562-8JP1. | 1763 | 812 | 96.8 | 0.83 | 1175 | 710 | 96.7 | 0.80 | 588 | 565 | 96.3 | 0.70 |
| 1RQ6 564-8JP1. | 1950 | 812 | 96.8 | 0.85 | 1300 | 710 | 96.8 | 0.83 | 650 | 564 | 96.5 | 0.75 |
| 1RQ6 566-8JP1. | 2138 | 812 | 96.9 | 0.84 | 1425 | 710 | 96.9 | 0.81 | 713 | 565 | 96.5 | 0.72 |

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Selection and ordering data

| Rated power                   |                          | High voltage motor<br>H-compact PLUS | Operating values at rated output for utilization 155 (F) |            |                |                          |                    |                        |                   |                                      |
|-------------------------------|--------------------------|--------------------------------------|--|------------|----------------|--------------------------|--------------------|------------------------|-------------------|--------------------------------------|
| IEC                           |                          |                                      | Rated speed  | Efficiency | Power factor   | Rated current at 4.16 kV | Rated torque       | Break-down torque      | Moment of inertia | Mechanical speed limit <sup>1)</sup> |
| $P_{155}^{\text{rated}}$      | $P_{130}^{\text{rated}}$ | Article No.                          | $n_{\text{rated}}$                                       | $\eta$     | $\cos \varphi$ | $I_{\text{rated}}$       | $T_{\text{rated}}$ | $T_B/T_{\text{rated}}$ | J                 | $n_{\text{max}}$                     |
| kW                            | kW                       |                                      | rpm  | %          | [-]            | A                        | Nm                 | [-]                    | kgm <sup>2</sup>  | rpm                                  |
| <b>3.4 ... 4.16 kV, 60 Hz</b> |                          |                                      |  |            |                |                          |                    |                        |                   |                                      |
| 2-pole                        |                          |                                      |  |            |                |                          |                    |                        |                   |                                      |
| 1280                          | — <sup>4)</sup>          | <b>1RQ6 450-2JS30</b>                | 3579   | 95.1       | 0.90           | 210                      | 3418               | 2.50                   | 13                | 3600 <sup>2)</sup>                   |
| 1420                          | — <sup>4)</sup>          | <b>1RQ6 452-2JS30</b>                | 3581   | 95.6       | 0.91           | 225                      | 3788               | 2.60                   | 14                | 3600 <sup>2)</sup>                   |
| 1580                          | — <sup>4)</sup>          | <b>1RQ6 454-2JS30</b>                | 3580   | 95.8       | 0.93           | 245                      | 4217               | 2.60                   | 16                | 3600 <sup>2)</sup>                   |
| 1740                          | — <sup>4)</sup>          | <b>1RQ6 456-2JS30</b>                | 3586   | 96.0       | 0.92           | 275                      | 4634               | 3.50                   | 18                | 3600 <sup>2)</sup>                   |
| 2250                          | 1980                     | <b>1RQ6 500-2JS30</b>                | 3578   | 96.1       | 0.90           | 360                      | 6005               | 2.50                   | 20                | 3600 <sup>2)</sup>                   |
| 2400                          | 2112                     | <b>1RQ6 502-2JS30</b>                | 3578   | 96.2       | 0.91           | 380                      | 6405               | 2.45                   | 22                | 3600 <sup>2)</sup>                   |
| 2800                          | 2464                     | <b>1RQ6 504-2JS30</b>                | 3577   | 96.5       | 0.92           | 440                      | 7475               | 2.40                   | 25                | 3600 <sup>2)</sup>                   |
| 2950                          | 2596                     | <b>1RQ6 506-2JS30</b>                | 3578   | 96.6       | 0.92           | 460                      | 7873               | 2.50                   | 27                | 3600 <sup>2)</sup>                   |
| 3500                          | 3150                     | <b>1RQ6 560-2JS30</b>                | 3579   | 96.3       | 0.90           | 560                      | 9339               | 1.95                   | 39                | 3600 <sup>2)</sup>                   |
| 3900                          | 3510                     | <b>1RQ6 562-2JS30</b>                | 3581   | 96.5       | 0.91           | 620                      | 10400              | 2.15                   | 43                | 3600 <sup>2)</sup>                   |
| 4400                          | 3960                     | <b>1RQ6 564-2JS30</b>                | 3583   | 96.7       | 0.92           | 690                      | 11727              | 2.35                   | 49                | 3600 <sup>2)</sup>                   |
| 4900                          | 4410                     | <b>1RQ6 566-2JS30</b>                | 3585   | 96.9       | 0.93           | 750                      | 13052              | 2.75                   | 54                | 3600 <sup>2)</sup>                   |
| 4-pole                        |                          |                                      |  |            |                |                          |                    |                        |                   |                                      |
| 1340                          | — <sup>4)</sup>          | <b>1RQ6 450-4JS3</b>                 | 1784   | 95.4       | 0.88           | 220                      | 7177               | 2.40                   | 20                | 1800                                 |
| 1410                          | — <sup>4)</sup>          | <b>1RQ6 452-4JS3</b>                 | 1785   | 95.6       | 0.89           | 230                      | 7546               | 2.40                   | 22                | 1800                                 |
| 1590                          | — <sup>4)</sup>          | <b>1RQ6 454-4JS3</b>                 | 1785   | 95.8       | 0.90           | 255                      | 8509               | 2.50                   | 25                | 1800                                 |
| 1740                          | — <sup>4)</sup>          | <b>1RQ6 456-4JS3</b>                 | 1785   | 95.9       | 0.91           | 275                      | 9313               | 2.70                   | 29                | 1800                                 |
| 2600 <sup>3)</sup>            | 2288                     | <b>1RQ6 500-4JS30</b>                | 1786   | 96.1       | 0.90           | 415                      | 13902              | 2.40                   | 42                | 1800                                 |
| 2700 <sup>3)</sup>            | 2376                     | <b>1RQ6 502-4JS30</b>                | 1786   | 96.2       | 0.91           | 430                      | 14436              | 2.45                   | 46                | 1800                                 |
| 3000 <sup>3)</sup>            | 2640                     | <b>1RQ6 504-4JS30</b>                | 1788   | 96.4       | 0.91           | 475                      | 16022              | 2.60                   | 52                | 1800                                 |
| 3200 <sup>3)</sup>            | 2816                     | <b>1RQ6 506-4JS30</b>                | 1787   | 96.4       | 0.92           | 500                      | 17100              | 2.40                   | 56                | 1800                                 |
| 3700 <sup>3)</sup>            | 3330                     | <b>1RQ6 560-4JS30</b>                | 1791   | 96.7       | 0.91           | 580                      | 19728              | 2.50                   | 84                | 1800                                 |
| 4100 <sup>3)</sup>            | 3690                     | <b>1RQ6 562-4JS30</b>                | 1792   | 96.9       | 0.91           | 650                      | 21848              | 2.50                   | 94                | 1800                                 |
| 4600 <sup>3)</sup>            | 4140                     | <b>1RQ6 564-4JS30</b>                | 1791   | 97.0       | 0.91           | 720                      | 24526              | 2.35                   | 105               | 1800                                 |
| 5100 <sup>3)</sup>            | 4590                     | <b>1RQ6 566-4JS30</b>                | 1791   | 97.2       | 0.92           | 790                      | 27192              | 2.40                   | 115               | 1800                                 |

#### Type of construction:

|                     |   |
|---------------------|---|
| IM B3               | 0 |
| IM V1 (with canopy) | 4 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation.

Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> There are speed exclusion ranges for this type. It must be ensured that the motors are not continuously operated in these speed ranges. The exclusion ranges must be clarified in advance in the factory.

<sup>3)</sup> Data of vertical motors (IM V1) on request.

<sup>4)</sup> Utilization 130 (B) on request.



## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

| Motor type<br>(repeated)       | Partial load values for square-law torque drive |      |        |                |                                     |      |        |                |                                     |      |        |                |
|--------------------------------|---|------|--------|----------------|-------------------------------------|------|--------|----------------|-------------------------------------|------|--------|----------------|
|                                | $P/P_{\text{rated}}$ 155 (F) = 75 %             |      |        |                | $P/P_{\text{rated}}$ 155 (F) = 50 % |      |        |                | $P/P_{\text{rated}}$ 155 (F) = 25 % |      |        |                |
|                                | $P$   | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$  | $\eta$ | $\cos \varphi$ |
|                                | kW  | rpm  | %      | [-]            | kW                                  | rpm  | %      | [-]            | kW                                  | rpm  | %      | [-]            |
| <b>Square-law torque drive</b> |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| <b>2-pole</b>                  |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RQ6 450-2...                  | 960   | 3254 | 95.2   | 0.90           | 640                                 | 2845 | 95.1   | 0.89           | 320                                 | 2261 | 94.8   | 0.83           |
| 1RQ6 452-2...                  | 1065  | 3256 | 95.6   | 0.91           | 710                                 | 2846 | 95.6   | 0.90           | 355                                 | 2262 | 95.2   | 0.85           |
| 1RQ6 454-2...                  | 1185  | 3255 | 95.9   | 0.93           | 790                                 | 2845 | 95.9   | 0.92           | 395                                 | 2261 | 95.7   | 0.89           |
| 1RQ6 456-2...                  | 1305  | 3259 | 96.0   | 0.91           | 871                                 | 2848 | 95.8   | 0.89           | 435                                 | 2263 | 95.3   | 0.81           |
| 1RQ6 500-2...                  | 1688  | 3255 | 96.1   | 0.89           | 1125                                | 2846 | 96.1   | 0.87           | 563                                 | 2261 | 95.8   | 0.78           |
| 1RQ6 502-2...                  | 1801  | 3255 | 96.3   | 0.90           | 1200                                | 2846 | 96.3   | 0.88           | 600                                 | 2261 | 96.0   | 0.81           |
| 1RQ6 504-2...                  | 2101  | 3254 | 96.6   | 0.91           | 1400                                | 2846 | 96.6   | 0.91           | 700                                 | 2261 | 96.5   | 0.86           |
| 1RQ6 506-2...                  | 2213  | 3255 | 96.7   | 0.92           | 1475                                | 2846 | 96.7   | 0.91           | 738                                 | 2261 | 96.5   | 0.85           |
| 1RQ6 560-2...                  | 2627  | 3256 | 96.4   | 0.90           | 1751                                | 2847 | 96.4   | 0.89           | 875                                 | 2262 | 96.2   | 0.84           |
| 1RQ6 562-2...                  | 2926  | 3258 | 96.6   | 0.91           | 1951                                | 2848 | 96.6   | 0.90           | 975                                 | 2263 | 96.4   | 0.85           |
| 1RQ6 564-2...                  | 3301  | 3259 | 96.8   | 0.92           | 2200                                | 2849 | 96.8   | 0.91           | 1100                                | 2263 | 96.6   | 0.86           |
| 1RQ6 566-2...                  | 3676  | 3260 | 97.0   | 0.92           | 2450                                | 2850 | 96.9   | 0.91           | 1226                                | 2263 | 96.7   | 0.84           |
| <b>4-pole</b>                  |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RQ6 450-4...                  | 1005  | 1623 | 95.6   | 0.88           | 670                                 | 1420 | 95.6   | 0.87           | 335                                 | 1129 | 95.4   | 0.80           |
| 1RQ6 452-4...                  | 1058  | 1624 | 95.7   | 0.88           | 705                                 | 1420 | 95.8   | 0.87           | 353                                 | 1130 | 95.5   | 0.81           |
| 1RQ6 454-4...                  | 1193  | 1624 | 96.0   | 0.90           | 795                                 | 1420 | 96.0   | 0.89           | 398                                 | 1130 | 95.8   | 0.83           |
| 1RQ6 456-4...                  | 1305  | 1624 | 96.1   | 0.91           | 870                                 | 1420 | 96.2   | 0.91           | 435                                 | 1130 | 96.1   | 0.86           |
| 1RQ6 500-4...                  | 1951  | 1626 | 96.1   | 0.89           | 1300                                | 1422 | 96.1   | 0.86           | 650                                 | 1130 | 95.8   | 0.75           |
| 1RQ6 502-4...                  | 2025  | 1626 | 96.2   | 0.90           | 1350                                | 1422 | 96.2   | 0.87           | 676                                 | 1130 | 95.9   | 0.78           |
| 1RQ6 504-4...                  | 2250  | 1627 | 96.4   | 0.90           | 1500                                | 1423 | 96.4   | 0.86           | 751                                 | 1130 | 96.0   | 0.76           |
| 1RQ6 506-4...                  | 2401  | 1626 | 96.5   | 0.91           | 1600                                | 1422 | 96.5   | 0.89           | 801                                 | 1130 | 96.3   | 0.82           |
| 1RQ6 560-4...                  | 2776  | 1629 | 96.7   | 0.89           | 1850                                | 1424 | 96.7   | 0.87           | 926                                 | 1131 | 96.3   | 0.77           |
| 1RQ6 562-4...                  | 3076  | 1629 | 96.9   | 0.90           | 2050                                | 1424 | 96.9   | 0.87           | 1026                                | 1131 | 96.5   | 0.78           |
| 1RQ6 564-4...                  | 3451  | 1629 | 97.1   | 0.91           | 2300                                | 1424 | 97.1   | 0.89           | 1151                                | 1131 | 96.8   | 0.81           |
| 1RQ6 566-4...                  | 3826  | 1629 | 97.2   | 0.91           | 2550                                | 1424 | 97.2   | 0.89           | 1276                                | 1131 | 97.0   | 0.82           |

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Selection and ordering data (continued)

| Rated power                   |                        | High voltage motor<br>H-compact PLUS | Operating values at rated output for utilization 155 (F) |             |            |              |                             |              |                   |                   |                                      |
|-------------------------------|------------------------|--------------------------------------|--|-------------|------------|--------------|-----------------------------|--------------|-------------------|-------------------|--------------------------------------|
| IEC                           | $P_{rated}$<br>155 (F) |                                      | $P_{rated}$<br>130 (B)                                   | Rated speed | Efficiency | Power factor | Rated current at<br>4.16 kV | Rated torque | Break-down torque | Moment of inertia | Mechanical speed limit <sup>1)</sup> |
|                               |                        |                                      |  |             |            |              |                             |              |                   |                   |                                      |
|                               | kW                     | kW                                   | rpm  | %           | [-]        | A            | Nm                          | [-]          | kgm <sup>2</sup>  | rpm               |                                      |
| <b>3.4 ... 4.16 kV, 60 Hz</b> |                        |                                      |  |             |            |              |                             |              |                   |                   |                                      |
| 6-pole                        |                        |                                      |  |             |            |              |                             |              |                   |                   |                                      |
| 1040                          | — <sup>2)</sup>        | <b>1RQ6 450-6JS3</b>                 | 1190   | 95.7        | 0.86       | 176          | 8354                        | 2.40         | 26                | 1200              |                                      |
| 1130                          | — <sup>2)</sup>        | <b>1RQ6 452-6JS3</b>                 | 1191   | 95.9        | 0.86       | 190          | 9071                        | 2.40         | 29                | 1200              |                                      |
| 1270                          | — <sup>2)</sup>        | <b>1RQ6 454-6JS3</b>                 | 1191   | 96.1        | 0.86       | 215          | 10187                       | 2.50         | 32                | 1200              |                                      |
| 1360                          | — <sup>2)</sup>        | <b>1RQ6 456-6JS3</b>                 | 1192   | 96.2        | 0.85       | 230          | 10902                       | 2.50         | 37                | 1200              |                                      |
| 1780                          | 1600                   | <b>1RQ6 500-6JS3</b>                 | 1190   | 96.1        | 0.86       | 300          | 14285                       | 2.00         | 56.0              | 1500              |                                      |
| 2000                          | 1800                   | <b>1RQ6 502-6JS3</b>                 | 1190   | 96.2        | 0.86       | 335          | 16050                       | 2.05         | 62.0              | 1500              |                                      |
| 2200                          | 2000                   | <b>1RQ6 504-6JS3</b>                 | 1190   | 96.4        | 0.86       | 370          | 17655                       | 2.10         | 69.0              | 1500              |                                      |
| 2450                          | 2200                   | <b>1RQ6 506-6JS3</b>                 | 1191   | 96.4        | 0.86       | 410          | 19645                       | 2.25         | 77.0              | 1500              |                                      |
| 3050                          | 2700                   | <b>1RQ6 560-6JS3</b>                 | 1189   | 96.3        | 0.87       | 510          | 24497                       | 2.00         | 108.0             | 1500              |                                      |
| 3450                          | 3050                   | <b>1RQ6 562-6JS3</b>                 | 1190   | 96.6        | 0.87       | 570          | 27687                       | 2.15         | 119.0             | 1500              |                                      |
| 3800                          | 3350                   | <b>1RQ6 564-6JS3</b>                 | 1190   | 96.7        | 0.88       | 620          | 30496                       | 2.25         | 132.0             | 1500              |                                      |
| 4100                          | 3600                   | <b>1RQ6 566-6JS3</b>                 | 1192   | 96.9        | 0.88       | 670          | 32848                       | 2.55         | 146.0             | 1500              |                                      |
| 8-pole                        |                        |                                      |  |             |            |              |                             |              |                   |                   |                                      |
| 740                           | — <sup>2)</sup>        | <b>1RQ6 450-8JS3</b>                 | 892  | 94.9        | 0.84       | 128          | 7927                        | 2.30         | 32                | 1200              |                                      |
| 820                           | — <sup>2)</sup>        | <b>1RQ6 452-8JS3</b>                 | 893  | 95.2        | 0.84       | 142          | 8778                        | 2.40         | 36                | 1200              |                                      |
| 910                           | — <sup>2)</sup>        | <b>1RQ6 454-8JS3</b>                 | 893  | 95.3        | 0.84       | 158          | 9739                        | 2.40         | 40                | 1200              |                                      |
| 1000                          | — <sup>2)</sup>        | <b>1RQ6 456-8JS3</b>                 | 893  | 95.5        | 0.84       | 174          | 10702                       | 2.30         | 46                | 1200              |                                      |
| 1380                          | 1240                   | <b>1RQ6 500-8JS3</b>                 | 892  | 95.6        | 0.84       | 240          | 14775                       | 1.80         | 69                | 1125              |                                      |
| 1540                          | 1380                   | <b>1RQ6 502-8JS3</b>                 | 892  | 95.6        | 0.84       | 265          | 16488                       | 1.85         | 76                | 1125              |                                      |
| 1720                          | 1540                   | <b>1RQ6 504-8JS3</b>                 | 892  | 95.8        | 0.84       | 295          | 18415                       | 1.85         | 85                | 1125              |                                      |
| 1820                          | 1640                   | <b>1RQ6 506-8JS3</b>                 | 893  | 95.9        | 0.84       | 315          | 19464                       | 2.05         | 94                | 1125              |                                      |
| 2250                          | 2000                   | <b>1RQ6 560-8JS3</b>                 | 891  | 96.3        | 0.84       | 385          | 24116                       | 1.95         | 128               | 1125              |                                      |
| 2500                          | 2200                   | <b>1RQ6 562-8JS3</b>                 | 892  | 96.5        | 0.84       | 430          | 26766                       | 2.05         | 141               | 1125              |                                      |
| 2750                          | 2400                   | <b>1RQ6 564-8JS3</b>                 | 893  | 96.6        | 0.85       | 465          | 29409                       | 2.30         | 156               | 1125              |                                      |
| 3000                          | 2650                   | <b>1RQ6 566-8JS3</b>                 | 892  | 96.7        | 0.85       | 510          | 32119                       | 2.15         | 173               | 1125              |                                      |

#### Type of construction:

|                     |   |
|---------------------|---|
| IM B3               | 0 |
| IM V1 (with canopy) | 4 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation.

Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> Utilization 130 (B) on request.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

Motor type  
(repeated)

Partial load values for square-law torque drive

$P/P_{rated}$  155 (F) = 75 %

$P/P_{rated}$  155 (F) = 50 %

$P/P_{rated}$  155 (F) = 25 %

$P$

$n$

$\eta$

$\cos \varphi$

$P$

$n$

$\eta$

$\cos \varphi$

$P$

$n$

$\eta$

$\cos \varphi$

kW

rpm

%

[-]

kW

rpm

%

[-]

kW

rpm

%

[-]

Square-law torque drive

6-pole

|               |      |      |      |      |      |     |      |      |      |     |      |      |
|---------------|------|------|------|------|------|-----|------|------|------|-----|------|------|
| 1RQ6 450-6... | 780  | 1082 | 95.9 | 0.85 | 520  | 947 | 96.0 | 0.83 | 260  | 753 | 95.8 | 0.74 |
| 1RQ6 452-6... | 848  | 1083 | 96.1 | 0.85 | 565  | 947 | 96.2 | 0.82 | 283  | 753 | 96.0 | 0.73 |
| 1RQ6 454-6... | 953  | 1083 | 96.2 | 0.85 | 635  | 947 | 96.3 | 0.82 | 318  | 753 | 96.0 | 0.72 |
| 1RQ6 456-6... | 1020 | 1084 | 96.4 | 0.84 | 680  | 948 | 96.4 | 0.81 | 340  | 753 | 96.1 | 0.71 |
| 1RQ6 500-6... | 1335 | 1082 | 96.2 | 0.85 | 890  | 946 | 96.2 | 0.84 | 445  | 752 | 95.9 | 0.76 |
| 1RQ6 502-6... | 1500 | 1082 | 96.3 | 0.86 | 1000 | 946 | 96.3 | 0.84 | 500  | 752 | 96.0 | 0.77 |
| 1RQ6 504-6... | 1650 | 1082 | 96.4 | 0.86 | 1100 | 946 | 96.4 | 0.84 | 550  | 752 | 96.1 | 0.76 |
| 1RQ6 506-6... | 1838 | 1083 | 96.5 | 0.85 | 1225 | 947 | 96.4 | 0.83 | 613  | 753 | 96.0 | 0.74 |
| 1RQ6 560-6... | 2288 | 1081 | 96.5 | 0.87 | 1525 | 945 | 96.6 | 0.87 | 763  | 752 | 96.5 | 0.83 |
| 1RQ6 562-6... | 2588 | 1082 | 96.7 | 0.87 | 1725 | 946 | 96.8 | 0.87 | 863  | 752 | 96.6 | 0.82 |
| 1RQ6 564-6... | 2850 | 1082 | 96.8 | 0.88 | 1900 | 946 | 96.9 | 0.87 | 950  | 753 | 96.7 | 0.82 |
| 1RQ6 566-6... | 3075 | 1084 | 97.0 | 0.87 | 2050 | 947 | 96.9 | 0.86 | 1025 | 753 | 96.6 | 0.78 |

8-pole

|               |      |     |      |      |      |     |      |      |     |     |      |      |
|---------------|------|-----|------|------|------|-----|------|------|-----|-----|------|------|
| 1RQ6 450-8... | 555  | 812 | 95.0 | 0.83 | 370  | 710 | 95.1 | 0.80 | 185 | 565 | 94.6 | 0.69 |
| 1RQ6 452-8... | 615  | 812 | 95.3 | 0.82 | 410  | 710 | 95.3 | 0.79 | 205 | 565 | 94.7 | 0.68 |
| 1RQ6 454-8... | 683  | 812 | 95.4 | 0.83 | 455  | 710 | 95.4 | 0.79 | 228 | 565 | 94.9 | 0.68 |
| 1RQ6 456-8... | 750  | 812 | 95.6 | 0.83 | 500  | 710 | 95.6 | 0.80 | 250 | 565 | 95.2 | 0.70 |
| 1RQ6 500-8... | 1035 | 811 | 95.7 | 0.83 | 690  | 709 | 95.8 | 0.81 | 345 | 564 | 95.3 | 0.73 |
| 1RQ6 502-8... | 1155 | 811 | 95.7 | 0.84 | 770  | 709 | 95.7 | 0.81 | 385 | 564 | 95.3 | 0.73 |
| 1RQ6 504-8... | 1290 | 811 | 96.0 | 0.84 | 860  | 709 | 96.0 | 0.82 | 430 | 564 | 95.6 | 0.74 |
| 1RQ6 506-8... | 1365 | 812 | 96.0 | 0.84 | 910  | 710 | 96.0 | 0.81 | 455 | 564 | 95.4 | 0.72 |
| 1RQ6 560-8... | 1688 | 811 | 96.5 | 0.85 | 1125 | 709 | 96.6 | 0.83 | 563 | 564 | 96.4 | 0.77 |
| 1RQ6 562-8... | 1875 | 811 | 96.6 | 0.85 | 1250 | 709 | 96.7 | 0.83 | 625 | 564 | 96.5 | 0.76 |
| 1RQ6 564-8... | 2063 | 812 | 96.7 | 0.84 | 1375 | 710 | 96.7 | 0.82 | 688 | 564 | 96.4 | 0.73 |
| 1RQ6 566-8... | 2250 | 811 | 96.8 | 0.85 | 1500 | 709 | 96.9 | 0.83 | 750 | 564 | 96.7 | 0.76 |

3

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Selection and ordering data

| Rated power<br>IEC            |                              | High voltage motor<br>SIMOTICS HV M (modular)<br><br>Article No. | Operating values at rated output for utilization 130 (B) |                           |                                       |  |                                   |   |  |  |
|-------------------------------|------------------------------|--|--|---------------------------|---------------------------------------|--|-----------------------------------|---|--|--|
| $P_{rated}$<br>155 (F)<br>kW  | $P_{rated}$<br>130 (B)<br>kW |  | Rated speed<br>$n_{rated}$<br>rpm                        | Efficiency<br>$\eta$<br>% | Power factor<br>$\cos \varphi$<br>[-] | Rated current at 4.16 kV<br>$I_{rated}$<br>A | Rated torque<br>$T_{rated}$<br>Nm | Break-down torque<br>$T_B/T_{rated}$<br>[-] | Moment of inertia<br>J<br>kgm <sup>2</sup> | Mechanical speed limit <sup>1)</sup><br>$n_{max}$<br>rpm |
| <b>3.4 ... 4.16 kV, 60 Hz</b> |                              |  |  |                           |                                       |  |                                   |   |  |  |
| 2-pole                        |                              |  |  |                           |                                       |  |                                   |   |  |  |
| 8360                          | 7600                         | <b>1RQ7 710-2J 30-0CJ0</b>                                       | 3589   | 96.1                      | 0.92                                  | 1200   | 20221                             | 2.35  | 147  | 3600   |
| 9350                          | 8500                         | <b>1RQ7 712-2J 30-0CJ0</b>                                       | 3588   | 96.3                      | 0.92                                  | 1340   | 22622                             | 2.35  | 158  | 3600   |
| 10340                         | 9400                         | <b>1RQ7 714-2J 30-0CJ0</b>                                       | 3588   | 96.6                      | 0.93                                  | 1460   | 25018                             | 2.45  | 174  | 3600   |
| 11330                         | 10300                        | <b>1RQ7 716-2J 30-0CJ0</b>                                       | 3588   | 96.8                      | 0.94                                  | 1580   | 27413                             | 2.45  | 189  | 3600   |
| 4-pole                        |                              |  |  |                           |                                       |  |                                   |   |  |  |
| 8680                          | 7750                         | <b>1RQ7 710-4J 30-0CJ0</b>                                       | 1793   | 97.3                      | 0.90                                  | 1220   | 41276                             | 2.45  | 261  | 1800   |
| 9632                          | 8600                         | <b>1RQ7 712-4J 30-0CJ0</b>                                       | 1793   | 97.4                      | 0.91                                  | 1340   | 45803                             | 2.45  | 286  | 1800   |
| 10696                         | 9550                         | <b>1RQ7 714-4J 30-0CJ0</b>                                       | 1793   | 97.5                      | 0.92                                  | 1480   | 50862                             | 2.70  | 321  | 1800   |
| 11872                         | 10600                        | <b>1RQ7 716-4J 30-0CJ0</b>                                       | 1793   | 97.6                      | 0.92                                  | 1640   | 56454                             | 2.70  | 362  | 1800   |
| 6-pole                        |                              |  |  |                           |                                       |  |                                   |   |  |  |
| 6496                          | 5800                         | <b>1RQ7 710-6J 30-0CJ0</b>                                       | 1196   | 96.9                      | 0.85                                  | 980  | 46309                             | 2.65  | 348  | 1800   |
| 7056                          | 6300                         | <b>1RQ7 712-6J 30-0CJ0</b>                                       | 1196   | 97.0                      | 0.85                                  | 1060   | 50301                             | 2.65  | 395  | 1800   |
| 7616                          | 6800                         | <b>1RQ7 714-6J 30-0CJ0</b>                                       | 1196   | 97.1                      | 0.86                                  | 1140   | 54294                             | 2.85  | 449  | 1800   |
| 8232                          | 7350                         | <b>1RQ7 716-6J 30-0CJ0</b>                                       | 1196   | 97.2                      | 0.87                                  | 1200   | 58685                             | 2.85  | 496  | 1800   |
| 8-pole                        |                              |  |  |                           |                                       |  |                                   |   |  |  |
| 4760                          | 4250                         | <b>1RQ7 710-8J 30-0CJ0</b>                                       | 896  | 96.8                      | 0.85                                  | 720  | 45295                             | 2.15  | 433  | 1000   |
| 5320                          | 4750                         | <b>1RQ7 712-8J 30-0CJ0</b>                                       | 896  | 97.0                      | 0.86                                  | 790  | 50624                             | 2.20  | 493  | 1000   |
| 5936                          | 5300                         | <b>1RQ7 714-8J 30-0CJ0</b>                                       | 896  | 97.1                      | 0.86                                  | 880  | 56486                             | 2.35  | 558  | 1000   |
| 6720                          | 6000                         | <b>1RQ7 716-8J 30-0CJ0</b>                                       | 896  | 97.1                      | 0.85                                  | 1000   | 63946                             | 2.65  | 616  | 1000   |
| 10-pole                       |                              |  |  |                           |                                       |  |                                   |   |  |  |
| 3640                          | 3250                         | <b>1RQ7 710-3J 30-0CJ0</b>                                       | 715  | 96.6                      | 0.86                                  | 540  | 43406                             | 2.20  | 430  | 900  |
| 4032                          | 3600                         | <b>1RQ7 712-3J 30-0CJ0</b>                                       | 715  | 96.6                      | 0.86                                  | 600  | 48080                             | 2.20  | 489  | 900  |
| 4424                          | 3950                         | <b>1RQ7 714-3J 30-0CJ0</b>                                       | 715  | 96.8                      | 0.86                                  | 660  | 52755                             | 2.20  | 553  | 900  |
| 4816                          | 4300                         | <b>1RQ7 716-3J 30-0CJ0</b>                                       | 715  | 96.8                      | 0.86                                  | 720  | 57429                             | 2.20  | 610  | 900  |

#### Cooling method

See page 1/8

#### Type of construction

See page 1/9

#### Housing and bearing version

See page 1/9

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7


| Motor type<br>(repeated) | Partial load values for square-law torque drive |      |        |                |                                     |      |        |                |                                     |      |        |                |
|--------------------------|---|------|--------|----------------|-------------------------------------|------|--------|----------------|-------------------------------------|------|--------|----------------|
|                          | $P/P_{\text{rated}}$ 130 (B) = 75 %             |      |        |                | $P/P_{\text{rated}}$ 130 (B) = 50 % |      |        |                | $P/P_{\text{rated}}$ 130 (B) = 25 % |      |        |                |
|                          | $P$   | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$  | $\eta$ | $\cos \varphi$ |
|                          | kW  | rpm  | %      | [-]            | kW                                  | rpm  | %      | [-]            | kW                                  | rpm  | %      | [-]            |
|                          | <b>Square-law torque drive</b>                  |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 2-pole                   |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RQ7 710-2...            | 5702  | 3261 | 96.0   | 0.92           | 3801                                | 2849 | 95.8   | 0.92           | 1900                                | 2264 | 95.2   | 0.89           |
| 1RQ7 712-2...            | 6375  | 3260 | 96.2   | 0.93           | 4250                                | 2849 | 96.0   | 0.93           | 2125                                | 2263 | 95.6   | 0.91           |
| 1RQ7 714-2...            | 7052  | 3260 | 96.5   | 0.94           | 4701                                | 2849 | 96.4   | 0.94           | 2351                                | 2264 | 95.9   | 0.92           |
| 1RQ7 716-2...            | 7728  | 3260 | 96.7   | 0.94           | 5152                                | 2849 | 96.5   | 0.94           | 2576                                | 2264 | 96.1   | 0.92           |
| 4-pole                   |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RQ7 710-4...            | 5818  | 1629 | 97.2   | 0.91           | 3880                                | 1424 | 97.0   | 0.90           | 1942                                | 1131 | 96.6   | 0.86           |
| 1RQ7 712-4...            | 6455  | 1629 | 97.3   | 0.92           | 4305                                | 1424 | 97.2   | 0.92           | 2155                                | 1131 | 96.8   | 0.88           |
| 1RQ7 714-4...            | 7167  | 1629 | 97.4   | 0.92           | 4779                                | 1424 | 97.3   | 0.92           | 2393                                | 1131 | 96.9   | 0.88           |
| 1RQ7 716-4...            | 7955  | 1629 | 97.6   | 0.92           | 5305                                | 1424 | 97.4   | 0.92           | 2656                                | 1131 | 97.1   | 0.89           |
| 6-pole                   |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RQ7 710-6...            | 4352  | 1086 | 96.8   | 0.84           | 2902                                | 949  | 96.5   | 0.80           | 1453                                | 754  | 95.7   | 0.70           |
| 1RQ7 712-6...            | 4726  | 1087 | 96.9   | 0.84           | 3152                                | 949  | 96.6   | 0.81           | 1577                                | 754  | 95.8   | 0.71           |
| 1RQ7 714-6...            | 5102  | 1087 | 96.9   | 0.85           | 3402                                | 950  | 96.6   | 0.82           | 1703                                | 754  | 95.9   | 0.72           |
| 1RQ7 716-6...            | 5513  | 1087 | 96.9   | 0.85           | 3676                                | 950  | 96.6   | 0.82           | 1840                                | 755  | 95.9   | 0.73           |
| 8-pole                   |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RQ7 710-8...            | 3191  | 814  | 96.7   | 0.85           | 2128                                | 711  | 96.5   | 0.83           | 1066                                | 565  | 95.8   | 0.75           |
| 1RQ7 712-8...            | 3566  | 814  | 96.8   | 0.86           | 2378                                | 711  | 96.6   | 0.84           | 1191                                | 565  | 96.0   | 0.76           |
| 1RQ7 714-8...            | 3978  | 814  | 96.9   | 0.86           | 2653                                | 712  | 96.7   | 0.83           | 1328                                | 566  | 96.1   | 0.75           |
| 1RQ7 716-8...            | 4505  | 814  | 97.0   | 0.86           | 3005                                | 711  | 96.8   | 0.85           | 1504                                | 565  | 96.2   | 0.78           |
| 10-pole                  |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RQ7 710-3...            | 2440  | 650  | 96.4   | 0.85           | 1628                                | 568  | 96.2   | 0.82           | 815                                 | 452  | 95.4   | 0.72           |
| 1RQ7 712-3...            | 2703  | 650  | 96.5   | 0.85           | 1803                                | 568  | 96.3   | 0.83           | 903                                 | 452  | 95.6   | 0.74           |
| 1RQ7 714-3...            | 2966  | 650  | 96.6   | 0.85           | 1978                                | 568  | 96.4   | 0.83           | 991                                 | 452  | 95.7   | 0.74           |
| 1RQ7 716-3...            | 3228  | 650  | 96.7   | 0.85           | 2153                                | 568  | 96.4   | 0.82           | 1078                                | 452  | 95.7   | 0.73           |

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Dimension drawings

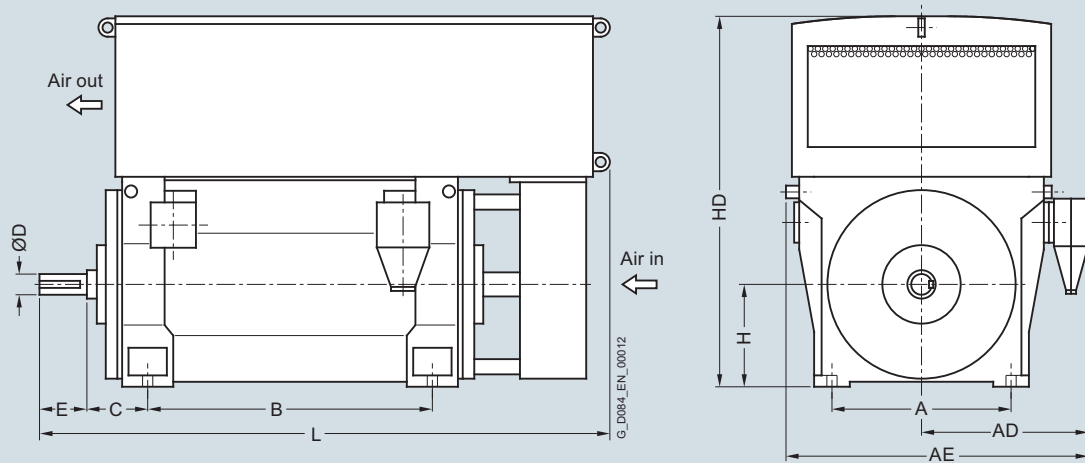

| Motor type  | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |                    |
|---|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|--------------------|
|   |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm            |
| <b>Up to 6.6 kV, anti-friction bearings, IM B3 type of construction</b> |              |            |                        |                        |         |         |         |         |         |          |                    |
| <b>2-pole</b>   |              |            |                        |                        |         |         |         |         |         |          |                    |
| 1RQ6450-2J..0 <sup>2)</sup>   | 4250         | 850        | 930                    | 1620                   | 1180    | 280     | 95      | 130     | 450     | 1842     | 2425 <sup>3)</sup> |
| 1RQ6452-2J..0 <sup>2)</sup>   | 4450         | 850        | 930                    | 1620                   | 1180    | 280     | 95      | 130     | 450     | 1842     | 2425 <sup>3)</sup> |
| 1RQ6454-2J..0 <sup>2)</sup>   | 4800         | 850        | 930                    | 1620                   | 1400    | 280     | 95      | 130     | 450     | 1842     | 2635 <sup>3)</sup> |
| 1RQ6456-2J..0 <sup>2)</sup>   | 5050         | 850        | 930                    | 1620                   | 1400    | 280     | 95      | 130     | 450     | 1842     | 2635 <sup>3)</sup> |
| 1RQ6500-2J..0 <sup>2)</sup>   | 6100         | 950        | 1135                   | 1835                   | 1320    | 315     | 110     | 165     | 500     | 2040     | 3450 <sup>3)</sup> |
| 1RQ6502-2J..0 <sup>2)</sup>   | 6250         | 950        | 1135                   | 1835                   | 1320    | 315     | 110     | 165     | 500     | 2040     | 3450 <sup>3)</sup> |
| <b>4-pole</b>   |              |            |                        |                        |         |         |         |         |         |          |                    |
| 1RQ6450-4J..0   | 4550         | 850        | 930                    | 1620                   | 1180    | 250     | 130     | 200     | 450     | 1842     | 2455               |
| 1RQ6452-4J..0   | 4750         | 850        | 930                    | 1620                   | 1180    | 250     | 130     | 200     | 450     | 1842     | 2455               |
| 1RQ6454-4J..0   | 5200         | 850        | 930                    | 1620                   | 1400    | 250     | 130     | 200     | 450     | 1842     | 2665               |
| 1RQ6456-4J..0   | 5450         | 850        | 930                    | 1620                   | 1400    | 250     | 130     | 200     | 450     | 1842     | 2665               |
| 1RQ6500-4J..0   | 6600         | 950        | 1135                   | 1835                   | 1320    | 280     | 150     | 200     | 500     | 2040     | 2900               |
| 1RQ6502-4J..0   | 6800         | 950        | 1135                   | 1835                   | 1320    | 280     | 150     | 200     | 500     | 2040     | 2900               |
| 1RQ6504-4J..0   | 7550         | 950        | 1135                   | 1835                   | 1500    | 280     | 150     | 200     | 500     | 2040     | 3050               |
| 1RQ6506-4J..0   | 7850         | 950        | 1135                   | 1835                   | 1500    | 280     | 150     | 200     | 500     | 2040     | 3050               |
| 1RQ6560-4J..0   | 8250         | 1060       | 1205                   | 1975                   | 1400    | 315     | 170     | 240     | 560     | 2300     | 3000               |
| 1RQ6562-4J..0   | 8600         | 1060       | 1205                   | 1975                   | 1400    | 315     | 170     | 240     | 560     | 2300     | 3000               |
| 1RQ6564-4J..0   | 9550         | 1060       | 1205                   | 1975                   | 1600    | 315     | 170     | 240     | 560     | 2300     | 3250               |
| 1RQ6566-4J..0   | 10100        | 1060       | 1205                   | 1975                   | 1600    | 315     | 170     | 240     | 560     | 2300     | 3250               |
| 1RQ4630-4J..0 <sup>2)</sup>   | 11100        | 1320       | 1330                   | 2210                   | 1600    | 335     | 190     | 280     | 630     | 2340     | 3140               |
| 1RQ4632-4J..0 <sup>2)</sup>   | 11800        | 1320       | 1330                   | 2210                   | 1600    | 335     | 190     | 280     | 630     | 2340     | 3140               |
| 1RQ4634-4J..0 <sup>2)</sup>   | 12900        | 1320       | 1330                   | 2210                   | 1800    | 335     | 200     | 280     | 630     | 2340     | 3380               |
| 1RQ4636-4J..0 <sup>2)</sup>   | 13450        | 1320       | 1330                   | 2210                   | 1800    | 335     | 200     | 280     | 630     | 2340     | 3380               |

<sup>1)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.

<sup>2)</sup> Anti-friction bearings only for 50 Hz version.


<sup>3)</sup> Including air inlet silencer.

## Motors for converter operation

### Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Dimension drawings (continued)

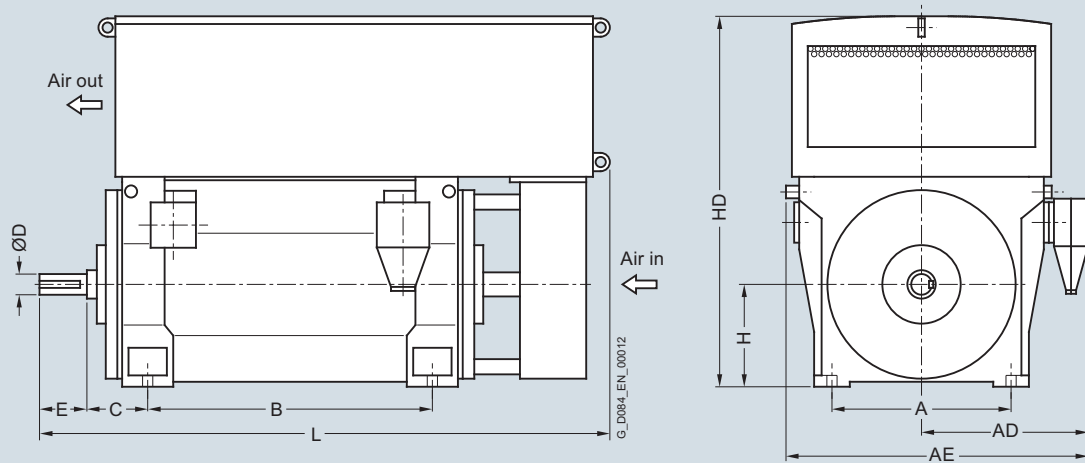

| Motor type  | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |         |
|---|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|---------|
|   |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, anti-friction bearings, IM B3 type of construction</b> |              |            |                        |                        |         |         |         |         |         |          |         |
| <b>6-pole</b>   |              |            |                        |                        |         |         |         |         |         |          |         |
| 1RQ6450-6J..0   | 4650         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1842     | 2455    |
| 1RQ6452-6J..0   | 4900         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1842     | 2455    |
| 1RQ6454-6J..0   | 5300         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1842     | 2665    |
| 1RQ6456-6J..0   | 5650         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1842     | 2665    |
| 1RQ6500-6J..0   | 6750         | 950        | 1135                   | 1835                   | 1320    | 315     | 160     | 240     | 500     | 1990     | 2850    |
| 1RQ6502-6J..0   | 7050         | 950        | 1135                   | 1835                   | 1320    | 315     | 160     | 240     | 500     | 1990     | 2850    |
| 1RQ6504-6J..0   | 7700         | 950        | 1135                   | 1835                   | 1500    | 315     | 160     | 240     | 500     | 1990     | 3300    |
| 1RQ6506-6J..0   | 8050         | 950        | 1135                   | 1835                   | 1500    | 315     | 160     | 240     | 500     | 1990     | 3300    |
| 1RQ6560-6J..0   | 9100         | 1060       | 1205                   | 1975                   | 1400    | 315     | 180     | 240     | 560     | 2240     | 3000    |
| 1RQ6562-6J..0   | 9550         | 1060       | 1205                   | 1975                   | 1400    | 315     | 180     | 240     | 560     | 2240     | 3000    |
| 1RQ6564-6J..0   | 10450        | 1060       | 1205                   | 1975                   | 1600    | 315     | 180     | 240     | 560     | 2240     | 3250    |
| 1RQ6566-6J..0   | 11000        | 1060       | 1205                   | 1975                   | 1600    | 315     | 180     | 240     | 560     | 2240     | 3250    |
| 1RQ4630-6J..0   | 11400        | 1320       | 1330                   | 2210                   | 1600    | 335     | 200     | 280     | 630     | 2340     | 3140    |
| 1RQ4632-6J..0   | 12000        | 1320       | 1330                   | 2210                   | 1600    | 335     | 200     | 280     | 630     | 2340     | 3140    |
| 1RQ4634-6J..0   | 12900        | 1320       | 1330                   | 2210                   | 1800    | 335     | 200     | 280     | 630     | 2340     | 3380    |
| 1RQ4636-6J..0   | 13750        | 1320       | 1330                   | 2210                   | 1800    | 335     | 200     | 280     | 630     | 2340     | 3380    |

**Note:**

Higher pole numbers are available on request.


<sup>1)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Dimension drawings (continued)

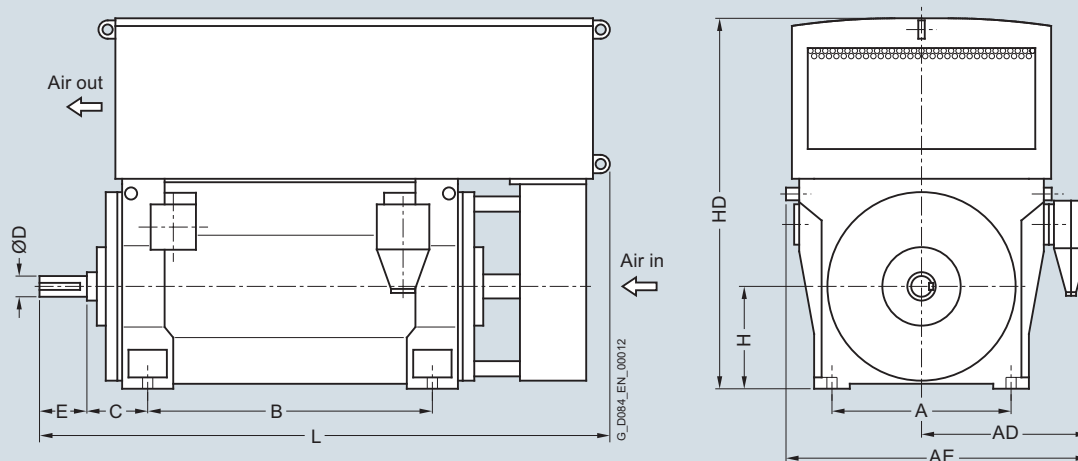

| Motor type | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |         |
|------------|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|---------|
|            |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |

#### Up to 6.6 kV, anti-friction bearings, IM B3 type of construction

8-pole

|               |       |      |      |      |      |     |     |     |     |      |      |
|---------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RQ6450-8J..0 | 4650  | 850  | 930  | 1620 | 1180 | 250 | 140 | 200 | 450 | 1842 | 2455 |
| 1RQ6452-8J..0 | 4950  | 850  | 930  | 1620 | 1180 | 250 | 140 | 200 | 450 | 1842 | 2455 |
| 1RQ6454-8J..0 | 5350  | 850  | 930  | 1620 | 1400 | 280 | 140 | 200 | 450 | 1842 | 2665 |
| 1RQ6456-8J..0 | 5700  | 850  | 930  | 1620 | 1400 | 280 | 140 | 200 | 450 | 1842 | 2665 |
| 1RQ6500-8J..0 | 6750  | 950  | 1135 | 1835 | 1320 | 315 | 160 | 240 | 500 | 1990 | 2850 |
| 1RQ6502-8J..0 | 7000  | 950  | 1135 | 1835 | 1320 | 315 | 160 | 240 | 500 | 1990 | 2850 |
| 1RQ6504-8J..0 | 7650  | 950  | 1135 | 1835 | 1500 | 315 | 160 | 240 | 500 | 1990 | 3300 |
| 1RQ6506-8J..0 | 8000  | 950  | 1135 | 1835 | 1500 | 315 | 160 | 240 | 500 | 1990 | 3300 |
| 1RQ6560-8J..0 | 9050  | 1060 | 1205 | 1975 | 1400 | 315 | 180 | 240 | 560 | 2240 | 3000 |
| 1RQ6562-8J..0 | 9450  | 1060 | 1205 | 1975 | 1400 | 315 | 180 | 240 | 560 | 2240 | 3000 |
| 1RQ6564-8J..0 | 10400 | 1060 | 1205 | 1975 | 1600 | 315 | 180 | 240 | 560 | 2240 | 3250 |
| 1RQ6566-8J..0 | 10900 | 1060 | 1205 | 1975 | 1600 | 315 | 180 | 240 | 560 | 2240 | 3250 |
| 1RQ4630-8J..0 | 11200 | 1320 | 1180 | 2060 | 1600 | 335 | 200 | 280 | 630 | 2340 | 3140 |
| 1RQ4632-8J..0 | 11950 | 1320 | 1330 | 2210 | 1600 | 335 | 200 | 280 | 630 | 2340 | 3140 |
| 1RQ4634-8J..0 | 12900 | 1320 | 1330 | 2210 | 1800 | 335 | 200 | 280 | 630 | 2340 | 3380 |
| 1RQ4636-8J..0 | 13650 | 1320 | 1330 | 2210 | 1800 | 335 | 200 | 280 | 630 | 2340 | 3380 |

Note:

Higher pole numbers are available on request.

<sup>1)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.




## Motors for converter operation

### Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Dimension drawings

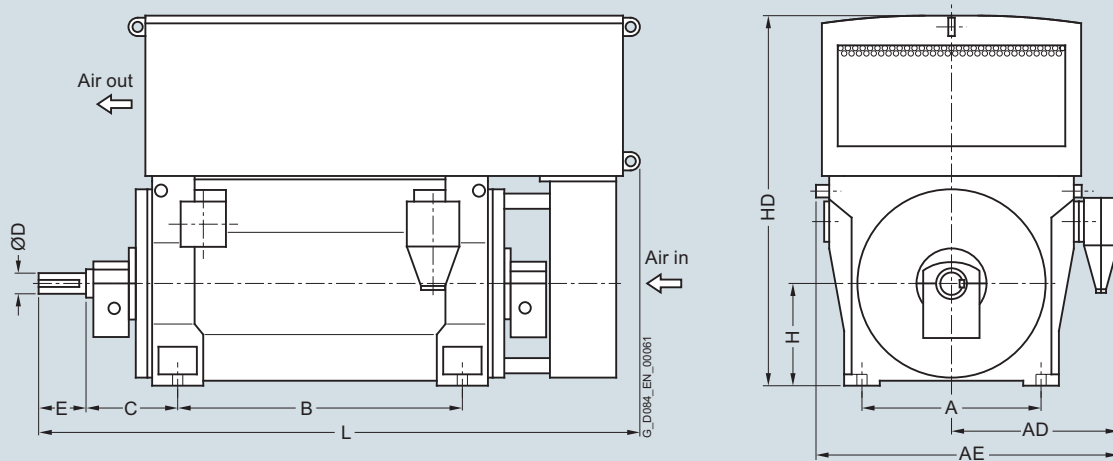

| Motor type   | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |                    |
|--|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|--------------------|
|  |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm            |
| <b>Up to 6.6 kV, sleeve bearings, IM B3 type of construction</b> |              |            |                        |                        |         |         |         |         |         |          |                    |
| 2-pole   |              |            |                        |                        |         |         |         |         |         |          |                    |
| 1RQ6450-2J..0-Z K96  | 4250         | 850        | 930                    | 1620                   | 1180    | 425     | 95      | 130     | 450     | 1842     | 2575 <sup>3)</sup> |
| 1RQ6452-2J..0-Z K96  | 4500         | 850        | 930                    | 1620                   | 1180    | 425     | 95      | 130     | 450     | 1842     | 2575 <sup>3)</sup> |
| 1RQ6454-2J..0-Z K96  | 4850         | 850        | 930                    | 1620                   | 1400    | 425     | 95      | 130     | 450     | 1842     | 2790 <sup>3)</sup> |
| 1RQ6456-2J..0-Z K96  | 5100         | 850        | 930                    | 1620                   | 1400    | 425     | 95      | 130     | 450     | 1842     | 2790 <sup>3)</sup> |
| 1RQ6500-2J..0-Z K96 <sup>2)</sup>                                | 6100         | 950        | 1135                   | 1835                   | 1320    | 450     | 110     | 165     | 500     | 2040     | 3550 <sup>3)</sup> |
| 1RQ6502-2J..0-Z K96 <sup>2)</sup>                                | 6250         | 950        | 1135                   | 1835                   | 1320    | 450     | 110     | 165     | 500     | 2040     | 3550 <sup>3)</sup> |
| 1RQ6504-2J..0  | 7100         | 950        | 1135                   | 1835                   | 1500    | 450     | 110     | 165     | 500     | 2040     | 3750 <sup>3)</sup> |
| 1RQ6506-2J..0  | 7350         | 950        | 1135                   | 1835                   | 1500    | 450     | 110     | 165     | 500     | 2040     | 3750 <sup>3)</sup> |
| 1RQ6560-2J..0  | 8150         | 1060       | 1205                   | 1975                   | 1400    | 600     | 130     | 200     | 560     | 2300     | 3900 <sup>3)</sup> |
| 1RQ6562-2J..0  | 8550         | 1060       | 1205                   | 1975                   | 1400    | 600     | 130     | 200     | 560     | 2300     | 3900 <sup>3)</sup> |
| 1RQ6564-2J..0  | 9500         | 1060       | 1205                   | 1975                   | 1600    | 600     | 130     | 200     | 560     | 2300     | 4130 <sup>3)</sup> |
| 1RQ6566-2J..0  | 9950         | 1060       | 1205                   | 1975                   | 1600    | 600     | 130     | 200     | 560     | 2300     | 4130 <sup>3)</sup> |

<sup>1)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.

<sup>2)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.


<sup>3)</sup> Including air inlet silencer.

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Dimension drawings (continued)

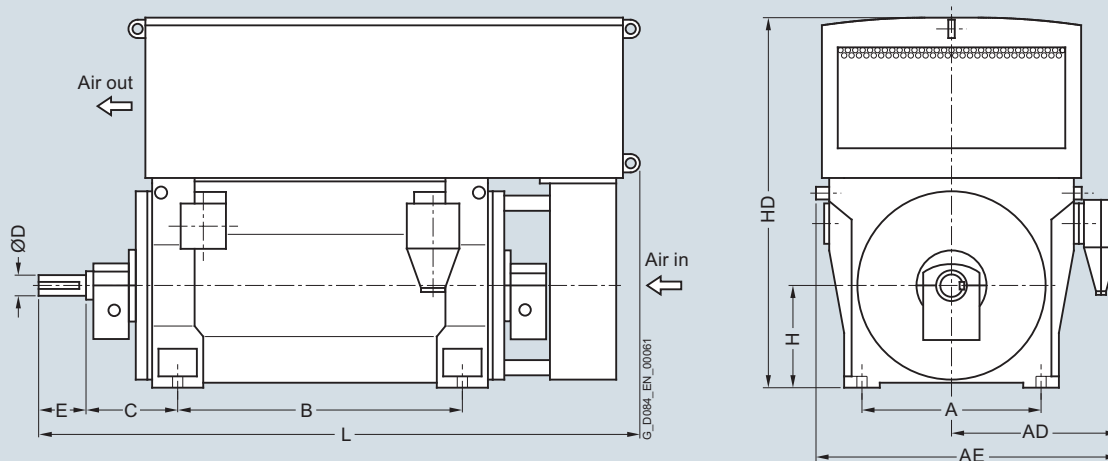

| Motor type | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |         |
|------------|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|---------|
|            |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |

#### Up to 6.6 kV, sleeve bearings, IM B3 type of construction

4-pole

|                                   |       |      |      |      |      |     |     |     |     |      |      |
|-----------------------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RQ6450-4J..0-Z K96               | 4650  | 850  | 930  | 1620 | 1180 | 500 | 130 | 200 | 450 | 1842 | 2705 |
| 1RQ6452-4J..0-Z K96               | 4850  | 850  | 930  | 1620 | 1180 | 500 | 130 | 200 | 450 | 1842 | 2705 |
| 1RQ6454-4J..0-Z K96               | 5300  | 850  | 930  | 1620 | 1400 | 500 | 130 | 200 | 450 | 1842 | 2915 |
| 1RQ6456-4J..0-Z K96               | 5550  | 850  | 930  | 1620 | 1400 | 500 | 130 | 200 | 450 | 1842 | 2915 |
| 1RQ6500-4J..0-Z K96               | 6900  | 950  | 1135 | 1835 | 1320 | 560 | 150 | 200 | 500 | 2040 | 3150 |
| 1RQ6502-4J..0-Z K96               | 7100  | 950  | 1135 | 1835 | 1320 | 560 | 150 | 200 | 500 | 2040 | 3150 |
| 1RQ6504-4J..0-Z K96               | 7800  | 950  | 1135 | 1835 | 1500 | 560 | 150 | 200 | 500 | 2040 | 3350 |
| 1RQ6506-4J..0-Z K96               | 8100  | 950  | 1135 | 1835 | 1500 | 560 | 150 | 200 | 500 | 2040 | 3350 |
| 1RQ6560-4J..0-Z K96               | 8350  | 1060 | 1205 | 1975 | 1400 | 600 | 170 | 240 | 560 | 2300 | 3270 |
| 1RQ6562-4J..0-Z K96               | 8750  | 1060 | 1205 | 1975 | 1400 | 600 | 170 | 240 | 560 | 2300 | 3270 |
| 1RQ6564-4J..0-Z K96               | 9700  | 1060 | 1205 | 1975 | 1600 | 600 | 170 | 240 | 560 | 2300 | 3500 |
| 1RQ6566-4J..0-Z K96               | 10200 | 1060 | 1205 | 1975 | 1600 | 600 | 170 | 240 | 560 | 2300 | 3500 |
| 1RQ4630-4J..0-Z K96 <sup>2)</sup> | 11350 | 1320 | 1330 | 2210 | 1600 | 600 | 190 | 280 | 630 | 2340 | 3400 |
| 1RQ4632-4J..0-Z K96 <sup>2)</sup> | 12050 | 1320 | 1330 | 2210 | 1600 | 600 | 190 | 280 | 630 | 2340 | 3400 |
| 1RQ4634-4J..0-Z K96 <sup>2)</sup> | 13150 | 1320 | 1330 | 2210 | 1800 | 600 | 200 | 280 | 630 | 2340 | 3640 |
| 1RQ4636-4J..0-Z K96 <sup>2)</sup> | 13700 | 1320 | 1330 | 2210 | 1800 | 600 | 200 | 280 | 630 | 2340 | 3640 |

<sup>1)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.


<sup>2)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.

## Motors for converter operation

### Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Dimension drawings (continued)

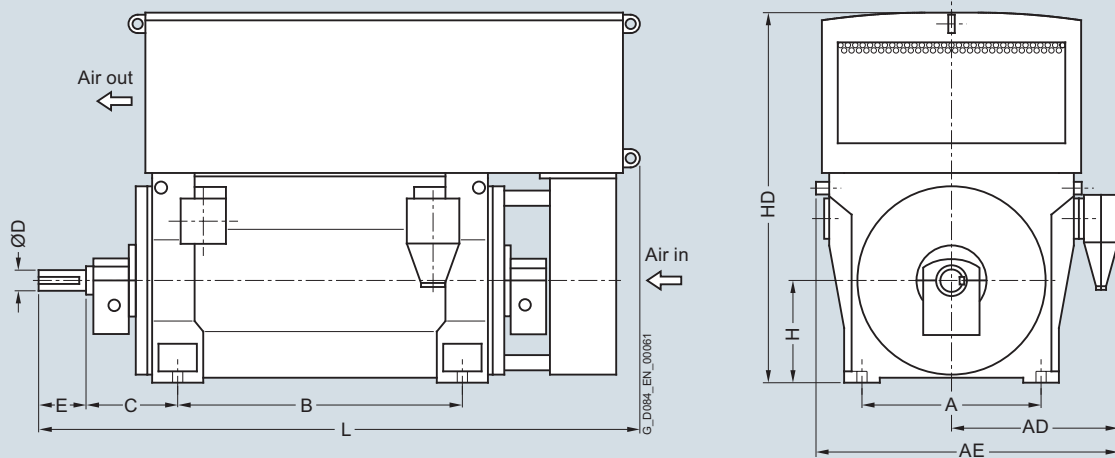

| Motor type | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |         |
|------------|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|---------|
|            |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |

#### Up to 6.6 kV, sleeve bearings, IM B3 type of construction

6-pole

|                     |       |      |      |      |      |     |     |     |     |      |      |
|---------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RQ6450-6J..0-Z K96 | 4800  | 850  | 930  | 1620 | 1180 | 500 | 140 | 200 | 450 | 1842 | 2705 |
| 1RQ6452-6J..0-Z K96 | 5050  | 850  | 930  | 1620 | 1180 | 500 | 140 | 200 | 450 | 1842 | 2705 |
| 1RQ6454-6J..0-Z K96 | 5450  | 850  | 930  | 1620 | 1400 | 500 | 140 | 200 | 450 | 1842 | 2915 |
| 1RQ6456-6J..0-Z K96 | 5800  | 850  | 930  | 1620 | 1400 | 500 | 140 | 200 | 450 | 1842 | 2915 |
| 1RQ6500-6J..0-Z K96 | 6900  | 950  | 1135 | 1835 | 1320 | 560 | 170 | 240 | 500 | 1990 | 2850 |
| 1RQ6502-6J..0-Z K96 | 7200  | 950  | 1135 | 1835 | 1320 | 560 | 170 | 240 | 500 | 1990 | 2850 |
| 1RQ6504-6J..0-Z K96 | 7850  | 950  | 1135 | 1835 | 1500 | 560 | 170 | 240 | 500 | 1990 | 3300 |
| 1RQ6506-6J..0-Z K96 | 8200  | 950  | 1135 | 1835 | 1500 | 560 | 170 | 240 | 500 | 1990 | 3300 |
| 1RQ6560-6J..0-Z K96 | 9300  | 1060 | 1205 | 1975 | 1400 | 600 | 170 | 240 | 560 | 2240 | 3300 |
| 1RQ6562-6J..0-Z K96 | 9750  | 1060 | 1205 | 1975 | 1400 | 600 | 170 | 240 | 560 | 2240 | 3300 |
| 1RQ6564-6J..0-Z K96 | 10650 | 1060 | 1205 | 1975 | 1600 | 600 | 170 | 240 | 560 | 2240 | 3500 |
| 1RQ6566-6J..0-Z K96 | 11150 | 1060 | 1205 | 1975 | 1600 | 600 | 170 | 240 | 560 | 2240 | 3500 |
| 1RQ4630-6J..0-Z K96 | 11650 | 1320 | 1330 | 2210 | 1600 | 600 | 200 | 280 | 630 | 2340 | 3400 |
| 1RQ4632-6J..0-Z K96 | 12250 | 1320 | 1330 | 2210 | 1600 | 600 | 200 | 280 | 630 | 2340 | 3400 |
| 1RQ4634-6J..0-Z K96 | 13150 | 1320 | 1330 | 2210 | 1800 | 600 | 200 | 280 | 630 | 2340 | 3640 |
| 1RQ4636-6J..0-Z K96 | 14000 | 1320 | 1330 | 2210 | 1800 | 600 | 200 | 280 | 630 | 2340 | 3640 |


<sup>1)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Dimension drawings (continued)

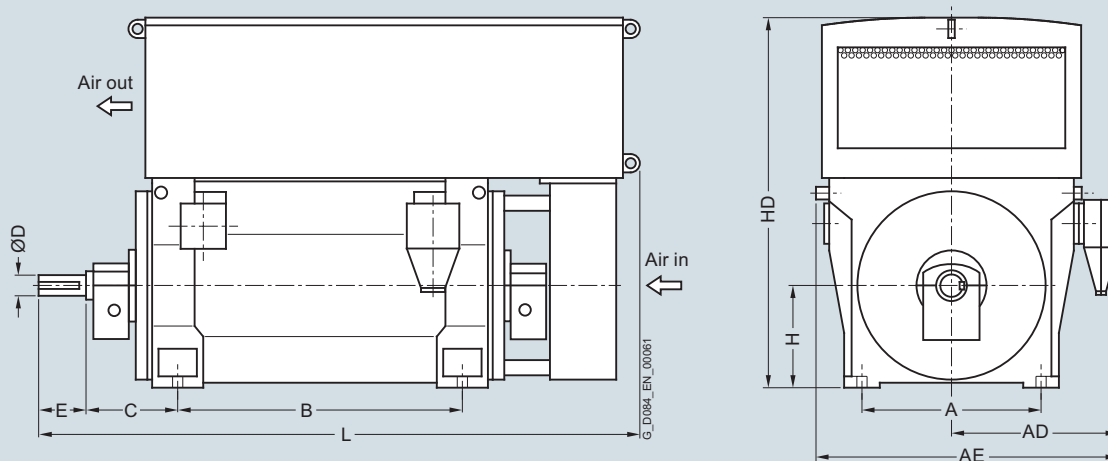

| Motor type | Weight<br>kg | Dimensions |                  |                  |    |    |    |    |    |    |    |
|------------|--------------|------------|------------------|------------------|----|----|----|----|----|----|----|
|            |              | A          | AD <sup>1)</sup> | AE <sup>1)</sup> | B  | C  | D  | E  | H  | HD | L  |
|            |              | mm         | mm               | mm               | mm | mm | mm | mm | mm | mm | mm |

#### Up to 6.6 kV, sleeve bearings, IM B3 type of construction

8-pole

|                     |       |      |      |      |      |     |     |     |     |      |      |
|---------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RQ6450-8J..0-Z K96 | 4800  | 850  | 930  | 1620 | 1180 | 500 | 140 | 200 | 450 | 1842 | 2705 |
| 1RQ6452-8J..0-Z K96 | 5100  | 850  | 930  | 1620 | 1180 | 500 | 140 | 200 | 450 | 1842 | 2705 |
| 1RQ6454-8J..0-Z K96 | 5500  | 850  | 930  | 1620 | 1400 | 500 | 140 | 200 | 450 | 1842 | 2915 |
| 1RQ6456-8J..0-Z K96 | 5850  | 850  | 930  | 1620 | 1400 | 500 | 140 | 200 | 450 | 1842 | 2915 |
| 1RQ6500-8J..0-Z K96 | 6900  | 950  | 1135 | 1835 | 1320 | 560 | 170 | 240 | 500 | 1990 | 2850 |
| 1RQ6502-8J..0-Z K96 | 7150  | 950  | 1135 | 1835 | 1320 | 560 | 170 | 240 | 500 | 1990 | 2850 |
| 1RQ6504-8J..0-Z K96 | 7800  | 950  | 1135 | 1835 | 1500 | 560 | 170 | 240 | 500 | 1990 | 3300 |
| 1RQ6506-8J..0-Z K96 | 8150  | 950  | 1135 | 1835 | 1500 | 560 | 170 | 240 | 500 | 1990 | 3300 |
| 1RQ6560-8J..0-Z K96 | 9250  | 1060 | 1205 | 1975 | 1400 | 600 | 170 | 240 | 560 | 2240 | 3300 |
| 1RQ6562-8J..0-Z K96 | 9650  | 1060 | 1205 | 1975 | 1400 | 600 | 170 | 240 | 560 | 2240 | 3300 |
| 1RQ6564-8J..0-Z K96 | 10550 | 1060 | 1205 | 1975 | 1600 | 600 | 170 | 240 | 560 | 2240 | 3500 |
| 1RQ6566-8J..0-Z K96 | 11100 | 1060 | 1205 | 1975 | 1600 | 600 | 170 | 240 | 560 | 2240 | 3500 |
| 1RQ4630-8J..0-Z K96 | 11450 | 1320 | 1180 | 2060 | 1600 | 600 | 200 | 280 | 630 | 2340 | 3400 |
| 1RQ4632-8J..0-Z K96 | 12200 | 1320 | 1330 | 2210 | 1600 | 600 | 200 | 280 | 630 | 2340 | 3400 |
| 1RQ4634-8J..0-Z K96 | 13150 | 1320 | 1330 | 2210 | 1800 | 600 | 200 | 280 | 630 | 2340 | 3640 |
| 1RQ4636-8J..0-Z K96 | 13900 | 1320 | 1330 | 2210 | 1800 | 600 | 200 | 280 | 630 | 2340 | 3640 |

Note:

Higher pole numbers are available on request.


<sup>1)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.

## Motors for converter operation

### Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Dimension drawings

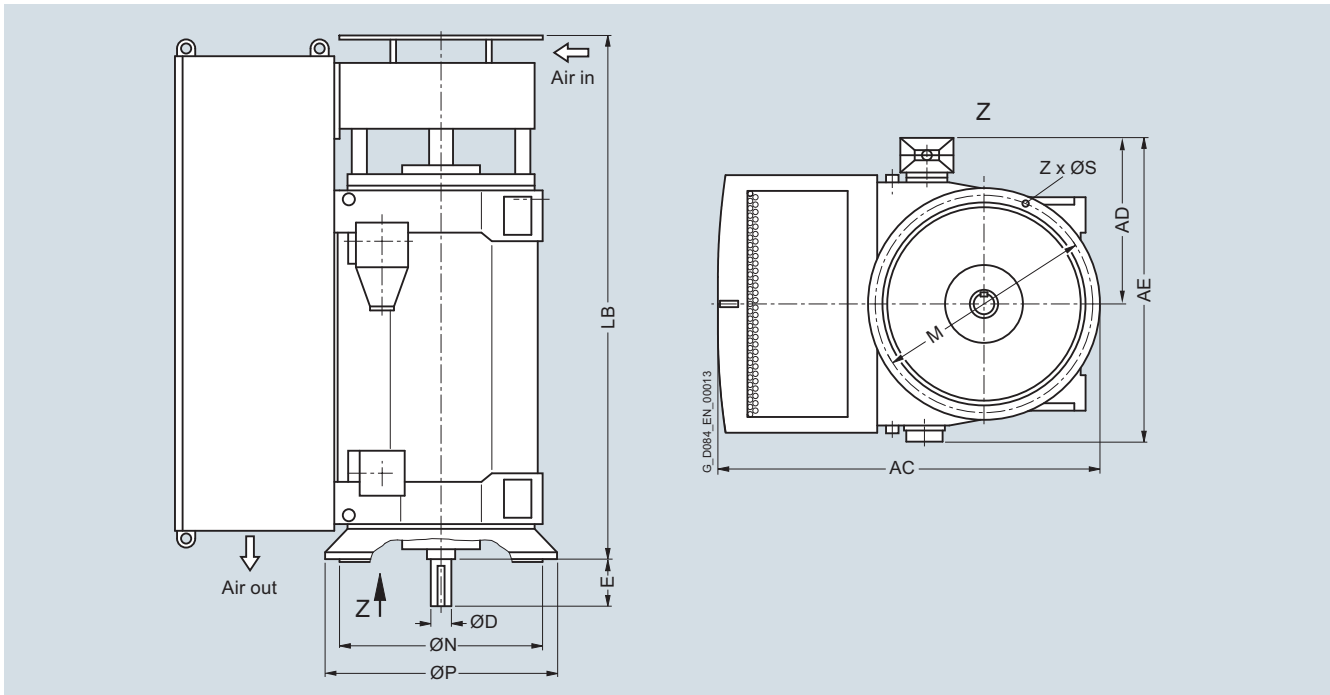

| Motor type  | Weight<br>kg | Dimensions |                        |                        |         |         |          |         |         |         |         |               |
|---|--------------|------------|------------------------|------------------------|---------|---------|----------|---------|---------|---------|---------|---------------|
|   |              | AC<br>mm   | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |
| <b>Up to 6.6 kV, anti-friction bearings, IM V1 type of construction</b> |              |            |                        |                        |         |         |          |         |         |         |         |               |
| 4-pole  |              |            |                        |                        |         |         |          |         |         |         |         |               |
| 1RQ6450-4J..4   | 4750         | 1967       | 930                    | 1620                   | 130     | 200     | 2730     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6452-4J..4   | 5000         | 1967       | 930                    | 1620                   | 130     | 200     | 2730     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6454-4J..4   | 5400         | 1967       | 930                    | 1620                   | 140     | 200     | 2940     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6456-4J..4   | 5700         | 1967       | 930                    | 1620                   | 140     | 200     | 2940     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6500-4J..4   | 6050         | 2130       | 1000                   | 1810                   | 140     | 200     | 2560     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6502-4J..4   | 6250         | 2130       | 1000                   | 1810                   | 140     | 200     | 2560     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6504-4J..4   | 6950         | 2130       | 1000                   | 1810                   | 150     | 200     | 2770     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6506-4J..4   | 7300         | 2130       | 1000                   | 1810                   | 150     | 200     | 2770     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6560-4J..4   | 8200         | 2400       | 1210                   | 2100                   | 170     | 240     | 2800     | 1400    | 1250    | 1320    | 26      | 16            |
| 1RQ6562-4J..4   | 8600         | 2400       | 1210                   | 2100                   | 170     | 240     | 2800     | 1400    | 1250    | 1320    | 26      | 16            |
| 1RQ6564-4J..4   | 9500         | 2400       | 1210                   | 2100                   | 180     | 240     | 3030     | 1400    | 1250    | 1320    | 26      | 16            |
| 1RQ6566-4J..4 <sup>2)</sup>   | 9950         | 2400       | 1210                   | 2100                   | 180     | 240     | 3030     | 1400    | 1250    | 1320    | 26      | 16            |
| 1RQ4630-4J..4 <sup>2)</sup>   | 12750        | 2840       | 1330                   | 2300                   | 200     | 280     | 3170     | 2000    | 1800    | 1900    | 33      | 16            |
| 1RQ4632-4J..4 <sup>2)</sup>   | 13450        | 2840       | 1330                   | 2300                   | 200     | 280     | 3170     | 2000    | 1800    | 1900    | 33      | 16            |
| 1RQ4634-4J..4 <sup>2)</sup>   | 14550        | 2840       | 1330                   | 2300                   | 200     | 280     | 3410     | 2000    | 1800    | 1900    | 33      | 16            |
| 1RQ4636-4J..4 <sup>2)</sup>   | 15100        | 2840       | 1330                   | 2300                   | 200     | 280     | 3410     | 2000    | 1800    | 1900    | 33      | 16            |

<sup>1)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.


<sup>2)</sup> Only in the 50 Hz version.

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Dimension drawings (continued)

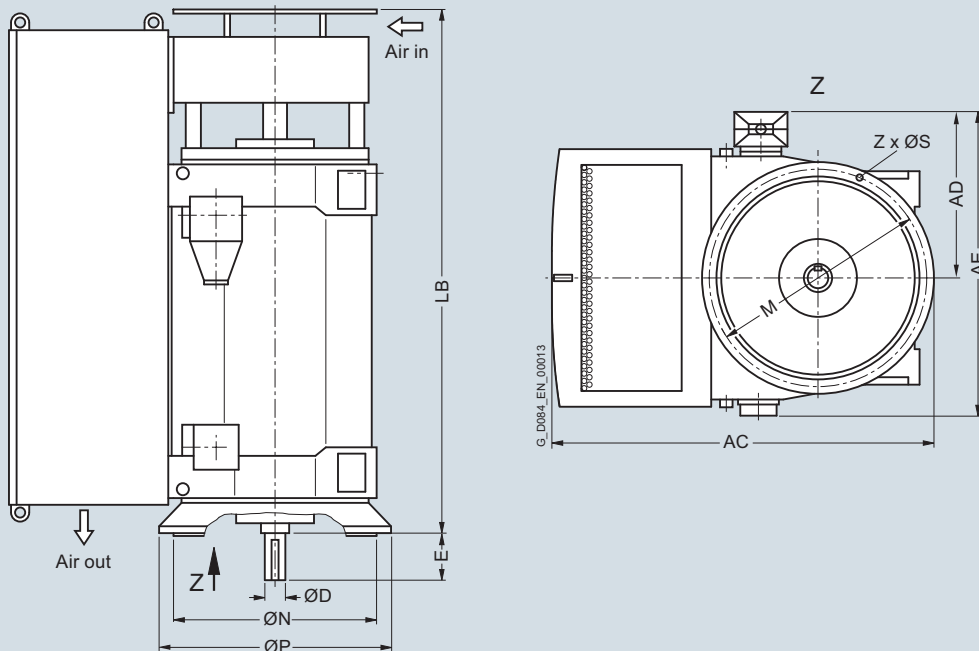

| Motor type  | Weight<br>kg | Dimensions |                        |                        |         |         |          |         |         |         |         |               |
|---|--------------|------------|------------------------|------------------------|---------|---------|----------|---------|---------|---------|---------|---------------|
|   |              | AC<br>mm   | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |
| <b>Up to 6.6 kV, anti-friction bearings, IM V1 type of construction</b> |              |            |                        |                        |         |         |          |         |         |         |         |               |
| 6-pole  |              |            |                        |                        |         |         |          |         |         |         |         |               |
| 1RQ6450-6J..4   | 4850         | 1967       | 930                    | 1620                   | 130     | 200     | 2730     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6452-6J..4   | 5150         | 1967       | 930                    | 1620                   | 130     | 200     | 2730     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6454-6J..4   | 5500         | 1967       | 930                    | 1620                   | 140     | 200     | 2940     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6456-6J..4   | 5850         | 1967       | 930                    | 1620                   | 140     | 200     | 2940     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6500-6J..4   | 6200         | 2130       | 1000                   | 1810                   | 150     | 200     | 2560     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6502-6J..4   | 6550         | 2130       | 1000                   | 1810                   | 150     | 200     | 2560     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6504-6J..4   | 7100         | 2130       | 1000                   | 1810                   | 160     | 240     | 2770     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6506-6J..4   | 7500         | 2130       | 1000                   | 1810                   | 160     | 240     | 2770     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6560-6J..4   | 8300         | 2400       | 1070                   | 1960                   | 170     | 240     | 2800     | 1400    | 1250    | 1320    | 26      | 16            |
| 1RQ6562-6J..4   | 8800         | 2400       | 1070                   | 1960                   | 170     | 240     | 2800     | 1400    | 1250    | 1320    | 26      | 16            |
| 1RQ6564-6J..4   | 9750         | 2400       | 1210                   | 2100                   | 180     | 240     | 3030     | 1400    | 1250    | 1320    | 26      | 16            |
| 1RQ6566-6J..4   | 10200        | 2400       | 1210                   | 2100                   | 180     | 240     | 3030     | 1400    | 1250    | 1320    | 26      | 16            |
| 1RQ4630-6J..4   | 13050        | 2840       | 1330                   | 2300                   | 200     | 280     | 3170     | 2000    | 1800    | 1900    | 33      | 16            |
| 1RQ4632-6J..4   | 13650        | 2840       | 1330                   | 2300                   | 200     | 280     | 3170     | 2000    | 1800    | 1900    | 33      | 16            |
| 1RQ4634-6J..4   | 14550        | 2840       | 1330                   | 2300                   | 200     | 280     | 3410     | 2000    | 1800    | 1900    | 33      | 16            |
| 1RQ4636-6J..4   | 15400        | 2840       | 1330                   | 2300                   | 200     | 280     | 3410     | 2000    | 1800    | 1900    | 33      | 16            |


<sup>1)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.

## Motors for converter operation

### Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Dimension drawings (continued)

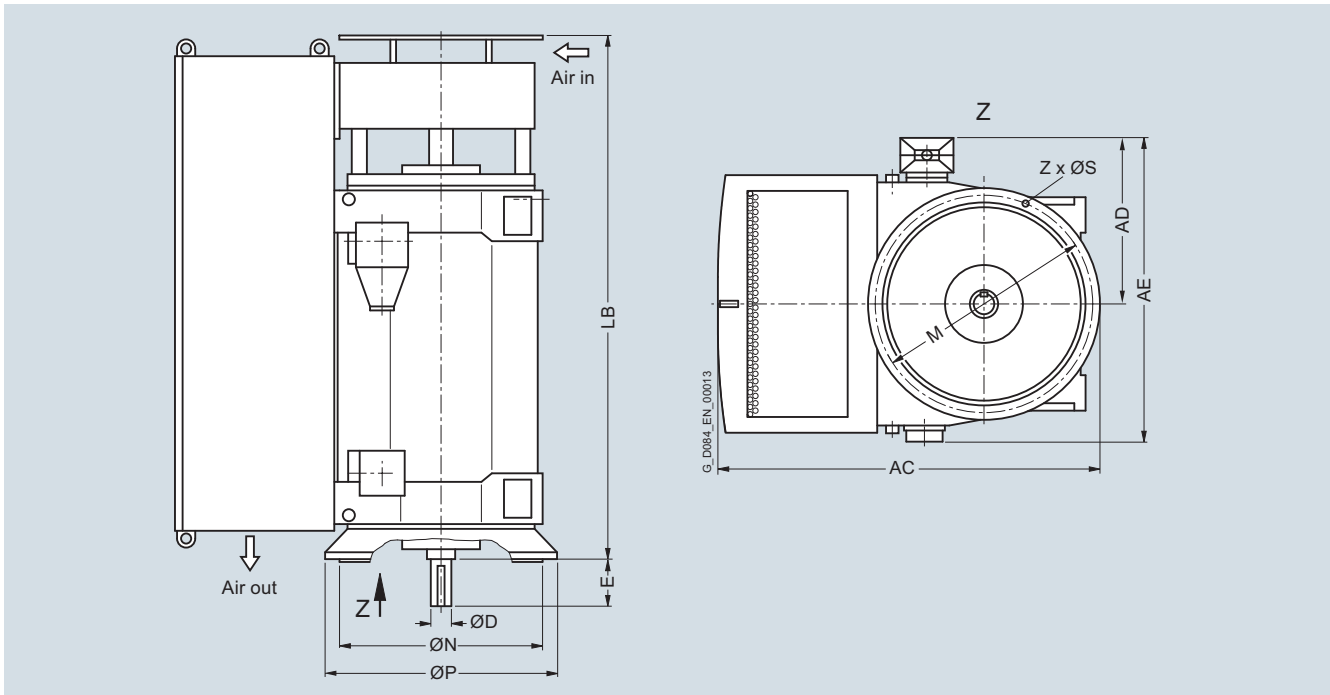

| Motor type  | Weight<br>kg | Dimensions |                        |                        |         |         |          |         |         |         |         |               |
|---|--------------|------------|------------------------|------------------------|---------|---------|----------|---------|---------|---------|---------|---------------|
|   |              | AC<br>mm   | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |
| <b>Up to 6.6 kV, anti-friction bearings, IM V1 type of construction</b> |              |            |                        |                        |         |         |          |         |         |         |         |               |
| 8-pole  |              |            |                        |                        |         |         |          |         |         |         |         |               |
| 1RQ6450-8J..4   | 4850         | 1967       | 930                    | 1620                   | 140     | 200     | 2730     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6452-8J..4   | 5150         | 1967       | 930                    | 1620                   | 140     | 200     | 2730     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6454-8J..4   | 5550         | 1967       | 930                    | 1620                   | 140     | 200     | 2940     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6456-8J..4   | 5900         | 1967       | 930                    | 1620                   | 140     | 200     | 2940     | 1150    | 1000    | 1080    | 26      | 8             |
| 1RQ6500-8J..4   | 6200         | 2130       | 1000                   | 1810                   | 150     | 200     | 2560     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6502-8J..4   | 6600         | 2130       | 1000                   | 1810                   | 150     | 200     | 2560     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6504-8J..4   | 7100         | 2130       | 1000                   | 1810                   | 160     | 240     | 2770     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6506-8J..4   | 7500         | 2130       | 1000                   | 1810                   | 160     | 240     | 2770     | 1250    | 1120    | 1180    | 26      | 8             |
| 1RQ6560-8J..4   | 8250         | 2400       | 1070                   | 1960                   | 170     | 240     | 2800     | 1400    | 1250    | 1320    | 26      | 16            |
| 1RQ6562-8J..4   | 8800         | 2400       | 1070                   | 1960                   | 170     | 240     | 2800     | 1400    | 1250    | 1320    | 26      | 16            |
| 1RQ6564-8J..4   | 9650         | 2400       | 1070                   | 1960                   | 180     | 240     | 3030     | 1400    | 1250    | 1320    | 26      | 16            |
| 1RQ6566-8J..4   | 10100        | 2400       | 1070                   | 1960                   | 180     | 240     | 3030     | 1400    | 1250    | 1320    | 26      | 16            |
| 1RQ4630-8J..4 <sup>2)</sup>   | 12850        | 2840       | 1180                   | 2150                   | 200     | 280     | 3170     | 2000    | 1800    | 1900    | 33      | 16            |
| 1RQ4632-8J..4 <sup>2)</sup>   | 13600        | 2840       | 1330                   | 2300                   | 200     | 280     | 3170     | 2000    | 1800    | 1900    | 33      | 16            |
| 1RQ4634-8J..4 <sup>2)</sup>   | 14550        | 2840       | 1330                   | 2300                   | 200     | 280     | 3410     | 2000    | 1800    | 1900    | 33      | 16            |
| 1RQ4636-8J..4 <sup>2)</sup>   | 15300        | 2840       | 1330                   | 2300                   | 200     | 280     | 3410     | 2000    | 1800    | 1900    | 33      | 16            |

#### Note:

Higher pole numbers are available on request.

<sup>1)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.


<sup>2)</sup> Only in the 50 Hz version.

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Dimension drawings

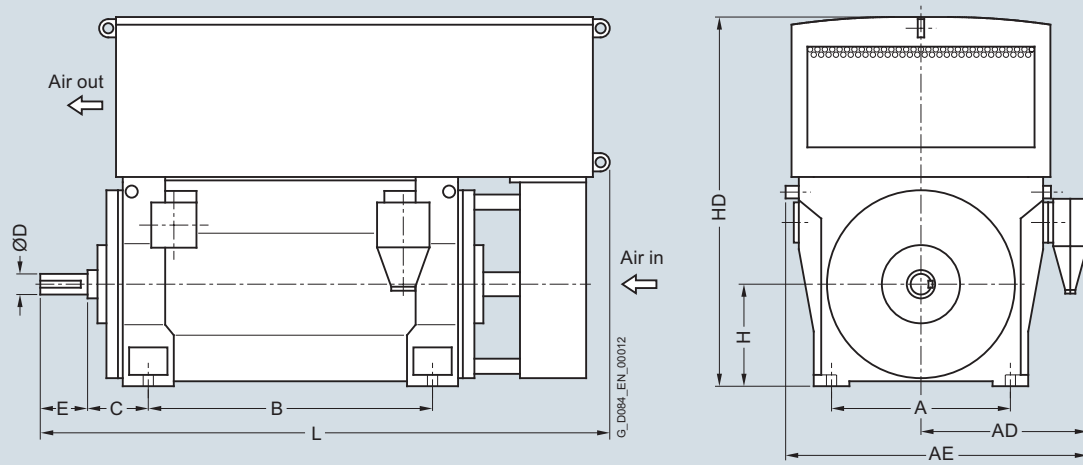

| Motor type   | Weight<br>kg | Dimensions |      |      |      |     |     |     |     |      |      |
|--|--------------|------------|------|------|------|-----|-----|-----|-----|------|------|
|  |              | A          | AD   | AE   | B    | C   | D   | E   | H   | HD   | L    |
| Up to 6.6 kV, IM B3 type of construction, anti-friction bearings – 1RQ7 series – IC611 |              |            |      |      |      |     |     |     |     |      |      |
| <b>4-pole</b>  |              |            |      |      |      |     |     |     |     |      |      |
| 1RQ7 710-4   | 17100        | 1500       | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | 3080 | 4500 |
| 1RQ7 712-4   | 17800        | 1500       | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | 3080 | 4500 |
| 1RQ7 714-4   | 19200        | 1500       | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | 3080 | 4740 |
| 1RQ7 716-4   | 20500        | 1500       | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | 3080 | 4740 |
| <b>6-pole</b>  |              |            |      |      |      |     |     |     |     |      |      |
| 1RQ7 710-6   | 17200        | 1500       | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | 3080 | 3960 |
| 1RQ7 712-6   | 18300        | 1500       | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | 3080 | 3960 |
| 1RQ7 714-6   | 19800        | 1500       | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | 3080 | 4200 |
| 1RQ7 716-6   | 20800        | 1500       | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | 3080 | 4200 |
| <b>8-pole</b>  |              |            |      |      |      |     |     |     |     |      |      |
| 1RQ7 710-8   | 16500        | 1500       | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | 2710 | 3960 |
| 1RQ7 712-8   | 17400        | 1500       | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | 2710 | 3960 |
| 1RQ7 714-8   | 18900        | 1500       | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | 2710 | 4200 |
| 1RQ7 716-8   | 19900        | 1500       | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | 2710 | 4200 |
| <b>10-pole</b>   |              |            |      |      |      |     |     |     |     |      |      |
| 1RQ7 710-3   | 16400        | 1500       | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | 2710 | 3960 |
| 1RQ7 712-3   | 17400        | 1500       | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | 2710 | 3960 |
| 1RQ7 714-3   | 18900        | 1500       | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | 2710 | 4200 |
| 1RQ7 716-3   | 20000        | 1500       | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | 2710 | 4200 |

**Note:**

Higher pole numbers are available on request.




## Motors for converter operation

### Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Dimension drawings

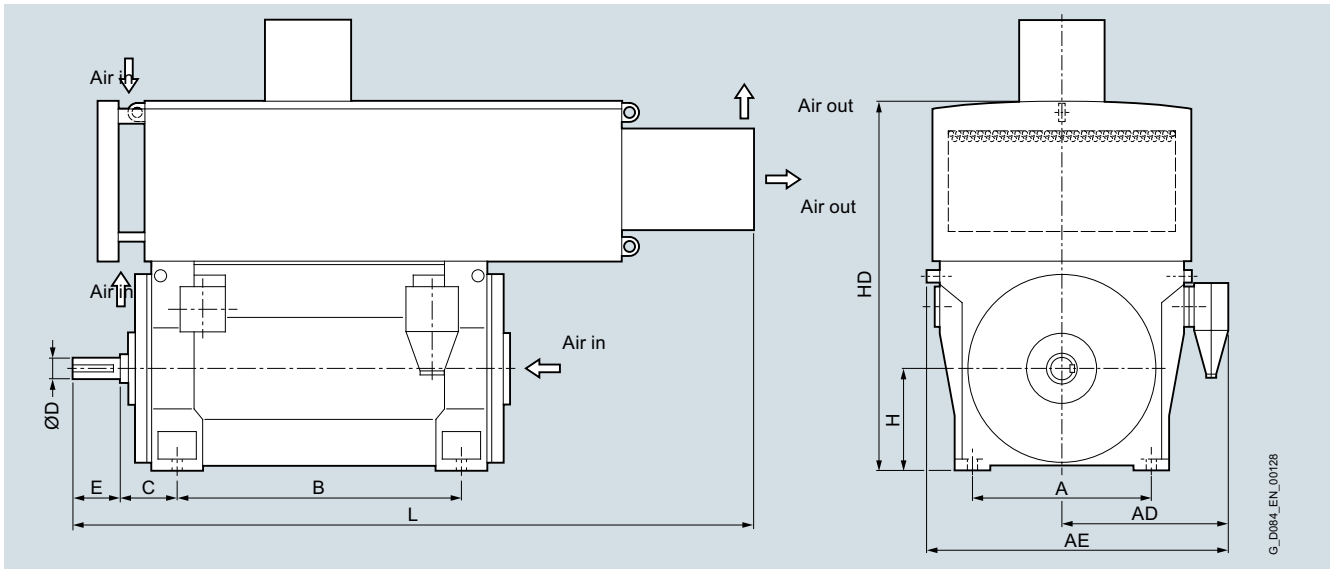

| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |                        |         |
|---|--------------|------------|----------|----------|---------|---------|---------|---------|---------|------------------------|---------|
|   |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>1)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, anti-friction bearings – 1RQ7 series – IC666</b> |              |            |          |          |         |         |         |         |         |                        |         |
| <b>4-pole</b>   |              |            |          |          |         |         |         |         |         |                        |         |
| 1RQ7 710-4  | 16900        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 3550                   | 4330    |
| 1RQ7 712-4  | 17600        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 3550                   | 4330    |
| 1RQ7 714-4  | 19000        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 3550                   | 4570    |
| 1RQ7 716-4  | 20300        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 3550                   | 4570    |
| <b>6-pole</b>   |              |            |          |          |         |         |         |         |         |                        |         |
| 1RQ7 710-6  | 17300        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 3550                   | 4330    |
| 1RQ7 712-6  | 18400        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 3550                   | 4330    |
| 1RQ7 714-6  | 19800        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 3550                   | 4570    |
| 1RQ7 716-6  | 20900        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 3550                   | 4570    |
| <b>8-pole</b>   |              |            |          |          |         |         |         |         |         |                        |         |
| 1RQ7 710-8  | 16800        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 3550                   | 4330    |
| 1RQ7 712-8  | 17600        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 3550                   | 4330    |
| 1RQ7 714-8  | 19200        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 3550                   | 4570    |
| 1RQ7 716-8  | 20200        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 3550                   | 4570    |
| <b>10-pole</b>  |              |            |          |          |         |         |         |         |         |                        |         |
| 1RQ7 710-3  | 16600        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 3550                   | 4330    |
| 1RQ7 712-3  | 17600        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 3550                   | 4330    |
| 1RQ7 714-3  | 19200        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 3550                   | 4570    |
| 1RQ7 716-3  | 20200        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 3550                   | 4570    |

#### Note:

Higher pole numbers are available on request.


<sup>1)</sup> Dimension HD without external blower  
(2 ... 6-pole = 600mm / ≥ 8-pole = 500 mm)

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Dimension drawings

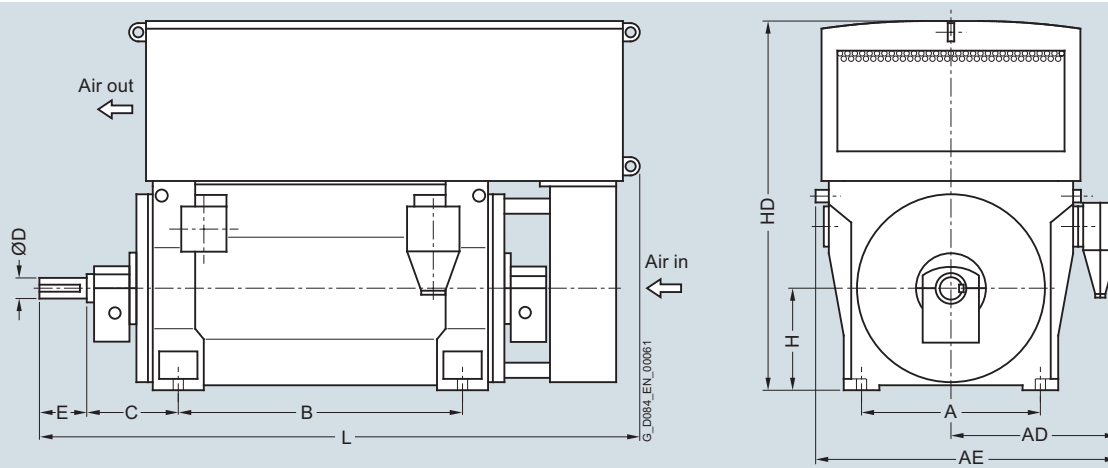

| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|--|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, sleeve bearings – 1RQ7 series – IC611</b> |              |            |          |          |         |         |         |         |         |          |         |
| <b>2-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ7 710-2   | 16500        | 1500       | 1800     | 2900     | 2000    | 560     | 200     | 280     | 710     | 3080     | 4630    |
| 1RQ7 712-2   | 17000        | 1500       | 1800     | 2900     | 2000    | 560     | 200     | 280     | 710     | 3080     | 4630    |
| 1RQ7 714-2   | 18400        | 1500       | 1800     | 2900     | 2240    | 560     | 200     | 280     | 710     | 3080     | 4870    |
| 1RQ7 716-2   | 19100        | 1500       | 1800     | 2900     | 2240    | 560     | 200     | 280     | 710     | 3080     | 4870    |
| <b>4-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ7 710-4   | 17500        | 1500       | 1800     | 2900     | 2000    | 710     | 220     | 350     | 710     | 3080     | 4840    |
| 1RQ7 712-4   | 18200        | 1500       | 1800     | 2900     | 2000    | 710     | 220     | 350     | 710     | 3080     | 4840    |
| 1RQ7 714-4   | 19500        | 1500       | 1800     | 2900     | 2240    | 710     | 220     | 350     | 710     | 3080     | 5080    |
| 1RQ7 716-4   | 20800        | 1500       | 1800     | 2900     | 2240    | 710     | 220     | 350     | 710     | 3080     | 5080    |
| <b>6-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ7 710-6   | 17300        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 3080     | 4250    |
| 1RQ7 712-6   | 18400        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 3080     | 4250    |
| 1RQ7 714-6   | 19900        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 3080     | 4490    |
| 1RQ7 716-6   | 20900        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 3080     | 4490    |
| <b>8-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ7 710-8   | 16500        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2710     | 4250    |
| 1RQ7 712-8   | 17400        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2710     | 4250    |
| 1RQ7 714-8   | 18900        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2710     | 4490    |
| 1RQ7 716-8   | 20000        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2710     | 4490    |
| <b>10-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RQ7 710-3   | 16400        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2710     | 4250    |
| 1RQ7 712-3   | 17400        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2710     | 4250    |
| 1RQ7 714-3   | 19000        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2710     | 4490    |
| 1RQ7 716-3   | 20000        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2710     | 4490    |

#### Note:


Higher pole numbers are available on request.

## Motors for converter operation

### Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

#### Dimension drawings

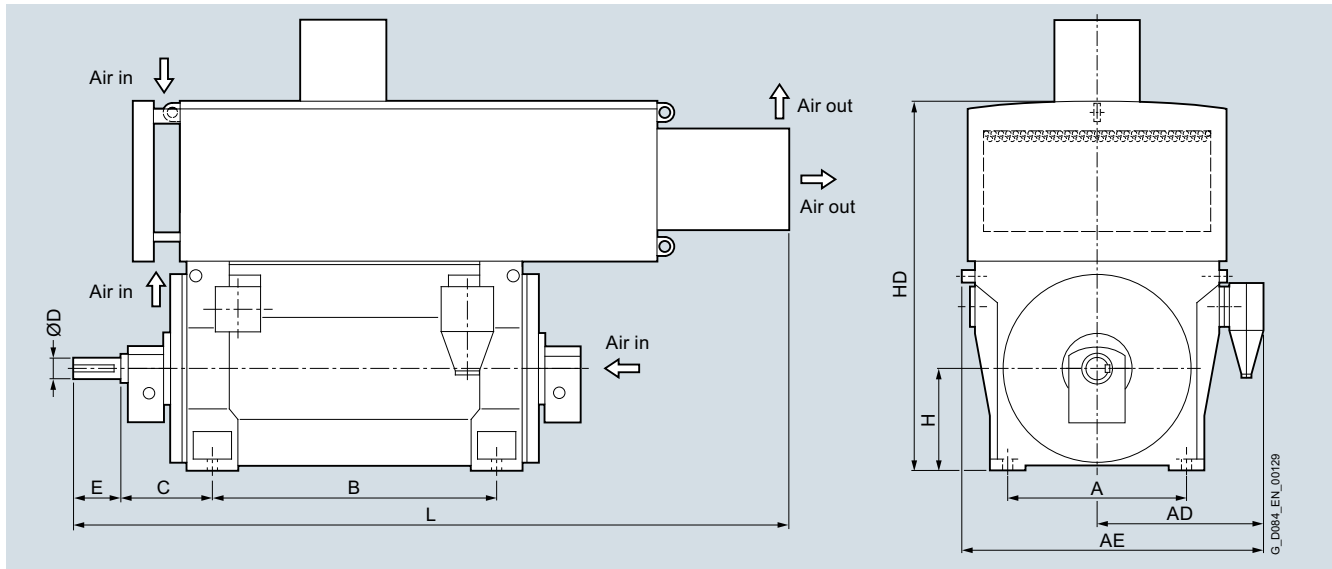

| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |                        |         |
|--|--------------|------------|----------|----------|---------|---------|---------|---------|---------|------------------------|---------|
|  |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>1)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, sleeve bearings – 1RQ7 series – IC666</b> |              |            |          |          |         |         |         |         |         |                        |         |
| <b>2-pole</b>  |              |            |          |          |         |         |         |         |         |                        |         |
| 1RQ7 710-2   | 16200        | 1500       | 1800     | 2900     | 2000    | 560     | 200     | 710     | 280     | 3550                   | 4450    |
| 1RQ7 712-2   | 16700        | 1500       | 1800     | 2900     | 2000    | 560     | 200     | 710     | 280     | 3550                   | 4450    |
| 1RQ7 714-2   | 18000        | 1500       | 1800     | 2900     | 2240    | 560     | 200     | 710     | 280     | 3550                   | 4690    |
| 1RQ7 716-2   | 18700        | 1500       | 1800     | 2900     | 2240    | 560     | 200     | 710     | 280     | 3550                   | 4690    |
| <b>4-pole</b>  |              |            |          |          |         |         |         |         |         |                        |         |
| 1RQ7 710-4   | 17200        | 1500       | 1800     | 2900     | 2000    | 710     | 220     | 710     | 350     | 3550                   | 4670    |
| 1RQ7 712-4   | 17900        | 1500       | 1800     | 2900     | 2000    | 710     | 220     | 710     | 350     | 3550                   | 4670    |
| 1RQ7 714-4   | 19300        | 1500       | 1800     | 2900     | 2240    | 710     | 220     | 710     | 350     | 3550                   | 4910    |
| 1RQ7 716-4   | 20600        | 1500       | 1800     | 2900     | 2240    | 710     | 220     | 710     | 350     | 3550                   | 4910    |
| <b>6-pole</b>  |              |            |          |          |         |         |         |         |         |                        |         |
| 1RQ7 710-6   | 17300        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 710     | 350     | 3550                   | 4630    |
| 1RQ7 712-6   | 18500        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 710     | 350     | 3550                   | 4630    |
| 1RQ7 714-6   | 19900        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 710     | 350     | 3550                   | 4870    |
| 1RQ7 716-6   | 20900        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 710     | 350     | 3550                   | 4870    |
| <b>8-pole</b>  |              |            |          |          |         |         |         |         |         |                        |         |
| 1RQ7 710-8   | 17000        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 710     | 350     | 3550                   | 4630    |
| 1RQ7 712-8   | 17900        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 710     | 350     | 3550                   | 4630    |
| 1RQ7 714-8   | 19200        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 710     | 350     | 3550                   | 4870    |
| 1RQ7 716-8   | 20200        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 710     | 350     | 3550                   | 4870    |
| <b>10-pole</b>   |              |            |          |          |         |         |         |         |         |                        |         |
| 1RQ7 710-3   | 16900        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 710     | 350     | 3550                   | 4630    |
| 1RQ7 712-3   | 17900        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 710     | 350     | 3550                   | 4630    |
| 1RQ7 714-3   | 19200        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 710     | 350     | 3550                   | 4870    |
| 1RQ7 716-3   | 20200        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 710     | 350     | 3550                   | 4870    |

#### Note:

Higher pole numbers are available on request.


<sup>1)</sup> Dimension "HD" without external blower  
(2 ... 6-pole = 600mm / 8-pole + = 500 mm)

## Motors for converter operation

Converter with non-sinusoidal output

Air-cooled motors · H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7

### Dimension drawings

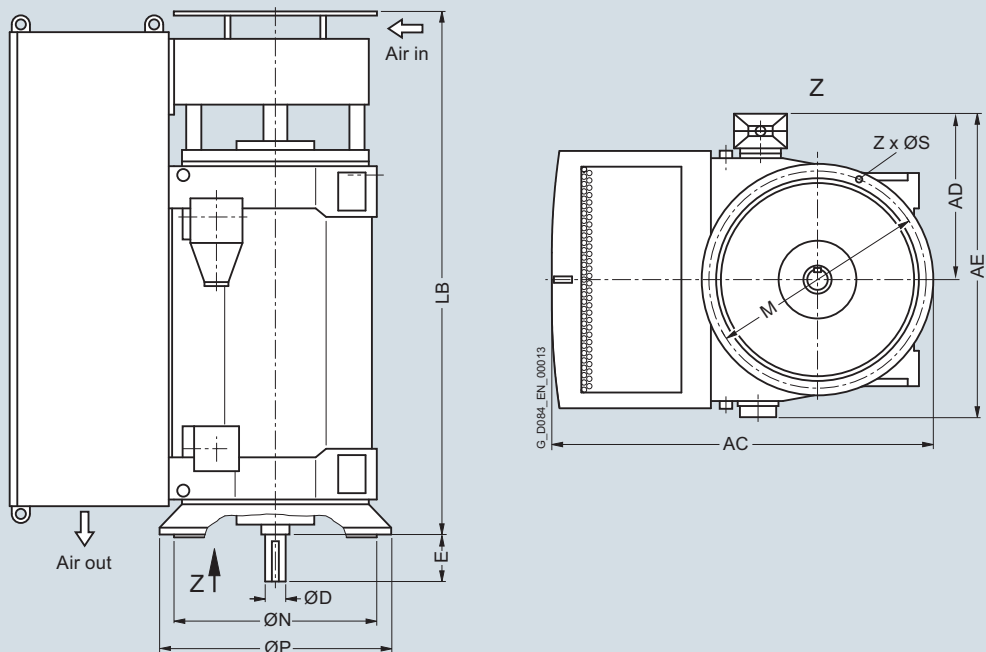

| Motor type | Weight<br>kg | Dimensions |          |          |         |         |          |         |         |         |         |               |
|------------|--------------|------------|----------|----------|---------|---------|----------|---------|---------|---------|---------|---------------|
|            |              | AC<br>mm   | AD<br>mm | AE<br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |

#### Up to 6.6 kV, IM V1 type of construction, anti-friction bearings, Z ventilation – 1RQ7 series – IC611

##### 6-pole

|            |       |      |      |      |     |     |      |      |      |      |    |    |
|------------|-------|------|------|------|-----|-----|------|------|------|------|----|----|
| 1RQ7 710-6 | 18100 | 3420 | 1800 | 2900 | 220 | 350 | 4020 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RQ7 712-6 | 19200 | 3420 | 1800 | 2900 | 220 | 350 | 4020 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RQ7 714-6 | 20700 | 3420 | 1800 | 2900 | 220 | 350 | 4260 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RQ7 716-6 | 21700 | 3420 | 1800 | 2900 | 220 | 350 | 4260 | 2000 | 1800 | 1900 | 35 | 24 |

##### 8-pole

|            |       |      |      |      |     |     |      |      |      |      |    |    |
|------------|-------|------|------|------|-----|-----|------|------|------|------|----|----|
| 1RQ7 710-8 | 16900 | 3050 | 1800 | 2900 | 220 | 350 | 4020 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RQ7 712-8 | 17800 | 3050 | 1800 | 2900 | 220 | 350 | 4020 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RQ7 714-8 | 19400 | 3050 | 1800 | 2900 | 220 | 350 | 4260 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RQ7 716-8 | 20400 | 3050 | 1800 | 2900 | 220 | 350 | 4260 | 2000 | 1800 | 1900 | 35 | 24 |

##### 10-pole

|            |       |      |      |      |     |     |      |      |      |      |    |    |
|------------|-------|------|------|------|-----|-----|------|------|------|------|----|----|
| 1RQ7 710-3 | 16700 | 3050 | 1800 | 2900 | 220 | 350 | 4020 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RQ7 712-3 | 17700 | 3050 | 1800 | 2900 | 220 | 350 | 4020 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RQ7 714-3 | 19300 | 3050 | 1800 | 2900 | 220 | 350 | 4260 | 2000 | 1800 | 1900 | 35 | 24 |
| 1RQ7 716-3 | 20400 | 3050 | 1800 | 2900 | 220 | 350 | 4260 | 2000 | 1800 | 1900 | 35 | 24 |

#### Note:

Higher pole numbers are available on request.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Water-cooled motors · H-compact 1LH4

#### Overview



#### Technical data

##### Overview of technical data

| H-compact 1LH4            |   |
|---------------------------|---|
| Rated voltage             | 690 V ... 4.16 kV   |
| Rated frequency           | 50/60 Hz  |
| Motor type                | Induction motor with squirrel-cage rotor                      |
| Type of construction      | IM B3, IM B35 and IM V1                                       |
| Degree of protection      | IP55  |
| Cooling method            | IC71W   |
| Stator winding insulation | Insulation system, thermal class 155 (F), utilized to 155 (F) |
| Shaft height              | 500 mm  |
| Bearings                  | Anti-friction bearings  |
| Cage material             | Copper  |
| Standards                 | IEC, EN   |
| Frame design              | Steel frame with water jacket                                 |

#### Technical data (continued)


##### Power ranges for IEC motors with reinforced insulation for SINAMICS drive converters without sine-wave filter

##### 1LH4 series (water-jacket-cooled)


Insulation system, thermal class 155 (F), utilized to 155 (F)

The power data listed here apply for a water inlet temperature of 38 °C and an installation altitude ≤ 1000 m.

690 V; 50 Hz

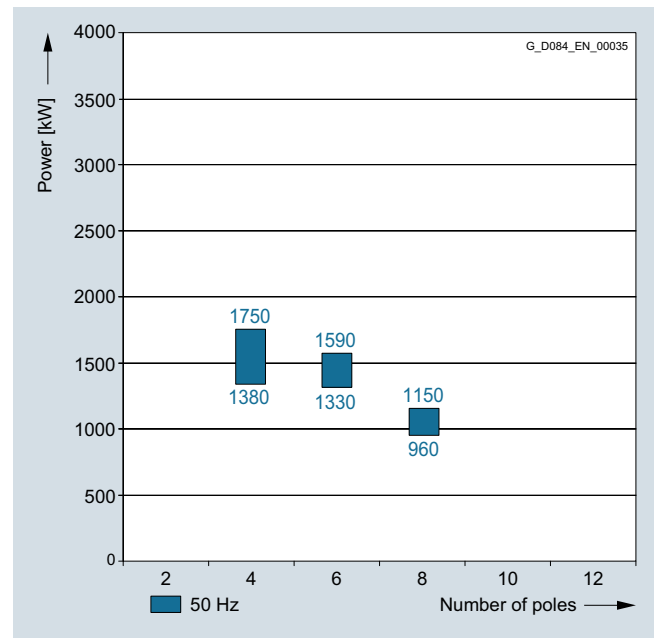

2.3 to 4.16 kV; 50 Hz

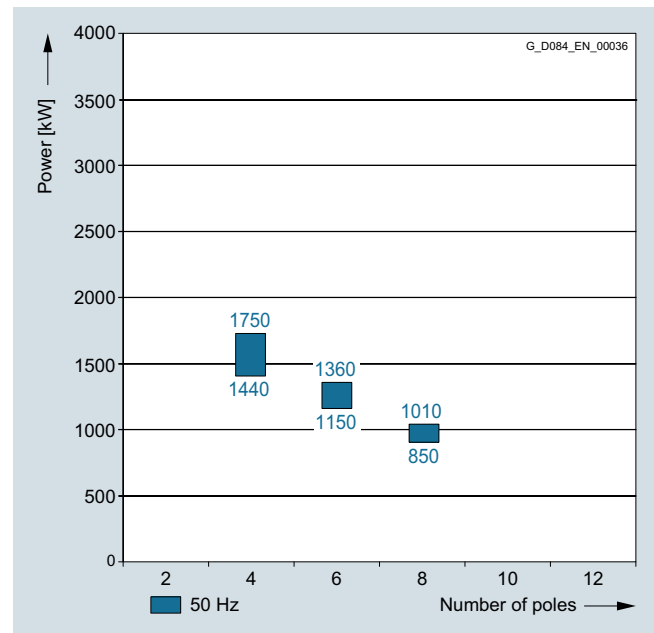

## Motors for converter operation

Converter with non-sinusoidal output

### Water-cooled motors · H-compact 1LH4

#### Selection and ordering data

| Rated power                      | Low-voltage motor<br>H-compact | Operating values at rated output for utilization 155 (F) |             |                       |                         |                          |  |                       |                                      |
|----------------------------------|--------------------------------|--|-------------|-----------------------|-------------------------|--------------------------|--|-----------------------|--------------------------------------|
| IEC                              |                                | Rated speed  | Efficiency  | Power factor          | Rated current at 690 V  | Rated torque             | Break-down torque                      | Moment of inertia     | Mechanical speed limit <sup>1)</sup> |
| $P_{\text{rated}}$ 155 (F)<br>kW | Article No.                    | $n_{\text{rated}}$<br>rpm                                | $\eta$<br>% | $\cos \varphi$<br>[-] | $I_{\text{rated}}$<br>A | $T_{\text{rated}}$<br>Nm | $T_{\text{B}}/T_{\text{rated}}$<br>[-] | J<br>kgm <sup>2</sup> | $n_{\text{max}}$<br>rpm              |
| <b>690 V, 50 Hz</b>              |                                |  |             |                       |                         |                          |  |                       |                                      |
| 4-pole                           |                                |  |             |                       |                         |                          |  |                       |                                      |
| 1380                             | <b>1LH4 500-4CM0</b>           | 1490   | 96.8        | 0.88                  | 1360                    | 8844                     | 2.0                                    | 44                    | 1800                                 |
| 1590                             | <b>1LH4 502-4CM0</b>           | 1491   | 97.1        | 0.87                  | 1580                    | 10183                    | 2.2                                    | 49                    | 1800                                 |
| 1750                             | <b>1LH4 504-4CM0</b>           | 1490   | 97.1        | 0.88                  | 1720                    | 11216                    | 2.0                                    | 56                    | 1800                                 |
| 6-pole                           |                                |  |             |                       |                         |                          |  |                       |                                      |
| 1330                             | <b>1LH4 500-6CM0</b>           | 994  | 97.0        | 0.85                  | 1350                    | 12777                    | 2.2                                    | 82                    | 1800                                 |
| 1440                             | <b>1LH4 502-6CM0</b>           | 994  | 97.0        | 0.86                  | 1450                    | 13834                    | 2.2                                    | 92                    | 1800                                 |
| 1590                             | <b>1LH4 504-6CM0</b>           | 994  | 97.1        | 0.86                  | 1600                    | 15275                    | 2.2                                    | 102                   | 1800                                 |
| 8-pole                           |                                |  |             |                       |                         |                          |  |                       |                                      |
| 960                              | <b>1LH4 500-8CM0</b>           | 745  | 96.5        | 0.80                  | 1040                    | 12305                    | 2.0                                    | 82                    | 1800                                 |
| 1030                             | <b>1LH4 502-8CM0</b>           | 745  | 96.6        | 0.80                  | 1120                    | 13202                    | 2.1                                    | 92                    | 1800                                 |
| 1150                             | <b>1LH4 504-8CM0</b>           | 745  | 96.7        | 0.80                  | 1250                    | 14741                    | 2.1                                    | 102                   | 1800                                 |

#### Type of construction:

IM B3  
IM V1 (without canopy)

0  
8

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details [see Page 3/2](#).  
Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007. The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

| Rated power                      | High voltage motor<br>H-compact | Operating values at rated output for utilization 155 (F) |             |                       |                          |                          |  |                       |                                      |
|----------------------------------|---------------------------------|--|-------------|-----------------------|--------------------------|--------------------------|--|-----------------------|--------------------------------------|
| IEC                              |                                 | Rated speed  | Efficiency  | Power factor          | Rated current at 4.16 kV | Rated torque             | Break-down torque                      | Moment of inertia     | Mechanical speed limit <sup>1)</sup> |
| $P_{\text{rated}}$ 155 (F)<br>kW | Article No.                     | $n_{\text{rated}}$<br>rpm                                | $\eta$<br>% | $\cos \varphi$<br>[-] | $I_{\text{rated}}$<br>A  | $T_{\text{rated}}$<br>Nm | $T_{\text{B}}/T_{\text{rated}}$<br>[-] | J<br>kgm <sup>2</sup> | $n_{\text{max}}$<br>rpm              |
| <b>2.3 ... 4.16 kV, 50 Hz</b>    |                                 |  |             |                       |                          |                          |  |                       |                                      |
| 4-pole                           |                                 |  |             |                       |                          |                          |  |                       |                                      |
| 1440                             | <b>1LH4 500-4CV</b>             | 1492   | 97.0        | 0.87                  | 235                      | 9216                     | 2.3                                    | 42                    | 1800                                 |
| 1590                             | <b>1LH4 502-4CV</b>             | 1492   | 97.1        | 0.87                  | 260                      | 10177                    | 2.4                                    | 47                    | 1800                                 |
| 1750                             | <b>1LH4 504-4CV</b>             | 1492   | 97.2        | 0.88                  | 285                      | 11201                    | 2.4                                    | 54                    | 1800                                 |
| 6-pole                           |                                 |  |             |                       |                          |                          |  |                       |                                      |
| 1150                             | <b>1LH4 500-6CV</b>             | 994  | 96.9        | 0.86                  | 192                      | 11048                    | 2.2                                    | 82                    | 1800                                 |
| 1250                             | <b>1LH4 502-6CV</b>             | 994  | 97.0        | 0.87                  | 205                      | 12009                    | 2.2                                    | 92                    | 1800                                 |
| 1360                             | <b>1LH4 504-6CV</b>             | 994  | 97.0        | 0.87                  | 225                      | 13065                    | 2.2                                    | 102                   | 1800                                 |
| 8-pole                           |                                 |  |             |                       |                          |                          |  |                       |                                      |
| 850                              | <b>1LH4 500-8CV</b>             | 745  | 96.3        | 0.80                  | 154                      | 10895                    | 2.0                                    | 82                    | 1800                                 |
| 910                              | <b>1LH4 502-8CV</b>             | 745  | 96.4        | 0.80                  | 164                      | 11664                    | 2.1                                    | 92                    | 1800                                 |
| 1010                             | <b>1LH4 504-8CV</b>             | 745  | 96.5        | 0.81                  | 180                      | 12946                    | 2.1                                    | 102                   | 1800                                 |

#### Voltage code:

3.3 kV, 50 Hz  
4.16 kV, 50 Hz  
Other voltage

2  
4  
9

#### Type of construction:

IM B3  
IM V1 (without canopy)

0  
8

#### Note:

Partial load values for H-compact 1LH4 are available on request.

Higher pole numbers are available on request.


<sup>1)</sup> For IM B3, anti-friction bearings.

## Motors for converter operation

### Converter with non-sinusoidal output

Water-cooled motors · H-compact 1LH4

#### Dimension drawings

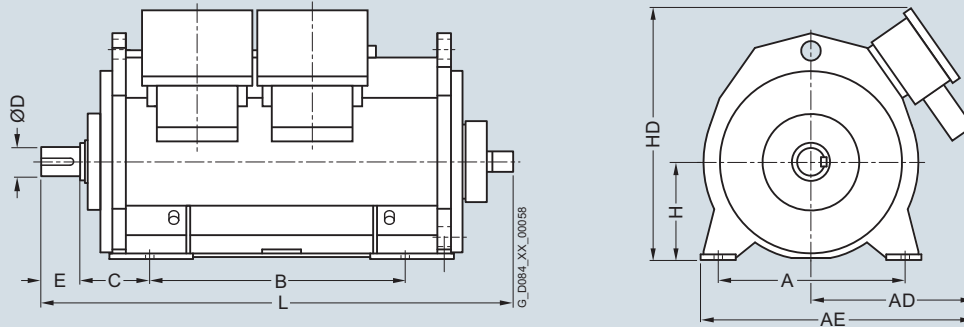

| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|---|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|   |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, anti-friction bearings, IM B3 type of construction</b> |              |            |          |          |         |         |         |         |         |          |         |
| <b>4-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1LH4500-4C..0   | 5910         | 950        | 820      | 1390     | 1320    | 355     | 150     | 200     | 500     | 1280     | 2250    |
| 1LH4502-4C..0   | 6310         | 950        | 820      | 1390     | 1320    | 355     | 150     | 200     | 500     | 1280     | 2250    |
| 1LH4504-4C..0   | 6810         | 950        | 820      | 1390     | 1320    | 355     | 150     | 200     | 500     | 1280     | 2250    |
| <b>6-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1LH4500-6C..0   | 6210         | 950        | 820      | 1390     | 1320    | 355     | 150     | 200     | 500     | 1280     | 2250    |
| 1LH4502-6C..0   | 6610         | 950        | 820      | 1390     | 1320    | 355     | 150     | 200     | 500     | 1280     | 2250    |
| 1LH4504-6C..0   | 7110         | 950        | 820      | 1390     | 1320    | 355     | 150     | 200     | 500     | 1280     | 2250    |
| <b>8-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1LH4500-8C..0   | 6210         | 950        | 820      | 1390     | 1320    | 355     | 150     | 200     | 500     | 1280     | 2250    |
| 1LH4502-8C..0   | 6510         | 950        | 820      | 1390     | 1320    | 355     | 150     | 200     | 500     | 1280     | 2250    |
| 1LH4504-8C..0   | 7010         | 950        | 820      | 1390     | 1320    | 355     | 150     | 200     | 500     | 1280     | 2250    |

#### Note:


Higher pole numbers are available on request.

## Motors for converter operation

Converter with non-sinusoidal output

Water-cooled motors · H-compact 1LH4

### Dimension drawings

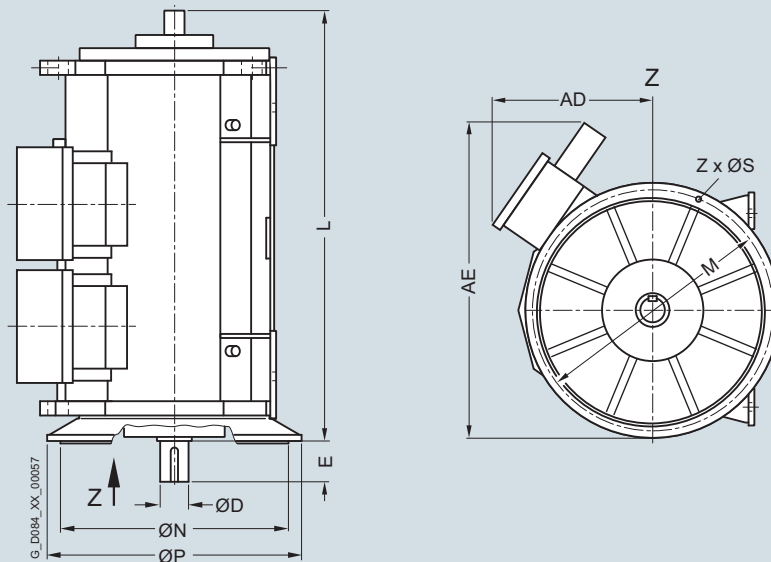

| Motor type | Weight<br>kg | Dimensions |          |         |         |         |         |         |         |         |         |
|------------|--------------|------------|----------|---------|---------|---------|---------|---------|---------|---------|---------|
|            |              | AD<br>mm   | AE<br>mm | D<br>mm | E<br>mm | L<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>mm |

#### Up to 6.6 kV, anti-friction bearings, IM V1 type of construction

##### 4-pole

|               |      |     |      |     |     |      |      |      |      |    |    |
|---------------|------|-----|------|-----|-----|------|------|------|------|----|----|
| 1LH4500-4C..8 | 5910 | 780 | 1450 | 150 | 200 | 2100 | 1250 | 1120 | 1180 | 26 | 16 |
| 1LH4502-4C..8 | 6310 | 780 | 1450 | 150 | 200 | 2100 | 1250 | 1120 | 1180 | 26 | 16 |
| 1LH4504-4C..8 | 6810 | 780 | 1450 | 150 | 200 | 2100 | 1250 | 1120 | 1180 | 26 | 16 |

##### 6-pole

|               |      |     |      |     |     |      |      |      |      |    |    |
|---------------|------|-----|------|-----|-----|------|------|------|------|----|----|
| 1LH4500-6C..8 | 6210 | 780 | 1450 | 150 | 200 | 2100 | 1250 | 1120 | 1180 | 26 | 16 |
| 1LH4502-6C..8 | 6610 | 780 | 1450 | 150 | 200 | 2100 | 1250 | 1120 | 1180 | 26 | 16 |
| 1LH4504-6C..8 | 7110 | 780 | 1450 | 150 | 200 | 2100 | 1250 | 1120 | 1180 | 26 | 16 |

##### 8-pole

|               |      |     |      |     |     |      |      |      |      |    |    |
|---------------|------|-----|------|-----|-----|------|------|------|------|----|----|
| 1LH4500-8C..8 | 6210 | 780 | 1450 | 150 | 200 | 2100 | 1250 | 1120 | 1180 | 26 | 16 |
| 1LH4502-8C..8 | 6510 | 780 | 1450 | 150 | 200 | 2100 | 1250 | 1120 | 1180 | 26 | 16 |
| 1LH4504-8C..8 | 7010 | 780 | 1450 | 150 | 200 | 2100 | 1250 | 1120 | 1180 | 26 | 16 |

#### Note:

Higher pole numbers are available on request.



## Motors for converter operation

### Converter with non-sinusoidal output

#### Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Overview



#### Technical data

##### Overview of technical data

| H-compact PLUS 1RN4, 1RN6,<br>SIMOTICS HV M 1RN7 |  |
|--|--|
| Rated voltage                                    | 690 V ... 4.16 kV                              |
| Rated frequency                                  | 50/60 Hz                                       |
| Motor type                                       | Induction motor with squirrel-cage rotor       |
| Type of construction                             | IM B3, IM V1                                   |
| Degree of protection                             | IP55   |
| Cooling method                                   | IC81W  |
| Stator winding insulation                        | Insulation system, thermal class 155 (F)       |
| Shaft height                                     | 450 ... 710 mm                                 |
| Bearings   | Anti-friction bearings, sleeve bearings        |
| Cage material                                    | Copper   |
| Standards  | IEC, EN  |
| Frame design for shaft heights<br>450 ... 560 mm | Housing: Cast iron<br>Cooling enclosure: Steel |
| Frame design for shaft heights<br>630 ... 710 mm | Housing: Steel<br>Cooling enclosure: Steel     |

The following versions can be offered on request:

- 2-pole up to 75 Hz
- 4-pole up to 100 Hz
- 6-pole up to 90 Hz

For individual motor types, it must be ensured that the motor does not run-through any critical speed in the required speed control range and that the maximum speed does not exceed the mechanical speed limit of the motor! Please contact your Siemens sales person regarding this check. The motor types are marked with footnotes in the following data tables.

<sup>1)</sup> Maximum and minimum power ratings can be different for specific voltage levels.

#### Technical data (continued)

##### Power ranges for IEC motors with reinforced insulation for SINAMICS converters without sine-wave filter


1RN4/1RN6, 1SL4/1SL6 (Ex ec)  
and 1SQ4/1SQ6 (Ex pxb) series

1RN7 series


Insulation system, thermal class 155 (F)

The power data listed here apply for a water inlet temperature of 25 °C and an installation altitude ≤ 1000 m.

690 V; 50 Hz and 60 Hz

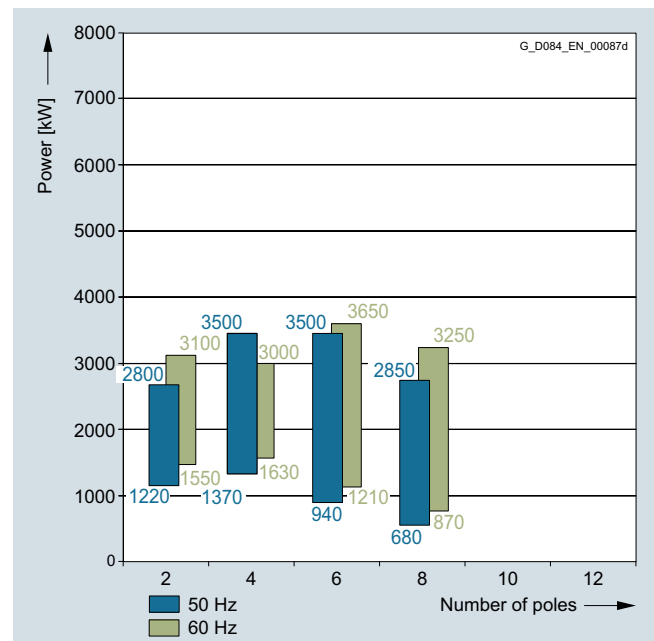

3.4 kV to 4.16 kV; 50 Hz and 60 Hz<sup>1)</sup>

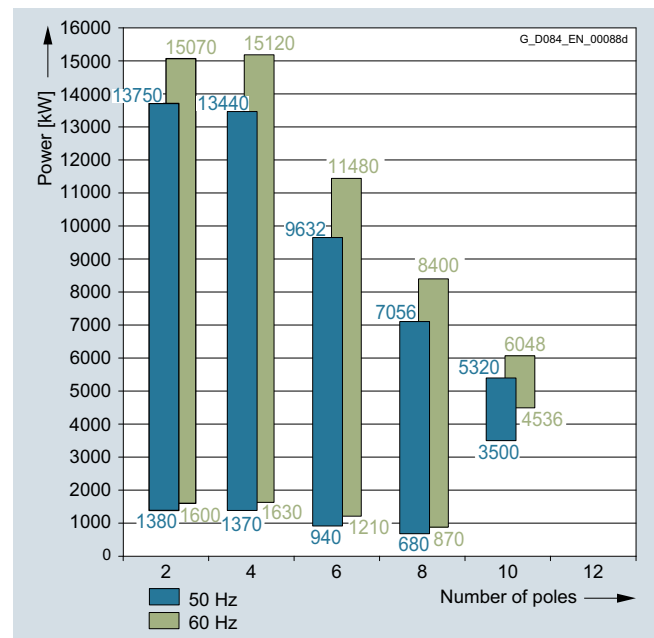

## Motors for converter operation

Converter with non-sinusoidal output

### Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Selection and ordering data

| Rated power<br><b>IEC</b><br>$P_{\text{rated}}$ 155 (F)<br>kW | <b>Low voltage motor<br/>H-compact PLUS</b><br><br>Article No. | Operating values at rated output for utilization 155 (F) |             |                       |                         |                          |                               |                       |                                      |
|---|--|--|-------------|-----------------------|-------------------------|--------------------------|-------------------------------|-----------------------|--------------------------------------|
|   |  | Rated speed  | Efficiency  | Power factor          | Rated current<br>690 V  | Rated torque             | Break-down torque             | Moment of inertia     | Mechanical speed limit <sup>1)</sup> |
|   |  | $n_{\text{rated}}$<br>rpm                                | $\eta$<br>% | $\cos \varphi$<br>[-] | $I_{\text{rated}}$<br>A | $T_{\text{rated}}$<br>Nm | $T_B/T_{\text{rated}}$<br>[-] | J<br>kgm <sup>2</sup> | $n_{\text{max}}$<br>rpm              |
| <b>690 V, 50 Hz</b>   |  |  |             |                       |                         |                          |                               |                       |                                      |
| 2-pole  |  |  |             |                       |                         |                          |                               |                       |                                      |
| 1220  | <b>1RN6 450-2HP00</b>  | 2980   | 95.5        | 0.90                  | 1180                    | 3913                     | 2.20                          | 13                    | 3000                                 |
| 1520  | <b>1RN6 452-2HP00</b>  | 2980   | 96.0        | 0.90                  | 2x740                   | 4875                     | 2.10                          | 14                    | 3000                                 |
| 1600  | <b>1RN6 454-2HP00</b>  | 2983   | 96.2        | 0.92                  | 2x760                   | 5129                     | 2.30                          | 16                    | 3000                                 |
| 1700  | <b>1RN6 456-2HP00</b>  | 2983   | 96.2        | 0.92                  | 2x800                   | 5445                     | 2.30                          | 18                    | 3000                                 |
| 2250  | <b>1RN6 500-2HP00</b>  | 2975   | 96.4        | 0.90                  | 2x1080                  | 7222                     | 2.30                          | 19                    | 3000                                 |
| 2550  | <b>1RN6 502-2HP00</b>  | 2974   | 96.6        | 0.90                  | 2x1220                  | 8188                     | 2.10                          | 20                    | 3000                                 |
| 2800  | <b>1RN6 504-2HP00</b>  | 2977   | 96.7        | 0.92                  | 4x660                   | 8982                     | 2.50                          | 24                    | 3000 <sup>3)</sup>                   |
| 4-pole  |  |  |             |                       |                         |                          |                               |                       |                                      |
| 1370  | <b>1RN6 450-4HP0</b>   | 1484   | 95.6        | 0.89                  | 2x670                   | 8833                     | 2.40                          | 20                    | 1800                                 |
| 1500  | <b>1RN6 452-4HP0</b>   | 1484   | 95.6        | 0.90                  | 2x730                   | 9671                     | 2.40                          | 22                    | 1800                                 |
| 1640  | <b>1RN6 454-4HP0</b>   | 1484   | 96.0        | 0.90                  | 2x790                   | 10568                    | 2.40                          | 25                    | 1800                                 |
| 1860  | <b>1RN6 456-4HP0</b>   | 1485   | 96.2        | 0.90                  | 2x900                   | 11977                    | 2.30                          | 29                    | 1800                                 |
| 2300 <sup>2)</sup>  | <b>1RN6 500-4HP00</b>  | 1486   | 96.6        | 0.90                  | 2x1100                  | 14780                    | 2.35                          | 42                    | 1800                                 |
| 2350 <sup>2)</sup>  | <b>1RN6 502-4HP00</b>  | 1486   | 96.6        | 0.92                  | 2x1100                  | 15102                    | 2.50                          | 46                    | 1800                                 |
| 2800 <sup>2)</sup>  | <b>1RN6 504-4HP00</b>  | 1488   | 96.9        | 0.90                  | 4x670                   | 17969                    | 2.60                          | 52                    | 1800                                 |
| 3200 <sup>2)</sup>  | <b>1RN6 560-4HP00</b>  | 1486   | 96.8        | 0.92                  | 4x750                   | 20564                    | 2.15                          | 82                    | 1800                                 |
| 3500 <sup>2)</sup>  | <b>1RN6 562-4HP00</b>  | 1487   | 96.9        | 0.92                  | 4x820                   | 22476                    | 2.15                          | 93                    | 1800                                 |

#### Type of construction:

|                        |          |
|------------------------|----------|
| IM B3                  | <b>0</b> |
| IM V1 (without canopy) | <b>8</b> |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation.

Additional details [see Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> Data of vertical motors (IM V1) on request.

<sup>3)</sup> There are speed exclusion ranges for this type. It must be ensured that the motors are not continuously operated in these speed ranges. The exclusion ranges must be clarified in advance in the factory.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

Motor type  
(repeated)

Partial load values for square-law torque drive

$P/P_{\text{rated}}$  155 (F) = 75 %

$P/P_{\text{rated}}$  155 (F) = 50 %

$P/P_{\text{rated}}$  155 (F) = 25 %

| $P$ | $n$ | $\eta$ | $\cos \varphi$ | $P$ | $n$ | $\eta$ | $\cos \varphi$ | $P$ | $n$ | $\eta$ | $\cos \varphi$ |
|-----|-----|--------|----------------|-----|-----|--------|----------------|-----|-----|--------|----------------|
| kW  | rpm | %      | [-]            | kW  | rpm | %      | [-]            | kW  | rpm | %      | [-]            |

**Square-law torque drive**

2-pole

|               |      |      |      |      |      |      |      |      |     |      |      |      |
|---------------|------|------|------|------|------|------|------|------|-----|------|------|------|
| 1RN6 450-2... | 916  | 2709 | 95.8 | 0.91 | 610  | 2371 | 96.0 | 0.90 | 305 | 1883 | 96.0 | 0.85 |
| 1RN6 452-2... | 1141 | 2708 | 96.4 | 0.91 | 760  | 2371 | 96.6 | 0.91 | 380 | 1883 | 96.5 | 0.87 |
| 1RN6 454-2... | 1201 | 2710 | 96.5 | 0.92 | 800  | 2372 | 96.6 | 0.91 | 400 | 1884 | 96.6 | 0.87 |
| 1RN6 456-2... | 1276 | 2711 | 96.5 | 0.92 | 850  | 2373 | 96.7 | 0.92 | 425 | 1884 | 96.6 | 0.88 |
| 1RN6 500-2... | 1688 | 2708 | 96.6 | 0.89 | 1125 | 2369 | 96.7 | 0.87 | 563 | 1883 | 96.7 | 0.79 |
| 1RN6 502-2... | 1913 | 2707 | 96.8 | 0.89 | 1275 | 2368 | 96.9 | 0.87 | 638 | 1882 | 96.9 | 0.81 |
| 1RN6 504-2... | 2101 | 2710 | 96.9 | 0.91 | 1400 | 2370 | 97.0 | 0.90 | 701 | 1883 | 97.0 | 0.84 |

4-pole

|               |      |      |      |      |      |      |      |      |     |     |      |      |
|---------------|------|------|------|------|------|------|------|------|-----|-----|------|------|
| 1RN6 450-4... | 1028 | 1350 | 95.9 | 0.88 | 685  | 1182 | 96.1 | 0.86 | 343 | 940 | 95.9 | 0.79 |
| 1RN6 452-4... | 1125 | 1350 | 96.0 | 0.90 | 750  | 1182 | 96.2 | 0.88 | 375 | 940 | 96.2 | 0.83 |
| 1RN6 454-4... | 1230 | 1350 | 96.3 | 0.90 | 820  | 1183 | 96.5 | 0.89 | 410 | 940 | 96.4 | 0.84 |
| 1RN6 456-4... | 1395 | 1351 | 96.5 | 0.89 | 930  | 1183 | 96.6 | 0.88 | 465 | 941 | 96.5 | 0.82 |
| 1RN6 500-4..  | 1726 | 1353 | 96.7 | 0.89 | 1150 | 1183 | 96.9 | 0.86 | 575 | 941 | 96.8 | 0.77 |
| 1RN6 502-4..  | 1763 | 1353 | 96.8 | 0.91 | 1175 | 1184 | 96.9 | 0.88 | 588 | 941 | 96.9 | 0.80 |
| 1RN6 504-4..  | 2100 | 1354 | 97.0 | 0.89 | 1400 | 1184 | 97.1 | 0.86 | 700 | 941 | 96.9 | 0.74 |
| 1RN6 560-4..  | 2401 | 1353 | 97.0 | 0.91 | 1600 | 1184 | 97.2 | 0.90 | 801 | 941 | 97.3 | 0.85 |
| 1RN6 562-4..  | 2626 | 1354 | 97.1 | 0.91 | 1750 | 1184 | 97.3 | 0.90 | 876 | 941 | 97.3 | 0.85 |

3

## Motors for converter operation

Converter with non-sinusoidal output

Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

### Selection and ordering data

| Rated power<br><br>IEC<br><br>$P_{\text{rated}}$ 155 (F)<br>kW | Low voltage motor<br>H-compact PLUS<br><br>Article No. | Operating values at rated output for utilization 155 (F) |             |                       |                         |                          |                               |                       |                                      |
|--|--|--|-------------|-----------------------|-------------------------|--------------------------|-------------------------------|-----------------------|--------------------------------------|
|  |  | Rated speed  | Efficiency  | Power factor          | Rated current<br>690 V  | Rated torque             | Break-down torque             | Moment of inertia     | Mechanical speed limit <sup>1)</sup> |
|  |  | $n_{\text{rated}}$<br>rpm                                | $\eta$<br>% | $\cos \varphi$<br>[-] | $I_{\text{rated}}$<br>A | $T_{\text{rated}}$<br>Nm | $T_B/T_{\text{rated}}$<br>[-] | J<br>kgm <sup>2</sup> | $n_{\text{max}}$<br>rpm              |
| <b>690 V, 50 Hz</b>  |  |  |             |                       |                         |                          |                               |                       |                                      |
| 6-pole   |  |  |             |                       |                         |                          |                               |                       |                                      |
| 940  | <b>1RN6 450-6HP0</b>                                   | 990  | 95.8        | 0.86                  | 950                     | 9079                     | 2.30                          | 26                    | 1200                                 |
| 1040   | <b>1RN6 452-6HP0</b>                                   | 991  | 95.9        | 0.86                  | 1060                    | 10039                    | 2.30                          | 29                    | 1200                                 |
| 1180   | <b>1RN6 454-6HP0</b>                                   | 991  | 96.0        | 0.86                  | 1200                    | 11394                    | 2.30                          | 32                    | 1200                                 |
| 1330   | <b>1RN6 456-6HP0</b>                                   | 992  | 96.2        | 0.86                  | 2x670                   | 12823                    | 2.30                          | 37                    | 1200                                 |
| 1800   | <b>1RN6 500-6HP0</b>                                   | 988  | 96.0        | 0.85                  | 2x920                   | 17399                    | 1.75                          | 56                    | 1500                                 |
| 2000   | <b>1RN6 502-6HP0</b>                                   | 988  | 96.2        | 0.86                  | 2x1020                  | 19332                    | 1.80                          | 62                    | 1500                                 |
| 2300   | <b>1RN6 504-6HP0</b>                                   | 989  | 96.4        | 0.85                  | 2x1180                  | 22209                    | 1.95                          | 69                    | 1500                                 |
| 2400   | <b>1RN6 506-6HP0</b>                                   | 990  | 96.4        | 0.86                  | 2x1220                  | 23152                    | 1.95                          | 77                    | 1500                                 |
| 2850   | <b>1RN6 560-6HP0</b>                                   | 990  | 96.6        | 0.87                  | 3x950                   | 27492                    | 2.25                          | 108                   | 1500                                 |
| 3200   | <b>1RN6 562-6HP0</b>                                   | 991  | 96.9        | 0.86                  | 3x1080                  | 30838                    | 2.45                          | 119                   | 1500                                 |
| 3500   | <b>1RN6 564-6HP0</b>                                   | 990  | 96.8        | 0.88                  | 3x1140                  | 33763                    | 2.20                          | 132                   | 1500                                 |
| 8-pole   |  |  |             |                       |                         |                          |                               |                       |                                      |
| 680  | <b>1RN6 450-8HP0</b>                                   | 743  | 94.9        | 0.83                  | 720                     | 8750                     | 2.30                          | 32                    | 1200                                 |
| 750  | <b>1RN6 452-8HP0</b>                                   | 743  | 95.2        | 0.84                  | 780                     | 9651                     | 2.40                          | 36                    | 1200                                 |
| 880  | <b>1RN6 454-8HP0</b>                                   | 743  | 95.2        | 0.84                  | 920                     | 11324                    | 2.40                          | 40                    | 1200                                 |
| 970  | <b>1RN6 456-8HP0</b>                                   | 744  | 95.4        | 0.84                  | 1020                    | 12476                    | 2.40                          | 46                    | 1200                                 |
| 1400   | <b>1RN6 500-8HP0</b>                                   | 741  | 95.8        | 0.83                  | 2x740                   | 18043                    | 1.85                          | 69                    | 1125                                 |
| 1560   | <b>1RN6 502-8HP0</b>                                   | 742  | 95.9        | 0.83                  | 2x820                   | 20078                    | 1.85                          | 76                    | 1125                                 |
| 1720   | <b>1RN6 504-8HP0</b>                                   | 742  | 96.0        | 0.83                  | 2x900                   | 22137                    | 1.95                          | 85                    | 1125                                 |
| 1900   | <b>1RN6 506-8HP0</b>                                   | 743  | 96.2        | 0.83                  | 2x1000                  | 24421                    | 2.10                          | 94                    | 1125                                 |
| 1960   | <b>1RN6 560-8HP0</b>                                   | 743  | 96.6        | 0.84                  | 2x1020                  | 25192                    | 2.15                          | 128                   | 1125                                 |
| 2300   | <b>1RN6 562-8HP0</b>                                   | 743  | 96.6        | 0.84                  | 2x1180                  | 29563                    | 2.20                          | 141                   | 1125                                 |
| 2600   | <b>1RN6 564-8HP0</b>                                   | 743  | 96.7        | 0.84                  | 4x670                   | 33419                    | 2.45                          | 156                   | 1125                                 |
| 2850   | <b>1RN6 566-8HP0</b>                                   | 743  | 96.7        | 0.85                  | 4x730                   | 36632                    | 2.25                          | 173                   | 1125                                 |
| <b>Type of construction:</b>                                   |  |  |             |                       |                         |                          |                               |                       |                                      |
| IM B3  |  | 0  |             |                       |                         |                          |                               |                       |                                      |
| IM V1 (without canopy)   |  | 8  |             |                       |                         |                          |                               |                       |                                      |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

Motor type  
(repeated)

Partial load values for square-law torque drive

$P/P_{\text{rated}}$  155 (F) = 75 %

$P/P_{\text{rated}}$  155 (F) = 50 %

$P/P_{\text{rated}}$  155 (F) = 25 %

| $P$ | $n$ | $\eta$ | $\cos \varphi$ | $P$ | $n$ | $\eta$ | $\cos \varphi$ | $P$ | $n$ | $\eta$ | $\cos \varphi$ |
|-----|-----|--------|----------------|-----|-----|--------|----------------|-----|-----|--------|----------------|
| kW  | rpm | %      | [-]            | kW  | rpm | %      | [-]            | kW  | rpm | %      | [-]            |

Square-law torque drive

6-pole

|               |      |     |      |      |      |     |      |      |     |     |      |      |
|---------------|------|-----|------|------|------|-----|------|------|-----|-----|------|------|
| 1RN6 450-6... | 705  | 900 | 96.1 | 0.85 | 470  | 789 | 96.3 | 0.82 | 235 | 627 | 96.2 | 0.73 |
| 1RN6 452-6... | 780  | 901 | 96.3 | 0.85 | 520  | 789 | 96.4 | 0.82 | 260 | 627 | 96.3 | 0.73 |
| 1RN6 454-6... | 885  | 901 | 96.3 | 0.85 | 590  | 789 | 96.4 | 0.83 | 295 | 627 | 96.4 | 0.74 |
| 1RN6 456-6... | 998  | 902 | 96.5 | 0.84 | 665  | 789 | 96.6 | 0.81 | 333 | 627 | 96.3 | 0.71 |
| 1RN6 500-6... | 1350 | 898 | 96.3 | 0.85 | 900  | 787 | 96.4 | 0.84 | 450 | 626 | 96.3 | 0.78 |
| 1RN6 502-6... | 1500 | 898 | 96.4 | 0.86 | 1000 | 787 | 96.6 | 0.84 | 500 | 626 | 96.4 | 0.78 |
| 1RN6 504-6... | 1725 | 899 | 96.5 | 0.85 | 1150 | 787 | 96.6 | 0.83 | 575 | 626 | 96.4 | 0.75 |
| 1RN6 506-6... | 1800 | 900 | 96.6 | 0.86 | 1200 | 788 | 96.7 | 0.84 | 600 | 626 | 96.5 | 0.77 |
| 1RN6 560-6... | 2138 | 900 | 96.7 | 0.87 | 1425 | 788 | 96.8 | 0.86 | 713 | 627 | 96.7 | 0.80 |
| 1RN6 562-6... | 2400 | 901 | 97.0 | 0.86 | 1600 | 789 | 97.0 | 0.84 | 800 | 627 | 96.7 | 0.76 |
| 1RN6 564-6... | 2625 | 900 | 97.0 | 0.88 | 1750 | 788 | 97.1 | 0.87 | 875 | 626 | 97.0 | 0.82 |

8-pole

|               |      |     |      |      |      |     |      |      |     |     |      |      |
|---------------|------|-----|------|------|------|-----|------|------|-----|-----|------|------|
| 1RN6 450-8... | 510  | 676 | 95.1 | 0.80 | 340  | 592 | 95.0 | 0.75 | 170 | 470 | 94.4 | 0.63 |
| 1RN6 452-8... | 563  | 676 | 95.4 | 0.81 | 375  | 592 | 95.4 | 0.77 | 188 | 470 | 94.9 | 0.65 |
| 1RN6 454-8... | 660  | 676 | 95.4 | 0.82 | 440  | 592 | 95.4 | 0.77 | 220 | 470 | 94.8 | 0.65 |
| 1RN6 456-8... | 728  | 676 | 95.6 | 0.82 | 485  | 592 | 95.6 | 0.77 | 243 | 470 | 95.1 | 0.65 |
| 1RN6 500-8... | 1050 | 674 | 95.9 | 0.82 | 700  | 590 | 95.9 | 0.80 | 350 | 469 | 95.5 | 0.70 |
| 1RN6 502-8... | 1170 | 674 | 96.0 | 0.82 | 780  | 591 | 96.1 | 0.80 | 390 | 469 | 95.6 | 0.70 |
| 1RN6 504-8... | 1290 | 675 | 96.1 | 0.82 | 860  | 591 | 96.1 | 0.79 | 430 | 470 | 95.7 | 0.70 |
| 1RN6 506-8... | 1425 | 675 | 96.3 | 0.82 | 950  | 591 | 96.2 | 0.78 | 475 | 470 | 95.6 | 0.67 |
| 1RN6 560-8... | 1470 | 675 | 96.7 | 0.84 | 980  | 591 | 96.8 | 0.82 | 490 | 470 | 96.6 | 0.73 |
| 1RN6 562-8... | 1725 | 675 | 96.7 | 0.84 | 1150 | 591 | 96.8 | 0.81 | 575 | 470 | 96.5 | 0.72 |
| 1RN6 564-8... | 1950 | 676 | 96.8 | 0.83 | 1300 | 592 | 96.8 | 0.79 | 650 | 470 | 96.4 | 0.69 |
| 1RN6 566-8... | 2138 | 675 | 96.8 | 0.84 | 1425 | 591 | 96.9 | 0.82 | 713 | 470 | 96.6 | 0.74 |

3

## Motors for converter operation

Converter with non-sinusoidal output

### Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Selection and ordering data

| Rated power              |                          | High voltage motor<br>H-compact PLUS | Operating values at rated output for utilization 155 (F) |            |                |                          |                    |                        |                   |                                      |
|--------------------------|--------------------------|--------------------------------------|--|------------|----------------|--------------------------|--------------------|------------------------|-------------------|--------------------------------------|
| IEC                      |                          |                                      | Rated speed  | Efficiency | Power factor   | Rated current at 4.16 kV | Rated torque       | Break-down torque      | Moment of inertia | Mechanical speed limit <sup>2)</sup> |
| $P_{155}^{\text{rated}}$ | $P_{130}^{\text{rated}}$ |                                      | $n_{\text{rated}}$                                       | $\eta$     | $\cos \varphi$ | $I_{\text{rated}}$       | $T_{\text{rated}}$ | $T_B/T_{\text{rated}}$ | J                 | $n_{\text{max}}$                     |
| kW                       | kW                       | Article No.                          | rpm  | %          | [-]            | A                        | Nm                 | [-]                    | kgm <sup>2</sup>  | rpm                                  |

#### 3.4 ... 4.16 kV, 50 Hz

##### 2-pole

|      |                 |                       |      |      |      |       |       |      |    |                    |
|------|-----------------|-----------------------|------|------|------|-------|-------|------|----|--------------------|
| 1380 | – <sup>6)</sup> | <b>1RN6 450-2HS40</b> | 2973 | 95.9 | 0.90 | 220   | 4433  | 2.00 | 13 | 3000               |
| 1570 | – <sup>6)</sup> | <b>1RN6 452-2HS40</b> | 2977 | 96.2 | 0.90 | 250   | 5040  | 2.20 | 14 | 3000               |
| 1750 | – <sup>6)</sup> | <b>1RN6 454-2HS40</b> | 2978 | 96.4 | 0.91 | 275   | 5616  | 2.30 | 16 | 3000               |
| 1950 | – <sup>6)</sup> | <b>1RN6 456-2HS40</b> | 2981 | 96.6 | 0.92 | 305   | 6252  | 2.30 | 18 | 3000               |
| 2550 | 2244            | <b>1RN6 500-2HS40</b> | 2967 | 96.2 | 0.89 | 415   | 8207  | 1.90 | 19 | 3000               |
| 2700 | 2376            | <b>1RN6 502-2HS40</b> | 2969 | 96.3 | 0.90 | 430   | 8684  | 2.00 | 20 | 3000               |
| 3200 | 2816            | <b>1RN6 504-2HS40</b> | 2974 | 96.6 | 0.91 | 510   | 10275 | 2.40 | 24 | 3000 <sup>5)</sup> |
| 3550 | 3124            | <b>1RN6 506-2HS40</b> | 2975 | 96.9 | 0.92 | 550   | 11395 | 2.40 | 26 | 3000 <sup>5)</sup> |
| 3700 | 3367            | <b>1RN6 560-2HS40</b> | 2977 | 96.7 | 0.90 | 590   | 11868 | 1.90 | 39 | 3000 <sup>5)</sup> |
| 4300 | 3913            | <b>1RN6 562-2HS40</b> | 2979 | 97.0 | 0.90 | 680   | 13784 | 2.05 | 43 | 3000 <sup>5)</sup> |
| 5000 | 4550            | <b>1RN6 564-2HS40</b> | 2981 | 97.1 | 0.90 | 790   | 16017 | 2.25 | 49 | 3000 <sup>5)</sup> |
| 5700 | 5187            | <b>1RN6 566-2HS40</b> | 2982 | 97.3 | 0.90 | 2x450 | 18253 | 2.45 | 54 | 3000 <sup>5)</sup> |

##### 4-pole

|                      |                 |                       |      |      |      |       |       |      |     |      |
|----------------------|-----------------|-----------------------|------|------|------|-------|-------|------|-----|------|
| 1370                 | – <sup>6)</sup> | <b>1RN6 450-4HS4</b>  | 1484 | 95.6 | 0.88 | 225   | 8824  | 2.60 | 20  | 1800 |
| 1500                 | – <sup>6)</sup> | <b>1RN6 452-4HS4</b>  | 1485 | 95.8 | 0.88 | 245   | 9649  | 2.50 | 22  | 1800 |
| 1640                 | – <sup>6)</sup> | <b>1RN6 454-4HS4</b>  | 1485 | 96.0 | 0.89 | 265   | 10549 | 2.50 | 25  | 1800 |
| 1860                 | – <sup>6)</sup> | <b>1RN6 456-4HS4</b>  | 1485 | 96.1 | 0.90 | 300   | 11966 | 2.50 | 29  | 1800 |
| 2500 <sup>4)</sup>   | 2200            | <b>1RN6 500-4HS40</b> | 1485 | 96.4 | 0.90 | 400   | 16076 | 2.25 | 42  | 1800 |
| 2800 <sup>4)</sup>   | 2464            | <b>1RN6 502-4HS40</b> | 1485 | 96.5 | 0.90 | 445   | 18005 | 2.25 | 46  | 1800 |
| 3150 <sup>4)</sup>   | 2772            | <b>1RN6 504-4HS40</b> | 1485 | 96.6 | 0.91 | 495   | 20256 | 2.25 | 52  | 1800 |
| 3450 <sup>1)4)</sup> | 3036            | <b>1RN6 506-4HS40</b> | 1486 | 96.8 | 0.91 | 540   | 22170 | 2.35 | 56  | 1800 |
| 3900 <sup>4)</sup>   | 3549            | <b>1RN6 560-4HS40</b> | 1489 | 97.0 | 0.89 | 630   | 25012 | 1.95 | 84  | 1800 |
| 4500 <sup>4)</sup>   | 4095            | <b>1RN6 562-4HS40</b> | 1489 | 97.1 | 0.90 | 710   | 28860 | 2.00 | 94  | 1800 |
| 5000 <sup>4)</sup>   | 4550            | <b>1RN6 564-4HS40</b> | 1490 | 97.2 | 0.91 | 780   | 32045 | 2.10 | 105 | 1800 |
| 5500 <sup>4)</sup>   | 5005            | <b>1RN6 566-4HS40</b> | 1490 | 97.4 | 0.91 | 2x430 | 35249 | 2.20 | 115 | 1800 |
| 5880 <sup>1)</sup>   | – <sup>6)</sup> | <b>1RN4 632-4HV</b>   | 1490 | 97.2 | 0.89 | 940   | 37687 | 2.20 | 150 | 1800 |
| 6470 <sup>1)</sup>   | – <sup>6)</sup> | <b>1RN4 634-4HV</b>   | 1490 | 97.3 | 0.90 | 1020  | 41469 | 2.20 | 168 | 1800 |
| 6960 <sup>1)</sup>   | – <sup>6)</sup> | <b>1RN4 636-4HV</b>   | 1491 | 97.4 | 0.90 | 1100  | 44579 | 2.40 | 197 | 1800 |

#### Voltage code:

|                |   |
|----------------|---|
| 4.16 kV, 50 Hz | 4 |
| Other voltage  | 9 |

#### Type of construction:

|                        |   |
|------------------------|---|
| IM B3                  | 0 |
| IM V1 (without canopy) | 8 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation.

Additional details see Page 3/2.

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

<sup>1)</sup> Rated voltage < 4.16 kV on request.

<sup>2)</sup> For IM B3, anti-friction bearings.

<sup>3)</sup> On request.

<sup>4)</sup> Data of vertical motors (IM V1) on request.

<sup>5)</sup> There are speed exclusion ranges for this type. It must be ensured that the motors are not continuously operated in these speed ranges. The exclusion ranges must be clarified in advance in the factory.

<sup>6)</sup> Utilization 130 (B) on request.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

Motor type  
(repeated)

Partial load values for square-law torque drive

 $P/P_{\text{rated}}$  155 (F) = 75 % $P/P_{\text{rated}}$  155 (F) = 50 % $P/P_{\text{rated}}$  155 (F) = 25 % $P$  $n$  $\eta$  $\cos \varphi$  $P$  $n$  $\eta$  $\cos \varphi$  $P$  $n$  $\eta$  $\cos \varphi$ 

kW

rpm

%

[-]

kW

rpm

%

[-]

kW

rpm

%

[-]

Square-law torque drive

2-pole

|               |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |
|---------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| 1RN6 450-2... | 1035                | 2704                | 96.1                | 0.91                | 690                 | 2368                | 96.3                | 0.91                | 345                 | 1882                | 96.4                | 0.87                |
| 1RN6 452-2... | 1178                | 2707                | 96.4                | 0.91                | 785                 | 2370                | 96.5                | 0.90                | 393                 | 1883                | 96.4                | 0.87                |
| 1RN6 454-2... | 1313                | 2707                | 96.6                | 0.92                | 875                 | 2370                | 96.7                | 0.91                | 438                 | 1883                | 96.6                | 0.88                |
| 1RN6 456-2... | 1464                | 2709                | 96.8                | 0.92                | 975                 | 2371                | 96.9                | 0.91                | 488                 | 1884                | 96.8                | 0.88                |
| 1RN6 500-2... | 1914                | 2704                | 96.5                | 0.88                | 1276                | 2366                | 96.6                | 0.87                | 638                 | 1881                | 96.7                | 0.81                |
| 1RN6 502-2... | 2026                | 2705                | 96.5                | 0.90                | 1350                | 2367                | 96.7                | 0.88                | 675                 | 1882                | 96.7                | 0.83                |
| 1RN6 504-2... | 2401                | 2708                | 96.8                | 0.90                | 1600                | 2369                | 96.9                | 0.89                | 801                 | 1883                | 96.8                | 0.81                |
| 1RN6 506-2... | 2663                | 2708                | 97.0                | 0.91                | 1775                | 2369                | 97.1                | 0.90                | 888                 | 1883                | 97.1                | 0.83                |
| 1RN6 560-2... | 2777                | 2709                | 96.9                | 0.90                | 1851                | 2370                | 97.0                | 0.89                | 925                 | 1883                | 97.0                | 0.84                |
| 1RN6 562-2... | 3226                | 2711                | 97.1                | 0.90                | 2151                | 2371                | 97.2                | 0.89                | 1076                | 1884                | 97.2                | 0.84                |
| 1RN6 564-2... | 3751                | 2712                | 97.3                | 0.91                | 2500                | 2371                | 97.3                | 0.90                | 1251                | 1884                | 97.3                | 0.85                |
| 1RN6 566-2... | 4276                | 2713                | 97.4                | 0.92                | 2850                | 2372                | 97.5                | 0.91                | 1426                | 1885                | 97.4                | 0.85                |
| 4-pole        |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |
| 1RN6 450-4... | 1028                | 1350                | 95.8                | 0.87                | 685                 | 1183                | 96.0                | 0.85                | 343                 | 940                 | 95.8                | 0.78                |
| 1RN6 452-4... | 1125                | 1351                | 96.0                | 0.87                | 750                 | 1183                | 96.1                | 0.85                | 375                 | 941                 | 95.9                | 0.77                |
| 1RN6 454-4... | 1230                | 1351                | 96.2                | 0.89                | 820                 | 1183                | 96.3                | 0.87                | 410                 | 941                 | 96.2                | 0.80                |
| 1RN6 456-4... | 1395                | 1351                | 96.3                | 0.90                | 930                 | 1183                | 96.5                | 0.88                | 465                 | 941                 | 96.4                | 0.83                |
| 1RN6 500-4... | 1876                | 1352                | 96.6                | 0.89                | 1250                | 1183                | 96.7                | 0.86                | 625                 | 941                 | 96.5                | 0.77                |
| 1RN6 502-4... | 2101                | 1352                | 96.7                | 0.89                | 1400                | 1183                | 96.8                | 0.86                | 700                 | 941                 | 96.6                | 0.77                |
| 1RN6 504-4... | 2363                | 1353                | 96.8                | 0.90                | 1575                | 1183                | 96.9                | 0.88                | 788                 | 941                 | 96.8                | 0.79                |
| 1RN6 506-4... | 2588                | 1353                | 96.9                | 0.90                | 1725                | 1184                | 97.0                | 0.88                | 863                 | 941                 | 96.9                | 0.79                |
| 1RN6 560-4... | 2927                | 1355                | 97.1                | 0.89                | 1950                | 1185                | 97.2                | 0.87                | 976                 | 942                 | 97.1                | 0.80                |
| 1RN6 562-4... | 3377                | 1355                | 97.2                | 0.90                | 2250                | 1185                | 97.4                | 0.88                | 1126                | 942                 | 97.3                | 0.82                |
| 1RN6 564-4... | 3752                | 1356                | 97.4                | 0.90                | 2500                | 1185                | 97.5                | 0.89                | 1251                | 942                 | 97.4                | 0.82                |
| 1RN6 566-4... | 4126                | 1356                | 97.5                | 0.90                | 2750                | 1186                | 97.6                | 0.88                | 1376                | 942                 | 97.4                | 0.81                |
| 1RN4 632-4... | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> |
| 1RN4 634-4... | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> |
| 1RN4 636-4... | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> | O. R. <sup>3)</sup> |

## Motors for converter operation

Converter with non-sinusoidal output

### Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Selection and ordering data (continued)

| Rated power                        |                                    | High voltage motor<br>H-compact PLUS | Operating values at rated output for utilization 155 (F) |              |                          |                         |                          |                               |                                      |                         |
|------------------------------------|------------------------------------|--------------------------------------|--|--------------|--------------------------|-------------------------|--------------------------|-------------------------------|--------------------------------------|-------------------------|
| IEC                                | Rated speed                        |                                      | Efficiency   | Power factor | Rated current at 4.16 kV | Rated torque            | Break-down torque        | Moment of inertia             | Mechanical speed limit <sup>2)</sup> |                         |
| $P_{155}^{\text{rated}}$ (F)<br>kW | $P_{130}^{\text{rated}}$ (B)<br>kW |                                      | $n_{\text{rated}}$<br>rpm                                | $\eta$<br>%  | $\cos \varphi$<br>[-]    | $I_{\text{rated}}$<br>A | $T_{\text{rated}}$<br>Nm | $T_B/T_{\text{rated}}$<br>[-] | J<br>kgm <sup>2</sup>                | $n_{\text{max}}$<br>rpm |
| <b>3.4 ... 4.16 kV, 50 Hz</b>      |                                    |                                      |  |              |                          |                         |                          |                               |                                      |                         |
| 6-pole                             |                                    |                                      |  |              |                          |                         |                          |                               |                                      |                         |
| 940                                | — <sup>4)</sup>                    | <b>1RN6 450-6HS4</b>                 | 990  | 95.7         | 0.85                     | 160                     | 9071                     | 2.40                          | 26                                   | 1200                    |
| 1040                               | — <sup>4)</sup>                    | <b>1RN6 452-6HS4</b>                 | 991  | 95.9         | 0.85                     | 178                     | 10026                    | 2.50                          | 29                                   | 1200                    |
| 1180                               | — <sup>4)</sup>                    | <b>1RN6 454-6HS4</b>                 | 991  | 96.1         | 0.86                     | 198                     | 11381                    | 2.50                          | 32                                   | 1200                    |
| 1330                               | — <sup>4)</sup>                    | <b>1RN6 456-6HS4</b>                 | 992  | 96.2         | 0.85                     | 225                     | 12811                    | 2.50                          | 37                                   | 1200                    |
| 2000                               | 1800                               | <b>1RN6 500-6HS4</b>                 | 987  | 95.8         | 0.84                     | 345                     | 19352                    | 1.75                          | 56                                   | 1500                    |
| 2200                               | 2000                               | <b>1RN6 502-6HS4</b>                 | 986  | 95.8         | 0.85                     | 375                     | 21308                    | 1.65                          | 62                                   | 1500                    |
| 2450                               | 2200                               | <b>1RN6 504-6HS4</b>                 | 987  | 96.0         | 0.85                     | 415                     | 23706                    | 1.70                          | 69                                   | 1500                    |
| 2650                               | 2400                               | <b>1RN6 506-6HS4</b>                 | 988  | 96.2         | 0.86                     | 445                     | 25615                    | 1.80                          | 77                                   | 1500                    |
| 3150                               | 2750                               | <b>1RN6 560-6HS4</b>                 | 989  | 96.5         | 0.86                     | 530                     | 30417                    | 2.05                          | 108                                  | 1500                    |
| 3500                               | 3100                               | <b>1RN6 562-6HS4</b>                 | 989  | 96.5         | 0.87                     | 580                     | 33797                    | 2.05                          | 119                                  | 1500                    |
| 3900                               | 3450                               | <b>1RN6 564-6HS4</b>                 | 989  | 96.6         | 0.87                     | 640                     | 37659                    | 2.10                          | 132                                  | 1500                    |
| 4250                               | 3750                               | <b>1RN6 566-6HS4</b>                 | 989  | 96.7         | 0.87                     | 700                     | 41039                    | 2.05                          | 146                                  | 1500                    |
| 4610 <sup>1)</sup>                 | — <sup>4)</sup>                    | <b>1RN4 632-6HV</b>                  | 993  | 97.0         | 0.86                     | 770                     | 44336                    | 2.10                          | 202                                  | 1200                    |
| 5000 <sup>1)</sup>                 | — <sup>4)</sup>                    | <b>1RN4 634-6HV</b>                  | 993  | 97.1         | 0.86                     | 830                     | 48087                    | 2.30                          | 223                                  | 1200                    |
| 5490 <sup>1)</sup>                 | — <sup>4)</sup>                    | <b>1RN4 636-6HV</b>                  | 994  | 97.2         | 0.86                     | 910                     | 52746                    | 2.30                          | 246                                  | 1200                    |
| 8-pole                             |                                    |                                      |  |              |                          |                         |                          |                               |                                      |                         |
| 680                                | — <sup>4)</sup>                    | <b>1RN6 450-8HS4</b>                 | 743  | 94.7         | 0.82                     | 122                     | 8743                     | 2.50                          | 32                                   | 1200                    |
| 750                                | — <sup>4)</sup>                    | <b>1RN6 452-8HS4</b>                 | 744  | 95.0         | 0.82                     | 134                     | 9638                     | 2.50                          | 36                                   | 1200                    |
| 880                                | — <sup>4)</sup>                    | <b>1RN6 454-8HS4</b>                 | 743  | 95.1         | 0.83                     | 154                     | 11318                    | 2.50                          | 40                                   | 1200                    |
| 970                                | — <sup>4)</sup>                    | <b>1RN6 456-8HS4</b>                 | 743  | 95.3         | 0.85                     | 166                     | 12477                    | 2.40                          | 46                                   | 1200                    |
| 1360                               | 1220                               | <b>1RN6 500-8HS4</b>                 | 741  | 95.4         | 0.83                     | 240                     | 17528                    | 1.75                          | 69                                   | 1125                    |
| 1540                               | 1380                               | <b>1RN6 502-8HS4</b>                 | 741  | 95.6         | 0.83                     | 270                     | 19848                    | 1.80                          | 76                                   | 1125                    |
| 1740                               | 1560                               | <b>1RN6 504-8HS4</b>                 | 742  | 95.8         | 0.83                     | 305                     | 22395                    | 1.90                          | 85                                   | 1125                    |
| 1880                               | 1700                               | <b>1RN6 506-8HS4</b>                 | 743  | 95.8         | 0.84                     | 325                     | 24164                    | 2.00                          | 94                                   | 1125                    |
| 2200                               | 1940                               | <b>1RN6 560-8HS4</b>                 | 741  | 96.1         | 0.84                     | 380                     | 28354                    | 1.90                          | 128                                  | 1125                    |
| 2500                               | 2200                               | <b>1RN6 562-8HS4</b>                 | 741  | 96.2         | 0.84                     | 430                     | 32220                    | 1.95                          | 141                                  | 1125                    |
| 2750                               | 2400                               | <b>1RN6 564-8HS4</b>                 | 742  | 96.4         | 0.84                     | 470                     | 35394                    | 2.05                          | 156                                  | 1125                    |
| 3000                               | 2640                               | <b>1RN6 566-8HS4</b>                 | 742  | 96.5         | 0.85                     | 510                     | 38612                    | 2.10                          | 173                                  | 1125                    |
| 3140 <sup>1)</sup>                 | — <sup>4)</sup>                    | <b>1RN4 630-8HV</b>                  | 743  | 96.5         | 0.85                     | 530                     | 40359                    | 1.90                          | 239                                  | 1200                    |
| 3430 <sup>1)</sup>                 | — <sup>4)</sup>                    | <b>1RN4 632-8HV</b>                  | 743  | 96.7         | 0.85                     | 580                     | 44087                    | 2.10                          | 265                                  | 1200                    |
| 3680 <sup>1)</sup>                 | — <sup>4)</sup>                    | <b>1RN4 634-8HV</b>                  | 743  | 96.7         | 0.85                     | 620                     | 47300                    | 2.00                          | 293                                  | 1200                    |
| 4020 <sup>1)</sup>                 | — <sup>4)</sup>                    | <b>1RN4 636-8HV</b>                  | 744  | 96.9         | 0.84                     | 690                     | 51601                    | 2.30                          | 324                                  | 1200                    |

#### Voltage code:

4.16 kV, 50 Hz

Other voltage

4  
9

#### Type of construction:

IM B3

IM V1 (without canopy)

0  
8

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation.

Additional details see Page 3/2.

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> Rated voltage < 4.16 kV on request.

<sup>2)</sup> For IM B3, anti-friction bearings.

<sup>3)</sup> On request.

<sup>4)</sup> Utilization 130 (B) on request.



## Motors for converter operation

### Converter with non-sinusoidal output

#### Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

| Motor type<br>(repeated)       | Partial load values for square-law torque drive |                      |                      |                      |                                      |                      |                      |                      |                                      |                      |                      |                      |
|--------------------------------|---|----------------------|----------------------|----------------------|--------------------------------------|----------------------|----------------------|----------------------|--------------------------------------|----------------------|----------------------|----------------------|
|                                | $P/P_{\text{rated}} 155 (F) = 75 \%$            |                      |                      |                      | $P/P_{\text{rated}} 155 (F) = 50 \%$ |                      |                      |                      | $P/P_{\text{rated}} 155 (F) = 25 \%$ |                      |                      |                      |
|                                | $P$   | $n$                  | $\eta$               | $\cos \varphi$       | $P$                                  | $n$                  | $\eta$               | $\cos \varphi$       | $P$                                  | $n$                  | $\eta$               | $\cos \varphi$       |
|                                | kW  | rpm                  | %                    | [-]                  | kW                                   | rpm                  | %                    | [-]                  | kW                                   | rpm                  | %                    | [-]                  |
| <b>Square-law torque drive</b> |   |                      |                      |                      |                                      |                      |                      |                      |                                      |                      |                      |                      |
| <b>6-pole</b>                  |   |                      |                      |                      |                                      |                      |                      |                      |                                      |                      |                      |                      |
| 1RN6 450-6...                  | 705   | 901                  | 96.0                 | 0.84                 | 470                                  | 789                  | 96.1                 | 0.81                 | 235                                  | 627                  | 96.0                 | 0.71                 |
| 1RN6 452-6...                  | 780   | 901                  | 96.1                 | 0.84                 | 520                                  | 789                  | 96.2                 | 0.80                 | 260                                  | 627                  | 96.0                 | 0.70                 |
| 1RN6 454-6...                  | 885   | 901                  | 96.3                 | 0.85                 | 590                                  | 789                  | 96.4                 | 0.82                 | 295                                  | 627                  | 96.3                 | 0.73                 |
| 1RN6 456-6...                  | 998   | 902                  | 96.4                 | 0.83                 | 665                                  | 790                  | 96.5                 | 0.80                 | 333                                  | 627                  | 96.2                 | 0.69                 |
| 1RN6 500-6...                  | 1500  | 898                  | 96.1                 | 0.84                 | 1000                                 | 786                  | 96.2                 | 0.83                 | 500                                  | 625                  | 96.1                 | 0.75                 |
| 1RN6 502-6...                  | 1650  | 897                  | 96.1                 | 0.85                 | 1100                                 | 786                  | 96.3                 | 0.84                 | 550                                  | 625                  | 96.3                 | 0.78                 |
| 1RN6 504-6...                  | 1838  | 897                  | 96.3                 | 0.85                 | 1225                                 | 786                  | 96.5                 | 0.85                 | 613                                  | 625                  | 96.4                 | 0.79                 |
| 1RN6 506-6...                  | 1988  | 898                  | 96.4                 | 0.86                 | 1325                                 | 787                  | 96.6                 | 0.85                 | 663                                  | 626                  | 96.5                 | 0.78                 |
| 1RN6 560-6...                  | 2363  | 899                  | 96.7                 | 0.87                 | 1575                                 | 788                  | 96.8                 | 0.86                 | 788                                  | 626                  | 96.8                 | 0.81                 |
| 1RN6 562-6...                  | 2625  | 899                  | 96.7                 | 0.87                 | 1750                                 | 788                  | 96.9                 | 0.87                 | 875                                  | 626                  | 96.8                 | 0.82                 |
| 1RN6 564-6...                  | 2925  | 900                  | 96.8                 | 0.87                 | 1950                                 | 788                  | 97.0                 | 0.86                 | 975                                  | 626                  | 96.9                 | 0.81                 |
| 1RN6 566-6...                  | 3188  | 899                  | 96.9                 | 0.88                 | 2125                                 | 788                  | 97.1                 | 0.87                 | 1063                                 | 626                  | 97.0                 | 0.82                 |
| 1RN4 632-6...                  | O. R. <sup>(3)</sup>                            | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                 | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                 | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> |
| 1RN4 634-6...                  | O. R. <sup>(3)</sup>                            | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                 | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                 | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> |
| 1RN4 636-6...                  | O. R. <sup>(3)</sup>                            | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                 | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                 | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> |
| <b>8-pole</b>                  |   |                      |                      |                      |                                      |                      |                      |                      |                                      |                      |                      |                      |
| 1RN6 450-8...                  | 510   | 676                  | 94.8                 | 0.80                 | 340                                  | 592                  | 94.7                 | 0.75                 | 170                                  | 470                  | 94.0                 | 0.63                 |
| 1RN6 452-8...                  | 563   | 676                  | 95.1                 | 0.80                 | 375                                  | 592                  | 95.1                 | 0.75                 | 188                                  | 470                  | 94.4                 | 0.62                 |
| 1RN6 454-8...                  | 660   | 676                  | 95.3                 | 0.82                 | 440                                  | 592                  | 95.3                 | 0.78                 | 220                                  | 470                  | 94.8                 | 0.66                 |
| 1RN6 456-8...                  | 728   | 676                  | 95.5                 | 0.83                 | 485                                  | 592                  | 95.5                 | 0.80                 | 243                                  | 470                  | 95.1                 | 0.69                 |
| 1RN6 500-8...                  | 1020  | 674                  | 95.7                 | 0.83                 | 680                                  | 590                  | 95.8                 | 0.81                 | 340                                  | 469                  | 95.4                 | 0.72                 |
| 1RN6 502-8...                  | 1155  | 674                  | 95.8                 | 0.83                 | 770                                  | 590                  | 95.9                 | 0.81                 | 385                                  | 469                  | 95.5                 | 0.72                 |
| 1RN6 504-8...                  | 1305  | 674                  | 96.0                 | 0.83                 | 870                                  | 591                  | 96.0                 | 0.80                 | 435                                  | 470                  | 95.6                 | 0.71                 |
| 1RN6 506-8...                  | 1410  | 675                  | 95.9                 | 0.82                 | 940                                  | 591                  | 95.9                 | 0.79                 | 470                                  | 470                  | 95.4                 | 0.69                 |
| 1RN6 560-8...                  | 1650  | 674                  | 96.3                 | 0.84                 | 1100                                 | 590                  | 96.5                 | 0.83                 | 550                                  | 469                  | 96.5                 | 0.76                 |
| 1RN6 562-8...                  | 1875  | 674                  | 96.4                 | 0.84                 | 1250                                 | 590                  | 96.6                 | 0.83                 | 625                                  | 469                  | 96.5                 | 0.76                 |
| 1RN6 564-8...                  | 2063  | 674                  | 96.6                 | 0.84                 | 1375                                 | 591                  | 96.7                 | 0.82                 | 688                                  | 470                  | 96.6                 | 0.75                 |
| 1RN6 566-8...                  | 2250  | 675                  | 96.7                 | 0.85                 | 1500                                 | 591                  | 96.8                 | 0.83                 | 750                                  | 470                  | 96.7                 | 0.75                 |
| 1RN4 630-8...                  | O. R. <sup>(3)</sup>                            | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                 | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                 | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> |
| 1RN4 632-8...                  | O. R. <sup>(3)</sup>                            | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                 | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                 | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> |
| 1RN4 634-8...                  | O. R. <sup>(3)</sup>                            | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                 | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                 | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> |
| 1RN4 636-8...                  | O. R. <sup>(3)</sup>                            | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                 | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup>                 | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> | O. R. <sup>(3)</sup> |

## Motors for converter operation

Converter with non-sinusoidal output

### Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Selection and ordering data

| Rated power                   |                        | High voltage motor<br>SIMOTICS HV M (modular) | Operating values at rated output for utilization 130 (B) |            |                |                          |              |                   |                   |                                      |
|-------------------------------|------------------------|---|--|------------|----------------|--------------------------|--------------|-------------------|-------------------|--------------------------------------|
| IEC                           |                        |   | Rated speed  | Efficiency | Power factor   | Rated current at 4.16 kV | Rated torque | Break-down torque | Moment of inertia | Mechanical speed limit <sup>1)</sup> |
| $P_{rated}$<br>155 (F)        | $P_{rated}$<br>130 (B) | Article No.                                   | $n_{rated}$  | $\eta$     | $\cos \varphi$ | $I_{rated}$              | $T_{rated}$  | $T_B/T_{rated}$   | J                 | $n_{max}$                            |
| kW                            | kW                     |   | rpm  | %          | [-]            | A                        | Nm           | [-]               | kgm <sup>2</sup>  | rpm                                  |
| <b>3.4 ... 4.16 kV, 50 Hz</b> |                        |   |  |            |                |                          |              |                   |                   |                                      |
| 2-pole                        |                        |   |  |            |                |                          |              |                   |                   |                                      |
| 9900                          | 9000                   | <b>1RN7 710-2 ■ ■ 40-0CJ0</b>                 | 2986   | 97.4       | 0.91           | 1400                     | 28782        | 2.00              | 148               | 3600                                 |
| 11000                         | 10000                  | <b>1RN7 712-2 ■ ■ 40-0CJ0</b>                 | 2985   | 97.5       | 0.91           | 1560                     | 31991        | 2.00              | 160               | 3600                                 |
| 12320                         | 11200                  | <b>1RN7 714-2 ■ ■ 40-0CJ0</b>                 | 2987   | 97.6       | 0.92           | 1740                     | 35806        | 2.25              | 175               | 3600                                 |
| 13750                         | 12500                  | <b>1RN7 716-2 ■ ■ 40-0CJ0</b>                 | 2986   | 97.7       | 0.92           | 1940                     | 39975        | 2.25              | 190               | 3600                                 |
| 4-pole                        |                        |   |  |            |                |                          |              |                   |                   |                                      |
| 9744                          | 8700                   | <b>1RN7 710-4 ■ ■ 40-0C ■ 0</b>               | 1491   | 97.5       | 0.90           | 1380                     | 55720        | 2.15              | 262               | 1800                                 |
| 10864                         | 9700                   | <b>1RN7 712-4 ■ ■ 40-0C ■ 0</b>               | 1491   | 97.6       | 0.90           | 1540                     | 62125        | 2.15              | 286               | 1800                                 |
| 12096                         | 10800                  | <b>1RN7 714-4 ■ ■ 40-0C ■ 0</b>               | 1492   | 97.7       | 0.91           | 1680                     | 69124        | 2.35              | 321               | 1800                                 |
| 13440                         | 12000                  | <b>1RN7 716-4 ■ ■ 40-0C ■ 0</b>               | 1492   | 97.8       | 0.91           | 1880                     | 76804        | 2.35              | 361               | 1800                                 |
| 6-pole                        |                        |   |  |            |                |                          |              |                   |                   |                                      |
| 7056                          | 6300                   | <b>1RN7 710-6 ■ ■ 4-0C ■ 0</b>                | 994  | 97.2       | 0.86           | 1040                     | 60524        | 2.10              | 350               | 1800                                 |
| 7840                          | 7000                   | <b>1RN7 712-6 ■ ■ 4-0C ■ 0</b>                | 994  | 97.3       | 0.86           | 1160                     | 67249        | 2.15              | 398               | 1800                                 |
| 8624                          | 7700                   | <b>1RN7 714-6 ■ ■ 4-0C ■ 0</b>                | 995  | 97.5       | 0.87           | 1260                     | 73899        | 2.30              | 450               | 1800                                 |
| 9632                          | 8600                   | <b>1RN7 716-6 ■ ■ 4-0C ■ 0</b>                | 995  | 97.5       | 0.86           | 1420                     | 82537        | 2.30              | 496               | 1800                                 |
| 8-pole                        |                        |   |  |            |                |                          |              |                   |                   |                                      |
| 5040                          | 4500                   | <b>1RN7 710-8 ■ ■ 4-0C ■ 0</b>                | 745  | 96.9       | 0.85           | 760                      | 57680        | 1.90              | 433               | 1000                                 |
| 5600                          | 5000                   | <b>1RN7 712-8 ■ ■ 4-0C ■ 0</b>                | 745  | 97.0       | 0.85           | 840                      | 64089        | 1.95              | 493               | 1000                                 |
| 6272                          | 5600                   | <b>1RN7 714-8 ■ ■ 4-0C ■ 0</b>                | 745  | 97.1       | 0.86           | 930                      | 71780        | 2.00              | 558               | 1000                                 |
| 7056                          | 6300                   | <b>1RN7 716-8 ■ ■ 4-0C ■ 0</b>                | 745  | 97.2       | 0.86           | 1040                     | 80752        | 2.15              | 617               | 1000                                 |
| 10-pole                       |                        |   |  |            |                |                          |              |                   |                   |                                      |
| 3920                          | 3500                   | <b>1RN7 710-3 ■ ■ 4-0C ■ 0</b>                | 595  | 96.6       | 0.84           | 600                      | 56172        | 2.20              | 429               | 900                                  |
| 4312                          | 3850                   | <b>1RN7 712-3 ■ ■ 4-0C ■ 0</b>                | 595  | 96.7       | 0.85           | 650                      | 61790        | 2.20              | 489               | 900                                  |
| 4816                          | 4300                   | <b>1RN7 714-3 ■ ■ 4-0C ■ 0</b>                | 595  | 96.8       | 0.84           | 730                      | 69012        | 2.20              | 551               | 900                                  |
| 5320                          | 4750                   | <b>1RN7 716-3 ■ ■ 4-0C ■ 0</b>                | 595  | 96.9       | 0.85           | 800                      | 76234        | 2.20              | 613               | 900                                  |

#### Cooling method

See page 1/8

#### Motor for line operation or for converter operation

See page 1/9

#### Type of construction

See page 1/9

#### Housing and bearing version

See page 1/9

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

| Motor type<br>(repeated) | Partial load values for square-law torque drive |      |        |                |  |      |        |                |  |      |        |                |
|--------------------------|---|------|--------|----------------|--|------|--------|----------------|--|------|--------|----------------|
|                          | $P/P_{\text{rated}} 130 \text{ (B)} = 75 \%$    |      |        |                | $P/P_{\text{rated}} 130 \text{ (B)} = 50 \%$ |      |        |                | $P/P_{\text{rated}} 130 \text{ (B)} = 25 \%$ |      |        |                |
|                          | $P$   | $n$  | $\eta$ | $\cos \varphi$ | $P$  | $n$  | $\eta$ | $\cos \varphi$ | $P$  | $n$  | $\eta$ | $\cos \varphi$ |
|                          | kW  | rpm  | %      | [-]            | kW   | rpm  | %      | [-]            | kW   | rpm  | %      | [-]            |
|                          | <b>Square-law torque drive</b>                  |      |        |                |  |      |        |                |  |      |        |                |
| 2-pole                   |   |      |        |                |  |      |        |                |  |      |        |                |
| 1RN7 710-2...            | 6749  | 2713 | 97.4   | 0.92           | 4499   | 2374 | 97.3   | 0.92           | 2249   | 1885 | 97.0   | 0.89           |
| 1RN7 712-2...            | 7500  | 2712 | 97.5   | 0.92           | 5000   | 2373 | 97.4   | 0.93           | 2499   | 1885 | 97.2   | 0.91           |
| 1RN7 714-2...            | 8404  | 2713 | 97.6   | 0.93           | 5603   | 2374 | 97.5   | 0.93           | 2802   | 1885 | 97.2   | 0.90           |
| 1RN7 716-2...            | 9375  | 2713 | 97.7   | 0.93           | 6250   | 2374 | 97.6   | 0.93           | 3124   | 1885 | 97.3   | 0.91           |
| 4-pole                   |   |      |        |                |  |      |        |                |  |      |        |                |
| 1RN7 710-4...            | 6527  | 1355 | 97.5   | 0.91           | 4359   | 1186 | 97.5   | 0.91           | 2181   | 942  | 97.2   | 0.89           |
| 1RN7 712-4...            | 7277  | 1355 | 97.6   | 0.91           | 4860   | 1186 | 97.6   | 0.91           | 2431   | 942  | 97.3   | 0.88           |
| 1RN7 714-4...            | 8105  | 1356 | 97.7   | 0.91           | 5412   | 1186 | 97.6   | 0.91           | 2708   | 942  | 97.3   | 0.88           |
| 1RN7 716-4...            | 9006  | 1356 | 97.8   | 0.92           | 6014   | 1186 | 97.7   | 0.92           | 3009   | 942  | 97.5   | 0.89           |
| 6-pole                   |   |      |        |                |  |      |        |                |  |      |        |                |
| 1RN7 710-6...            | 4728  | 903  | 97.2   | 0.85           | 3157   | 790  | 97.0   | 0.84           | 1580   | 628  | 96.5   | 0.77           |
| 1RN7 712-6...            | 5254  | 903  | 97.3   | 0.86           | 3508   | 791  | 97.1   | 0.85           | 1756   | 628  | 96.7   | 0.78           |
| 1RN7 714-6...            | 5778  | 904  | 97.4   | 0.86           | 3859   | 791  | 97.2   | 0.84           | 1930   | 628  | 96.7   | 0.77           |
| 1RN7 716-6...            | 6453  | 904  | 97.4   | 0.86           | 4309   | 791  | 97.2   | 0.83           | 2155   | 628  | 96.7   | 0.75           |
| 8-pole                   |   |      |        |                |  |      |        |                |  |      |        |                |
| 1RN7 710-8...            | 3379  | 677  | 96.8   | 0.85           | 2257   | 592  | 96.7   | 0.84           | 1130   | 471  | 96.2   | 0.77           |
| 1RN7 712-8...            | 3754  | 677  | 97.0   | 0.85           | 2507   | 593  | 96.8   | 0.84           | 1255   | 471  | 96.3   | 0.77           |
| 1RN7 714-8...            | 4204  | 677  | 97.1   | 0.86           | 2808   | 593  | 96.9   | 0.84           | 1405   | 471  | 96.4   | 0.78           |
| 1RN7 716-8...            | 4729  | 677  | 97.1   | 0.85           | 3158   | 593  | 96.9   | 0.83           | 1580   | 471  | 96.4   | 0.76           |
| 10-pole                  |   |      |        |                |  |      |        |                |  |      |        |                |
| 1RN7 710-3...            | 2627  | 541  | 96.5   | 0.83           | 1755   | 473  | 96.3   | 0.79           | 878  | 376  | 95.7   | 0.68           |
| 1RN7 712-3...            | 2890  | 541  | 96.7   | 0.84           | 1930   | 473  | 96.5   | 0.81           | 966  | 376  | 95.9   | 0.71           |
| 1RN7 714-3...            | 3227  | 541  | 96.7   | 0.83           | 2156   | 474  | 96.5   | 0.80           | 1079   | 376  | 95.8   | 0.69           |
| 1RA7 716-3...            | 3565  | 541  | 96.8   | 0.84           | 2381   | 473  | 96.6   | 0.81           | 1192   | 376  | 96.0   | 0.71           |

## Motors for converter operation

Converter with non-sinusoidal output

Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

### Selection and ordering data

| Rated power<br><b>IEC</b><br>$P_{\text{rated}}$ 155 (F)<br>kW | <b>Low voltage motor<br/>H-compact PLUS</b><br><br>Article No. | Operating values at rated output for utilization 155 (F) |             |                       |                         |                          |                               |                       |                                      |
|---|--|--|-------------|-----------------------|-------------------------|--------------------------|-------------------------------|-----------------------|--------------------------------------|
|   |  | Rated speed  | Efficiency  | Power factor          | Rated current<br>690 V  | Rated torque             | Break-down torque             | Moment of inertia     | Mechanical speed limit <sup>1)</sup> |
|   |  | $n_{\text{rated}}$<br>rpm                                | $\eta$<br>% | $\cos \varphi$<br>[-] | $I_{\text{rated}}$<br>A | $T_{\text{rated}}$<br>Nm | $T_B/T_{\text{rated}}$<br>[-] | J<br>kgm <sup>2</sup> | $n_{\text{max}}$<br>rpm              |
| <b>690 V, 60 Hz</b>   |  |  |             |                       |                         |                          |                               |                       |                                      |
| 2-pole  |  |  |             |                       |                         |                          |                               |                       |                                      |
| 1550  | <b>1RN6 450-2HP10</b>  | 3578   | 95.9        | 0.90                  | 2x750                   | 4140                     | 1.90                          | 13                    | 3600 <sup>2)</sup>                   |
| 1650  | <b>1RN6 452-2HP10</b>  | 3581   | 96.0        | 0.91                  | 2x790                   | 4403                     | 2.20                          | 14                    | 3600 <sup>2)</sup>                   |
| 1720  | <b>1RN6 454-2HP10</b>  | 3584   | 96.1        | 0.91                  | 2x820                   | 4586                     | 2.40                          | 16                    | 3600 <sup>2)</sup>                   |
| 2180  | <b>1RN6 456-2HP10</b>  | 3584   | 96.7        | 0.92                  | 2x1020                  | 5814                     | 2.40                          | 18                    | 3600 <sup>2)</sup>                   |
| 2500  | <b>1RN6 500-2HP10</b>  | 3579   | 96.7        | 0.90                  | 2x1200                  | 6670                     | 2.55                          | 20                    | 3600 <sup>2)</sup>                   |
| 2750  | <b>1RN6 502-2HP10</b>  | 3577   | 96.6        | 0.91                  | 4x650                   | 7342                     | 2.35                          | 22                    | 3600 <sup>2)</sup>                   |
| 3100  | <b>1RN6 504-2HP10</b>  | 3581   | 97.0        | 0.92                  | 4x730                   | 8267                     | 2.55                          | 25                    | 3600 <sup>2)</sup>                   |
| 4-pole  |  |  |             |                       |                         |                          |                               |                       |                                      |
| 1630  | <b>1RN6 450-4HP1</b> ■   | 1784   | 95.9        | 0.88                  | 2x810                   | 8740                     | 2.30                          | 20                    | 1800                                 |
| 1750  | <b>1RN6 452-4HP1</b> ■   | 1783   | 96.0        | 0.90                  | 2x850                   | 9385                     | 2.30                          | 22                    | 1800                                 |
| 2070  | <b>1RN6 454-4HP1</b> ■   | 1783   | 96.2        | 0.90                  | 2x1000                  | 11104                    | 2.30                          | 25                    | 1800                                 |
| 2310  | <b>1RN6 456-4HP1</b> ■   | 1786   | 96.4        | 0.89                  | 2x1120                  | 12364                    | 2.50                          | 29                    | 1800                                 |
| 2700 <sup>4)</sup>  | <b>1RN6 500-4HP10</b>  | 1788   | 96.9        | 0.90                  | 4x650                   | 14420                    | 2.80                          | 42                    | 1800 <sup>3)</sup>                   |
| 2850 <sup>4)</sup>  | <b>1RN6 502-4HP10</b>  | 1786   | 96.9        | 0.91                  | 4x680                   | 15238                    | 2.50                          | 46                    | 1800 <sup>3)</sup>                   |
| 3000 <sup>4)</sup>  | <b>1RN6 504-4HP10</b>  | 1786   | 97.0        | 0.92                  | 4x700                   | 16040                    | 2.40                          | 52                    | 1800 <sup>3)</sup>                   |

#### Type of construction:

|                        |          |
|------------------------|----------|
| IM B3                  | <b>0</b> |
| IM V1 (without canopy) | <b>8</b> |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details, see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

<sup>2)</sup> There are speed exclusion ranges for this type. It must be ensured that the motors are not continuously operated in these speed ranges. The exclusion ranges must be clarified in advance in the factory.

<sup>3)</sup> Higher speed limit on request.

<sup>4)</sup> Data of vertical motors (IM V1) on request.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

Motor type  
(repeated)

Partial load values for square-law torque drive

$P/P_{\text{rated}}$  155 (F) = 75 %

$P/P_{\text{rated}}$  155 (F) = 50 %

$P/P_{\text{rated}}$  155 (F) = 25 %

$P$        $n$        $\eta$        $\cos \varphi$        $P$        $n$        $\eta$        $\cos \varphi$        $P$        $n$        $\eta$        $\cos \varphi$   
kW      rpm      %      [-]      kW      rpm      %      [-]      kW      rpm      %      [-]

**Square-law torque drive**

2-pole

|               |      |      |      |      |      |      |      |      |     |      |      |      |
|---------------|------|------|------|------|------|------|------|------|-----|------|------|------|
| 1RN6 450-2... | 1164 | 3253 | 96.2 | 0.90 | 775  | 2844 | 96.3 | 0.90 | 388 | 2261 | 96.2 | 0.86 |
| 1RN6 452-2... | 1239 | 3255 | 96.3 | 0.92 | 825  | 2845 | 96.4 | 0.91 | 413 | 2262 | 96.3 | 0.87 |
| 1RN6 454-2... | 1291 | 3257 | 96.3 | 0.92 | 860  | 2847 | 96.4 | 0.91 | 430 | 2262 | 96.2 | 0.86 |
| 1RN6 456-2... | 1636 | 3258 | 96.9 | 0.92 | 1090 | 2847 | 96.9 | 0.91 | 545 | 2263 | 96.7 | 0.87 |
| 1RN6 500-2... | 1876 | 3256 | 96.8 | 0.89 | 1250 | 2846 | 96.8 | 0.87 | 626 | 2261 | 96.6 | 0.77 |
| 1RN6 502-2... | 2064 | 3254 | 96.8 | 0.90 | 1375 | 2846 | 96.9 | 0.89 | 688 | 2261 | 96.8 | 0.82 |
| 1RN6 504-2... | 2325 | 3257 | 97.1 | 0.91 | 1550 | 2847 | 97.1 | 0.89 | 776 | 2262 | 97.0 | 0.82 |

4-pole

|               |      |      |      |      |      |      |      |      |     |      |      |      |
|---------------|------|------|------|------|------|------|------|------|-----|------|------|------|
| 1RN6 450-4... | 1223 | 1623 | 96.1 | 0.88 | 815  | 1420 | 96.2 | 0.86 | 408 | 1129 | 95.9 | 0.78 |
| 1RN6 452-4... | 1313 | 1623 | 96.3 | 0.90 | 875  | 1419 | 96.4 | 0.89 | 438 | 1129 | 96.3 | 0.84 |
| 1RN6 454-4... | 1553 | 1623 | 96.5 | 0.90 | 1035 | 1419 | 96.6 | 0.89 | 518 | 1129 | 96.5 | 0.85 |
| 1RN6 456-4... | 1733 | 1625 | 96.6 | 0.89 | 1155 | 1421 | 96.6 | 0.87 | 578 | 1130 | 96.3 | 0.79 |
| 1RN6 500-4... | 2025 | 1627 | 97.0 | 0.88 | 1351 | 1422 | 97.0 | 0.83 | 675 | 1130 | 96.6 | 0.70 |
| 1RN6 502-4... | 2138 | 1626 | 97.0 | 0.90 | 1425 | 1422 | 97.1 | 0.87 | 713 | 1130 | 96.9 | 0.78 |
| 1RN6 504-4... | 2251 | 1625 | 97.1 | 0.91 | 1500 | 1421 | 97.2 | 0.90 | 750 | 1130 | 97.2 | 0.83 |

3

## Motors for converter operation

Converter with non-sinusoidal output

### Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Selection and ordering data

| Rated power<br><br>IEC<br><br>$P_{\text{rated}}$ 155 (F)<br>kW | Low voltage motor<br>H-compact PLUS<br><br>Article No. | Operating values at rated output for utilization 155 (F) |             |                       |                         |                          |  |                       |                                      |
|--|--|--|-------------|-----------------------|-------------------------|--------------------------|--|-----------------------|--------------------------------------|
|  |  | Rated speed  | Efficiency  | Power factor          | Rated current<br>690 V  | Rated torque             | Break-down torque                      | Moment of inertia     | Mechanical speed limit <sup>1)</sup> |
|  |  | $n_{\text{rated}}$<br>rpm                                | $\eta$<br>% | $\cos \varphi$<br>[-] | $I_{\text{rated}}$<br>A | $T_{\text{rated}}$<br>Nm | $T_{\text{B}}/T_{\text{rated}}$<br>[-] | J<br>kgm <sup>2</sup> | $n_{\text{max}}$<br>rpm              |
| <b>690 V, 60 Hz</b>  |  |  |             |                       |                         |                          |  |                       |                                      |
| 6-pole   |  |  |             |                       |                         |                          |  |                       |                                      |
| 1210   | <b>1RN6 450-6HP1</b>                                   | 1191   | 96.1        | 0.85                  | 2x620                   | 9718                     | 2.40                                   | 26                    | 1200                                 |
| 1350   | <b>1RN6 452-6HP1</b>                                   | 1191   | 96.3        | 0.84                  | 2x700                   | 10837                    | 2.40                                   | 29                    | 1200                                 |
| 1480   | <b>1RN6 454-6HP1</b>                                   | 1191   | 96.3        | 0.86                  | 2x750                   | 11883                    | 2.30                                   | 32                    | 1200                                 |
| 1620   | <b>1RN6 456-6HP1</b>                                   | 1192   | 96.6        | 0.86                  | 2x820                   | 12995                    | 2.40                                   | 37                    | 1200                                 |
| 2150   | <b>1RN6 500-6HP1</b>                                   | 1190   | 96.5        | 0.84                  | 2x1100                  | 17254                    | 2.10                                   | 56                    | 1500                                 |
| 2400   | <b>1RN6 502-6HP1</b>                                   | 1188   | 96.5        | 0.85                  | 2x1220                  | 19293                    | 1.85                                   | 62                    | 1500                                 |
| 2700   | <b>1RN6 504-6HP1</b>                                   | 1190   | 96.7        | 0.84                  | 3x930                   | 21668                    | 2.15                                   | 69                    | 1500                                 |
| 2950   | <b>1RN6 506-6HP1</b>                                   | 1189   | 96.7        | 0.86                  | 3x990                   | 23694                    | 1.90                                   | 77                    | 1500                                 |
| 3300   | <b>1RN6 560-6HP1</b>                                   | 1191   | 96.9        | 0.87                  | 3x1100                  | 26461                    | 2.30                                   | 108                   | 1500                                 |
| 3650   | <b>1RN6 562-6HP1</b>                                   | 1190   | 96.8        | 0.87                  | 3x1200                  | 29292                    | 2.10                                   | 119                   | 1500                                 |
| 8-pole   |  |  |             |                       |                         |                          |  |                       |                                      |
| 870  | <b>1RN6 450-8HP1</b>                                   | 893  | 95.3        | 0.84                  | 910                     | 9323                     | 2.30                                   | 32                    | 1200                                 |
| 960  | <b>1RN6 452-8HP1</b>                                   | 892  | 95.4        | 0.84                  | 1000                    | 10290                    | 2.20                                   | 36                    | 1200                                 |
| 1050   | <b>1RN6 454-8HP1</b>                                   | 893  | 95.5        | 0.84                  | 1100                    | 11239                    | 2.40                                   | 40                    | 1200                                 |
| 1180   | <b>1RN6 456-8HP1</b>                                   | 893  | 95.7        | 0.85                  | 1220                    | 12636                    | 2.30                                   | 46                    | 1200                                 |
| 1600   | <b>1RN6 500-8HP1</b>                                   | 892  | 96.0        | 0.83                  | 2x840                   | 17130                    | 1.85                                   | 69                    | 1125                                 |
| 1800   | <b>1RN6 502-8HP1</b>                                   | 892  | 96.1        | 0.83                  | 2x940                   | 19271                    | 1.90                                   | 76                    | 1125                                 |
| 2000   | <b>1RN6 504-8HP1</b>                                   | 893  | 96.3        | 0.83                  | 2x1040                  | 21389                    | 2.05                                   | 85                    | 1125                                 |
| 2200   | <b>1RN6 506-8HP1</b>                                   | 893  | 96.4        | 0.83                  | 2x1160                  | 23527                    | 2.05                                   | 94                    | 1125                                 |
| 2250   | <b>1RN6 560-8HP1</b>                                   | 893  | 96.7        | 0.84                  | 2x1160                  | 24062                    | 2.30                                   | 128                   | 1125                                 |
| 2600   | <b>1RN6 562-8HP1</b>                                   | 893  | 96.8        | 0.84                  | 4x670                   | 27805                    | 2.25                                   | 141                   | 1125                                 |
| 2900   | <b>1RN6 564-8HP1</b>                                   | 894  | 96.9        | 0.83                  | 4x750                   | 30979                    | 2.65                                   | 156                   | 1125                                 |
| 3250   | <b>1RN6 566-8HP1</b>                                   | 893  | 97.0        | 0.85                  | 4x820                   | 34756                    | 2.35                                   | 173                   | 1125                                 |

#### Type of construction:

|                        |   |
|------------------------|---|
| IM B3                  | 0 |
| IM V1 (without canopy) | 8 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation.

Additional details, [see Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

Motor type  
(repeated)

Partial load values for square-law torque drive

$P/P_{\text{rated}}$  155 (F) = 75 %

$P/P_{\text{rated}}$  155 (F) = 50 %

$P/P_{\text{rated}}$  155 (F) = 25 %

| $P$ | $n$ | $\eta$ | $\cos \varphi$ | $P$ | $n$ | $\eta$ | $\cos \varphi$ | $P$ | $n$ | $\eta$ | $\cos \varphi$ |
|-----|-----|--------|----------------|-----|-----|--------|----------------|-----|-----|--------|----------------|
| kW  | rpm | %      | [-]            | kW  | rpm | %      | [-]            | kW  | rpm | %      | [-]            |

Square-law torque drive

6-pole

|               |      |      |      |      |      |     |      |      |     |     |      |      |
|---------------|------|------|------|------|------|-----|------|------|-----|-----|------|------|
| 1RN6 450-6... | 908  | 1083 | 96.3 | 0.82 | 605  | 947 | 96.4 | 0.79 | 303 | 753 | 96.0 | 0.67 |
| 1RN6 452-6... | 1013 | 1083 | 96.5 | 0.82 | 675  | 947 | 96.5 | 0.78 | 338 | 753 | 96.2 | 0.67 |
| 1RN6 454-6... | 1110 | 1083 | 96.5 | 0.84 | 740  | 947 | 96.6 | 0.81 | 370 | 753 | 96.3 | 0.71 |
| 1RN6 456-6... | 1215 | 1084 | 96.8 | 0.84 | 810  | 947 | 96.8 | 0.81 | 405 | 753 | 96.5 | 0.71 |
| 1RN6 500-6... | 1613 | 1082 | 96.5 | 0.83 | 1075 | 946 | 96.5 | 0.79 | 538 | 752 | 96.0 | 0.69 |
| 1RN6 502-6... | 1800 | 1081 | 96.6 | 0.86 | 1200 | 945 | 96.7 | 0.84 | 600 | 752 | 96.5 | 0.78 |
| 1RN6 504-6... | 2025 | 1082 | 96.7 | 0.83 | 1350 | 946 | 96.7 | 0.80 | 675 | 752 | 96.2 | 0.69 |
| 1RN6 506-6... | 2213 | 1081 | 96.8 | 0.86 | 1475 | 946 | 96.9 | 0.85 | 738 | 752 | 96.7 | 0.78 |
| 1RN6 560-6... | 2475 | 1083 | 97.0 | 0.87 | 1650 | 947 | 97.0 | 0.86 | 825 | 753 | 96.7 | 0.79 |
| 1RN6 562-6... | 2738 | 1082 | 97.0 | 0.88 | 1825 | 946 | 97.1 | 0.87 | 913 | 752 | 97.0 | 0.83 |

8-pole

|               |      |     |      |      |      |     |      |      |     |     |      |      |
|---------------|------|-----|------|------|------|-----|------|------|-----|-----|------|------|
| 1RN6 450-8... | 653  | 812 | 95.5 | 0.81 | 435  | 710 | 95.4 | 0.77 | 218 | 565 | 94.9 | 0.66 |
| 1RN6 452-8... | 720  | 812 | 95.7 | 0.83 | 480  | 710 | 95.6 | 0.79 | 240 | 565 | 95.2 | 0.68 |
| 1RN6 454-8... | 788  | 812 | 95.6 | 0.81 | 525  | 710 | 95.6 | 0.77 | 263 | 565 | 95.0 | 0.65 |
| 1RN6 456-8... | 885  | 812 | 95.9 | 0.83 | 590  | 710 | 95.8 | 0.79 | 295 | 565 | 95.3 | 0.69 |
| 1RN6 500-8... | 1200 | 811 | 96.1 | 0.83 | 800  | 709 | 96.1 | 0.80 | 400 | 564 | 95.7 | 0.71 |
| 1RN6 502-8... | 1350 | 811 | 96.2 | 0.83 | 900  | 709 | 96.2 | 0.80 | 450 | 564 | 95.7 | 0.71 |
| 1RN6 504-8... | 1500 | 812 | 96.3 | 0.82 | 1000 | 710 | 96.3 | 0.79 | 500 | 564 | 95.7 | 0.69 |
| 1RN6 506-8... | 1650 | 812 | 96.4 | 0.82 | 1100 | 710 | 96.3 | 0.79 | 550 | 564 | 95.7 | 0.69 |
| 1RN6 560-8... | 1688 | 812 | 96.8 | 0.84 | 1125 | 710 | 96.8 | 0.81 | 563 | 564 | 96.5 | 0.72 |
| 1RN6 562-8... | 1950 | 812 | 96.9 | 0.84 | 1300 | 710 | 96.9 | 0.82 | 650 | 564 | 96.6 | 0.73 |
| 1RN6 564-8... | 2175 | 813 | 96.9 | 0.82 | 1450 | 710 | 96.8 | 0.78 | 725 | 565 | 96.3 | 0.67 |
| 1RN6 566-8... | 2438 | 812 | 97.1 | 0.84 | 1625 | 710 | 97.0 | 0.81 | 813 | 565 | 96.7 | 0.72 |

3

## Motors for converter operation

Converter with non-sinusoidal output

Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

### Selection and ordering data

| Rated power                   |                        | High voltage motor<br>H-compact PLUS | Operating values at rated output for utilization 155 (F) |            |                |                          |              |                   |                   |                                      |
|-------------------------------|------------------------|--------------------------------------|--|------------|----------------|--------------------------|--------------|-------------------|-------------------|--------------------------------------|
| IEC                           |                        |                                      | Rated speed  | Efficiency | Power factor   | Rated current at 4.16 kV | Rated torque | Break-down torque | Moment of inertia | Mechanical speed limit <sup>2)</sup> |
| $P_{rated}$<br>155 (F)        | $P_{rated}$<br>130 (B) | Article No.                          | $n_{rated}$  | $\eta$     | $\cos \varphi$ | $I_{rated}$              | $T_{rated}$  | $T_B/T_{rated}$   | J                 | $n_{max}$                            |
| kW                            | kW                     |                                      | rpm  | %          | [-]            | A                        | Nm           | [-]               | kgm <sup>2</sup>  | rpm                                  |
| <b>3.4 ... 4.16 kV, 60 Hz</b> |                        |                                      |  |            |                |                          |              |                   |                   |                                      |
| 2-pole                        |                        |                                      |  |            |                |                          |              |                   |                   |                                      |
| 1600                          | <sup>-5)</sup>         | <b>1RN6 450-2HS30</b>                | 3576   | 96.0       | 0.89           | 260                      | 4274         | 2.10              | 13                | 3600 <sup>3)</sup>                   |
| 1850                          | <sup>-5)</sup>         | <b>1RN6 452-2HS30</b>                | 3578   | 96.3       | 0.91           | 295                      | 4941         | 2.30              | 14                | 3600 <sup>3)</sup>                   |
| 2060                          | <sup>-5)</sup>         | <b>1RN6 454-2HS30</b>                | 3579   | 96.6       | 0.91           | 325                      | 5500         | 2.30              | 16                | 3600 <sup>3)</sup>                   |
| 2300                          | <sup>-5)</sup>         | <b>1RN6 456-2HS30</b>                | 3581   | 96.8       | 0.92           | 360                      | 6137         | 2.40              | 18                | 3600 <sup>3)</sup>                   |
| 3000                          | 2640                   | <b>1RN6 500-2HS30</b>                | 3572   | 96.5       | 0.89           | 485                      | 8020         | 2.05              | 20                | 3600 <sup>3)</sup>                   |
| 3250                          | 2860                   | <b>1RN6 502-2HS30</b>                | 3570   | 96.5       | 0.89           | 530                      | 8693         | 1.95              | 22                | 3600 <sup>3)</sup>                   |
| 3700                          | 3256                   | <b>1RN6 504-2HS30</b>                | 3576   | 96.8       | 0.91           | 580                      | 9880         | 2.30              | 25                | 3600 <sup>3)</sup>                   |
| 4200                          | 3696                   | <b>1RN6 506-2HS30</b>                | 3577   | 97.1       | 0.92           | 650                      | 11212        | 2.45              | 27                | 3600 <sup>3)</sup>                   |
| 4600                          | 4186                   | <b>1RN6 560-2HS30</b>                | 3577   | 96.8       | 0.90           | 730                      | 12280        | 1.90              | 39                | 3600 <sup>3)</sup>                   |
| 5100                          | 4641                   | <b>1RN6 562-2HS30</b>                | 3579   | 96.9       | 0.91           | 2x400                    | 13608        | 2.05              | 43                | 3600 <sup>3)</sup>                   |
| 5900                          | 5369                   | <b>1RN6 564-2HS30</b>                | 3580   | 97.1       | 0.92           | 2x460                    | 15738        | 2.15              | 49                | 3600 <sup>3)</sup>                   |
| 6700                          | 6097                   | <b>1RN6 566-2HS30</b>                | 3582   | 97.3       | 0.92           | 2x520                    | 17862        | 2.45              | 54                | 3600 <sup>3)</sup>                   |
| 4-pole                        |                        |                                      |  |            |                |                          |              |                   |                   |                                      |
| 1630                          | <sup>-5)</sup>         | <b>1RN6 450-4HS3</b>                 | 1782   | 95.7       | 0.89           | 265                      | 8742         | 2.30              | 20                | 1800                                 |
| 1750                          | <sup>-5)</sup>         | <b>1RN6 452-4HS3</b>                 | 1783   | 95.9       | 0.89           | 285                      | 9375         | 2.40              | 22                | 1800                                 |
| 2070                          | <sup>-5)</sup>         | <b>1RN6 454-4HS3</b>                 | 1784   | 96.1       | 0.90           | 330                      | 11088        | 2.50              | 25                | 1800                                 |
| 2310                          | <sup>-5)</sup>         | <b>1RN6 456-4HS3</b>                 | 1786   | 96.3       | 0.89           | 375                      | 12358        | 2.50              | 29                | 1800                                 |
| 3100 <sup>4)</sup>            | 2728                   | <b>1RN6 500-4HS30</b>                | 1785   | 96.7       | 0.90           | 495                      | 16584        | 2.30              | 42                | 1800                                 |
| 3450 <sup>4)</sup>            | 3036                   | <b>1RN6 502-4HS30</b>                | 1785   | 96.8       | 0.90           | 550                      | 18457        | 2.20              | 46                | 1800                                 |
| 3800 <sup>4)</sup>            | 3344                   | <b>1RN6 504-4HS30</b>                | 1786   | 97.0       | 0.91           | 600                      | 20318        | 2.35              | 52                | 1800                                 |
| 4100 <sup>4)</sup>            | 3608                   | <b>1RN6 506-4HS30</b>                | 1787   | 97.0       | 0.91           | 640                      | 21909        | 2.40              | 56                | 1800                                 |
| 4700 <sup>4)</sup>            | 4277                   | <b>1RN6 560-4HS30</b>                | 1789   | 97.2       | 0.90           | 750                      | 25088        | 1.95              | 84                | 1800                                 |
| 5400 <sup>4)</sup>            | 4914                   | <b>1RN6 562-4HS30</b>                | 1789   | 97.3       | 0.90           | 2x430                    | 28824        | 1.95              | 94                | 1800                                 |
| 6000 <sup>4)</sup>            | 5460                   | <b>1RN6 564-4HS30</b>                | 1789   | 97.4       | 0.91           | 2x470                    | 32027        | 2.05              | 105               | 1800                                 |
| 6600 <sup>4)</sup>            | 6006                   | <b>1RN6 566-4HS30</b>                | 1790   | 97.5       | 0.91           | 2x520                    | 35210        | 2.10              | 115               | 1800                                 |
| 7400 <sup>1)</sup>            | <sup>-5)</sup>         | <b>1RN4 632-4HV5</b>                 | 1790   | 97.3       | 0.89           | 1180                     | 39480        | 1.90              | 150               | 1800                                 |

#### Type of construction:

|                        |   |
|------------------------|---|
| IM B3                  | 0 |
| IM V1 (without canopy) | 8 |

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

<sup>1)</sup> Rated voltage < 4.16 kV on request

<sup>2)</sup> For IM B3, anti-friction bearings.

<sup>3)</sup> There are speed exclusion ranges for this type. It must be ensured that the motors are not continuously operated in these speed ranges. The exclusion ranges must be clarified in advance in the factory.

<sup>4)</sup> Data of vertical motors (IM V1) on request.

<sup>5)</sup> Utilization 130 (B) on request.



## Motors for converter operation

### Converter with non-sinusoidal output

#### Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

| Motor type<br>(repeated) | Partial load values for square-law torque drive |      |        |                |                                     |      |        |                |                                     |      |        |                |
|--------------------------|---|------|--------|----------------|-------------------------------------|------|--------|----------------|-------------------------------------|------|--------|----------------|
|                          | $P/P_{\text{rated}}$ 155 (F) = 75 %             |      |        |                | $P/P_{\text{rated}}$ 155 (F) = 50 % |      |        |                | $P/P_{\text{rated}}$ 155 (F) = 25 % |      |        |                |
|                          | $P$   | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$  | $\eta$ | $\cos \varphi$ |
|                          | kW  | rpm  | %      | [-]            | kW                                  | rpm  | %      | [-]            | kW                                  | rpm  | %      | [-]            |
|                          | <b>Square-law torque drive</b>                  |      |        |                |                                     |      |        |                |                                     |      |        |                |
| <b>2-pole</b>            |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RN6 450-2...            | 1201  | 3251 | 96.1   | 0.90           | 800                                 | 2843 | 96.2   | 0.90           | 400                                 | 2260 | 96.1   | 0.85           |
| 1RN6 452-2...            | 1389  | 3253 | 96.4   | 0.91           | 925                                 | 2844 | 96.5   | 0.91           | 463                                 | 2261 | 96.3   | 0.87           |
| 1RN6 454-2...            | 1545  | 3254 | 96.7   | 0.91           | 1030                                | 2845 | 96.7   | 0.90           | 515                                 | 2261 | 96.5   | 0.86           |
| 1RN6 456-2...            | 1725  | 3256 | 96.9   | 0.92           | 1150                                | 2846 | 96.9   | 0.91           | 575                                 | 2262 | 96.7   | 0.87           |
| 1RN6 500-2...            | 2251  | 3251 | 96.7   | 0.89           | 1500                                | 2844 | 96.8   | 0.87           | 750                                 | 2260 | 96.6   | 0.79           |
| 1RN6 502-2...            | 2439  | 3250 | 96.7   | 0.89           | 1626                                | 2843 | 96.8   | 0.88           | 813                                 | 2259 | 96.8   | 0.83           |
| 1RN6 504-2...            | 2776  | 3254 | 97.0   | 0.91           | 1850                                | 2845 | 97.0   | 0.89           | 926                                 | 2261 | 96.9   | 0.83           |
| 1RN6 506-2...            | 3151  | 3254 | 97.2   | 0.91           | 2100                                | 2846 | 97.2   | 0.89           | 1051                                | 2261 | 97.1   | 0.83           |
| 1RN6 560-2...            | 3452  | 3255 | 96.9   | 0.90           | 2301                                | 2846 | 97.0   | 0.88           | 1150                                | 2262 | 96.9   | 0.83           |
| 1RN6 562-2...            | 3827  | 3256 | 97.0   | 0.90           | 2551                                | 2847 | 97.1   | 0.89           | 1275                                | 2262 | 97.0   | 0.84           |
| 1RN6 564-2...            | 4427  | 3257 | 97.3   | 0.91           | 2951                                | 2848 | 97.3   | 0.90           | 1476                                | 2262 | 97.2   | 0.85           |
| 1RN6 566-2...            | 5026  | 3258 | 97.4   | 0.92           | 3350                                | 2849 | 97.4   | 0.90           | 1676                                | 2263 | 97.2   | 0.83           |
| <b>4-pole</b>            |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RN6 450-4...            | 1224  | 1622 | 96.0   | 0.89           | 815                                 | 1419 | 96.1   | 0.88           | 408                                 | 1129 | 96.0   | 0.83           |
| 1RN6 452-4...            | 1313  | 1623 | 96.1   | 0.89           | 875                                 | 1420 | 96.2   | 0.88           | 438                                 | 1129 | 96.1   | 0.82           |
| 1RN6 454-4...            | 1553  | 1623 | 96.3   | 0.90           | 1035                                | 1420 | 96.4   | 0.89           | 518                                 | 1129 | 96.3   | 0.83           |
| 1RN6 456-4...            | 1733  | 1624 | 96.5   | 0.89           | 1155                                | 1421 | 96.5   | 0.87           | 578                                 | 1130 | 96.2   | 0.80           |
| 1RN6 500-4...            | 2326  | 1625 | 96.8   | 0.89           | 1550                                | 1421 | 96.8   | 0.86           | 775                                 | 1130 | 96.6   | 0.75           |
| 1RN6 502-4...            | 2589  | 1625 | 96.9   | 0.89           | 1725                                | 1421 | 96.9   | 0.86           | 863                                 | 1130 | 96.8   | 0.77           |
| 1RN6 504-4...            | 2851  | 1626 | 97.1   | 0.90           | 1900                                | 1422 | 97.1   | 0.87           | 950                                 | 1130 | 96.8   | 0.78           |
| 1RN6 506-4...            | 3076  | 1626 | 97.1   | 0.90           | 2050                                | 1422 | 97.1   | 0.87           | 1025                                | 1130 | 96.8   | 0.77           |
| 1RN6 560-4...            | 3527  | 1628 | 97.3   | 0.89           | 2350                                | 1423 | 97.3   | 0.87           | 1176                                | 1131 | 97.2   | 0.80           |
| 1RN6 562-4...            | 4052  | 1628 | 97.4   | 0.90           | 2701                                | 1423 | 97.5   | 0.89           | 1351                                | 1131 | 97.4   | 0.83           |
| 1RN6 564-4...            | 4502  | 1628 | 97.5   | 0.90           | 3000                                | 1423 | 97.5   | 0.89           | 1501                                | 1131 | 97.4   | 0.82           |
| 1RN6 566-4...            | 4952  | 1628 | 97.6   | 0.91           | 3300                                | 1423 | 97.7   | 0.90           | 1651                                | 1131 | 97.5   | 0.84           |
| 1RN4 632-4...            | 5550  | 1626 | 97.5   | 0.90           | 3700                                | 1421 | 97.1   | 0.87           | 1850                                | 1128 | 96.5   | 0.75           |

## Motors for converter operation

Converter with non-sinusoidal output

Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

### Selection and ordering data

| Rated power                   |                        | High voltage motor<br>H-compact PLUS | Operating values at rated output for utilization 155 (F) |            |                |                          |              |                   |                   |                                      |
|-------------------------------|------------------------|--------------------------------------|--|------------|----------------|--------------------------|--------------|-------------------|-------------------|--------------------------------------|
| IEC                           |                        |                                      | Rated speed  | Efficiency | Power factor   | Rated current at 4.16 kV | Rated torque | Break-down torque | Moment of inertia | Mechanical speed limit <sup>2)</sup> |
| $P_{rated}$<br>155 (F)        | $P_{rated}$<br>130 (B) | Article No.                          | $n_{rated}$  | $\eta$     | $\cos \varphi$ | $I_{rated}$              | $T_{rated}$  | $T_B/T_{rated}$   | J                 | $n_{max}$                            |
| kW                            | kW                     |                                      | rpm  | %          | [-]            | A                        | Nm           | [-]               | kgm <sup>2</sup>  | rpm                                  |
| <b>3.4 ... 4.16 kV, 60 Hz</b> |                        |                                      |  |            |                |                          |              |                   |                   |                                      |
| 6-pole                        |                        |                                      |  |            |                |                          |              |                   |                   |                                      |
| 1210                          | — <sup>3)</sup>        | <b>1RN6 450-6HS3</b>                 | 1190   | 96.0       | 0.84           | 210                      | 9715         | 2.40              | 26                | 1200                                 |
| 1350                          | — <sup>3)</sup>        | <b>1RN6 452-6HS3</b>                 | 1191   | 96.2       | 0.85           | 230                      | 10833        | 2.40              | 29                | 1200                                 |
| 1480                          | — <sup>3)</sup>        | <b>1RN6 454-6HS3</b>                 | 1191   | 96.3       | 0.85           | 250                      | 11875        | 2.50              | 32                | 1200                                 |
| 1620                          | — <sup>3)</sup>        | <b>1RN6 456-6HS3</b>                 | 1191   | 96.4       | 0.87           | 270                      | 12995        | 2.50              | 37                | 1200                                 |
| 2350                          | 2100                   | <b>1RN6 500-6HS3</b>                 | 1187   | 96.0       | 0.85           | 400                      | 18907        | 1.65              | 56                | 1500                                 |
| 2600                          | 2350                   | <b>1RN6 502-6HS3</b>                 | 1188   | 96.4       | 0.84           | 445                      | 20901        | 1.85              | 62                | 1500                                 |
| 2900                          | 2600                   | <b>1RN6 504-6HS3</b>                 | 1187   | 96.3       | 0.85           | 490                      | 23332        | 1.70              | 69                | 1500                                 |
| 3100                          | 2800                   | <b>1RN6 506-6HS3</b>                 | 1188   | 96.4       | 0.86           | 520                      | 24920        | 1.75              | 77                | 1500                                 |
| 3750                          | 3300                   | <b>1RN6 560-6HS3</b>                 | 1189   | 96.6       | 0.86           | 630                      | 30120        | 2.00              | 108               | 1500                                 |
| 4250                          | 3750                   | <b>1RN6 562-6HS3</b>                 | 1189   | 96.8       | 0.86           | 710                      | 34136        | 2.05              | 119               | 1500                                 |
| 4700                          | 4150                   | <b>1RN6 564-6HS3</b>                 | 1190   | 96.9       | 0.87           | 770                      | 37718        | 2.15              | 132               | 1500                                 |
| 5100                          | 4500                   | <b>1RN6 566-6HS3</b>                 | 1190   | 97.0       | 0.87           | 840                      | 40929        | 2.20              | 146               | 1500                                 |
| 8-pole                        |                        |                                      |  |            |                |                          |              |                   |                   |                                      |
| 870                           | — <sup>3)</sup>        | <b>1RN6 450-8HS3</b>                 | 893  | 95.2       | 0.81           | 156                      | 9308         | 2.50              | 32                | 1200                                 |
| 960                           | — <sup>3)</sup>        | <b>1RN6 452-8HS3</b>                 | 893  | 95.3       | 0.82           | 170                      | 10269        | 2.50              | 36                | 1200                                 |
| 1050                          | — <sup>3)</sup>        | <b>1RN6 454-8HS3</b>                 | 893  | 95.4       | 0.84           | 182                      | 11239        | 2.40              | 40                | 1200                                 |
| 1180                          | — <sup>3)</sup>        | <b>1RN6 456-8HS3</b>                 | 894  | 95.6       | 0.82           | 210                      | 12613        | 2.50              | 46                | 1200                                 |
| 1640                          | 1480                   | <b>1RN6 500-8HS3</b>                 | 891  | 95.7       | 0.83           | 285                      | 17578        | 1.75              | 69                | 1125                                 |
| 1840                          | 1660                   | <b>1RN6 502-8HS3</b>                 | 892  | 96.0       | 0.83           | 320                      | 19700        | 1.90              | 76                | 1125                                 |
| 2050                          | 1860                   | <b>1RN6 504-8HS3</b>                 | 892  | 96.0       | 0.84           | 355                      | 21948        | 1.80              | 85                | 1125                                 |
| 2300                          | 2050                   | <b>1RN6 506-8HS3</b>                 | 892  | 96.1       | 0.84           | 395                      | 24624        | 1.95              | 94                | 1125                                 |
| 2650                          | 2350                   | <b>1RN6 560-8HS3</b>                 | 892  | 96.4       | 0.84           | 455                      | 28372        | 1.95              | 128               | 1125                                 |
| 3000                          | 2650                   | <b>1RN6 562-8HS3</b>                 | 891  | 96.5       | 0.84           | 510                      | 32155        | 1.90              | 141               | 1125                                 |
| 3300                          | 2900                   | <b>1RN6 564-8HS3</b>                 | 891  | 96.6       | 0.84           | 560                      | 35370        | 1.90              | 156               | 1125                                 |
| 3500                          | 3100                   | <b>1RN6 566-8HS3</b>                 | 892  | 96.8       | 0.85           | 590                      | 37472        | 2.05              | 173               | 1125                                 |

#### Type of construction:

IM B3 **0**  
IM V1 (without canopy) **8**

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation.

Additional details see Page 3/2.

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> Rated voltage < 4.16 kV on request.

<sup>2)</sup> For IM B3, anti-friction bearings.

<sup>3)</sup> Utilization 130 (B) on request.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

| Motor type<br>(repeated)       | Partial load values for square-law torque drive |      |        |                |                                     |     |        |                |                                     |     |        |                |
|--------------------------------|---|------|--------|----------------|-------------------------------------|-----|--------|----------------|-------------------------------------|-----|--------|----------------|
|                                | $P/P_{\text{rated}}$ 155 (F) = 75 %             |      |        |                | $P/P_{\text{rated}}$ 155 (F) = 50 % |     |        |                | $P/P_{\text{rated}}$ 155 (F) = 25 % |     |        |                |
|                                | $P$   | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$ | $\eta$ | $\cos \varphi$ | $P$                                 | $n$ | $\eta$ | $\cos \varphi$ |
|                                | kW  | rpm  | %      | [-]            | kW                                  | rpm | %      | [-]            | kW                                  | rpm | %      | [-]            |
| <b>Square-law torque drive</b> |   |      |        |                |                                     |     |        |                |                                     |     |        |                |
| <b>6-pole</b>                  |   |      |        |                |                                     |     |        |                |                                     |     |        |                |
| 1RN6 450-6...                  | 908   | 1083 | 96.2   | 0.83           | 605                                 | 947 | 96.2   | 0.80           | 303                                 | 753 | 96.0   | 0.69           |
| 1RN6 452-6...                  | 1013  | 1083 | 96.3   | 0.84           | 675                                 | 947 | 96.4   | 0.80           | 338                                 | 753 | 96.1   | 0.70           |
| 1RN6 454-6...                  | 1110  | 1083 | 96.5   | 0.84           | 740                                 | 947 | 96.5   | 0.81           | 370                                 | 753 | 96.3   | 0.71           |
| 1RN6 456-6...                  | 1215  | 1083 | 96.6   | 0.86           | 810                                 | 947 | 96.7   | 0.83           | 405                                 | 753 | 96.5   | 0.74           |
| 1RN6 500-6...                  | 1763  | 1079 | 96.3   | 0.85           | 1175                                | 944 | 96.4   | 0.84           | 588                                 | 751 | 96.3   | 0.78           |
| 1RN6 502-6...                  | 1950  | 1081 | 96.5   | 0.84           | 1300                                | 945 | 96.6   | 0.82           | 650                                 | 752 | 96.3   | 0.74           |
| 1RN6 504-6...                  | 2175  | 1080 | 96.5   | 0.85           | 1450                                | 945 | 96.6   | 0.85           | 725                                 | 751 | 96.5   | 0.79           |
| 1RN6 506-6...                  | 2325  | 1081 | 96.6   | 0.86           | 1550                                | 945 | 96.7   | 0.85           | 775                                 | 752 | 96.6   | 0.79           |
| 1RN6 560-6...                  | 2813  | 1081 | 96.8   | 0.87           | 1875                                | 946 | 96.9   | 0.87           | 938                                 | 752 | 96.8   | 0.82           |
| 1RN6 562-6...                  | 3188  | 1082 | 97.0   | 0.87           | 2125                                | 946 | 97.0   | 0.86           | 1063                                | 752 | 96.9   | 0.81           |
| 1RN6 564-6...                  | 3525  | 1082 | 97.0   | 0.87           | 2350                                | 946 | 97.1   | 0.86           | 1175                                | 752 | 96.9   | 0.80           |
| 1RN6 566-6...                  | 3825  | 1082 | 97.1   | 0.88           | 2550                                | 946 | 97.2   | 0.87           | 1275                                | 753 | 97.0   | 0.81           |
| <b>8-pole</b>                  |   |      |        |                |                                     |     |        |                |                                     |     |        |                |
| 1RN6 450-8...                  | 653   | 812  | 95.2   | 0.79           | 435                                 | 710 | 95.1   | 0.74           | 218                                 | 565 | 94.3   | 0.61           |
| 1RN6 452-8...                  | 720   | 812  | 95.4   | 0.80           | 480                                 | 710 | 95.3   | 0.75           | 240                                 | 565 | 94.5   | 0.62           |
| 1RN6 454-8...                  | 788   | 812  | 95.5   | 0.83           | 525                                 | 710 | 95.5   | 0.79           | 263                                 | 565 | 95.0   | 0.69           |
| 1RN6 456-8...                  | 885   | 813  | 95.6   | 0.79           | 590                                 | 711 | 95.5   | 0.75           | 295                                 | 565 | 94.8   | 0.62           |
| 1RN6 500-8...                  | 1230  | 810  | 95.9   | 0.83           | 820                                 | 709 | 95.9   | 0.81           | 410                                 | 564 | 95.5   | 0.72           |
| 1RN6 502-8...                  | 1380  | 811  | 96.0   | 0.82           | 920                                 | 709 | 96.0   | 0.79           | 460                                 | 564 | 95.5   | 0.70           |
| 1RN6 504-8...                  | 1538  | 811  | 96.1   | 0.83           | 1025                                | 709 | 96.1   | 0.81           | 513                                 | 564 | 95.7   | 0.72           |
| 1RN6 506-8...                  | 1725  | 811  | 96.2   | 0.83           | 1150                                | 709 | 96.1   | 0.80           | 575                                 | 564 | 95.6   | 0.71           |
| 1RN6 560-8...                  | 1988  | 811  | 96.6   | 0.84           | 1325                                | 709 | 96.7   | 0.83           | 663                                 | 564 | 96.5   | 0.75           |
| 1RN6 562-8...                  | 2250  | 810  | 96.7   | 0.85           | 1500                                | 709 | 96.8   | 0.83           | 750                                 | 564 | 96.7   | 0.77           |
| 1RN6 564-8...                  | 2475  | 811  | 96.8   | 0.85           | 1650                                | 709 | 96.9   | 0.84           | 825                                 | 564 | 96.8   | 0.77           |
| 1RN6 566-8...                  | 2625  | 811  | 96.9   | 0.85           | 1750                                | 709 | 97.0   | 0.83           | 875                                 | 564 | 96.8   | 0.76           |

## Motors for converter operation

Converter with non-sinusoidal output

### Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Selection and ordering data

| Rated power<br><b>IEC</b>     |                               | High voltage motor<br><b>SIMOTICS HV M (modular)</b> | Operating values at rated output for utilization 130 (B) |             |                       |                          |                          |  |                       |                                      |
|-------------------------------|-------------------------------|--|--|-------------|-----------------------|--------------------------|--------------------------|--|-----------------------|--------------------------------------|
| $P_{\text{rated}}$<br>155 (F) | $P_{\text{rated}}$<br>130 (B) |  | Rated speed  | Efficiency  | Power factor          | Rated current at 4.16 kV | Rated torque             | Break-down torque                      | Moment of inertia     | Mechanical speed limit <sup>1)</sup> |
| kW                            | kW                            | Article No.  | $n_{\text{rated}}$<br>rpm                                | $\eta$<br>% | $\cos \varphi$<br>[-] | $I_{\text{rated}}$<br>A  | $T_{\text{rated}}$<br>Nm | $T_{\text{B}}/T_{\text{rated}}$<br>[-] | J<br>kgm <sup>2</sup> | $n_{\text{max}}$<br>rpm              |
| <b>3.4 ... 4.16 kV, 60 Hz</b> |                               |  |  |             |                       |                          |                          |  |                       |                                      |
| 2-pole                        |                               |  |  |             |                       |                          |                          |  |                       |                                      |
| 11660                         | 10600                         | <b>1RN7 710-2 ■ ■ 30-0CJ0</b>                        | 3585   | 97.3        | 0.91                  | 1660                     | 28235                    | 2.05                                   | 148                   | 3600                                 |
| 12980                         | 11800                         | <b>1RN7 712-2 ■ ■ 30-0CJ0</b>                        | 3586   | 97.4        | 0.91                  | 1840                     | 31423                    | 2.05                                   | 158                   | 3600                                 |
| 14300                         | 13000                         | <b>1RN7 714-2 ■ ■ 30-0CJ0</b>                        | 3586   | 97.5        | 0.93                  | 1980                     | 34618                    | 2.25                                   | 175                   | 3600                                 |
| 15070                         | 13700                         | <b>1RN7 716-2 ■ ■ 30-0CJ0</b>                        | 3586   | 97.5        | 0.93                  | 2100                     | 36482                    | 2.25                                   | 189                   | 3600                                 |
| 4-pole                        |                               |  |  |             |                       |                          |                          |  |                       |                                      |
| 10976                         | 9800                          | <b>1RN7 710-4 ■ ■ 30-0CJ0</b>                        | 1791   | 97.6        | 0.90                  | 1540                     | 52252                    | 2.15                                   | 262                   | 1800                                 |
| 12208                         | 10900                         | <b>1RN7 712-4 ■ ■ 30-0CJ0</b>                        | 1792   | 97.6        | 0.90                  | 1720                     | 58084                    | 2.15                                   | 286                   | 1800                                 |
| 13552                         | 12100                         | <b>1RN7 714-4 ■ ■ 30-0CJ0</b>                        | 1792   | 97.7        | 0.91                  | 1880                     | 64479                    | 2.35                                   | 321                   | 1800                                 |
| 15120                         | 13500                         | <b>1RN7 716-4 ■ ■ 30-0CJ0</b>                        | 1792   | 97.8        | 0.91                  | 2100                     | 71939                    | 2.35                                   | 362                   | 1800                                 |
| 6-pole                        |                               |  |  |             |                       |                          |                          |  |                       |                                      |
| 8400                          | 7500                          | <b>1RN7 710-6 ■ ■ 3-0CJ0</b>                         | 1194   | 97.4        | 0.86                  | 1240                     | 59983                    | 2.15                                   | 350                   | 1800                                 |
| 9296                          | 8300                          | <b>1RN7 712-6 ■ ■ 3-0CJ0</b>                         | 1195   | 97.4        | 0.86                  | 1380                     | 66326                    | 2.20                                   | 396                   | 1800                                 |
| 10304                         | 9200                          | <b>1RN7 714-6 ■ ■ 3-0CJ0</b>                         | 1195   | 97.5        | 0.85                  | 1540                     | 73518                    | 2.35                                   | 448                   | 1800                                 |
| 11480                         | 10250                         | <b>1RN7 716-6 ■ ■ 3-0CJ0</b>                         | 1195   | 97.6        | 0.86                  | 1700                     | 81908                    | 2.35                                   | 496                   | 1800                                 |
| 8-pole                        |                               |  |  |             |                       |                          |                          |  |                       |                                      |
| 5936                          | 5300                          | <b>1RN7 710-8 ■ ■ 3-0CJ0</b>                         | 895  | 97.0        | 0.84                  | 900                      | 56549                    | 2.05                                   | 433                   | 1000                                 |
| 6720                          | 6000                          | <b>1RN7 712-8 ■ ■ 3-0CJ0</b>                         | 895  | 97.1        | 0.85                  | 1000                     | 64018                    | 2.10                                   | 493                   | 1000                                 |
| 7504                          | 6700                          | <b>1RN7 714-8 ■ ■ 3-0CJ0</b>                         | 895  | 97.3        | 0.86                  | 1120                     | 71486                    | 2.10                                   | 558                   | 1000                                 |
| 8400                          | 7500                          | <b>1RN7 716-8 ■ ■ 3-0CJ0</b>                         | 896  | 97.3        | 0.86                  | 1240                     | 79933                    | 2.10                                   | 616                   | 1000                                 |
| 10-pole                       |                               |  |  |             |                       |                          |                          |  |                       |                                      |
| 4536                          | 4050                          | <b>1RN7 710-3 ■ ■ 3-0CJ0</b>                         | 715  | 96.8        | 0.85                  | 680                      | 54090                    | 2.20                                   | 430                   | 900                                  |
| 4984                          | 4450                          | <b>1RN7 712-3 ■ ■ 3-0CJ0</b>                         | 715  | 96.9        | 0.85                  | 750                      | 59433                    | 2.20                                   | 488                   | 900                                  |
| 5488                          | 4900                          | <b>1RN7 714-3 ■ ■ 3-0CJ0</b>                         | 715  | 96.9        | 0.85                  | 830                      | 65443                    | 2.20                                   | 552                   | 900                                  |
| 6048                          | 5400                          | <b>1RN7 716-3 ■ ■ 3-0CJ0</b>                         | 715  | 97.0        | 0.86                  | 900                      | 72121                    | 2.20                                   | 613                   | 900                                  |

#### Cooling method

See page 1/8

#### Motor for line operation or for converter operation

See page 1/9

#### Type of construction

See page 1/9

#### Housing and bearing version

See page 1/9

#### Note:

The motors for converter operation with non-sinusoidal output have, among other things, a reinforced winding insulation. Additional details see [Page 3/2](#).

Ratings are defined for sinusoidal supply, based on IEC 60034-2-1:2007.

The ratings for converter operation depend on the converter and its settings and cannot be predetermined.

Higher pole numbers are available on request.

<sup>1)</sup> For IM B3, anti-friction bearings.

## Motors for converter operation

### Converter with non-sinusoidal output

#### Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7


| Motor type<br>(repeated)       | Partial load values for square-law torque drive |      |        |                |                                     |      |        |                |                                     |      |        |                |
|--------------------------------|---|------|--------|----------------|-------------------------------------|------|--------|----------------|-------------------------------------|------|--------|----------------|
|                                | $P/P_{\text{rated}}$ 130 (B) = 75 %             |      |        |                | $P/P_{\text{rated}}$ 130 (B) = 50 % |      |        |                | $P/P_{\text{rated}}$ 130 (B) = 25 % |      |        |                |
|                                | $P$   | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$  | $\eta$ | $\cos \varphi$ | $P$                                 | $n$  | $\eta$ | $\cos \varphi$ |
|                                | kW  | rpm  | %      | [-]            | kW                                  | rpm  | %      | [-]            | kW                                  | rpm  | %      | [-]            |
| <b>Square-law torque drive</b> |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| <b>2-pole</b>                  |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RN7 710-2...                  | 7947  | 3258 | 97.2   | 0.92           | 5298                                | 2847 | 97.1   | 0.92           | 2649                                | 2263 | 96.8   | 0.90           |
| 1RN7 712-2...                  | 8850  | 3258 | 97.4   | 0.92           | 5900                                | 2847 | 97.3   | 0.92           | 2949                                | 2263 | 96.9   | 0.90           |
| 1RN7 714-2...                  | 9755  | 3259 | 97.5   | 0.93           | 6503                                | 2848 | 97.3   | 0.93           | 3251                                | 2263 | 97.0   | 0.91           |
| 1RN7 716-2...                  | 10275   | 3259 | 97.5   | 0.94           | 6850                                | 2848 | 97.4   | 0.94           | 3425                                | 2263 | 97.1   | 0.92           |
| <b>4-pole</b>                  |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RN7 710-4...                  | 7353  | 1628 | 97.6   | 0.91           | 4904                                | 1423 | 97.5   | 0.91           | 2455                                | 1131 | 97.2   | 0.88           |
| 1RN7 712-4...                  | 8179  | 1628 | 97.6   | 0.91           | 5454                                | 1423 | 97.5   | 0.91           | 2731                                | 1131 | 97.2   | 0.89           |
| 1RN7 714-4...                  | 9083  | 1629 | 97.7   | 0.91           | 6058                                | 1423 | 97.6   | 0.91           | 3033                                | 1131 | 97.2   | 0.88           |
| 1RN7 716-4...                  | 10135   | 1629 | 97.8   | 0.92           | 6758                                | 1423 | 97.7   | 0.92           | 3384                                | 1131 | 97.3   | 0.89           |
| <b>6-pole</b>                  |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RN7 710-6...                  | 5631  | 1085 | 97.3   | 0.85           | 3756                                | 948  | 97.1   | 0.84           | 1880                                | 754  | 96.6   | 0.77           |
| 1RN7 712-6...                  | 6229  | 1086 | 97.3   | 0.85           | 4154                                | 949  | 97.1   | 0.83           | 2080                                | 754  | 96.5   | 0.75           |
| 1RN7 714-6...                  | 6904  | 1086 | 97.4   | 0.85           | 4604                                | 949  | 97.1   | 0.82           | 2305                                | 754  | 96.5   | 0.74           |
| 1RN7 716-6...                  | 7693  | 1086 | 97.5   | 0.85           | 5130                                | 949  | 97.2   | 0.83           | 2568                                | 754  | 96.7   | 0.75           |
| <b>8-pole</b>                  |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RN7 710-8...                  | 3980  | 814  | 96.9   | 0.84           | 2654                                | 711  | 96.7   | 0.82           | 1329                                | 565  | 96.0   | 0.74           |
| 1RN7 712-8...                  | 4505  | 814  | 97.0   | 0.85           | 3005                                | 711  | 96.8   | 0.83           | 1504                                | 565  | 96.2   | 0.75           |
| 1RN7 714-8...                  | 5031  | 814  | 97.1   | 0.85           | 3356                                | 711  | 97.0   | 0.84           | 1680                                | 565  | 96.4   | 0.76           |
| 1RN7 716-8...                  | 5631  | 814  | 97.2   | 0.85           | 3756                                | 711  | 97.0   | 0.83           | 1880                                | 565  | 96.4   | 0.76           |
| <b>10-pole</b>                 |   |      |        |                |                                     |      |        |                |                                     |      |        |                |
| 1RN7 710-3...                  | 3040  | 650  | 96.6   | 0.83           | 2028                                | 568  | 96.4   | 0.80           | 1016                                | 452  | 95.7   | 0.69           |
| 1RN7 712-3...                  | 3341  | 650  | 96.8   | 0.84           | 2228                                | 568  | 96.5   | 0.80           | 1116                                | 452  | 95.9   | 0.70           |
| 1RN7 714-3...                  | 3678  | 650  | 96.8   | 0.84           | 2454                                | 568  | 96.6   | 0.81           | 1229                                | 452  | 95.9   | 0.71           |
| 1RN7 716-3...                  | 4054  | 650  | 96.9   | 0.85           | 2704                                | 568  | 96.7   | 0.82           | 1355                                | 452  | 96.1   | 0.73           |

## Motors for converter operation

Converter with non-sinusoidal output

Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

### Dimension drawings

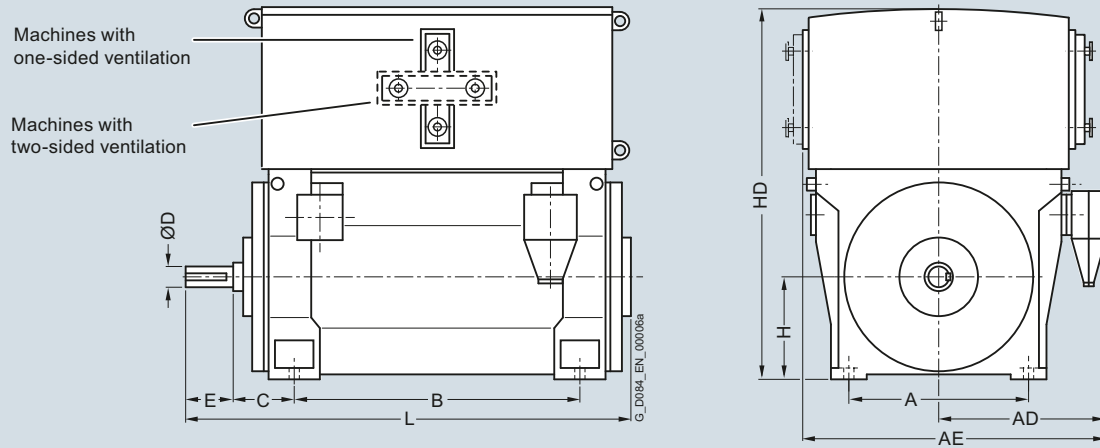

| Motor type  | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |         |
|---|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|---------|
|   |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, anti-friction bearings, IM B3 type of construction</b> |              |            |                        |                        |         |         |         |         |         |          |         |
| <b>2-pole</b>   |              |            |                        |                        |         |         |         |         |         |          |         |
| 1RN6450-2H..0 <sup>2)</sup>   | 4050         | 850        | 930                    | 1620                   | 1180    | 280     | 95      | 130     | 450     | 1653     | 1843    |
| 1RN6452-2H..0 <sup>2)</sup>   | 4250         | 850        | 930                    | 1620                   | 1180    | 280     | 95      | 130     | 450     | 1653     | 1843    |
| 1RN6454-2H..0 <sup>2)</sup>   | 4550         | 850        | 930                    | 1620                   | 1400    | 280     | 95      | 130     | 450     | 1653     | 2053    |
| 1RN6456-2H..0 <sup>2)</sup>   | 4850         | 850        | 930                    | 1620                   | 1400    | 280     | 95      | 130     | 450     | 1653     | 2053    |
| 1RN6500-2H..0 <sup>2)</sup>   | 5850         | 950        | 1135                   | 1835                   | 1320    | 315     | 110     | 165     | 500     | 1980     | 2150    |
| 1RN6502-2H..0 <sup>2)</sup>   | 6000         | 950        | 1135                   | 1835                   | 1320    | 315     | 110     | 165     | 500     | 1980     | 2150    |
| <b>4-pole</b>   |              |            |                        |                        |         |         |         |         |         |          |         |
| 1RN6450-4H..0   | 4350         | 850        | 930                    | 1620                   | 1180    | 250     | 130     | 200     | 450     | 1684     | 1896    |
| 1RN6452-4H..0   | 4600         | 850        | 930                    | 1620                   | 1180    | 250     | 130     | 200     | 450     | 1684     | 1896    |
| 1RN6454-4H..0   | 4950         | 850        | 930                    | 1620                   | 1400    | 250     | 130     | 200     | 450     | 1684     | 2106    |
| 1RN6456-4H..0   | 5250         | 850        | 930                    | 1620                   | 1400    | 250     | 130     | 200     | 450     | 1684     | 2106    |
| 1RN6500-4H..0   | 6350         | 950        | 1135                   | 1835                   | 1320    | 280     | 150     | 200     | 500     | 1980     | 2150    |
| 1RN6502-4H..0   | 6550         | 950        | 1135                   | 1835                   | 1320    | 280     | 150     | 200     | 500     | 1980     | 2150    |
| 1RN6504-4H..0   | 7200         | 950        | 1135                   | 1835                   | 1500    | 280     | 150     | 200     | 500     | 1980     | 2300    |
| 1RN6506-4H..0   | 7500         | 950        | 1135                   | 1835                   | 1500    | 280     | 150     | 200     | 500     | 1980     | 2300    |
| 1RN6560-4H..0   | 7600         | 1060       | 1205                   | 1975                   | 1400    | 315     | 170     | 240     | 560     | 2150     | 2300    |
| 1RN6562-4H..0   | 8000         | 1060       | 1205                   | 1975                   | 1400    | 315     | 170     | 240     | 560     | 2150     | 2300    |
| 1RN6564-4H..0   | 8900         | 1060       | 1205                   | 1975                   | 1600    | 315     | 170     | 240     | 560     | 2150     | 2550    |
| 1RN6566-4H..0   | 9400         | 1060       | 1205                   | 1975                   | 1600    | 315     | 170     | 240     | 560     | 2150     | 2550    |
| 1RN4630-4H..0 <sup>2)</sup>   | 10400        | 1320       | 1330                   | 2290                   | 1600    | 335     | 200     | 280     | 630     | 2400     | 2500    |
| 1RN4632-4H..0 <sup>2)</sup>   | 11100        | 1320       | 1330                   | 2290                   | 1600    | 335     | 200     | 280     | 630     | 2400     | 2500    |
| 1RN4634-4H..0 <sup>2)</sup>   | 12150        | 1320       | 1330                   | 2290                   | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |
| 1RN4636-4H..0 <sup>2)</sup>   | 12700        | 1320       | 1330                   | 2290                   | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |
| <b>6-pole</b>   |              |            |                        |                        |         |         |         |         |         |          |         |
| 1RN6450-6H..0   | 4450         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1684     | 1896    |
| 1RN6452-6H..0   | 4750         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1684     | 1896    |
| 1RN6454-6H..0   | 5100         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1684     | 2136    |
| 1RN6456-6H..0   | 5450         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1684     | 2136    |

<sup>1)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.


<sup>2)</sup> Anti-friction bearings only for 50 Hz version.

## Motors for converter operation

### Converter with non-sinusoidal output

Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Dimension drawings (continued)

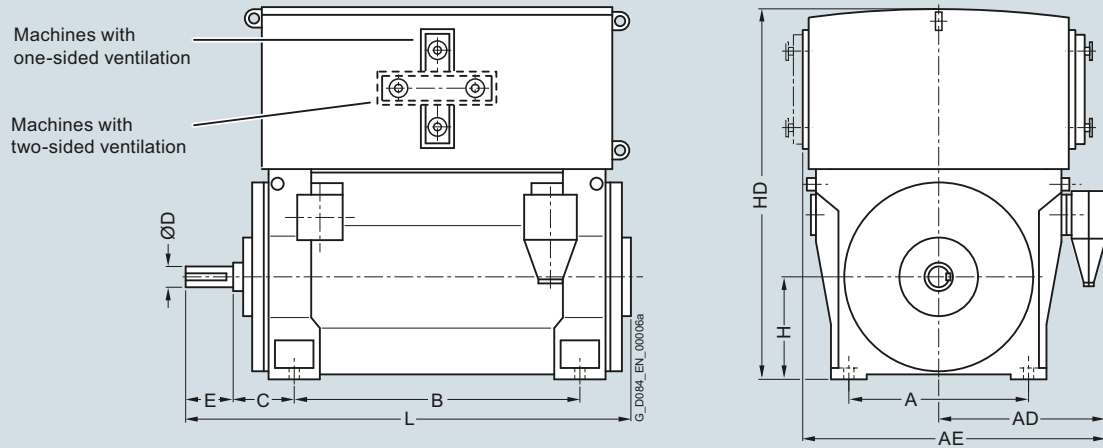

| Motor type  | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |         |
|---|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|---------|
|   |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, anti-friction bearings, IM B3 type of construction</b> |              |            |                        |                        |         |         |         |         |         |          |         |
| <b>6-pole</b>   |              |            |                        |                        |         |         |         |         |         |          |         |
| 1RN6500-6H..0   | 6400         | 950        | 1135                   | 1835                   | 1320    | 315     | 160     | 240     | 500     | 1960     | 2150    |
| 1RN6502-6H..0   | 6650         | 950        | 1135                   | 1835                   | 1320    | 315     | 160     | 240     | 500     | 1960     | 2150    |
| 1RN6504-6H..0   | 7250         | 950        | 1135                   | 1835                   | 1500    | 315     | 160     | 240     | 500     | 1960     | 2360    |
| 1RN6506-6H..0   | 7650         | 950        | 1135                   | 1835                   | 1500    | 315     | 160     | 240     | 500     | 1960     | 2360    |
| 1RN6560-6H..0   | 8600         | 1060       | 1205                   | 1975                   | 1400    | 315     | 180     | 240     | 560     | 2180     | 2300    |
| 1RN6562-6H..0   | 9000         | 1060       | 1205                   | 1975                   | 1400    | 315     | 180     | 240     | 560     | 2180     | 2300    |
| 1RN6564-6H..0   | 9850         | 1060       | 1205                   | 1975                   | 1600    | 315     | 180     | 240     | 560     | 2180     | 2550    |
| 1RN6566-6H..0   | 10400        | 1060       | 1205                   | 1975                   | 1600    | 315     | 180     | 240     | 560     | 2180     | 2550    |
| 1RN4630-6H..0   | 10650        | 1320       | 1330                   | 2290                   | 1600    | 335     | 220     | 280     | 630     | 2400     | 2500    |
| 1RN4632-6H..0   | 11200        | 1320       | 1330                   | 2290                   | 1600    | 335     | 220     | 280     | 630     | 2400     | 2500    |
| 1RN4634-6H..0   | 12300        | 1320       | 1330                   | 2290                   | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |
| 1RN4636-6H..0   | 13000        | 1320       | 1330                   | 2290                   | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |
| <b>8-pole</b>   |              |            |                        |                        |         |         |         |         |         |          |         |
| 1RN6450-8H..0   | 4450         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1684     | 1896    |
| 1RN6452-8H..0   | 4750         | 850        | 930                    | 1620                   | 1180    | 250     | 140     | 200     | 450     | 1684     | 1896    |
| 1RN6454-8H..0   | 5150         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1684     | 2136    |
| 1RN6456-8H..0   | 5450         | 850        | 930                    | 1620                   | 1400    | 280     | 140     | 200     | 450     | 1684     | 2136    |
| 1RN6500-8H..0   | 6350         | 950        | 1135                   | 1835                   | 1320    | 315     | 160     | 240     | 500     | 1960     | 2150    |
| 1RN6502-8H..0   | 6600         | 950        | 1135                   | 1835                   | 1320    | 315     | 160     | 240     | 500     | 1960     | 2150    |
| 1RN6504-8H..0   | 7250         | 950        | 1135                   | 1835                   | 1500    | 315     | 160     | 240     | 500     | 1960     | 2360    |
| 1RN6506-8H..0   | 7600         | 950        | 1135                   | 1835                   | 1500    | 315     | 160     | 240     | 500     | 1960     | 2360    |
| 1RN6560-8H..0   | 8550         | 1060       | 1205                   | 1975                   | 1400    | 315     | 180     | 240     | 560     | 2180     | 2300    |
| 1RN6562-8H..0   | 9000         | 1060       | 1205                   | 1975                   | 1400    | 315     | 180     | 240     | 560     | 2180     | 2300    |
| 1RN6564-8H..0   | 9800         | 1060       | 1205                   | 1975                   | 1600    | 315     | 180     | 240     | 560     | 2180     | 2550    |
| 1RN6566-8H..0   | 10350        | 1060       | 1205                   | 1975                   | 1600    | 315     | 180     | 240     | 560     | 2180     | 2550    |
| 1RN4630-8H..0   | 10600        | 1320       | 1330                   | 2290                   | 1600    | 335     | 220     | 280     | 630     | 2400     | 2500    |
| 1RN4632-8H..0   | 11200        | 1320       | 1330                   | 2290                   | 1600    | 335     | 220     | 280     | 630     | 2400     | 2500    |
| 1RN4634-8H..0   | 12150        | 1320       | 1330                   | 2290                   | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |
| 1RN4636-8H..0   | 12900        | 1320       | 1330                   | 2290                   | 1800    | 335     | 220     | 280     | 630     | 2400     | 2740    |

#### Note:

Higher pole numbers are available on request.


<sup>1)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.

## Motors for converter operation

Converter with non-sinusoidal output

Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

### Dimension drawings

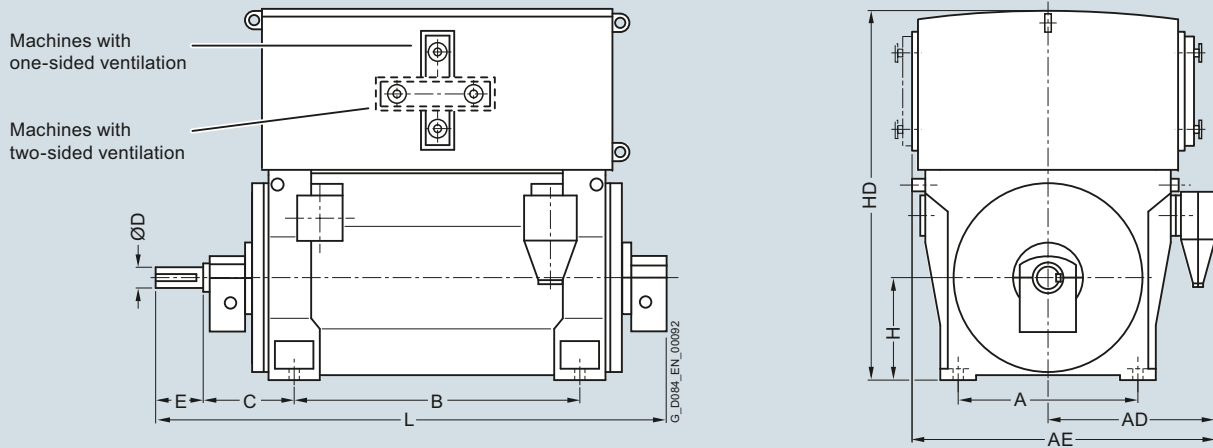

| Motor type | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |         |
|------------|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|---------|
|            |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |

#### Up to 6.6 kV, sleeve bearings, IM B3 type of construction

2-pole

|                                   |      |      |      |      |      |     |     |     |     |      |      |
|-----------------------------------|------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RN6450-2H..0-Z K96               | 4050 | 850  | 930  | 1620 | 1180 | 425 | 95  | 130 | 450 | 1653 | 2218 |
| 1RN6452-2H..0-Z K96               | 4300 | 850  | 930  | 1620 | 1180 | 425 | 95  | 130 | 450 | 1653 | 2218 |
| 1RN6454-2H..0-Z K96               | 4600 | 850  | 930  | 1620 | 1400 | 425 | 95  | 130 | 450 | 1653 | 2428 |
| 1RN6456-2H..0-Z K96               | 4900 | 850  | 930  | 1620 | 1400 | 425 | 95  | 130 | 450 | 1653 | 2428 |
| 1RN6500-2H..0-Z K96 <sup>2)</sup> | 5900 | 950  | 1135 | 1835 | 1320 | 450 | 110 | 165 | 500 | 1980 | 2500 |
| 1RN6502-2H..0-Z K96 <sup>2)</sup> | 6050 | 950  | 1135 | 1835 | 1320 | 450 | 110 | 165 | 500 | 1980 | 2500 |
| 1RN6504-2H..0                     | 6850 | 950  | 1135 | 1835 | 1500 | 450 | 110 | 165 | 500 | 1980 | 2650 |
| 1RN6506-2H..0                     | 7100 | 950  | 1135 | 1835 | 1500 | 450 | 110 | 165 | 500 | 1980 | 2650 |
| 1RN6560-2H..0                     | 7600 | 1060 | 1205 | 1975 | 1400 | 600 | 130 | 200 | 560 | 2150 | 2850 |
| 1RN6562-2H..0                     | 8000 | 1060 | 1205 | 1975 | 1400 | 600 | 130 | 200 | 560 | 2150 | 2850 |
| 1RN6564-2H..0                     | 8900 | 1060 | 1205 | 1975 | 1600 | 600 | 130 | 200 | 560 | 2150 | 3100 |
| 1RN6566-2H..0                     | 9350 | 1060 | 1205 | 1975 | 1600 | 600 | 130 | 200 | 560 | 2150 | 3100 |

<sup>1)</sup> For  $V_{rated} \geq 2.0$  kV and current  $I_{rated} > 315$  A, the dimension changes by + 140 mm.

<sup>2)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.




## Motors for converter operation

### Converter with non-sinusoidal output

Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Dimension drawings (continued)

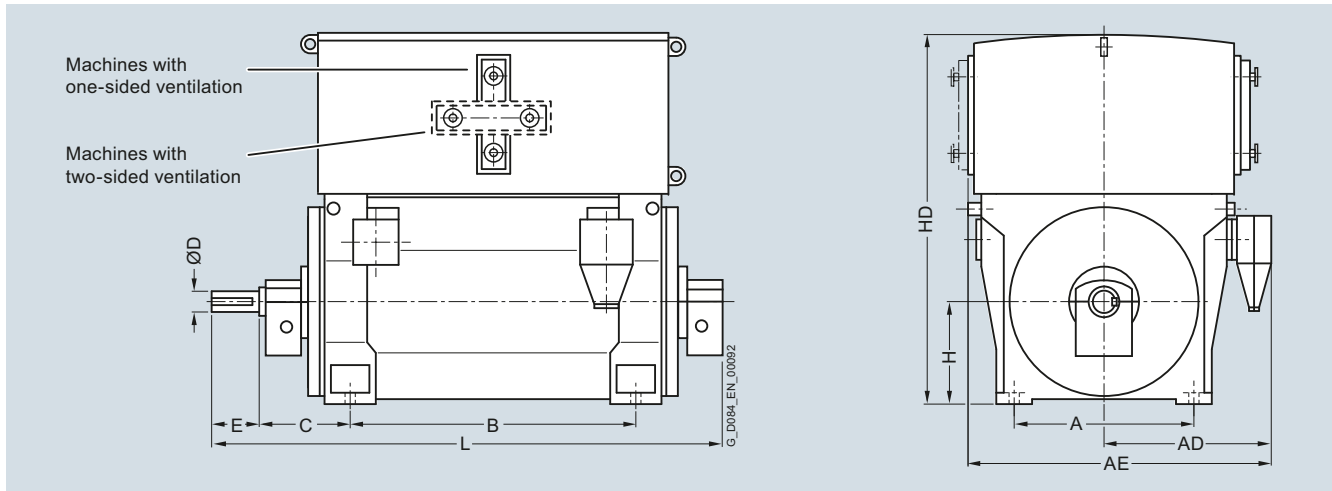

| Motor type   | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |         |
|--|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, sleeve bearings, IM B3 type of construction</b> |              |            |                        |                        |         |         |         |         |         |          |         |
| 4-pole   |              |            |                        |                        |         |         |         |         |         |          |         |
| 1RN6450-4H..0-Z K96  | 4400         | 850        | 930                    | 1620                   | 1180    | 500     | 130     | 200     | 450     | 1684     | 2438    |
| 1RN6452-4H..0-Z K96  | 4650         | 850        | 930                    | 1620                   | 1180    | 500     | 130     | 200     | 450     | 1684     | 2438    |
| 1RN6454-4H..0-Z K96  | 5050         | 850        | 930                    | 1620                   | 1400    | 500     | 130     | 200     | 450     | 1684     | 2648    |
| 1RN6456-4H..0-Z K96  | 5350         | 850        | 930                    | 1620                   | 1400    | 500     | 130     | 200     | 450     | 1684     | 2648    |
| 1RN6500-4H..0-Z K96  | 6650         | 950        | 1135                   | 1835                   | 1320    | 560     | 150     | 200     | 500     | 1980     | 2700    |
| 1RN6502-4H..0-Z K96  | 6850         | 950        | 1135                   | 1835                   | 1320    | 560     | 150     | 200     | 500     | 1980     | 2700    |
| 1RN6504-4H..0-Z K96  | 7550         | 950        | 1135                   | 1835                   | 1500    | 560     | 150     | 200     | 500     | 1980     | 2880    |
| 1RN6506-4H..0-Z K96  | 7850         | 950        | 1135                   | 1835                   | 1500    | 560     | 150     | 200     | 500     | 1980     | 2880    |
| 1RN6560-4H..0-Z K96  | 7800         | 1060       | 1205                   | 1975                   | 1400    | 600     | 170     | 240     | 560     | 2150     | 2900    |
| 1RN6562-4H..0-Z K96  | 8200         | 1060       | 1205                   | 1975                   | 1400    | 600     | 170     | 240     | 560     | 2150     | 2900    |
| 1RN6564-4H..0-Z K96  | 9050         | 1060       | 1205                   | 1975                   | 1600    | 600     | 170     | 240     | 560     | 2150     | 3100    |
| 1RN6566-4H..0-Z K96  | 9600         | 1060       | 1205                   | 1975                   | 1600    | 600     | 170     | 240     | 560     | 2150     | 3100    |
| 1RN4630-4H..0-Z K96 <sup>2)</sup>                                | 10650        | 1320       | 1330                   | 2290                   | 1600    | 600     | 200     | 280     | 630     | 2400     | 2970    |
| 1RN4632-4H..0-Z K96 <sup>2)</sup>                                | 11350        | 1320       | 1330                   | 2290                   | 1600    | 600     | 200     | 280     | 630     | 2400     | 2970    |
| 1RN4634-4H..0-Z K96 <sup>2)</sup>                                | 12400        | 1320       | 1330                   | 2290                   | 1800    | 600     | 220     | 280     | 630     | 2400     | 3210    |
| 1RN4636-4H..0-Z K96 <sup>2)</sup>                                | 13000        | 1320       | 1330                   | 2290                   | 1800    | 600     | 220     | 280     | 630     | 2400     | 3210    |

<sup>1)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.


<sup>2)</sup> For the 60 Hz version, sleeve bearings are standard, "-Z K96" not necessary.

## Motors for converter operation

Converter with non-sinusoidal output

Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

### Dimension drawings (continued)

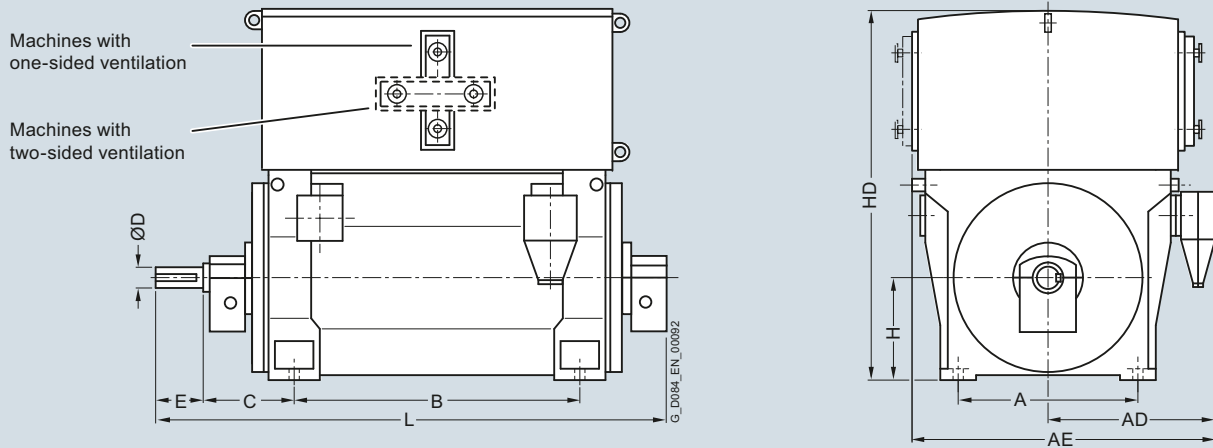

| Motor type | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |         |
|------------|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|---------|
|            |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |

#### Up to 6.6 kV, sleeve bearings, IM B3 type of construction

6-pole

|                     |       |      |      |      |      |     |     |     |     |      |      |
|---------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RN6450-6H..0-Z K96 | 4550  | 850  | 930  | 1620 | 1180 | 500 | 140 | 200 | 450 | 1684 | 2438 |
| 1RN6452-6H..0-Z K96 | 4800  | 850  | 930  | 1620 | 1180 | 500 | 140 | 200 | 450 | 1684 | 2438 |
| 1RN6454-6H..0-Z K96 | 5150  | 850  | 930  | 1620 | 1400 | 500 | 140 | 200 | 450 | 1684 | 2648 |
| 1RN6456-6H..0-Z K96 | 5500  | 850  | 930  | 1620 | 1400 | 500 | 140 | 200 | 450 | 1684 | 2648 |
| 1RN6500-6H..0-Z K96 | 6550  | 950  | 1135 | 1835 | 1320 | 560 | 170 | 240 | 500 | 1960 | 2700 |
| 1RN6502-6H..0-Z K96 | 6850  | 950  | 1135 | 1835 | 1320 | 560 | 170 | 240 | 500 | 1960 | 2700 |
| 1RN6504-6H..0-Z K96 | 7450  | 950  | 1135 | 1835 | 1500 | 560 | 170 | 240 | 500 | 1960 | 2900 |
| 1RN6506-6H..0-Z K96 | 7850  | 950  | 1135 | 1835 | 1500 | 560 | 170 | 240 | 500 | 1960 | 2900 |
| 1RN6560-6H..0-Z K96 | 8850  | 1060 | 1205 | 1975 | 1400 | 600 | 170 | 240 | 560 | 2200 | 2950 |
| 1RN6562-6H..0-Z K96 | 9250  | 1060 | 1205 | 1975 | 1400 | 600 | 170 | 240 | 560 | 2200 | 2950 |
| 1RN6564-6H..0-Z K96 | 10100 | 1060 | 1205 | 1975 | 1600 | 600 | 170 | 240 | 560 | 2200 | 3150 |
| 1RN6566-6H..0-Z K96 | 10650 | 1060 | 1205 | 1975 | 1600 | 600 | 170 | 240 | 560 | 2200 | 3150 |
| 1RN4630-6H..0-Z K96 | 10950 | 1320 | 1330 | 2290 | 1600 | 600 | 220 | 280 | 630 | 2400 | 2970 |
| 1RN4632-6H..0-Z K96 | 11500 | 1320 | 1330 | 2290 | 1600 | 600 | 220 | 280 | 630 | 2400 | 2970 |
| 1RN4634-6H..0-Z K96 | 12550 | 1320 | 1330 | 2290 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |
| 1RN4636-6H..0-Z K96 | 13300 | 1320 | 1330 | 2290 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |


<sup>1)</sup> For  $V_{rated} \geq 2.0$  kV and current  $I_{rated} > 315$  A, the dimension changes by + 140 mm.

## Motors for converter operation

### Converter with non-sinusoidal output

Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Dimension drawings (continued)

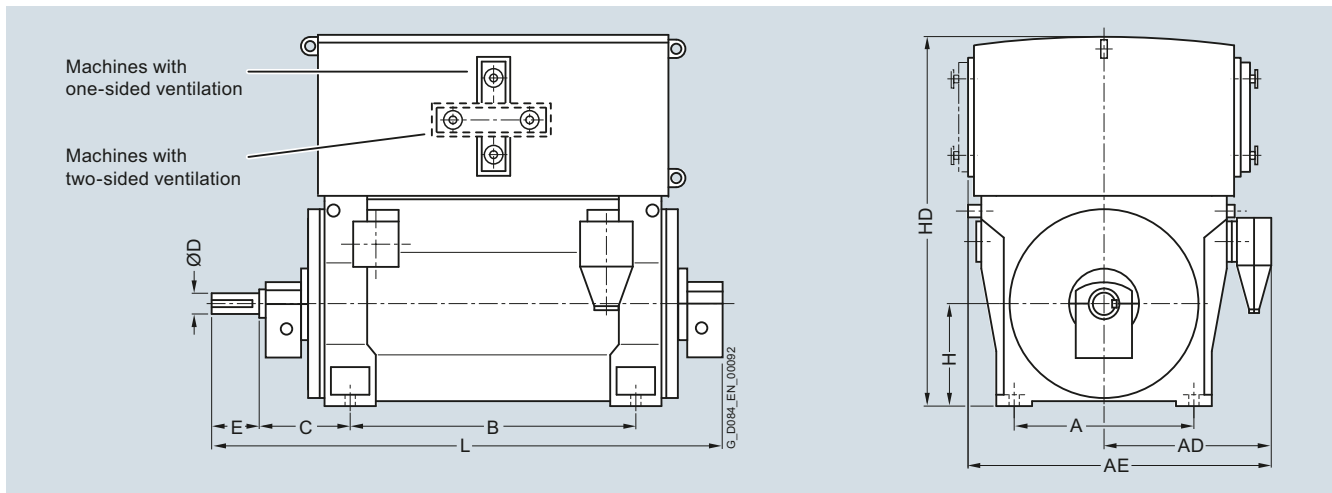

| Motor type | Weight<br>kg | Dimensions |                        |                        |         |         |         |         |         |          |         |
|------------|--------------|------------|------------------------|------------------------|---------|---------|---------|---------|---------|----------|---------|
|            |              | A<br>mm    | AD <sup>1)</sup><br>mm | AE <sup>1)</sup><br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |

#### Up to 6.6 kV, sleeve bearings, IM B3 type of construction

8-pole

|                     |       |      |      |      |      |     |     |     |     |      |      |
|---------------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RN6450-8H..0-Z K96 | 4550  | 850  | 930  | 1620 | 1180 | 500 | 140 | 200 | 450 | 1684 | 2438 |
| 1RN6452-8H..0-Z K96 | 4850  | 850  | 930  | 1620 | 1180 | 500 | 140 | 200 | 450 | 1684 | 2438 |
| 1RN6454-8H..0-Z K96 | 5200  | 850  | 930  | 1620 | 1400 | 500 | 140 | 200 | 450 | 1684 | 2648 |
| 1RN6456-8H..0-Z K96 | 5550  | 850  | 930  | 1620 | 1400 | 500 | 140 | 200 | 450 | 1684 | 2648 |
| 1RN6500-8H..0-Z K96 | 6500  | 950  | 1135 | 1835 | 1320 | 560 | 170 | 240 | 500 | 1960 | 2700 |
| 1RN6502-8H..0-Z K96 | 6800  | 950  | 1135 | 1835 | 1320 | 560 | 170 | 240 | 500 | 1960 | 2700 |
| 1RN6504-8H..0-Z K96 | 7400  | 950  | 1135 | 1835 | 1500 | 560 | 170 | 240 | 500 | 1960 | 2900 |
| 1RN6506-8H..0-Z K96 | 7800  | 950  | 1135 | 1835 | 1500 | 560 | 170 | 240 | 500 | 1960 | 2900 |
| 1RN6560-8H..0-Z K96 | 8800  | 1060 | 1205 | 1975 | 1400 | 600 | 170 | 240 | 560 | 2200 | 2950 |
| 1RN6562-8H..0-Z K96 | 9250  | 1060 | 1205 | 1975 | 1400 | 600 | 170 | 240 | 560 | 2200 | 2950 |
| 1RN6564-8H..0-Z K96 | 10050 | 1060 | 1205 | 1975 | 1600 | 600 | 170 | 240 | 560 | 2200 | 3150 |
| 1RN6566-8H..0-Z K96 | 10600 | 1060 | 1205 | 1975 | 1600 | 600 | 170 | 240 | 560 | 2200 | 3150 |
| 1RN4630-8H..0-Z K96 | 10850 | 1320 | 1330 | 2290 | 1600 | 600 | 220 | 280 | 630 | 2400 | 2970 |
| 1RN4632-8H..0-Z K96 | 11500 | 1320 | 1330 | 2290 | 1600 | 600 | 220 | 280 | 630 | 2400 | 2970 |
| 1RN4634-8H..0-Z K96 | 12450 | 1320 | 1330 | 2290 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |
| 1RN4636-8H..0-Z K96 | 13150 | 1320 | 1330 | 2290 | 1800 | 600 | 220 | 280 | 630 | 2400 | 3210 |

#### Note:

Higher pole numbers are available on request.


<sup>1)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.

## Motors for converter operation

Converter with non-sinusoidal output

Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

### Dimension drawings

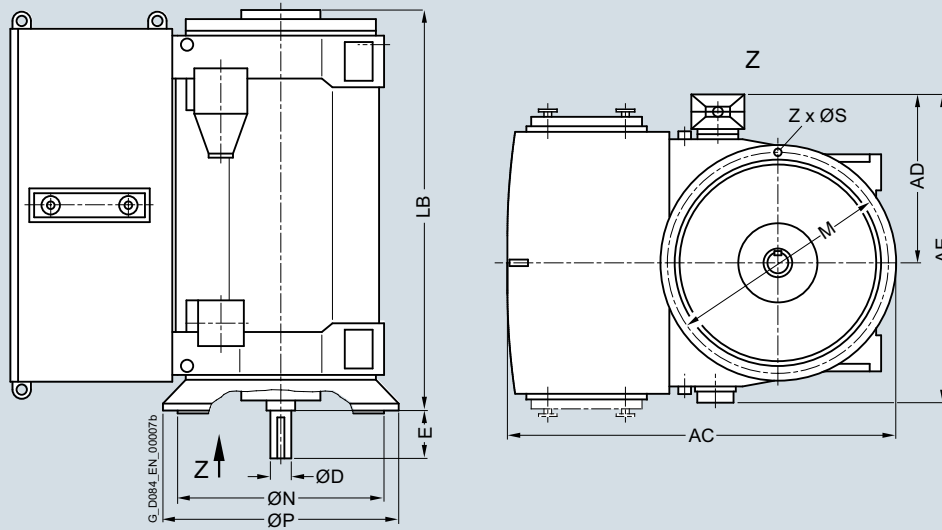

| Motor type  | Weight<br>kg | Dimensions |                  |                  |     |     |      |      |      |      |    |    |
|---|--------------|------------|------------------|------------------|-----|-----|------|------|------|------|----|----|
|   |              | AC         | AD <sup>1)</sup> | AE <sup>1)</sup> | D   | E   | LB   | P    | N    | M    | S  | Z  |
| <b>Up to 6.6 kV, anti-friction bearings, IM V1 type of construction</b> |              |            |                  |                  |     |     |      |      |      |      |    |    |
| <b>4-pole</b>   |              |            |                  |                  |     |     |      |      |      |      |    |    |
| 1RN6450-4H..8   | 4550         | 1809       | 930              | 1620             | 130 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RN6452-4H..8   | 4750         | 1809       | 930              | 1620             | 130 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RN6454-4H..8   | 5150         | 1809       | 930              | 1620             | 130 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RN6456-4H..8   | 5450         | 1809       | 930              | 1620             | 130 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RN6500-4H..8   | 5500         | 1960       | 1000             | 1810             | 150 | 200 | 1910 | 1250 | 1120 | 1180 | 26 | 8  |
| 1RN6502-4H..8   | 5700         | 1960       | 1000             | 1810             | 150 | 200 | 1910 | 1250 | 1120 | 1180 | 26 | 8  |
| 1RN6504-4H..8   | 6400         | 1960       | 1000             | 1810             | 160 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8  |
| 1RN6506-4H..8   | 6800         | 1960       | 1000             | 1810             | 160 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8  |
| 1RN6560-4H..8   | 7550         | 2180       | 1210             | 2100             | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RN6562-4H..8 <sup>2)</sup>   | 8000         | 2180       | 1210             | 2100             | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RN6564-4H..8 <sup>2)</sup>   | 8900         | 2180       | 1210             | 2100             | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RN6566-4H..8 <sup>2)</sup>   | 9350         | 2180       | 1210             | 2100             | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RN4630-4H..8 <sup>2)</sup>   | 12050        | 2875       | 1330             | 2300             | 200 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RN4632-4H..8 <sup>2)</sup>   | 12750        | 2875       | 1330             | 2300             | 200 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RN4634-4H..8 <sup>2)</sup>   | 13800        | 2875       | 1330             | 2300             | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RN4636-4H..8 <sup>2)</sup>   | 14350        | 2875       | 1330             | 2300             | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 16 |
| <b>6-pole</b>   |              |            |                  |                  |     |     |      |      |      |      |    |    |
| 1RN6450-6H..8   | 4650         | 1809       | 930              | 1620             | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RN6452-6H..8   | 4950         | 1809       | 930              | 1620             | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RN6454-6H..8   | 5300         | 1809       | 930              | 1620             | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RN6456-6H..8   | 5650         | 1809       | 930              | 1620             | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RN6500-6H..8   | 5650         | 1960       | 1000             | 1810             | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 8  |
| 1RN6502-6H..8   | 6050         | 1960       | 1000             | 1810             | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 8  |
| 1RN6504-6H..8   | 6550         | 1960       | 1000             | 1810             | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8  |
| 1RN6506-6H..8   | 6950         | 1960       | 1000             | 1810             | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8  |

<sup>1)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.


<sup>2)</sup> Only in the 50 Hz version.

## Motors for converter operation

### Converter with non-sinusoidal output

Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Dimension drawings (continued)

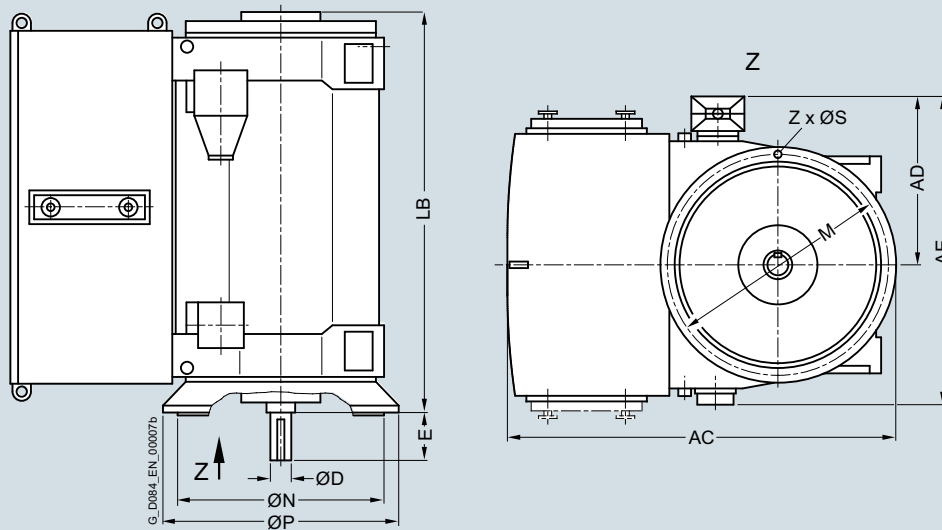

| Motor type   | Weight<br>kg | Dimensions |                  |                  |     |     |      |      |      |      |    |    |
|--|--------------|------------|------------------|------------------|-----|-----|------|------|------|------|----|----|
|  |              | AC         | AD <sup>1)</sup> | AE <sup>1)</sup> | D   | E   | LB   | P    | N    | M    | S  | Z  |
| Up to 6.6 kV, anti-friction bearings, IM V1 type of construction |              |            |                  |                  |     |     |      |      |      |      |    |    |
| 6-pole   |              |            |                  |                  |     |     |      |      |      |      |    |    |
| 1RN6560-6H..8  | 7650         | 2180       | 1210             | 2100             | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RN6562-6H..8  | 8250         | 2180       | 1210             | 2100             | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RN6564-6H..8  | 9100         | 2180       | 1210             | 2100             | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RN6566-6H..8  | 9550         | 2180       | 1210             | 2100             | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RN4630-6H..8  | 12300        | 2875       | 1330             | 2300             | 220 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RN4632-6H..8  | 12850        | 2875       | 1330             | 2300             | 220 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RN4634-6H..8  | 13950        | 2875       | 1330             | 2300             | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RN4636-6H..8  | 14650        | 2875       | 1330             | 2300             | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 16 |
| 8-pole   |              |            |                  |                  |     |     |      |      |      |      |    |    |
| 1RN6450-8H..8  | 4650         | 1809       | 930              | 1620             | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RN6452-8H..8  | 4950         | 1809       | 930              | 1620             | 140 | 200 | 1720 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RN6454-8H..8  | 5350         | 1809       | 930              | 1620             | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RN6456-8H..8  | 5650         | 1809       | 930              | 1620             | 140 | 200 | 1930 | 1150 | 1000 | 1080 | 26 | 8  |
| 1RN6500-8H..8  | 5700         | 1960       | 1000             | 1810             | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 8  |
| 1RN6502-8H..8  | 6050         | 1960       | 1000             | 1810             | 160 | 240 | 1910 | 1250 | 1120 | 1180 | 26 | 8  |
| 1RN6504-8H..8  | 6550         | 1960       | 1000             | 1810             | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8  |
| 1RN6506-8H..8  | 6950         | 1960       | 1000             | 1810             | 170 | 240 | 2120 | 1250 | 1120 | 1180 | 26 | 8  |
| 1RN6560-8H..8  | 7650         | 2180       | 1070             | 1960             | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RN6562-8H..8  | 8150         | 2180       | 1070             | 1960             | 180 | 240 | 2090 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RN6564-8H..8  | 9000         | 2180       | 1070             | 1960             | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RN6566-8H..8  | 9450         | 2180       | 1070             | 1960             | 190 | 280 | 2320 | 1400 | 1250 | 1320 | 26 | 16 |
| 1RN4630-8H..8  | 12250        | 2875       | 1330             | 2300             | 220 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RN4632-8H..8  | 12850        | 2875       | 1330             | 2300             | 220 | 280 | 2400 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RN4634-8H..8  | 13800        | 2875       | 1330             | 2300             | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 16 |
| 1RN4636-8H..8  | 14550        | 2875       | 1330             | 2300             | 220 | 280 | 2640 | 2000 | 1800 | 1900 | 33 | 16 |

#### Note:


Higher pole numbers are available on request.

## Motors for converter operation

Converter with non-sinusoidal output

Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

### Dimension drawings

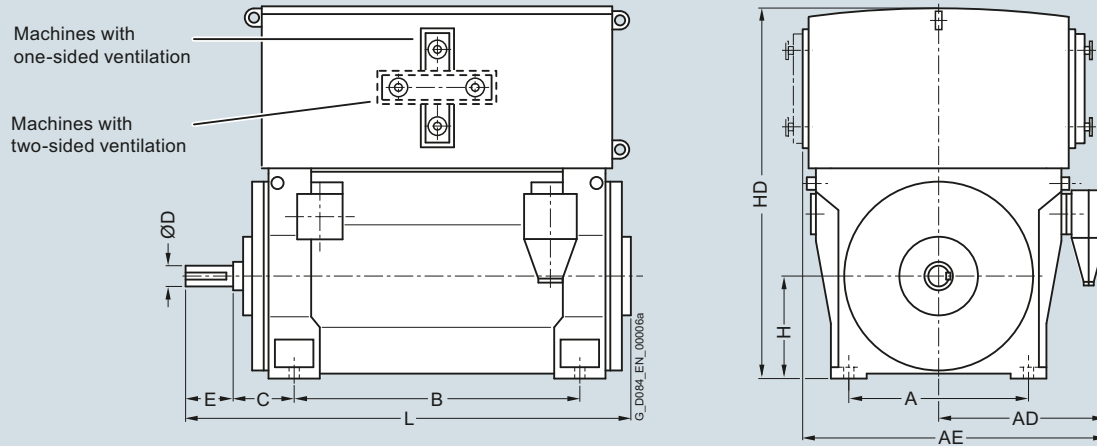

| Motor type | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|------------|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|            |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |

#### Up to 6.6 kV, IM B3 type of construction, anti-friction bearings – 1RN7 series – IC81W

##### 4-pole

|            |       |      |      |      |      |     |     |     |     |      |      |
|------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RN7 710-4 | 15700 | 1500 | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | 2570 | 3070 |
| 1RN7 712-4 | 16300 | 1500 | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | 2570 | 3070 |
| 1RN7 714-4 | 17700 | 1500 | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | 2570 | 3310 |
| 1RN7 716-4 | 18900 | 1500 | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | 2570 | 3310 |

##### 6-pole

|            |       |      |      |      |      |     |     |     |     |      |      |
|------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RN7 710-6 | 16000 | 1500 | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | 2570 | 3070 |
| 1RN7 712-6 | 17000 | 1500 | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | 2570 | 3070 |
| 1RN7 714-6 | 18500 | 1500 | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | 2570 | 3310 |
| 1RN7 716-6 | 19600 | 1500 | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | 2570 | 3310 |

##### 8-pole

|            |       |      |      |      |      |     |     |     |     |      |      |
|------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RN7 710-8 | 15600 | 1500 | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | 2570 | 3070 |
| 1RN7 712-8 | 16500 | 1500 | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | 2570 | 3070 |
| 1RN7 714-8 | 18000 | 1500 | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | 2570 | 3310 |
| 1RN7 716-8 | 19000 | 1500 | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | 2570 | 3310 |

##### 10-pole

|            |       |      |      |      |      |     |     |     |     |      |      |
|------------|-------|------|------|------|------|-----|-----|-----|-----|------|------|
| 1RN7 710-3 | 15600 | 1500 | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | 2570 | 3070 |
| 1RN7 712-3 | 16500 | 1500 | 1800 | 2900 | 2000 | 375 | 220 | 350 | 710 | 2570 | 3070 |
| 1RN7 714-3 | 18000 | 1500 | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | 2570 | 3310 |
| 1RN7 716-3 | 19000 | 1500 | 1800 | 2900 | 2240 | 375 | 220 | 350 | 710 | 2570 | 3310 |

#### Note:


Higher pole numbers are available on request.

## Motors for converter operation

### Converter with non-sinusoidal output

Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Dimension drawings

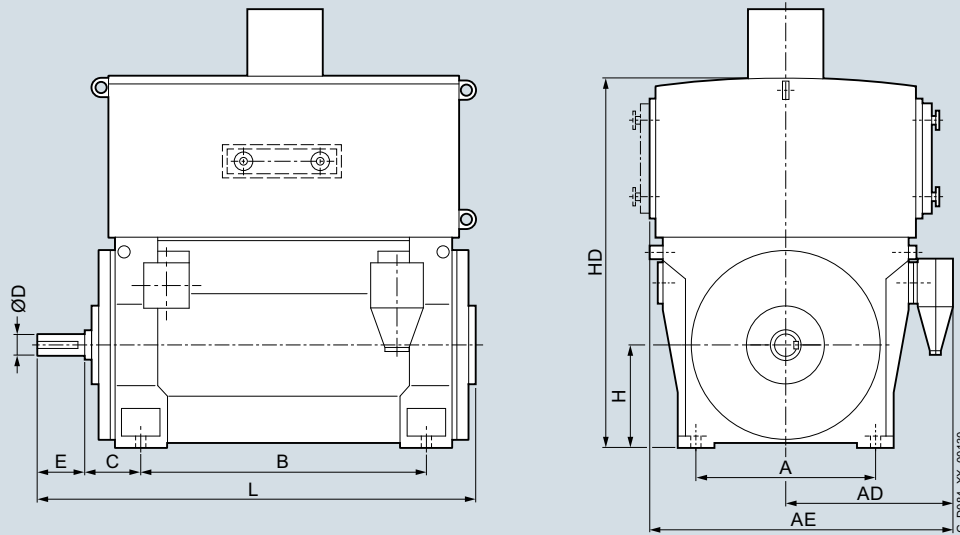

| Motor type  | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |                        |         |
|---|--------------|------------|----------|----------|---------|---------|---------|---------|---------|------------------------|---------|
|   |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD <sup>1)</sup><br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, anti-friction bearings – 1RN7 series – IC86W</b> |              |            |          |          |         |         |         |         |         |                        |         |
| <b>4-pole</b>   |              |            |          |          |         |         |         |         |         |                        |         |
| 1RN7 710-4  | 15400        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2900                   | 3070    |
| 1RN7 712-4  | 16000        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2900                   | 3070    |
| 1RN7 714-4  | 17400        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2900                   | 3310    |
| 1RN7 716-4  | 18600        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2900                   | 3310    |
| <b>6-pole</b>   |              |            |          |          |         |         |         |         |         |                        |         |
| 1RN7 710-6  | 15700        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2900                   | 3070    |
| 1RN7 712-6  | 16800        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2900                   | 3070    |
| 1RN7 714-6  | 18300        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2900                   | 3310    |
| 1RN7 716-6  | 19400        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2900                   | 3310    |
| <b>8-pole</b>   |              |            |          |          |         |         |         |         |         |                        |         |
| 1RN7 710-8  | 15200        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2900                   | 3070    |
| 1RN7 712-8  | 16100        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2900                   | 3070    |
| 1RN7 714-8  | 17600        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2900                   | 3310    |
| 1RN7 716-8  | 18600        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2900                   | 3310    |
| <b>10-pole</b>  |              |            |          |          |         |         |         |         |         |                        |         |
| 1RN7 710-3  | 15200        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2900                   | 3070    |
| 1RN7 712-3  | 16100        | 1500       | 1800     | 2900     | 2000    | 375     | 220     | 350     | 710     | 2900                   | 3070    |
| 1RN7 714-3  | 17600        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2900                   | 3310    |
| 1RN7 716-3  | 18600        | 1500       | 1800     | 2900     | 2240    | 375     | 220     | 350     | 710     | 2900                   | 3310    |

#### Note:

Higher pole numbers are available on request.


<sup>1)</sup> Dimension "HD" without external blower  
(2 ... 6-pole = 600mm / 8-pole + = 500 mm)

## Motors for converter operation

Converter with non-sinusoidal output

Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

### Dimension drawings

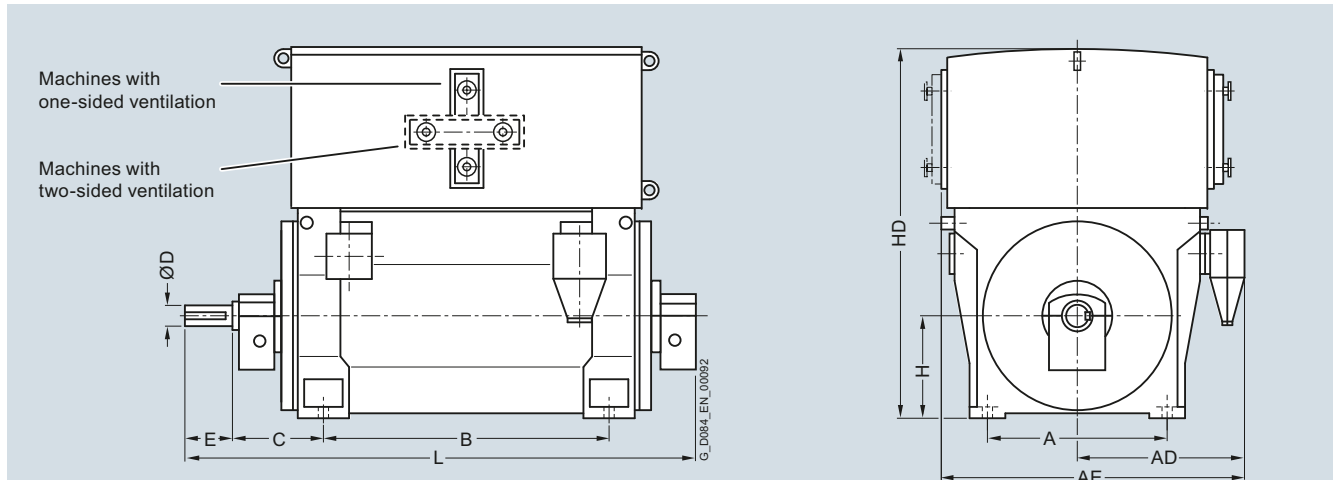

| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|--|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, sleeve bearings – 1RN7 series – IC81W</b> |              |            |          |          |         |         |         |         |         |          |         |
| <b>2-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-2   | 14900        | 1500       | 1800     | 2900     | 2000    | 560     | 200     | 280     | 710     | 2570     | 3320    |
| 1RN7 712-2   | 15500        | 1500       | 1800     | 2900     | 2000    | 560     | 200     | 280     | 710     | 2570     | 3320    |
| 1RN7 714-2   | 16700        | 1500       | 1800     | 2900     | 2240    | 560     | 200     | 280     | 710     | 2570     | 3560    |
| 1RN7 716-2   | 17500        | 1500       | 1800     | 2900     | 2240    | 560     | 200     | 280     | 710     | 2570     | 3560    |
| <b>4-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-4   | 16100        | 1500       | 1800     | 2900     | 2000    | 710     | 220     | 350     | 710     | 2570     | 3650    |
| 1RN7 712-4   | 16700        | 1500       | 1800     | 2900     | 2000    | 710     | 220     | 350     | 710     | 2570     | 3650    |
| 1RN7 714-4   | 18000        | 1500       | 1800     | 2900     | 2240    | 710     | 220     | 350     | 710     | 2570     | 3890    |
| 1RN7 716-4   | 19300        | 1500       | 1800     | 2900     | 2240    | 710     | 220     | 350     | 710     | 2570     | 3890    |
| <b>6-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-6   | 16100        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2570     | 3570    |
| 1RN7 712-6   | 17100        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2570     | 3570    |
| 1RN7 714-6   | 18600        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2570     | 3810    |
| 1RN7 716-6   | 19700        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2570     | 3810    |
| <b>8-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-8   | 15700        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2570     | 3570    |
| 1RN7 712-8   | 16600        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2570     | 3570    |
| 1RN7 714-8   | 18000        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2570     | 3810    |
| 1RN7 716-8   | 19000        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2570     | 3810    |
| <b>10-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-3   | 15600        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2570     | 3570    |
| 1RN7 712-3   | 16600        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2570     | 3570    |
| 1RN7 714-3   | 18100        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2570     | 3810    |
| 1RN7 716-3   | 19000        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2570     | 3810    |

#### Note:

Higher pole numbers are available on request.




## Motors for converter operation

### Converter with non-sinusoidal output

Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

#### Dimension drawings

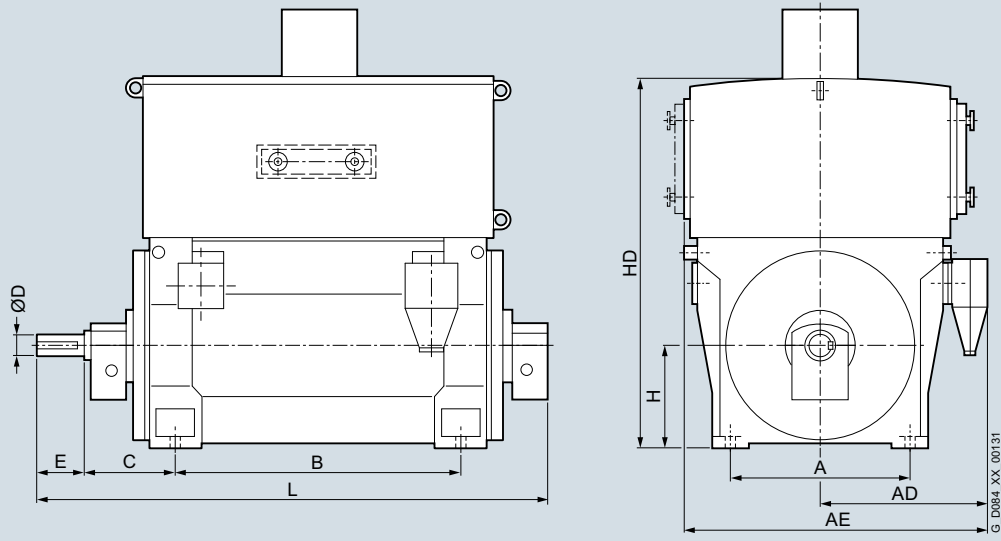

| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |         |         |         |          |         |
|--|--------------|------------|----------|----------|---------|---------|---------|---------|---------|----------|---------|
|  |              | A<br>mm    | AD<br>mm | AE<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | H<br>mm | HD<br>mm | L<br>mm |
| <b>Up to 6.6 kV, IM B3 type of construction, sleeve bearings – 1RN7 series – IC86W</b> |              |            |          |          |         |         |         |         |         |          |         |
| <b>2-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-2   | 14600        | 1500       | 1800     | 2900     | 2000    | 560     | 200     | 280     | 710     | 2900     | 3320    |
| 1RN7 712-2   | 15200        | 1500       | 1800     | 2900     | 2000    | 560     | 200     | 280     | 710     | 2900     | 3320    |
| 1RN7 714-2   | 16400        | 1500       | 1800     | 2900     | 2240    | 560     | 200     | 280     | 710     | 2900     | 3560    |
| 1RN7 716-2   | 17200        | 1500       | 1800     | 2900     | 2240    | 560     | 200     | 280     | 710     | 2900     | 3560    |
| <b>4-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-4   | 15800        | 1500       | 1800     | 2900     | 2000    | 710     | 220     | 350     | 710     | 2900     | 3650    |
| 1RN7 712-4   | 16400        | 1500       | 1800     | 2900     | 2000    | 710     | 220     | 350     | 710     | 2900     | 3650    |
| 1RN7 714-4   | 17700        | 1500       | 1800     | 2900     | 2240    | 710     | 220     | 350     | 710     | 2900     | 3890    |
| 1RN7 716-4   | 19000        | 1500       | 1800     | 2900     | 2240    | 710     | 220     | 350     | 710     | 2900     | 3890    |
| <b>6-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-6   | 15800        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2900     | 3570    |
| 1RN7 712-6   | 16800        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2900     | 3570    |
| 1RN7 714-6   | 18300        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2900     | 3810    |
| 1RN7 716-6   | 19400        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2900     | 3810    |
| <b>8-pole</b>  |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-8   | 15200        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2900     | 3570    |
| 1RN7 712-8   | 16200        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2900     | 3570    |
| 1RN7 714-8   | 17600        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2900     | 3810    |
| 1RN7 716-8   | 18600        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2900     | 3810    |
| <b>10-pole</b>   |              |            |          |          |         |         |         |         |         |          |         |
| 1RN7 710-3   | 15200        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2900     | 3570    |
| 1RN7 712-3   | 16200        | 1500       | 1800     | 2900     | 2000    | 670     | 220     | 350     | 710     | 2900     | 3570    |
| 1RN7 714-3   | 17700        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2900     | 3810    |
| 1RN7 716-3   | 18600        | 1500       | 1800     | 2900     | 2240    | 670     | 220     | 350     | 710     | 2900     | 3810    |

**Note:**


Higher pole numbers are available on request.

## Motors for converter operation

Converter with non-sinusoidal output

Water-cooled motors · H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7

### Dimension drawings

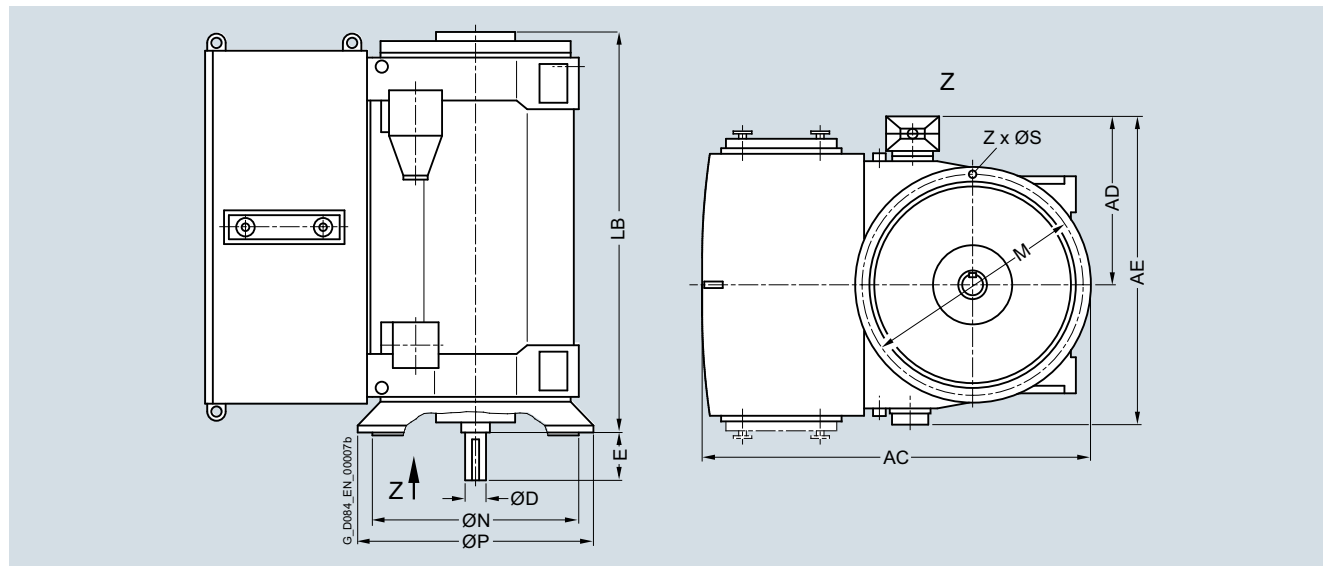

| Motor type   | Weight<br>kg | Dimensions |          |          |         |         |          |         |         |         |         |               |
|--|--------------|------------|----------|----------|---------|---------|----------|---------|---------|---------|---------|---------------|
|  |              | AC<br>mm   | AD<br>mm | AE<br>mm | D<br>mm | E<br>mm | LB<br>mm | P<br>mm | N<br>mm | M<br>mm | S<br>mm | Z<br>Quantity |
| <b>Up to 6.6 kV, IM V1 type of construction, anti-friction bearings, Z ventilation – 1RN7 series – IC81W</b> |              |            |          |          |         |         |          |         |         |         |         |               |
| 6-pole   |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RN7 710-6   | 16700        | 2900       | 1800     | 2900     | 220     | 350     | 3140     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RN7 712-6   | 17700        | 2900       | 1800     | 2900     | 220     | 350     | 3140     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RN7 714-6   | 19200        | 2900       | 1800     | 2900     | 220     | 350     | 3380     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RN7 716-6   | 20300        | 2900       | 1800     | 2900     | 220     | 350     | 3380     | 2000    | 1800    | 1900    | 35      | 24            |
| 8-pole   |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RN7 710-8   | 16600        | 2900       | 1800     | 2900     | 220     | 350     | 3140     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RN7 712-8   | 17600        | 2900       | 1800     | 2900     | 220     | 350     | 3140     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RN7 714-8   | 19100        | 2900       | 1800     | 2900     | 220     | 350     | 3380     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RN7 716-8   | 20100        | 2900       | 1800     | 2900     | 220     | 350     | 3380     | 2000    | 1800    | 1900    | 35      | 24            |
| 10-pole  |              |            |          |          |         |         |          |         |         |         |         |               |
| 1RN7 710-3   | 16400        | 2900       | 1800     | 2900     | 220     | 350     | 3140     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RN7 712-3   | 17300        | 2900       | 1800     | 2900     | 220     | 350     | 3140     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RN7 714-3   | 18900        | 2900       | 1800     | 2900     | 220     | 350     | 3380     | 2000    | 1800    | 1900    | 35      | 24            |
| 1RN7 716-3   | 19800        | 2900       | 1800     | 2900     | 220     | 350     | 3380     | 2000    | 1800    | 1900    | 35      | 24            |

#### Note:

Higher pole numbers are available on request.

<sup>1)</sup> For  $V_{\text{rated}} \geq 2.0$  kV and current  $I_{\text{rated}} > 315$  A, the dimension changes by + 140 mm.

### Overview

Using the following options, SIMOTICS HV/TN can be adapted to order-specific requirements. The Article No. is supplemented with a "-Z" and with either one or several order codes.

Other options can be addressed on request with the LOHER VARIO (rib-cooled) or LOHER VARIO PLUS (modular design) motor series.

| Order code | Option description                                       | Remark              |
|------------|--|---------------------|
|            | <b>Paint finish</b>                                      |                     |
| <b>K26</b> | Special paint finish in RAL 7030                         |                     |
| <b>Y53</b> | Standard paint finish in a color different from RAL 7030 | Plain text required |
| <b>Y54</b> | Special paint finish in a color different from RAL 7030  | Plain text required |
|            | <b>Documentation</b>                                     |                     |
| <b>B00</b> | No motor manual  |                     |
| <b>B21</b> | Documentation on CD-ROM instead of paper printout        |                     |
| <b>B22</b> | Documentation as e-mail instead of paper                 |                     |
| <b>B23</b> | Motor manual printed on paper, 3x                        |                     |
| <b>B27</b> | Run out protocol   |                     |
| <b>B28</b> | Protocol air gap calculation                             |                     |
| <b>B34</b> | Document standard inspection and test plan               |                     |
| <b>B35</b> | Document balancing report                                |                     |
| <b>B36</b> | Document test and inspection description                 |                     |
| <b>B37</b> | Document load characteristics                            |                     |
| <b>B38</b> | Document recommended spare parts                         |                     |
| <b>B41</b> | Document instrumentation list                            |                     |
| <b>B43</b> | Document production schedule: Generated once             |                     |
| <b>B44</b> | Document production schedule: Updated biweekly           |                     |
| <b>B45</b> | Document production schedule: Updated monthly            |                     |
| <b>B48</b> | Document order-specific inspection and test plan         |                     |
|            | <b>Document language</b>                                 |                     |
| <b>D00</b> | Documentation in German                                  |                     |
| <b>D54</b> | Documentation in Czech                                   |                     |
| <b>D55</b> | Documentation in Polish                                  |                     |
| <b>D56</b> | Documentation in Russian                                 |                     |
| <b>D72</b> | Documentation in Italian                                 |                     |
| <b>D73</b> | Documentation in Finnish                                 |                     |
| <b>D74</b> | Documentation in Dutch                                   |                     |
| <b>D75</b> | Documentation in Turkish                                 |                     |
| <b>D76</b> | Documentation in English                                 | Standard            |
| <b>D77</b> | Documentation in French                                  |                     |
| <b>D78</b> | Documentation in Spanish                                 |                     |
| <b>D79</b> | Documentation in Portuguese                              |                     |
| <b>D80</b> | Documentation in Bulgarian                               |                     |
| <b>D81</b> | Documentation in Norwegian                               |                     |
| <b>D82</b> | Documentation in Hungarian                               |                     |
| <b>D83</b> | Documentation in Swedish                                 |                     |
| <b>D84</b> | Documentation in Chinese                                 |                     |

## Motors for converter operation

### Options and tests

#### Description of options

##### Overview (continued)

| Order code | Option description   | Remark  |
|------------|--|---|
|            | <b>Speed monitoring</b>  |   |
| A03        | Speed monitoring using an inductive proximity switch, Pepperl + Fuchs, incl. terminal box, without evaluation unit                     |   |
| H70        | Rotary pulse encoder LL 861 900 220 (Leine+Linde)  |   |
| H73        | Rotary pulse encoder HOG 10 D1024 I (16 mm)  |   |
| H76        | Rotary pulse encoder HOG 10 D1024 I with integrated shaft grounding  |   |
| H88        | Rotary pulse encoder HOG 11 DN 1024 I (16 mm) with special anti-corrosion protection   | For marine applications                       |
| H89        | Rotary pulse encoder HOG 11 DN 1024 I (16 mm) with integrated shaft grounding and special anti-corrosion protection                    | For marine applications                       |
|            | <b>Direction of rotation</b>   |   |
| K97        | Rotation clockwise (CW)  | Standard                                      |
| K98        | Rotation counter-clockwise (CCW)   |   |
|            | <b>Noise reduction</b>   |   |
| L20        | Silencer for air inlet   |   |
| L21        | Noise reduction: Silencer for air outlet   | Only for H-compact PLUS and SIMOTICS HV M     |
| L22        | Noise reduction: Lining of interior space  | Only for H-compact PLUS and SIMOTICS HV M     |
| L23        | External metal fan, unidirectional   | Only for H-compact                            |
| L25        | Rustless grid at inlet silencer  | Only for H-compact                            |
|            | <b>Terminal box mounting position</b>  |   |
| K09        | Terminal box on right-hand side, view from DE  | Standard                                      |
| K10        | Terminal box on left-hand side, view from DE   |   |
| K83        | Terminal box rotated through 90°, cable entry from DE  |   |
| K84        | Terminal box rotated through 90°, cable entry from NDE   |   |
| K85        | Terminal box rotated through 180°  |   |
| N81        | Bracket rotated through 180°, terminal box rotated through 90°, cable entry from NDE   | Only for H-compact                            |
| N82        | Bracket rotated through 180°, terminal box rotated through 90°, cable entry from DE  | Only for H-compact                            |
| N83        | Bracket rotated through 180°, terminal box rotated through 180°, cable entry from above  |   |
| N84        | Bracket rotated through 180°, rotated through 90°, cable entry from below  |   |
| N85        | Terminal box on NDE  | Only for H-compact                            |
|            | <b>Terminal box, main and auxiliary terminal box</b>   |   |
| L54        | Terminal box, 6 terminals with 2 cable entries for connection to power supply, rated current > 315 A                                   |   |
| L59        | Terminal box with sealing chamber for 1 cable entry  |   |
| L55        | Star-point terminal box, up to 6.6 kV, 3 terminals   |   |
| L56        | Star-point terminal box, up to 11 kV, 3 terminals  |   |
| L57        | Star-point terminal box, up to 6.6 kV, 6 terminals   |   |
| L58        | Star-point terminal box, for installing current transformer (without current transformer)  |   |
| M50        | Auxiliary terminal box in cast iron  |   |
| M51        | Auxiliary terminal box material: Stainless steel   |   |
| M52        | Separate auxiliary terminal box for anti-condensation heater   | Standard for H-compact PLUS and SIMOTICS HV M |
|            | <b>Terminal box – accessories/equipping</b>  |   |
| K59        | Cable plug connection, rated voltage 2 to 6.6 kV   |   |
| L79        | Gland plate for 3 winding ends to connect to the line supply via separately mounted terminal box, 3 m free cable length from the frame |   |
| L80        | Gland plate for 6 winding ends to connect to the line supply via separately mounted terminal box, 3 m free cable length from the frame |   |
| L83        | Cable plug connection, rated voltage 9 to 11 kV  |   |

## Overview (continued)

| Order code   | Option description   | Remark  |
|--|--|---|
| <b>Cooling air monitoring</b>                      |  |   |
| A44  | 1 resistance thermometer Pt100 for 2-, 3- or 4-wire connection from terminal box for cold air temperature  |   |
| A45  | 1 resistance thermometer Pt100 for 2-, 3- or 4-wire connection from terminal box for hot air temperature   |   |
| A46  | 1 double resistance thermometer Pt100 for 2-, 3- or 4-wire connection from terminal box, for cold air temperature  |   |
| A47  | 1 double resistance thermometer Pt100 for 2-, 3- or 4-wire connection from terminal box, for hot air temperature   |   |
| A86  | 1 dial-type thermometer with 2 NO-Contacts for cold air temperature incl. terminal box   |   |
| A87  | 1 dial-type thermometer with 2 NO-Contacts for hot air temperature incl. terminal box  |   |
| <b>Bearing version/instrumentation</b>             |  |   |
| H09 + H11  | DIN flange type for forced oil lubrication for oil inlet with flowmeter, manometer and throttle valve (incl. counter flange) + DIN flange type forced oil lubrication for oil outlet with sight glass (incl. counter flange)       |   |
| H10 + H12  | ANSI flange type for forced oil lubrication for oil inlet with flowmeter, manometer and throttle valve (incl. counter flange) + ANSI flange type for forced oil lubrication for oil outlet with sight glass (incl. counter flange) |   |
| H43  | DIN flange type for forced oil lubrication for in- and outlet without instruments (with counter flanges)   |   |
| H44  | ANSI flange type for forced oil lubrication for in- and outlet without instruments (with counter flanges)  |   |
| K20  | Bearing design on DE for increased forces (reinforced)   | H-compact SH 315 and SH 355 only                      |
| K96  | Sleeve bearing instead of anti-friction bearing  |   |
| L18  | DE insulation  |   |
| L27  | Insulated bearing on NDE   | Standard for H-compact PLUS and SIMOTICS HV M         |
| L60  | Forced-circulation oil lubrication (with oil cooling) instead of oil-ring lubrication  |   |
| L66  | Air cooling, but prepared for future conversion to forced-circulation oil lubrication  |   |
| P44  | Oil manifold; connections with counter flange; flange flush with the axial shaft face  |   |
| <b>Bearing monitoring – sleeve bearings</b>        |  |   |
| A02  | Shaft vibration monitoring for sleeve bearings, Bently Nevada system   |   |
| A39  | Prepared for shaft vibration monitoring for sleeve bearings (without monitoring system)  |   |
| A41  | 2 resistance thermometers Pt100 for 2-, 3- or 4-wire connection from terminals for sleeve bearing  |   |
| A43  | 2 double resistance thermometers Pt100 for 2-, 3- or 4-wire connection from terminals for sleeve bearing   |   |
| A70  | 2 dial-type thermometers without contacts  |   |
| A71  | 2 dial-type thermometers with contacts   |   |
| <b>Bearing monitoring – anti-friction bearings</b> |  |   |
| A40  | 2 resistance thermometers Pt100 for 2-, 3- or 4-wire connection from terminal box for anti-friction bearings   |   |
| A42  | 2 double resistance thermometers Pt100 for 2-, 3- or 4-wire connection from terminals for anti-friction bearings   |   |
| G50  | Shock pulse measuring nipple (SPM) at DE and NDE   | Standard  |
| H05  | Shock pulse measurement (SPM), fixed sensors and distributor box   |   |
| H07  | Shock pulse measurement (SPM), complete alarm box  |   |
| <b>Mechanical versions</b>                         |  |   |
| K16  | Second shaft extension up to 50 % rated torque   |   |
| L81  | Vibration severity grade B according to IEC/ EN 60034-14   | Not available for 2-pole motors with roller bearings. |
| Y55  | Non-standard cylindrical shaft extension (an inquiry must be sent to the factory)  |   |
| Y85  | Oil shrink fit for cylindrical, single-stage shaft extension instead of a key connection   |   |

## Motors for converter operation

### Options and tests

#### Description of options

##### Overview (continued)

| Order code | Option description  | Remark  |
|------------|---|---|
|            | <b>Certified for pump drives</b>  |   |
| E88        | Construction supervision for motors for seawater desalination plants where Siemens AG commissions the acceptance authority                              |   |
| E89        | Construction supervision for motors for seawater desalination plants where a third party commissions the acceptance authority                           |   |
| E90        | Pump drive for seawater desalination plants certified according to Lloyds Register  |   |
|            | <b>Marine applications</b>  | Options and tests for marine and offshore applications: <a href="#">see Chapter 5</a> . |
|            | <b>Others/additional options</b>  |   |
| H08        | Leakage water detection   |   |
| K52        | Degree of protection IP56 non-heavy-sea   |   |
| L15        | Supporting ring for coupling guard  |   |
| L17        | Mounting a coupling provided (finish machined and balanced)   |   |
| L31        | Motor mounting materials for mounting on a steel foundation: Bolts, shims and taper dowels  |   |
| L32        | Motor mounting materials for mounting on a concrete foundation or concrete base: Threaded bolts, armature plates, sole plates, shims and taper dowels   |   |
| L33        | Motor mounting materials to mount on a concrete foundation or concrete base: T-head bolts, foundation bolt sleeves, sole plates, shims and taper dowels |   |
| L91        | Higher number of starts, > 1000 ... 10000 starts per year, for Cu rotors  |   |
| L92        | Higher number of starts, > 5000 ... 10000 starts per year, for Al rotors  |   |
| P45        | External screws made of stainless steel   |   |
|            | <b>Anti-condensation heating</b>  |   |
| L08        | Anti-condensation heater, rated voltage 400 V   |   |
| L09        | Anti-condensation heater, rated voltage 500 V   |   |
| M12        | Anti-condensation heater for 110 to 120 V   |   |
| M13        | Anti-condensation heater for 220 to 240 V   | Standard for H-compact PLUS and SIMOTICS HV M   |
| Y83        | Anti-condensation heater with other rated voltages, V = additional text required)   |   |
|            | <b>Ambient conditions</b>   |   |
| D02        | Operation at ambient temperatures up to -50 °C, transport up to -50 °C  |   |
| D03        | Operation at ambient temperatures up to -40 °C, transport up to -40 °C  |   |
| D04        | Operation at ambient temperatures up to -30 °C, transport up to -40 °C  |   |
| E81        | Outdoor use with high salinity or offshore applications (corrosivity grade C5-M/ C5-I)  |   |
| E82        | Outdoor use with moderate salinity (corrosivity grade C4)   |   |
| E83        | Outdoor use with low salinity (corrosivity grade C3)  |   |
| M06        | For use in sulfurous or hydrogenous atmosphere  |   |
|            | <b>Winding and motor protection</b>   |   |
| A12        | 6 PTC thermistors without lightning arresters   |   |
| A23        | 1 temperature sensor KTY 84-130   |   |
| A65        | 6 embedded resistance thermometers Pt100 for 2-, 3- or 4-wire connection from terminal box without lightning arresters                                  | Standard  |
| A66        | 6 embedded resistance thermometers Pt100 for 2-, 3- or 4-wire connection from terminal box with lightning arresters                                     |   |

## Overview (continued)

| Order code | Option description  | Remark                              |
|------------|---|-------------------------------------|
|            | <b>Tests with acceptance</b>  |                                     |
| F01        | All standard tests (routine test), with acceptance  |                                     |
| F15        | Recording of no-load characteristic and determination of core and friction losses, with acceptance      |                                     |
| F17        | Recording of short-circuit characteristic and determination of short-circuit losses, with acceptance    |                                     |
| F19        | Recording of load characteristic, with acceptance   |                                     |
| F23        | Dissipation factor test (tan delta) on 2 (test) coils, with acceptance                                  | In addition, specify order code F90 |
| F29        | No-load noise measurement, without noise analysis, with acceptance                                      |                                     |
| F31        | Cooling air flow and pressure drop measurement, with acceptance   |                                     |
| F35        | Recording of current and torque characteristics during acceleration, with acceptance                    |                                     |
| F37        | Determination of moment of inertia by retardation method, with acceptance                               |                                     |
| F39        | Overspeed test, with acceptance   |                                     |
| F41        | Recording of residual voltage curve, with acceptance  |                                     |
| F53        | Locked-rotor torque and current measurement, with acceptance  |                                     |
| F55        | Polarization index measurement, with acceptance   |                                     |
| F61        | Impulse or AC voltage test on 2 (test) coils, with acceptance   | In addition, specify order code F90 |
| F63        | Noise analysis, with acceptance   |                                     |
| F83        | Type test for horizontal motors with temperature rise test, with acceptance                             |                                     |
| F90        | 2 test coils  |                                     |
| F93        | Type test for vertical motors with temperature rise test, with acceptance                               |                                     |
|            | <b>Tests without acceptance</b>   |                                     |
| F14        | Recording of no-load characteristic and determination of core and friction losses, without acceptance   |                                     |
| F16        | Recording of short-circuit characteristic and determination of short-circuit losses, without acceptance |                                     |
| F18        | Recording of load characteristic, without acceptance  |                                     |
| F22        | Dissipation factor test (tan delta) on 2 (test) coils, without acceptance                               | In addition, specify order code F90 |
| F28        | No-load noise measurement, without noise analysis, without acceptance                                   |                                     |
| F30        | Cooling air flow and pressure drop measurement, without acceptance                                      |                                     |
| F34        | Recording of current and torque characteristics during acceleration, without acceptance                 |                                     |
| F36        | Determination of moment of inertia by retardation method, without acceptance                            |                                     |
| F38        | Overspeed test, without acceptance  |                                     |
| F42        | "Conformance Test (Wet Test)" to NEMA Standard, without acceptance                                      |                                     |
| F52        | Locked-rotor torque and current measurement, without acceptance   |                                     |
| F54        | Polarization index measurement, without acceptance  |                                     |
| F60        | Impulse or AC voltage test on 2 (test) coils, without acceptance  | In addition, specify order code F90 |
| F62        | Noise analysis, without acceptance  |                                     |
| F82        | Type test for horizontal motors with temperature rise test, without acceptance                          |                                     |
| F90        | 2 test coils  |                                     |
| F92        | Type test for vertical motors with temperature rise test, without acceptance                            |                                     |

## Motors for converter operation

### Options and tests

#### Description of options

##### Overview (continued)

| Order code | Option description   | Remark                            |
|------------|--|-----------------------------------|
|            | <b>Extension of liability for defects</b>  | <b>Article number for reorder</b> |
| <b>Q80</b> | Extension of liability for defects, by 12 months to a total of 24 months (2 years) from delivery   | <b>9LD1720-0AA24</b>              |
| <b>Q81</b> | Extension of liability for defects, by 18 months to a total of 30 months (2.5 years) from delivery | <b>9LD1720-0AA30</b>              |
| <b>Q82</b> | Extension of liability for defects, by 24 months to a total of 36 months (3 years) from delivery   | <b>9LD1720-0AA36</b>              |
| <b>Q83</b> | Extension of liability for defects, by 30 months to a total of 42 months (3.5 years) from delivery | <b>9LD1720-0AA42</b>              |
| <b>Q84</b> | Extension of liability for defects, by 36 months to a total of 48 months (4 years) from delivery   | <b>9LD1720-0AA48</b>              |
| <b>Q85</b> | Extension of liability for defects, by 48 months to a total of 60 months (5 years) from delivery   | <b>9LD1720-0AA60</b>              |

##### Conditions for an extension of liability for defects

You will find the currently valid conditions for an extension of liability for defects under:

<http://support.automation.siemens.com/WW/view/en/56715113>



## Explosion-protected motors



|             |   |
|-------------|---|
| <b>4/2</b>  | <b>Overview</b>   |
| 4/2         | Classification of zones   |
| 4/3         | Types of protection   |
| 4/4         | Certification   |
| <b>4/5</b>  | <b>Type of protection Ex ec/Ex tc</b>   |
| 4/5         | Air-cooled motors<br>H-compact 1MS4   |
| 4/6         | Air-cooled motors<br>H-compact PLUS 1SG4/1SG6,<br>SIMOTICS HV M 1SG7  |
| 4/7         | Water-cooled motors<br>H-compact PLUS 1SL4/1SL6,<br>SIMOTICS HV M 1SL7  |
| <b>4/8</b>  | <b>Type of protection Ex pxb</b>  |
| 4/8         | Overview  |
| 4/9         | Air-cooled motors<br>H-compact 1MG4   |
| 4/10        | Air-cooled motors<br>H-compact PLUS 1SB4/1SB6,<br>SIMOTICS HV M 1SB7  |
| 4/11        | Water-cooled motors<br>H-compact PLUS 1SQ4/1SQ6,<br>SIMOTICS HV M 1SQ7  |
| <b>4/12</b> | <b>Type of protection Ex eb</b>   |
| 4/12        | Air-cooled motors<br>H-compact 1MA4   |
| 4/13        | Air-cooled motors/Water-cooled motors<br>H-compact PLUS 1SJ4, 1SJ6 and<br>SIMOTICS HV M 1SJ7<br>H-compact PLUS 1SN4, 1SN6 and<br>SIMOTICS HV M 1SN7 |
| <b>4/14</b> | <b>Options and tests</b>  |
| 4/14        | Description of options  |

## Explosion-protected motors

### Overview

#### Classification of zones

#### Overview


In many industries, the manufacture, processing, transport or storage of combustible materials results in the creation or release of gases, vapors or mist into the environment. Combustible dusts are created in other processes.

Explosive atmospheres are formed when gases, vapors, mist or dust come into contact with oxygen in the air. If ignited, this can result in an explosion. In the chemical and petrochemical industries in particular, when crude oil and natural gas are transported, or in mining, milling (e.g. grain and granular solids), this can result in serious injury to personnel and damage to equipment.

To ensure maximum safety in these areas, legislators in most countries have implemented appropriate stipulations in the form

of laws and regulations based on national and international standards.

Hazardous areas are classified in zones. Classification in zones depends on the probability of the presence of an explosive atmosphere, the duration and the location. Information and specifications regarding classification in zones are provided in IEC/EN 60079-10-1 for gas atmospheres and in IEC/EN 60079-10-2 for potentially explosive atmospheres as a result of dust. Further, a distinction is made between various explosion groups as well as temperature classes and these are included in the hazard assessment.

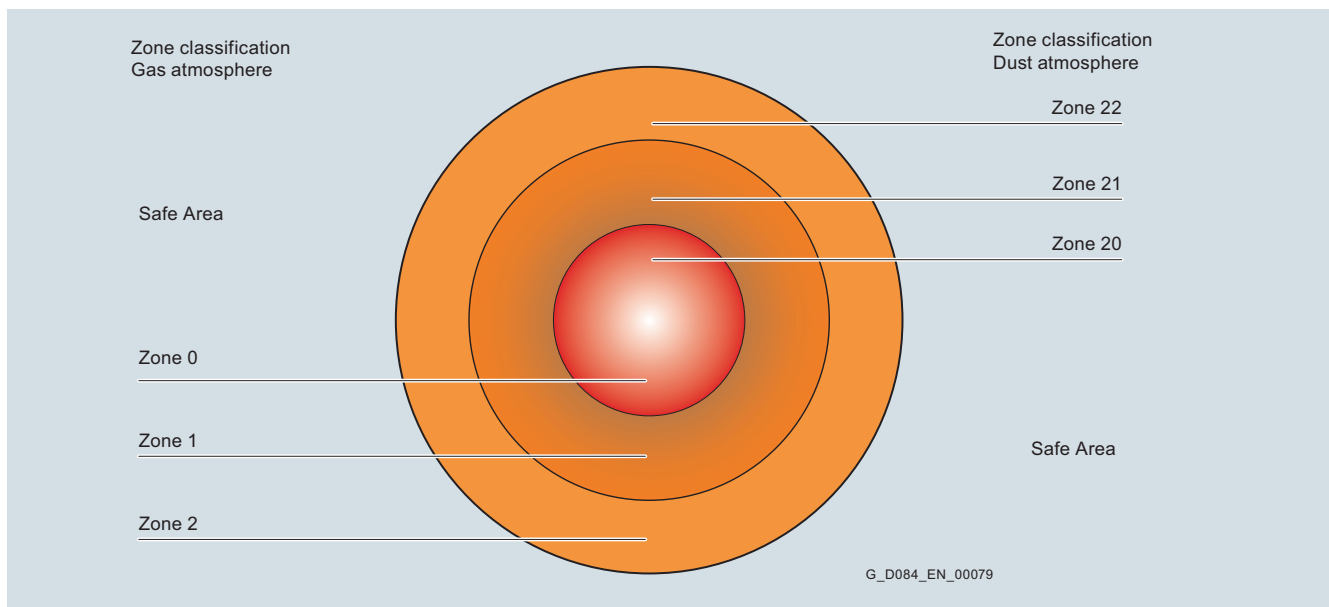

Depending on the particular zone and therefore the associated hazard, operating equipment must comply with defined minimum requirements regarding the type of protection. The different

types of protection require corresponding measures to prevent ignition that should be implemented at the motor in order to prevent that a surrounding explosive atmosphere is ignited.

| Zone Dust <sup>2)</sup> | Gas <sup>1)2)</sup> | Zone definition acc. to IEC/EN 60079-10-1 for Gas atmospheres IEC/EN 60079-10-2 for dust atmospheres   | Assigned types of protection | Category according to 94/9/EC |
|-------------------------|---------------------|--|------------------------------|-------------------------------|
| 22                      | –                   | An area in which in normal operation it is not expected that an explosive atmosphere in the form of a cloud of combustible dust in the air occurs, and if it does occur then only briefly. | Ex tc                        | 3D                            |
| –                       | 2                   | An area in which in normal operation it is not expected that an explosive gas atmosphere occurs and if so, only infrequently and only briefly.   | Ex ec                        | 3G                            |
| –                       | 1                   | An area in which it is expected that an explosive gas atmosphere occurs during normal operation.   | Ex eb<br>Ex pxb<br>Ex db     | 2G                            |
| –                       | 0                   | An area in which it is expected that a gas atmosphere is constantly present or for long periods of time  | Motors are not permitted     |                               |

#### Note:

Referring to the 60079 IEC/EN standards, the following should be observed:

- The previous Ex e and Ex nA markings have been changed to Ex eb and Ex ec respectively. For both, the associated standard is IEC/EN 60079-7:2015. Expiration date of old marking: 2018-07-31

- The previous Ex px marking has been changed to Ex pxb. The associated standard is IEC/EN 60079-2:2014. Expiration date of old marking: 2017-08-25

<sup>1)</sup> Motors for Zone 1 may also be used in Zone 2.

<sup>2)</sup> Motors, which are marked for gas or dust protection, must not be used in hybrid mixtures! Hybrid mixtures: When explosive gas and dust atmospheres occur simultaneously.

**Overview** (continued)**Type of protection, pressurized enclosure *Ex pxb* acc. to IEC/EN 60079-2**

In the motor, protective gas is kept under pressure in relation to the surrounding atmosphere to prevent the penetration of explosive atmospheres. The inside of the motor must be flushed with a protective gas before it is switched on.

H-compact (type series 1MG4) as well as H-compact PLUS and SIMOTICS HV M motors (air-cooled, type series 1SB4/1SB6/1SB7 and water-cooled, type series 1SQ4/1SQ6/1SQ7) fulfill this type of protection.

**Type of protection, increased safety *Ex eb* acc. to IEC/EN 60079-7**

Additional measures are taken to prevent the possibility of high temperatures and to prevent sparks or arcs from occurring inside the motor and at external motor components.

Increased safety can be guaranteed by H-compact (type series 1MA4) as well as H-compact PLUS and SIMOTICS HV M motors (air-cooled, type series 1SJ4/1SJ6/1SJ7 and water-cooled, type series 1SN4/1SN6/1SN7). An inquiry must be sent to the factory.

**Type of protection, flameproof enclosure *Ex db* acc. to IEC/EN 60079-1**

The components that can ignite an explosive atmosphere are located in an enclosure that is not damaged by an internal explosion and flameproof joints prevent flames from escaping to the explosive atmosphere on the outside.

The LOHER VARIO series is available in ***Ex db***.

**Type of protection, *Ex ec* acc. to IEC/EN 60079-7**

The type of protection ***Ex ec*** ensures that a motor in normal operation as well as when operated under deviating conditions as specified in the standard is not in a position to ignite a surrounding explosive gas atmosphere.

The series of H-compact (type series 1MS4) as well as H-compact PLUS and SIMOTICS HV M motors (air-cooled, type series 1SG4/1SG6/1SG7 and water-cooled, type series 1SL4/1SL6/1SL7) are available in ***Ex ec***.

**Type of protection *Ex t* acc. to IEC/EN 60079-31**

This type of protection applies for electrical equipment protected using an enclosure and with limited surface temperature for use in areas in which combustible dust can occur in concentration levels that could cause a fire or an explosion.

The series of H-compact (type series 1MS4) as well as H-compact PLUS and SIMOTICS HV M motors (air-cooled, type series 1SG4/1SG6/1SG7 and water-cooled, type series 1SL4/1SL6/1SL7) are available in ***Ex tc***.

**Explosion-protected motors for converter operation**

Principally, explosion-protected motors can be fed from drive converters. As a result of the different design, system analyses, system tests etc. for the various types of protection, an inquiry is required to check whether these motors can be actually implemented.

## Explosion-protected motors

### Overview

#### Certification

#### Overview (continued)

##### Certification

Motors for use in hazardous areas are certified according to the EC Directive 94/9/EC (ATEX) or other regional certification schemes and are marked according to the following schematic.

| Example, pressurized enclosure:  | Acc. to Directive 94/9/EC (ATEX) |      |    |    |   |   | Acc. to Standards (IEC/EN) |     |    |    |   |
|--|----------------------------------|------|----|----|---|---|----------------------------|-----|----|----|---|
|  | CE                               | XXXX | ⊕x | II | 2 | G | Ex                         | pxb | II | T3 | X |
| CE marking   |                                  |      |    |    |   |   |                            |     |    |    |   |
| Number of the certifying "notified body"   |                                  |      |    |    |   |   |                            |     |    |    |   |
| Ex symbol for explosion protected equipment  |                                  |      |    |    |   |   |                            |     |    |    |   |
| Groups:  |                                  |      |    |    |   |   |                            |     |    |    |   |
| • I = mining   |                                  |      |    |    |   |   |                            |     |    |    |   |
| • II = other than mining   |                                  |      |    |    |   |   |                            |     |    |    |   |
| Category:  |                                  |      |    |    |   |   |                            |     |    |    |   |
| • 2 (Zone 1/21)  |                                  |      |    |    |   |   |                            |     |    |    |   |
| • 3 (Zone 2/22)  |                                  |      |    |    |   |   |                            |     |    |    |   |
| Explosive atmosphere   |                                  |      |    |    |   |   |                            |     |    |    |   |
| • G = gas  |                                  |      |    |    |   |   |                            |     |    |    |   |
| • D = dust   |                                  |      |    |    |   |   |                            |     |    |    |   |
| Explosion protected equipment  |                                  |      |    |    |   |   |                            |     |    |    |   |
| Type of protection db, eb, ec, pxb, tc   |                                  |      |    |    |   |   |                            |     |    |    |   |
| Note: Additional types of protection for accessories are alphabetically listed   |                                  |      |    |    |   |   |                            |     |    |    |   |
| Explosion group, where relevant, restricted (Gas: IIA, IIB, IIC; Dust: IIIA, IIIB, IIIC)   |                                  |      |    |    |   |   |                            |     |    |    |   |
| Temperature class with max. surface temperature  |                                  |      |    |    |   |   |                            |     |    |    |   |
| • T1 ≤ 450 °C  |                                  |      |    |    |   |   |                            |     |    |    |   |
| • T2 ≤ 300 °C  |                                  |      |    |    |   |   |                            |     |    |    |   |
| • T3 ≤ 200 °C (standard for motors from Siemens I DT LD P)   |                                  |      |    |    |   |   |                            |     |    |    |   |
| • T4 ≤ 135 °C  |                                  |      |    |    |   |   |                            |     |    |    |   |
| Alternatively the maximum surface temperature may be marked: e.g. T125 °C<br>(possible for gas, necessary for dust explosion protected machines) |                                  |      |    |    |   |   |                            |     |    |    |   |
| Special conditions according to the operating instructions or type examination certificate   |                                  |      |    |    |   |   |                            |     |    |    |   |


Additional information on the subject of explosion protection, types of protection and zones is provided in the Siemens brochure *Explosion Protection*.

## Explosion-protected motors

Type of protection Ex ec/Ex tc

Air-cooled motors · H-compact 1MS4

### Overview

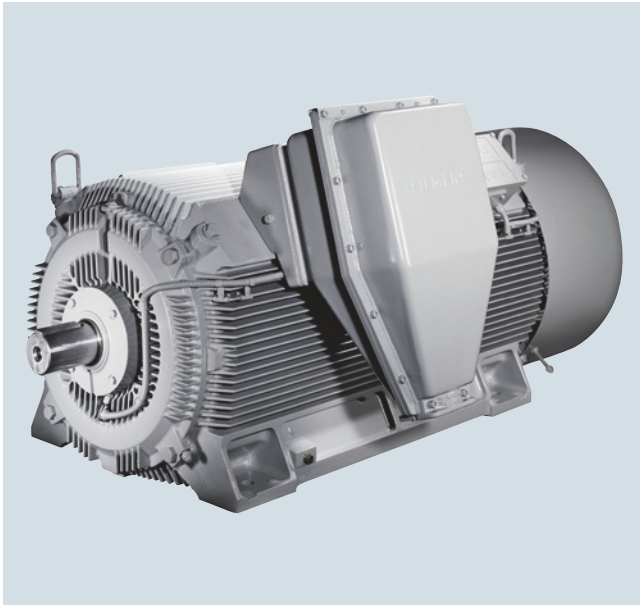

### Technical data

#### Overview of technical data

| H-compact 1MS4               |   |
|------------------------------|---|
| Rated voltage                | 2.0 ... 11 kV   |
| Rated frequency              | 50/60 Hz  |
| Motor type                   | Induction motor with squirrel-cage rotor  |
| Type of construction         | IM B3, IM V1  |
| Degree of protection         | IP55  |
| Type of protection           | Ex ec/Ex tc   |
| Operation in hazardous areas | Zone 2/Zone 22  |
| Cooling method               | IC411/IC416   |
| Stator winding insulation    | Thermal class 155 (F), utilized to 130 (B)                                      |
| Shaft height                 | 315 ... 630 mm  |
| Bearings                     | Anti-friction bearings, sleeve bearings   |
| Cage material                | Die-cast aluminum or copper (dependent on the shaft height and number of poles) |
| Standards                    | IEC, EN   |
| Frame design                 | Cast iron with cooling ribs   |

The series of H-compact motors (IC411/IC416 cooling type), developed for Zone 2 in type of protection **Ex ec** or for Zone 22 in type of protection **Ex tc** are available as 1MS4 motors. The Article No. schematic is shown in Chapter 1.

These **Ex ec** or **Ex tc** measures do not affect the performance data or main dimensions with respect to H-compact motors (1LA4 type series). This is the reason that the values of the 1LA4 type series from Chapter 2 and Chapter 3 can also be used for 1MS4 motors.

An extensive range of options and tests are available for H-compact motors, type of protection **Ex ec** or **Ex tc** (--> Options and tests).

## Explosion-protected motors

Type of protection Ex ec/Ex tc

Air-cooled motors · H-compact PLUS 1SG4/1SG6, SIMOTICS HV M 1SG7

### Overview



### Technical data

#### Overview of technical data

| H-compact PLUS 1SG4/1SG6,<br>SIMOTICS HV M 1SG7  |  |
|--|--|
| Rated voltage                                    | 3.3 ... 11 kV                                  |
| Rated frequency                                  | 50/60 Hz                                       |
| Motor type                                       | Induction motor with squirrel-cage rotor       |
| Type of construction                             | IM B3, IM V1                                   |
| Degree of protection                             | IP55   |
| Type of protection                               | Ex ec/Ex tc                                    |
| Operation in hazardous areas                     | Zone 2/Zone 22                                 |
| Cooling method                                   | IC611/IC616/IC666                              |
| Stator winding insulation                        | Thermal class 155 (F), utilized to 130 (B)     |
| Shaft height                                     | 450 ... 710 mm                                 |
| Bearings   | Anti-friction bearings, sleeve bearings        |
| Cage material                                    | Copper   |
| Standards  | IEC, EN  |
| Frame design for shaft heights<br>450 ... 560 mm | Housing: Cast iron<br>Cooling enclosure: Steel |
| Frame design for shaft heights<br>630 ... 710 mm | Housing: Steel<br>Cooling enclosure: Steel     |

H-compact PLUS and SIMOTICS HV M motors (type series 1SG4, 1SG6 and 1SG7) developed for Zone 2 in type of protection **Ex ec** or for Zone 22 in type of protection **Ex tc** are available as modular motors with air/air heat exchanger. The Article No. schematic is shown in Chapter 1.

These **Ex ec** or **Ex tc** measures do not affect the performance data or main dimensions with respect to H-compact PLUS motors. This is the reason that the values of the 1RQ4, 1RQ6 or 1RQ7 type series from Chapter 2 can be used for 1SG4, 1SG6 and 1SG7 motors.

An extensive range of options and tests are available for H-compact PLUS motors, type of protection **Ex ec** or **Ex tc** (--> Options and tests).

## Explosion-protected motors

Type of protection Ex ec/Ex tc

Water-cooled motors · H-compact PLUS 1SL4/1SL6, SIMOTICS HV M 1SL7

### Overview



### Technical data

#### Overview of technical data

| H-compact PLUS 1SL4/1SL6,<br>SIMOTICS HM M 1SL7  |  |
|--|--|
| Rated voltage                                    | 3.3 ... 11 kV                                  |
| Rated frequency                                  | 50/60 Hz                                       |
| Motor type                                       | Induction motor with squirrel-cage rotor       |
| Type of construction                             | IM B3, IM V1                                   |
| Degree of protection                             | IP55   |
| Type of protection                               | Ex ec/Ex tc                                    |
| Operation in hazardous areas                     | Zone 2/Zone 22                                 |
| Cooling method                                   | IC81W/IC86W                                    |
| Stator winding insulation                        | Thermal class 155 (F), utilized to 130 (B)     |
| Shaft height                                     | 450 ... 710 mm                                 |
| Bearings   | Anti-friction bearings, sleeve bearings        |
| Cage material                                    | Copper   |
| Standards  | IEC, EN  |
| Frame design for shaft heights<br>450 ... 560 mm | Housing: Cast iron<br>Cooling enclosure: Steel |
| Frame design for shaft heights<br>630 ... 710 mm | Housing: Steel<br>Cooling enclosure: Steel     |

H-compact PLUS and SIMOTICS HV M motors (type series 1SL4, 1SL6 and 1SL7) developed for Zone 2 in type of protection **Ex ec** or for Zone 22 in type of protection **Ex tc** are available as modular motors with air/water heat exchanger (cooling type IC81W/IC86W).

The Article No. schematic is shown in Chapter 1.

These **Ex ec** or **Ex tc** measures do not affect the performance data or main dimensions with respect to H-compact PLUS motors. This is the reason that the values of the 1RN4, 1RN6 or 1RN7 type series from Chapter 2 can be used for 1SL4, 1SL6 and 1SL7 motors.

An extensive range of options and tests are available for H-compact PLUS motors, type of protection **Ex ec** or **Ex tc** (--> Options and tests).

## Explosion-protected motors

Type of protection Ex pxb

### Overview

#### Overview

For motors with pressurized enclosure (type of protection **Ex pxb**) the terminal box is included in the pressurized enclosure or has increased safety (type of protection **Ex eb**).

For motors > 11 kV, the terminal box is always included in the pressurized enclosure.




## Explosion-protected motors

### Type of protection Ex pxb

Air-cooled motors · H-compact 1MG4

#### Overview

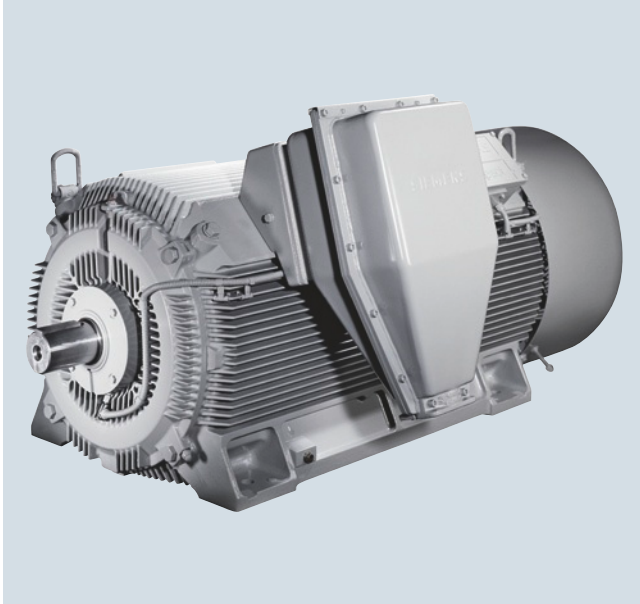

#### Technical data

##### Overview of technical data

| H-compact 1MG4                      |   |
|-------------------------------------|---|
| <b>Rated voltage</b>                | 2.0 ... 11 kV   |
| <b>Rated frequency</b>              | 50/60 Hz  |
| <b>Motor type</b>                   | Induction motor with squirrel-cage rotor  |
| <b>Type of construction</b>         | IM B3, IM V1  |
| <b>Degree of protection</b>         | IP55  |
| <b>Type of protection</b>           | Ex pxb  |
| <b>Operation in hazardous areas</b> | Zone 1 (may also be used in Zone 2)   |
| <b>Cooling method</b>               | IC411/IC416   |
| <b>Stator winding insulation</b>    | Thermal class 155 (F), utilized to 155 (F)                                      |
| <b>Shaft height</b>                 | 315 ... 560 mm  |
| <b>Bearings</b>                     | Anti-friction bearings, sleeve bearings   |
| <b>Cage material</b>                | Die-cast aluminum or copper (dependent on the shaft height and number of poles) |
| <b>Standards</b>                    | IEC, EN   |
| <b>Frame design</b>                 | Cast iron with cooling ribs   |

The H-compact motors (IC411/IC416 cooling type), developed for Zone 1 in type of protection **Ex pxb** are available as 1MG4 motors. The Article No. schematic is shown in Chapter 1.

The motors are shipped with a control unit to maintain the internal pressure and to carry out the purging process required each time before the motor is started.

These **Ex pxb** measures have no effect on the performance data with respect to H-compact motors of the 1LA4 type series. This is the reason that the values of the 1LA4 motors from Chapter 1 can be used for 1MG4 motors. Main dimensions on request.

A wide range of options and tests is available for H-compact motors, type of protection **Ex pxb**.

## Explosion-protected motors

Type of protection Ex pxb

Air-cooled motors · H-compact PLUS 1SB4/1SB6, SIMOTICS HV M 1SB7

### Overview



### Technical data

#### Overview of technical data

| H-compact PLUS 1SB4/1SB6,<br>SIMOTICS HV M 1SB7 |  |
|---|--|
| Rated voltage                                   | 3.3 ... 13.8 kV                                |
| Rated frequency                                 | 50/60 Hz                                       |
| Motor type                                      | Induction motor with squirrel-cage rotor       |
| Type of construction                            | IM B3, IM V1                                   |
| Degree of protection                            | IP55   |
| Type of protection                              | Ex pxb   |
| Operation in hazardous areas                    | Zone 1 (may also be used in Zone 2)            |
| Cooling method                                  | IC611/IC616/IC666                              |
| Stator winding insulation                       | Thermal class 155 (F), utilized to 130 (B)     |
| Shaft height                                    | 450 ... 710 mm                                 |
| Bearings  | Anti-friction bearings, sleeve bearings        |
| Cage material                                   | Copper   |
| Standards                                       | IEC, EN  |
| Frame design for shaft heights 450 ... 560 mm   | Housing: Cast iron<br>Cooling enclosure: Steel |
| Frame design for shaft heights 630 ... 710 mm   | Housing: Steel<br>Cooling enclosure: Steel     |

This series of H-compact PLUS motors, developed for Zone 1 (type series 1SB4, 1SB6 and 1SB7) in type of protection **Ex pxb** are available as modular motors with air/air heat exchanger (IC611/IC616/IC666 cooling type). The Article No. schematic is shown in Chapter 1.

The motors are shipped with a control unit to maintain the internal pressure and to carry out the purging process required each time before the motor is started.

These **Ex pxb** measures have no effect on the performance data when compared to H-compact PLUS motors. This is the reason that the values of 1RQ4, 1RQ6 or 1RQ7 motors from Chapter 2 can be used for 1SB4, 1SB6 and 1SB7 motors. Main dimensions on request.

A wide range of options and tests is available for H-compact PLUS motors, type of protection **Ex pxb**.

## Explosion-protected motors

### Type of protection Ex pxb

Water-cooled motors · H-compact PLUS 1SQ4/1SQ6, SIMOTICS HV M 1SQ7

#### Overview



#### Technical data

##### Overview of technical data

| H-compact PLUS 1SQ4/1SQ6,<br>SIMOTICS HV M 1SQ7  |  |
|--|--|
| Rated voltage                                    | 3.3 ... 13.8 kV                                |
| Rated frequency                                  | 50/60 Hz                                       |
| Motor type                                       | Induction motor with squirrel-cage rotor       |
| Type of construction                             | IM B3, IM V1                                   |
| Degree of protection                             | IP55   |
| Type of protection                               | Ex pxb   |
| Operation in hazardous areas                     | Zone 1 (may also be used in Zone 2)            |
| Cooling method                                   | IC81W/IC86W                                    |
| Stator winding insulation                        | Thermal class 155 (F), utilized to 130 (B)     |
| Shaft height                                     | 450 ... 710 mm                                 |
| Bearings   | Anti-friction bearings, sleeve bearings        |
| Cage material                                    | Copper   |
| Standards  | IEC, EN  |
| Frame design for shaft heights<br>450 ... 560 mm | Housing: Cast iron<br>Cooling enclosure: Steel |
| Frame design for shaft heights<br>630 ... 710 mm | Housing: Steel<br>Cooling enclosure: Steel     |

This series of H-compact PLUS motors, developed for Zone 1 (type series 1SQ4, 1SQ6 and 1SQ7) in type of protection **Ex pxb** is available as modular motors with air/water heat exchanger (IC81W/IC86W cooling type). The Article No. schematic is shown in Chapter 1.

The motors are shipped with a control unit to maintain the internal pressure and to carry out the purging process required each time before the motor is started.

These **Ex pxb** measures have no effect on the performance data when compared to H-compact PLUS motors. This is the reason that the values of 1RN4, 1RN6 or 1RN7 type series from Chapter 2 can be used for 1SQ4, 1SQ6 and 1SQ7 motors. Main dimensions on request.

A wide range of options and tests is available for H-compact PLUS motors, type of protection **Ex pxb**.

## Explosion-protected motors

Type of protection Ex eb

Air-cooled motors · H-compact 1MA4

### Overview



### Technical data

#### Overview of technical data

| H-compact 1MA4               |   |
|------------------------------|---|
| Rated voltage                | 3.0 ... 11 kV   |
| Rated frequency              | 50/60 Hz  |
| Motor type                   | Induction motor with squirrel-cage rotor  |
| Type of construction         | IM B3, IM V1  |
| Degree of protection         | IP55  |
| Type of protection           | Ex eb   |
| Operation in hazardous areas | Zone 1 (may also be used in Zone 2)   |
| Cooling method               | IC411/IC416   |
| Stator winding insulation    | Thermal class 155 (F), utilized to 130 (B)                                      |
| Shaft height                 | 315 ... 560 mm  |
| Bearings                     | Anti-friction bearings, sleeve bearings   |
| Cage material                | Die-cast aluminum or copper (dependent on the shaft height and number of poles) |
| Standards                    | IEC, EN   |
| Frame design                 | Cast iron with cooling ribs   |

The series of H-compact motors developed for Zone 1 in type of protection **Ex eb** is available as 1MA4 motors (cooling type IC411/IC416). The Article No. code is shown in Chapter 1.

**An inquiry must always be sent to the factory for these motors.**

**Overview*****Air-cooled motors******H-compact PLUS 1SJ4 and 1SJ6***

Based on the series of H-compact PLUS motors, air/air-cooled motors, type **1SJ4** and **1SJ6** are available for Zone 1 in **Ex eb**.

**An inquiry must always be sent to the factory for these motors.**

***Water-cooled motors******H-compact PLUS 1SN4 and 1SN6***

Based on the series of H-compact PLUS motors, air/water-cooled motors, type **1SN4** and **1SN6** are available for Zone 1 in **Ex eb**.

**An inquiry must always be sent to the factory for these motors.**

## Explosion-protected motors

### Options and tests

#### Description of options

#### Options

Using the following options, H-compact and H-compact PLUS can be adapted to order-specific requirements. The Article No. is supplemented with a "-Z" and with either one or several order codes.

Other options can be addressed on request with the VARIO (rib-cooled) or VARIO PLUS (modular design) motor series.

| Order code | Option description                                       | Remark              |
|------------|--|---------------------|
|            | <b>Paint finish</b>                                      |                     |
| K26        | Special paint finish in RAL 7030                         |                     |
| Y53        | Standard paint finish in a color different from RAL 7030 | Plain text required |
| Y54        | Special paint finish in a color different from RAL 7030  | Plain text required |
|            | <b>Documentation</b>                                     |                     |
| B00        | No motor manual  |                     |
| B21        | Documentation on CD-ROM instead of paper printout        |                     |
| B22        | Documentation as e-mail instead of paper                 |                     |
| B23        | Motor manual printed on paper, 3x                        |                     |
| B27        | Run out protocol   |                     |
| B28        | Protocol air gap calculation                             |                     |
| B34        | Document standard inspection and test plan               |                     |
| B35        | Document balancing report                                |                     |
| B36        | Document test and inspection description                 |                     |
| B37        | Document load characteristics                            |                     |
| B38        | Document recommended spare parts                         |                     |
| B41        | Document instrumentation list                            |                     |
| B43        | Document production schedule: Generated once             |                     |
| B44        | Document production schedule: Updated biweekly           |                     |
| B45        | Document production schedule: Updated monthly            |                     |
| B48        | Document order-specific inspection and test plan         |                     |
|            | <b>Document language</b>                                 |                     |
| D00        | Documentation in German                                  |                     |
| D54        | Documentation in Czech                                   |                     |
| D55        | Documentation in Polish                                  |                     |
| D56        | Documentation in Russian                                 |                     |
| D72        | Documentation in Italian                                 |                     |
| D73        | Documentation in Finnish                                 |                     |
| D74        | Documentation in Dutch                                   |                     |
| D75        | Documentation in Turkish                                 |                     |
| D76        | Documentation in English                                 | Standard            |
| D77        | Documentation in French                                  |                     |
| D78        | Documentation in Spanish                                 |                     |
| D79        | Documentation in Portuguese                              |                     |
| D80        | Documentation in Bulgarian                               |                     |
| D81        | Documentation in Norwegian                               |                     |
| D82        | Documentation in Hungarian                               |                     |
| D83        | Documentation in Swedish                                 |                     |
| D84        | Documentation in Chinese                                 |                     |
|            | <b>Direction of rotation</b>                             |                     |
| K97        | Rotation clockwise (CW)                                  | Standard            |
| K98        | Rotation counter-clockwise (CCW)                         |                     |

## Options (continued)

| Order code | Option description   | Remark                                    |
|------------|--|---|
|            | <b>Noise reduction</b>   |   |
| L20        | Silencer for air inlet   |   |
| L21        | Noise reduction: Silencer for air outlet   | Only for H-compact PLUS and SIMOTICS HV M |
| L22        | Noise reduction: Lining of interior space  | Only for H-compact PLUS and SIMOTICS HV M |
| L23        | External metal fan, unidirectional   | Only for H-compact                        |
| L25        | Rustless grid at inlet silencer  | Only for H-compact                        |
|            | <b>Terminal box mounting position</b>  |   |
| K09        | Terminal box on right-hand side, view from DE  | Standard                                  |
| K10        | Terminal box on left-hand side, view from DE   |   |
| K83        | Terminal box rotated through 90°, cable entry from DE  |   |
| K84        | Terminal box rotated through 90°, cable entry from NDE   |   |
| K85        | Terminal box rotated through 180°  |   |
| N81        | Bracket rotated through 180°, terminal box rotated through 90°, cable entry from NDE                               | Only for H-compact                        |
| N82        | Bracket rotated through 180°, terminal box rotated through 90°, cable entry from DE                                | Only for H-compact                        |
| N83        | Bracket rotated through 180°, terminal box rotated through 180°, cable entry from above                            |   |
| N84        | Bracket rotated through 180°, rotated through 90°, cable entry from below  |   |
| N85        | Terminal box on NDE  | Only for H-compact                        |
|            | <b>Terminal box, main and auxiliary terminal box</b>   |   |
| L54        | Terminal box, 6 terminals with 2 cable entries for connection to power supply, rated current > 315 A               |   |
| L59        | Terminal box with sealing chamber for 1 cable entry  |   |
| L55        | Star-point terminal box, up to 6.6 kV, 3 terminals   |   |
| L56        | Star-point terminal box, up to 11 kV, 3 terminals  |   |
| L57        | Star-point terminal box, up to 6.6 kV, 6 terminals   |   |
| M50        | Auxiliary terminal box in cast iron  |   |
| M51        | Auxiliary terminal box material: Stainless steel   |   |
| M52        | Separate auxiliary terminal box for anti-condensation heater   |   |
|            | <b>Cooling air monitoring</b>  |   |
| A44        | 1 resistance thermometer Pt100 for 2-, 3- or 4-wire connection from terminal box for cold air temperature          |   |
| A45        | 1 resistance thermometer Pt100 for 2-, 3- or 4-wire connection from terminal box for hot air temperature           |   |
| A46        | 1 double resistance thermometer Pt100 for 2-, 3- or 4-wire connection from terminal box, for cold air temperature  |   |
| A47        | 1 double resistance thermometer Pt100 for 2-, 3- or 4-wire connection from terminal box, for hot air temperature   |   |
| A86        | 1 dial-type thermometer with 2 NO-Contacts for cold air temperature incl. terminal box                             |   |
| A87        | 1 dial-type thermometer with 2 NO-Contacts for hot air temperature incl. terminal box                              |   |
|            | <b>Speed monitoring</b>  |   |
| A03        | Speed monitoring using an inductive proximity switch, Pepperl + Fuchs, incl. terminal box, without evaluation unit |   |

## Explosion-protected motors

### Options and tests

#### Description of options

#### Options (continued)

| Order code   | Option description   | Remark  |
|--|--|---|
| <b>Bearing version/instrumentation</b>             |  |   |
| <b>H09 + H11</b>                                   | DIN flange type for forced oil lubrication for oil inlet with flowmeter, manometer and throttle valve (incl. counter flange) + DIN flange type forced oil lubrication for oil outlet with sight glass (incl. counter flange)       |   |
| <b>H10 + H12</b>                                   | ANSI flange type for forced oil lubrication for oil inlet with flowmeter, manometer and throttle valve (incl. counter flange) + ANSI flange type for forced oil lubrication for oil outlet with sight glass (incl. counter flange) |   |
| <b>H43</b>   | DIN flange type for forced oil lubrication for in- and outlet without instruments (with counter flanges)   |   |
| <b>H44</b>   | ANSI flange type for forced oil lubrication for in- and outlet without instruments (with counter flanges)  |   |
| <b>K20</b>   | Bearing design on DE for increased forces (reinforced)   | H-compact SH 315 and SH 355 only                      |
| <b>K96</b>   | Sleeve bearing instead of anti-friction bearing  |   |
| <b>L18</b>   | DE insulation  |   |
| <b>L27</b>   | Insulated bearing on NDE   | Standard for H-compact PLUS and SIMOTICS HV M         |
| <b>L60</b>   | Forced-circulation oil lubrication (with oil cooling) instead of oil-ring lubrication  |   |
| <b>L66</b>   | Air cooling, but prepared for future conversion to forced-circulation oil lubrication  |   |
| <b>P44</b>   | Oil manifold; connections with counter flange; flange flush with the axial shaft face  |   |
| <b>Bearing monitoring – sleeve bearings</b>        |  |   |
| <b>A02</b>   | Shaft vibration monitoring for sleeve bearings, Bently Nevada system   |   |
| <b>A39</b>   | Prepared for shaft vibration monitoring for sleeve bearings (without monitoring system)  |   |
| <b>A41</b>   | 2 resistance thermometers Pt100 for 2-, 3- or 4-wire connection from terminals for sleeve bearing  |   |
| <b>A43</b>   | 2 double resistance thermometers Pt100 for 2-, 3- or 4-wire connection from terminals for sleeve bearing   |   |
| <b>A70</b>   | 2 dial-type thermometers without contacts  |   |
| <b>A71</b>   | 2 dial-type thermometers with contacts   |   |
| <b>Bearing monitoring – anti-friction bearings</b> |  |   |
| <b>A40</b>   | 2 resistance thermometers Pt100 for 2-, 3- or 4-wire connection from terminal box for anti-friction bearings   |   |
| <b>A42</b>   | 2 double resistance thermometers Pt100 for 2-, 3- or 4-wire connection from terminals for anti-friction bearings   |   |
| <b>G50</b>   | Shock pulse measuring nipple (SPM) at DE and NDE   | Standard  |
| <b>Mechanical versions</b>                         |  |   |
| <b>K16</b>   | Second shaft extension up to 50 % rated torque   |   |
| <b>L81</b>   | Vibration severity grade B according to IEC/ EN 60034-14   | Not available for 2-pole motors with roller bearings. |
| <b>Y55</b>   | Non-standard cylindrical shaft extension (an inquiry must be sent to the factory)  |   |
| <b>Y85</b>   | Oil shrink fit for cylindrical, single-stage shaft extension instead of a key connection   |   |



## Options (continued)

| Order code | Option description  | Remark  |
|------------|---|---|
|            | <b>Others/additional options</b>  |   |
| H08        | Leakage water detection   |   |
| K52        | Degree of protection IP56 non-heavy-sea   |   |
| K35        | External metal fan, bidirectional   | Only for H-compact  |
| L15        | Supporting ring for coupling guard  |   |
| L17        | Mounting a coupling provided (finish machined and balanced)   |   |
| L31        | Motor mounting materials for mounting on a steel foundation: Bolts, shims and taper dowels  |   |
| L32        | Motor mounting materials for mounting on a concrete foundation or concrete base: Threaded bolts, armature plates, sole plates, shims and taper dowels   |   |
| L33        | Motor mounting materials to mount on a concrete foundation or concrete base: T-head bolts, foundation bolt sleeves, sole plates, shims and taper dowels |   |
| L91        | Higher number of starts, > 1000 ... 10000 starts per year, for Cu rotors  |   |
| L92        | Higher number of starts, > 5000 ... 10000 starts per year, for Al rotors  |   |
| P45        | External screws made of stainless steel   |   |
|            | <b>Anti-condensation heating</b>  |   |
| M14        | Anti-condensation heater Ex eb II T3, rated voltage range 110 to 120 V  |   |
| M15        | Anti-condensation heater Ex eb II T3, rated voltage range 220 to 240 V  | Standard for H-compact in type of protection Ex eb (1MA4) and H-compact PLUS            |
|            | <b>Ambient conditions</b>   |   |
| D02        | Operation at ambient temperatures up to -50 °C, transport up to -50 °C  |   |
| D03        | Operation at ambient temperatures up to -40 °C, transport up to -40 °C  |   |
| D04        | Operation at ambient temperatures up to -30 °C, transport up to -40 °C  |   |
| E81        | Outdoor use with high salinity or offshore applications (corrosivity grade C5-M/ C5-I)  |   |
| E82        | Outdoor use with moderate salinity (corrosivity grade C4)   |   |
| E83        | Outdoor use with low salinity (corrosivity grade C3)  |   |
|            | <b>Winding and motor protection</b>   |   |
| A12        | 6 PTC thermistors without lightning arresters   |   |
| A23        | 1 temperature sensor KTY 84-130   |   |
| A65        | 6 embedded resistance thermometers Pt100 for 2-, 3- or 4-wire connection from terminal box without lightning arresters                                  | Standard  |
| A67        | 6 embedded screened resistance thermometers Pt100 for 3- or 4-wire connection from terminal box without lightning arresters                             |   |
|            | <b>Marine applications</b>  | Options and tests for marine and offshore applications: <a href="#">see Chapter 5</a> . |

## Explosion-protected motors

### Options and tests

#### Description of options

#### Options (continued)

| Order code | Option description  | Remark                              |
|------------|---|-------------------------------------|
|            | <b>Tests with acceptance</b>  |                                     |
| F01        | All standard tests (routine test), with acceptance  |                                     |
| F15        | Recording of no-load characteristic and determination of core and friction losses, with acceptance      |                                     |
| F17        | Recording of short-circuit characteristic and determination of short-circuit losses, with acceptance    |                                     |
| F19        | Recording of load characteristic, with acceptance   |                                     |
| F23        | Dissipation factor test (tan delta) on 2 (test) coils, with acceptance                                  | In addition, specify order code F90 |
| F29        | No-load noise measurement, without noise analysis, with acceptance                                      |                                     |
| F31        | Cooling air flow and pressure drop measurement, with acceptance   |                                     |
| F35        | Recording of current and torque characteristics during acceleration, with acceptance                    |                                     |
| F37        | Determination of moment of inertia by retardation method, with acceptance                               |                                     |
| F39        | Overspeed test, with acceptance   |                                     |
| F41        | Recording of residual voltage curve, with acceptance  |                                     |
| F53        | Locked-rotor torque and current measurement, with acceptance  |                                     |
| F55        | Polarization index measurement, with acceptance   |                                     |
| F61        | Impulse or AC voltage test on 2 (test) coils, with acceptance   | In addition, specify order code F90 |
| F63        | Noise analysis, with acceptance   |                                     |
| F83        | Type test for horizontal motors with temperature rise test, with acceptance                             |                                     |
| F90        | 2 test coils  |                                     |
| F93        | Type test for vertical motors with temperature rise test, with acceptance                               |                                     |
|            | <b>Tests without acceptance</b>   |                                     |
| F14        | Recording of no-load characteristic and determination of core and friction losses, without acceptance   |                                     |
| F16        | Recording of short-circuit characteristic and determination of short-circuit losses, without acceptance |                                     |
| F18        | Recording of load characteristic, without acceptance  |                                     |
| F22        | Dissipation factor test (tan delta) on 2 (test) coils, without acceptance                               | In addition, specify order code F90 |
| F28        | No-load noise measurement, without noise analysis, without acceptance                                   |                                     |
| F30        | Cooling air flow and pressure drop measurement, without acceptance                                      |                                     |
| F34        | Recording of current and torque characteristics during acceleration, without acceptance                 |                                     |
| F36        | Determination of moment of inertia by retardation method, without acceptance                            |                                     |
| F38        | Overspeed test, without acceptance  |                                     |
| F42        | "Conformance Test (Wet Test)" to NEMA Standard, without acceptance                                      |                                     |
| F52        | Locked-rotor torque and current measurement, without acceptance   |                                     |
| F54        | Polarization index measurement, without acceptance  |                                     |
| F60        | Impulse or AC voltage test on 2 (test) coils, without acceptance  | In addition, specify order code F90 |
| F62        | Noise analysis, without acceptance  |                                     |
| F82        | Type test for horizontal motors with temperature rise test, without acceptance                          |                                     |
| F90        | 2 test coils  |                                     |
| F92        | Type test for vertical motors with temperature rise test, without acceptance                            |                                     |
|            | <b>Certificates for explosion protection</b>  |                                     |
| D32        | Ex certification for China (CQST)   |                                     |
| D35        | Ex certification for Russia (RosTechNadzor)   |                                     |
| D36        | Conformity declaration acc. to 94/9/EG (ATEX) of an independent test body for Zone 2 motors (Ex ec)     |                                     |
| D37        | IECEx certification   |                                     |

**Overview** (continued)

| Order code | Option description   | Remark                            |
|------------|--|-----------------------------------|
|            | <b>Extension of liability for defects</b>  | <b>Article number for reorder</b> |
| <b>Q80</b> | Extension of liability for defects, by 12 months to a total of 24 months (2 years) from delivery   | <b>9LD1720-0AA24</b>              |
| <b>Q81</b> | Extension of liability for defects, by 18 months to a total of 30 months (2.5 years) from delivery | <b>9LD1720-0AA30</b>              |
| <b>Q82</b> | Extension of liability for defects, by 24 months to a total of 36 months (3 years) from delivery   | <b>9LD1720-0AA36</b>              |
| <b>Q83</b> | Extension of liability for defects, by 30 months to a total of 42 months (3.5 years) from delivery | <b>9LD1720-0AA42</b>              |
| <b>Q84</b> | Extension of liability for defects, by 36 months to a total of 48 months (4 years) from delivery   | <b>9LD1720-0AA48</b>              |
| <b>Q85</b> | Extension of liability for defects, by 48 months to a total of 60 months (5 years) from delivery   | <b>9LD1720-0AA60</b>              |

Conditions for an extension of liability for defects

You will find the currently valid conditions for an extension of liability for defects under:

<http://support.automation.siemens.com/WW/view/en/56715113>

## Explosion-protected motors

Options and tests

Notes

4

## Options for marine and offshore applications




|            |                          |
|------------|--------------------------|
| <b>5/2</b> | <b>Orientation</b>       |
| <b>5/7</b> | <b>Ordering examples</b> |
| <b>5/9</b> | <b>Options</b>           |

## Options for marine and offshore applications

### Orientation

### Overview

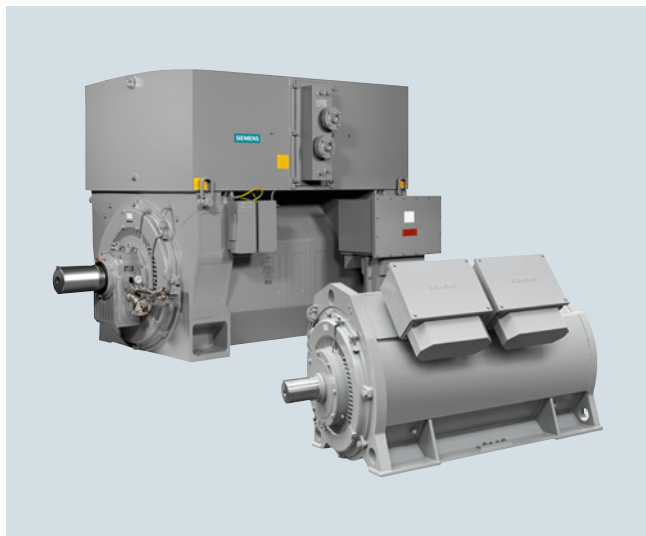

The SIMOTICS HV/TN series in a marine design have been designed for below-deck operation on ships. If the motors are intended for on deck operation or for offshore applications, then these must be explicitly ordered using an additional order code. The reason

for this is that in these cases special measures are required. The thermal utilization of the motors is adapted to the generally higher ambient temperatures onboard ships. If the application demands compliance with additional regulations, such as explosion protection, the appropriate motor series must be chosen.

The motors onboard ships are subdivided into three importance categories by the marine classification societies in collaboration with customers, depending on the field of application:

- **Essential Service for Propulsion** or also Primary Essential Service
- **Essential Service** or also Secondary Essential Service or Important Service
- **Non-Essential Service** or also Non-Important Service

As the assignment of a drive to one of the importance categories has a direct impact on the scope of the marine options, this must be known when ordering the motor.

The following services of the motor manufacturer are associated with the categories:

|   | Importance category   |   |   |
|---|---|---|---|
|   | <b>Essential Service for Propulsion</b>   | <b>Essential Service</b>  | <b>Non-Essential Service</b>  |
| Typical applications                            | Propeller drive, thruster (if used as main drive/declared as propulsion)  | Thrusters, lateral thrust units, anchor winches, bilge and ballast pumps, fire-fighting pumps | Pumps for service water   |
| Version   | In accordance with the regulations of the classification society  |   | In accordance with ambient conditions of the classification society |
| Acceptance test certificate                     | Acceptance test certificate 3.2 according to EN10204  |   | Acceptance test certificate 3.1 according to EN 10204 <sup>1)</sup> |
| Individual acceptance by classification society | Will be performed. Motor is assigned an individual certificate of the classification society.                   |   | Not necessary   |
| Ordering several identical motors               | Differentiation between the first motor and additional ones must be realized when ordering using an order code. |   | No distinction  |
| Rating plate data                               | Information about ambient conditions of the classification society  |   |   |
| Stamp of the classification society             | Stamp on the shaft <sup>2)</sup> and enclosure  |   | No stamp  |

#### Classification authorities

| Society                               | Abbreviation | Location |
|---------------------------------------|--------------|----------|
| American Bureau Of Shipping           | ABS          | USA      |
| Bureau Veritas                        | BV           | France   |
| China Classification Society          | CCS          | China    |
| Det Norske Veritas Germanischer Lloyd | DNV GL       | Germany  |
| Korean Register                       | KR           | Korea    |
| Lloyds Register                       | LR           | UK       |

<sup>1)</sup> Certificate is not stipulated by the classification society but it is issued according to the internal quality standards within the scope of a routine test.

<sup>2)</sup> Provided that it is specified that the classification society supervises construction.

### Benefits

The marine motors offer the user a number of advantages and benefits:

- Cast iron and steel versions can be supplied for corrosive atmospheres especially for high humidity levels and salt laden air
- Increased corrosion protection using specially designed paint finishes is available
- Certified marine motors can be supplied for use in areas to be protected against explosion
- In depth know-how regarding customer requirements
- Worldwide service network with 24-hour service hotline for motors and converters

### Application


Our marine motors are designed for use onboard ships (installed below deck or on deck under a protective canopy):

- Applications onboard ships as main and auxiliary drives below deck, e.g.:
  - Fans (air conditioning, refrigeration plants)
  - Pumps (for fire-extinguishing water, fuels, oils)
  - Winches (anchor winches, warping winches, lifting gear)
  - Compressors
  - Bow thruster drives
  - Main propulsion drives
  - Ex motors for hazardous zones

If marine motors are to be used on deck in especially corrosive atmospheres or in offshore applications, then they must be additionally upgraded to meet these more stringent conditions. For this purpose, one of the options E81, E82 or E83 should be selected.

- Typical applications are:
  - Coastal areas, e.g. oil rigs, drilling ships
  - Dynamic positioning drives for platforms
  - Pumps

Offshore versions must be specifically ordered, as they require special measures.

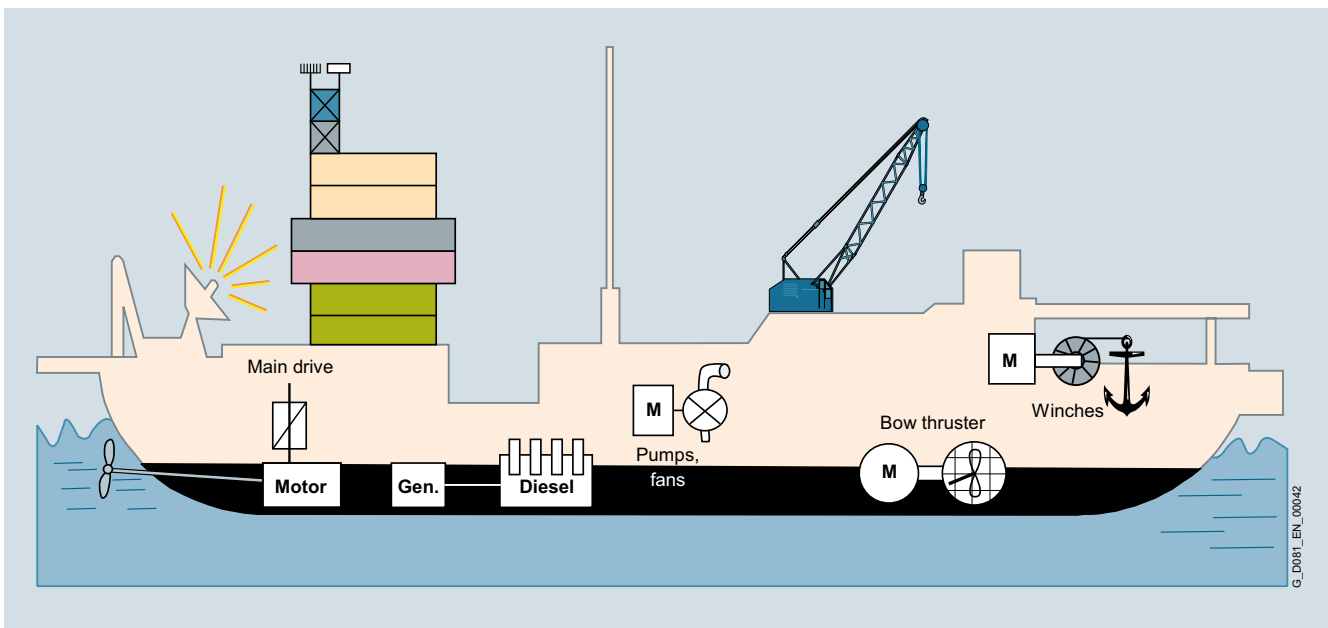

Typical areas of application

## Options for marine and offshore applications

### Orientation

#### Technical data

##### Enclosure version

Depending on the motor series, motors are available in a corrosion-resistant steel enclosure or in a rugged low-vibration cast-iron version.

##### Motor connection

Cable glands are not included in the scope of delivery.

All marine motors generally have an external grounding terminal.

Regulations of the individual classifications societies for motors:

| Classification society | Coolant temperature CT |                   | Admissible temperature rise limit according to the classification society |   |  | Rated power limit for individual acceptance test<br>kW | Construction supervision mandatory |
|------------------------|------------------------|-------------------|---|---|--|--|------------------------------------|
|                        | Water cooling<br>°C    | Air cooling<br>°C | Temperature class<br>130 (B)<br>K   | 155 (F),<br>$P_{\text{rated}} < 5000 \text{ kW}$<br>K | 155 (F),<br>$P_{\text{rated}} \geq 5000 \text{ kW}$<br>K |  |                                    |
| <b>LR</b>              | 32                     | 45                | 70  | 95  | 90   | ≥ 100  | ≥ 100 kW                           |
| <b>BV</b>              | 32                     | 45                | 75  | 100   | 95   | ≥ 100  | ≥ 500 kW                           |
| <b>DNV GL</b>          | 32                     | 45                | 75  | 100   | 100  | ≥ 300  | –                                  |
| <b>ABS</b>             | 32                     | 50                | 70  | 95  | 90   | ≥ 100  | –                                  |
| <b>KR</b>              | 32                     | 45                | 75  | 100   | 95   | ≥ 7.5  | –                                  |
| <b>CCS</b>             | 32                     | 45                | 75  | 100   | 95   | All power ratings                                      | All power ratings                  |



**Technical data** (continued)

Regulations of the individual classification societies with order codes when ordering SIMOTICS HV/TN motors (low and high voltage versions) in a marine design

**SIMOTICS HV/TN in a marine design**

|   | Motor type H-compact | Motor type H-compact PLUS, SIMOTICS HV/TN |
|---|----------------------|---|
| Water-cooled motors for line and converter operation  | 1LH4                 | 1RN4, 1RN6, 1RN7                          |
| Air-cooled motors for line and converter operation (self-ventilated)                                | 1LA4                 | 1RQ4, 1RQ6, 1RQ7                          |
| Air-cooled motors with externally mounted fan for converter operation                               | 1PQ4                 | 1RQ4, 1RQ6, 1RQ7                          |
| Self-ventilated motors with open-circuit air cooling for line and converter operation               | –                    | 1RA4, 1RP6, 1RA7                          |
| Motors with the cooling types listed above with type of protection "nA" or "ID" (Zone 2 or Zone 22) | 1MS4                 | 1SL4, 1SL6, 1SL7<br>1SG4, 1SG6, 1SG7      |
| Motors with the cooling types listed above with type of protection "e" (Zone 1)                     | 1MA4                 | 1SN4, 1SN6<br>1SJ4, 1SJ6                  |
| Motors with the cooling types listed above with type of protection "px" (Zone 1)                    | 1MG4                 | 1SQ4, 1SQ6, 1SQ7<br>1SB4, 1SB6, 1SB7      |

SIMOTICS HV/TN motors for marine applications must be ordered with the classification-specific options. This ensures that both the mechanical design of the motor, and the tests are performed exactly in accordance with the instructions provided by the respective classification society.

There are four categories of classification-specific options:

- 1) *Design options* define the marine-compatible technical design in accordance with the definitions of the classification society
- 2) *Certification options* define the scope of the test certificates
- 3) *Test options* define the scope of the individual tests
- 4) *Additional options* for deviations and special conditions: specify the customer's request for participation in the tests at the factory, or define coolant temperatures that differ from the requirements of the classification society (additional plain text required)

The options of the importance categories listed above are combined with each other depending on the class of importance, classification society and other conditions.

If motors are to be designed according to the specifications of several classification societies, a special inquiry is necessary.

**Motors for Non-Essential Services**

The technical design is in accordance with the ambient operating conditions specified by the classification society. One of the marine design options X00, X01, X12<sup>1)</sup>, X03, X05 or X06 must be specified depending on the classification society. Acceptance inspections are not required. There is no distinction between ordering an individual motor or several ones.

| Non-Essential Service | Options according to the classification society |     |               |        |     |     |
|-----------------------|---|-----|---------------|--------|-----|-----|
|                       | ABS   | BV  | CCS           | DNV GL | KR  | LR  |
| Technical version     | X00   | X01 | <sup>1)</sup> | X03    | X05 | X06 |

**Motors for Essential Services**

The technical design is in accordance with regulations of the classification society: Options X10 to X16. An acceptance test certificate 3.2 according to EN 10204 and a product certificate of the classification society is provided with each motor. Depending on the classification society, the test steps are defined by options X30 to X42 for the first motor (even numbers) and X31 to X43 for the additional motors (uneven numbers). Options J70 to J82 or J71 to J83 define the expenditure for certifying the motor.

| Essential Service   | Options according to the classification society |     |     |        |     |     |
|---|---|-----|-----|--------|-----|-----|
|   | ABS   | BV  | CCS | DNV GL | KR  | LR  |
| Technical version   | X10   | X11 | X12 | X13    | X15 | X16 |
| Certification   |   |     |     |        |     |     |
| • First motor   | J70   | J72 | J74 | J76    | J80 | J82 |
| • Additional motors   | J71   | J73 | J75 | J77    | J81 | J83 |
| Scope of the tests and presence of representatives of the classification society                                  |   |     |     |        |     |     |
| • First motor   | X30   | X32 | X34 | X36    | X40 | X42 |
| • Additional motors   | X31   | X33 | X35 | X37    | X41 | X43 |
| Tests in presence of representatives of the customer (in addition to the inspector of the classification society) | X99   |     |     |        |     |     |
| Conditions deviating from classification requirements must be fulfilled   | E80   |     |     |        |     |     |

**Motors for Essential Services for Propulsion**

The technical design is in accordance with regulations of the classification society: Options X20 to X26. An acceptance test certificate 3.2 according to EN 10204 and a product certificate of the classification society is provided with each motor. Depending on the classification society, the test steps are defined by options X60 to X72 for the first motor (even numbers) and X61 to X73 for the additional motors (uneven numbers). Options N40 to N52, or N41 to N53 define the expenditure for certifying the motor.

| Essential Service for Propulsion  | Options according to the classification society |     |     |        |     |     |
|---|---|-----|-----|--------|-----|-----|
|   | ABS   | BV  | CCS | DNV GL | KR  | LR  |
| Technical version   | X20   | X21 | X22 | X23    | X25 | X26 |
| Certification   |   |     |     |        |     |     |
| • First motor   | N40   | N42 | N44 | N46    | N50 | N52 |
| • Additional motors   | N41   | N43 | N45 | N47    | N51 | N53 |
| Scope of the tests and presence of representatives of the classification society                                  |   |     |     |        |     |     |
| • First motor   | X60   | X62 | X64 | X66    | X70 | X72 |
| • Additional motors   | X61   | X63 | X65 | X67    | X71 | X73 |
| Tests in presence of representatives of the customer (in addition to the inspector of the classification society) | X99   |     |     |        |     |     |
| Conditions deviating from classification requirements must be fulfilled   | E80   |     |     |        |     |     |

**Option E80 is used if a different coolant temperature CT is required. The CT must also be specified in plain text, e.g. CT55.**

<sup>1)</sup> Non-Essential Service must be handled by CCS just like an Essential Service.

## Options for marine and offshore applications

### Orientation

#### Technical data (continued)

##### Scope of design options X00 to X26

All classification-specific technical measures are contained in the design options.

##### Temperature class and coolant temperature

Standard motors and explosion-protected motors up to shaft height 710 mm

In general, marine motors are designed for a coolant temperature CT 45 °C in temperature class 155 (F), used according to 155 (F). Motors according to the ABS classification that specify CT 50 °C are an exception. When motors are used according to temperature class 130 (B) derating is required.

Coolant temperatures that exceed CT 45 °C require derating in accordance with the following table:

|   | Coolant temperature CT |       |       |       |
|---|------------------------|-------|-------|-------|
|   | 45 °C                  | 50 °C | 55 °C | 60 °C |
| <b>Temperature class 155 (F) according to 155 (F)</b> |                        |       |       |       |
| Derating factor for line operation                    | 1.00                   | 0.95  | 0.90  | 0.85  |

More detailed information is available on request.

##### Rating plate and acceptance test certificate

The metal rating plate includes the data of the relevant classification society (exception: Non-Essential Services) and the associated coolant temperature.

| SIEMENS   |    |  |    |     |      |       |                                |                  |            |        |       |
|---|----|--|----|-----|------|-------|--------------------------------|------------------|------------|--------|-------|
| 3~ MOT. 1LA4 452-4CN16-Z NoN- X71267756010001 / 2009 IMB35 Th.Cl.155(F) |    |  |    |     |      |       |                                |                  |            |        |       |
| V   | Hz |  | A  | kW  | cosφ | 1/min | I <sub>A</sub> /I <sub>N</sub> | T <sub>E</sub> s | Certif.No. | IP     |       |
| 6600 Y  | 60 |  | 93 | 880 | 0.86 | 1792  |                                |                  |            | 55     |       |
|   |    |  |    |     |      |       |                                |                  |            | ←      |       |
|   |    |  |    |     |      |       |                                |                  |            | VUW    |       |
| Rotor SQU.CAGE KL IEC/EN 60034-1  |    |  |    |     |      |       |                                |                  |            | Gew/Wt | 5.4 t |
| MARINE EQUIPMENT / CLASSIFICATION SOCIETY: ABS                          |    |  |    |     |      |       |                                |                  |            |        |       |
| Ta: -20...+50°C   |    |  |    |     |      |       |                                |                  |            |        |       |
|   |    |  |    |     |      |       |                                |                  |            |        |       |
| MADE IN GERMANY D-90441 Nürnberg  |    |  |    |     |      |       |                                |                  |            |        |       |

##### Degree of protection

The degrees of protection as specified in Catalog D 84.1 apply. For IP56 (non-heavy sea, order code K52) the formation of ice must be avoided.

##### Winding and motor protection

To monitor the winding – and if specified by the classification society – to monitor the bearings, the motors are equipped with PTC thermistors, temperature sensors and resistance thermometers. Marine motors are equipped with anti-condensation heating in order to prevent possible condensation forming on the windings.

##### Paint finish

The paint finish has an increased coating thickness (order code K26). This is suitable for indoor installations and outdoors under a roof or canopy.

A paint finish according to DIN EN ISO 12944-5 C5-M is used for unprotected installation on deck, especially aggressive atmospheres or offshore applications. This is part of order code E81, which upgrades a standard marine motor for these special ambient conditions.

Special paint colors and increased layer thicknesses are available on request.

##### Recommended special versions:

- Installation of 2 screw-in PT100 resistance thermometers in basic circuit for anti-friction bearings – Order code A40
- IP56 degree of protection (non-heavy-sea) for protection against harmful dust deposits, protection against water jets from any direction – Order code K52
- Degree of protection IP65 on request.
- External screws and bolts manufactured out of stainless steel – Order code P45
- Upgrading a marine motor for unprotected installation on deck, use in especially aggressive atmospheres or offshore applications – Order code E81

#### Additional information

##### Order information

The fees of the classification societies for individual acceptance inspections are included in the order code.

## Selection and ordering data

## Ordering examples:

| Selection criteria  | Requirement  | Structure of the Article No. |
|---|--|------------------------------|
| <b>1st ordering example: 5 motors for Non-Essential Service according to LR (Lloyds Register), UK</b> |  |                              |
| Motor type  | Rib-cooled H-compact high voltage motor, low voltage version, self-ventilated, cooling type IC411, degree of protection IP55 | 1LA4■■■■-■■■■■               |
| Shaft height  | 560 mm   | 1LA4560-6■■■■■               |
| No. of poles/synchronous speed  | 6-pole/1000 rpm  |                              |
| Type rating   | 1750 kW  |                              |
| Rotor cage material   | Copper   | 1LA4560-6C■■■■■              |
| Voltage and frequency   | 690 V, 50 Hz   | 1LA4560-6CM0■                |
| Operating mode  | Converter operation  |                              |
| Type of construction  | IM B3  | 1LA4560-6CM00                |
| Special versions  | Technical design in accordance with LR (Lloyds Register), UK   | 1LA4560-6CM00-Z X06          |
|   | Article No. for all 5 motors   | 1LA4560-6CM00-Z X06          |
| <b>2nd ordering example: 7 motors for Essential Service according to BV (Bureau Veritas), France</b>  |  |                              |
| Motor type  | Water-cooled high voltage H-compact PLUS motor, cooling type IC81W, degree of protection IP55, type of protection Ex pxb     | 1SQ4■■■■-■■■■■               |
| Shaft height  | 630 mm   | 1SQ4632-4■■■■■               |
| No. of poles/synchronous speed  | 4-pole/1500 rpm  |                              |
| Type rating   | 6000 kW  |                              |
| Ventilation   | Shaft-mounted fan (basic version)  | 1SQ4632-4H■■■■■              |
| Rotor version and operating mode  | Copper (standard), line operation  | 1SQ4632-4HE■■■               |
| Voltage and frequency   | 6 kV, 50 Hz  | 1SQ4632-4HE6■                |
| Type of construction  | IM V10 with canopy   | 1SQ4632-4HE64                |
| Special versions  |  |                              |
| <b>1st motor</b>  | Technical design in accordance with BV (Bureau Veritas), France  | 1SQ4632-4HE64-Z X11          |
|   | Necessary certification for first motor ordered in accordance with BV (Bureau Veritas), France                               | 1SQ4632-4HE64-Z X11+J72      |
|   | Necessary tests for first motor ordered in accordance with BV (Bureau Veritas), France                                       | 1SQ4632-4HE64-Z X11+J72+X32  |
|   | Article No. for 1st motor  | 1SQ4632-4HE64-Z X11+J72+X32  |
| <b>Additional 6 motors</b><br>(additional motors)   | Technical design in accordance with BV (Bureau Veritas), France  | 1SQ4632-4HE64-Z X11          |
|   | Necessary certification for additional motors ordered in accordance with BV (Bureau Veritas), France                         | 1SQ4632-4HE64-Z X11+J73      |
|   | Necessary tests for additional motors ordered in accordance with BV (Bureau Veritas), France                                 | 1SQ4632-2HE64-Z X11+J73+X33  |
|   | Article No. for the additional 6 motors  | 1SQ4632-2HE64-Z X11+J73+X33  |

## Options for marine and offshore applications

### Ordering examples

| Selection criteria   | Requirement   | Structure of the Article No.   |
|--|---|--|
| <b>3rd ordering example: 2 motors for Essential Service according to DNV GL (Det Norske Veritas Germanischer Lloyd), Germany</b>           |   |  |
| Motor type   | The same as for the 1st ordering example  | <b>1LA4560-6CM00</b>   |
| Special versions   |   |  |
| <b>1st motor</b>   | Technical design in accordance with DNV GL (Det Norske Veritas Germanischer Lloyd), Germany   | <b>1LA4560-6CM00-Z X13</b>   |
|  | Necessary certification for first motor ordered according to DNV GL (Det Norske Veritas Germanischer Lloyd), Germany                                      | <b>1LA4560-6CM00-Z X13+J76</b>   |
|  | Necessary tests for first motor ordered according to DNV GL (Det Norske Veritas Germanischer Lloyd), Germany  | <b>1LA4560-6CM00-Z X13+J76+X36</b>   |
|  | Tests in presence of representatives of the customer (in addition to the inspector of the classification society)   | <b>1LA4560-6CM00-Z X13+J76+X36+X99</b>   |
|  | Article No. for 1st motor   | <b>1LA4560-6CM00-Z X13+J76+X36+X99</b>   |
| <b>Additional motor</b><br>(additional motors)   | Technical design in accordance with DNV GL (Det Norske Veritas Germanischer Lloyd), Germany   | <b>1LA4560-6CM00-Z X13</b>   |
|  | Necessary certification for additional motors ordered according to DNV GL (Det Norske Veritas Germanischer Lloyd), Germany                                | <b>1LA4560-6CM00-Z X13+J77</b>   |
|  | Necessary tests for additional motors ordered according to DNV GL (Det Norske Veritas Germanischer Lloyd), Germany  | <b>1LA4560-6CM00-Z X13+J77+X37</b>   |
|  | Article No. for additional motor  | <b>1LA4560-6CM00-Z X13+J77+X37</b>   |
| <b>4th ordering example: 3 motors for Essential Service Propulsion according to ABS (American Bureau of Shipping), USA</b>                 |   |  |
| Motor type   | The same as for the 2nd ordering example  | <b>1SQ4632-4HE64</b>   |
| Special versions   |   |  |
| <b>1st motor</b>   | Technical design in accordance with ABS (American Bureau of Shipping), USA  | <b>1SQ4632-4HE64-Z X20</b>   |
|  | Necessary certification for first motor ordered according to ABS (American Bureau of Shipping), USA   | <b>1SQ4632-4HE64-Z X20+N40</b>   |
|  | Necessary tests for first motor ordered according to ABS (American Bureau of Shipping), USA   | <b>1SQ4632-4HE64-Z X20+N40+X60</b>   |
|  | Article No. for 1st motor   | <b>1SQ4632-4HE64-Z X20+N40+X60</b>   |
| <b>Additional 2 motors</b><br>(additional motors)  | Technical design in accordance with ABS (American Bureau of Shipping), USA  | <b>1SQ4632-4HE64-Z X20</b>   |
|  | Necessary certification for additional motors ordered according to ABS (American Bureau of Shipping), USA   | <b>1SQ4632-4HE64-Z X20+N41</b>   |
|  | Necessary tests for additional motors ordered according to ABS (American Bureau of Shipping), USA   | <b>1SQ4632-4HE64-Z X20+N41+X61</b>   |
|  | Article No. for the additional 2 motors   | <b>1SQ4632-4HE64-Z X20+N41+X61</b>   |
| <b>5th ordering example: 1 motor for Essential Service according to ABS (American Bureau of Shipping), USA, coolant temperature 60 °C:</b> |   |  |
| Motor type   | The same as for the 1st ordering example  | <b>1LA4560-6CM00</b>   |
| Special versions   |   |  |
|  | Technical design in accordance with ABS (American Bureau of Shipping), USA  | <b>1LA4560-6CM00-Z X10</b>   |
|  | Necessary certification for first motor ordered according to ABS (American Bureau of Shipping), USA   | <b>1LA4560-6CM00-Z X10+J70</b>   |
|  | Necessary tests for first motor ordered according to ABS (American Bureau of Shipping), USA   | <b>1LA4560-6CM00-Z X10+J70+X30</b>   |
|  | Motor for marine application, higher ambient temperature and/or utilization to temperature class 155 (F) according to 130 (B) – Coolant temperature 60 °C | <b>1LA4560-6CM00-Z X10+J70+X30+E80</b><br><b>Plain text: COOLANT TEMP CT60</b> |
|  | Article No. for the motor   | <b>1LA4560-6CM00-Z X10+J70+X30+E80</b><br><b>Plain text: COOLANT TEMP CT60</b> |

## Options

*Options for marine motors*

| Order code  | Option description   |
|---|--|
| <b>Non-Essential Service</b>                        |  |
| <i>Technical version</i>                            |  |
| X00   | Version according to ABS for Non-Essential Service   |
| X01   | Version according to BV for Non-Essential Service  |
| X12 <sup>1)</sup>                                   | Version according to CCS for Essential Service   |
| X03   | Version according to DNV GL for Non-Essential Service  |
| X05   | Version according to KR for Non-Essential Service  |
| X06   | Version according to LR for Non-Essential Service  |
| <b>Essential Service</b>                            |  |
| <i>Technical version</i>                            |  |
| X10   | Version according to ABS for Essential Service   |
| X11   | Version according to BV for Essential Service  |
| X12   | Version according to CCS for Essential Service   |
| X13   | Version according to DNV GL for Essential Service  |
| X15   | Version according to KR for Essential Service  |
| X16   | Version according to LR for Essential Service  |
| <i>Certification</i>                                |  |
| <b>for the first motor ordered</b>                  |  |
| J70   | Certification for the first motor ordered according to ABS for Essential Service                     |
| J72   | Certification for the first motor ordered according to BV for Essential Service                      |
| J74   | Certification for the first motor ordered according to CCS for Essential Service                     |
| J76   | Certification for the first motor ordered according to DNV GL for Essential Service                  |
| J80   | Certification for the first motor ordered according to KR for Essential Service                      |
| J82   | Certification for the first motor ordered according to LR for Essential Service                      |
| <b>for the second and additional motors ordered</b> |  |
| J71   | Certification for the second and additional motors ordered according to ABS for Essential Service    |
| J73   | Certification for the second and additional motors ordered according to BV for Essential Service     |
| J75   | Certification for the second and additional motors ordered according to CCS for Essential Service    |
| J77   | Certification for the second and additional motors ordered according to DNV GL for Essential Service |
| J81   | Certification for the second and additional motors ordered according to KR for Essential Service     |
| J83   | Certification for the second and additional motors ordered according to LR for Essential Service     |
| <i>Tests</i>  |  |
| <b>for the first motor ordered</b>                  |  |
| X30   | Tests for the first motor ordered according to ABS for Essential Service                             |
| X32   | Tests for the first motor ordered according to BV for Essential Service                              |
| X34   | Tests for the first motor ordered according to CCS for Essential Service                             |
| X36   | Tests for the first motor ordered according to DNV GL for Essential Service                          |
| X40   | Tests for the first motor ordered according to KR for Essential Service                              |
| X42   | Tests for the first motor ordered according to LR for Essential Service                              |
| <b>for the second and additional motors ordered</b> |  |
| X31   | Tests for the second and additional motors ordered according to ABS for Essential Service            |
| X33   | Tests for the second and additional motors ordered according to BV for Essential Service             |
| X35   | Tests for the second and additional motors ordered according to CCS for Essential Service            |
| X37   | Tests for the second and additional motors ordered according to DNV GL for Essential Service         |
| X41   | Tests for the second and additional motors ordered according to KR for Essential Service             |
| X43   | Tests for the second and additional motors ordered according to LR for Essential Service             |

<sup>1)</sup> CCS handles Non-Essential Service just the same as Essential Service

## Options for marine and offshore applications

### Options

#### Options (continued)

| Order code | Option description  |
|------------|---|
|            | <b>Essential Service Propulsion</b>   |
|            | <i>Technical version</i>  |
| <b>X20</b> | Version according to ABS for Essential Service Propulsion   |
| <b>X21</b> | Version according to BV for Essential Service Propulsion  |
| <b>X22</b> | Version according to CCS for Essential Service Propulsion   |
| <b>X23</b> | Version according to DNV GL for Essential Service Propulsion  |
| <b>X25</b> | Version according to KR for Essential Service Propulsion  |
| <b>X26</b> | Version according to LR for Essential Service Propulsion  |
|            | <i>Certification</i>  |
|            | <b>for the first motor ordered for essential service propulsion</b>   |
| <b>N40</b> | Certification for the first motor ordered according to ABS for Essential Service Propulsion                     |
| <b>N42</b> | Certification for the first motor ordered according to BV for Essential Service Propulsion                      |
| <b>N44</b> | Certification for the first motor ordered according to CCS for Essential Service Propulsion                     |
| <b>N46</b> | Certification for the first motor ordered according to DNV GL for Essential Service Propulsion                  |
| <b>N50</b> | Certification for the first motor ordered according to KR for Essential Service Propulsion                      |
| <b>N52</b> | Certification for the first motor ordered according to LR for Essential Service Propulsion                      |
|            | <i>Certification</i>  |
|            | <b>for the second and additional motors ordered</b>   |
| <b>N41</b> | Certification for the second and additional motors ordered according to ABS for Essential Service Propulsion    |
| <b>N43</b> | Certification for the second and additional motors ordered according to BV for Essential Service Propulsion     |
| <b>N45</b> | Certification for the second and additional motors ordered according to CCS for Essential Service Propulsion    |
| <b>N47</b> | Certification for the second and additional motors ordered according to DNV GL for Essential Service Propulsion |
| <b>N51</b> | Certification for the second and additional motors ordered according to KR for Essential Service Propulsion     |
| <b>N53</b> | Certification for the second and additional motors ordered according to LR for Essential Service Propulsion     |
|            | <i>Tests</i>  |
|            | <b>for the first motor ordered</b>  |
| <b>X60</b> | Tests for the first motor ordered according to ABS for Essential Service Propulsion                             |
| <b>X62</b> | Tests for the first motor ordered according to BV for Essential Service Propulsion                              |
| <b>X64</b> | Tests for the first motor ordered according to CCS for Essential Service Propulsion                             |
| <b>X66</b> | Tests for the first motor ordered according to DNV GL for Essential Service Propulsion                          |
| <b>X70</b> | Tests for the first motor ordered according to KR for Essential Service Propulsion                              |
| <b>X72</b> | Tests for the first motor ordered according to LR for Essential Service Propulsion                              |
|            | <b>for the second and additional motors ordered</b>   |
| <b>X61</b> | Tests for the second and additional motors ordered according to ABS for Essential Service Propulsion            |
| <b>X63</b> | Tests for the second and additional motors ordered according to BV for Essential Service Propulsion             |
| <b>X65</b> | Tests for the second and additional motors ordered according to CCS for Essential Service Propulsion            |
| <b>X67</b> | Tests for the second and additional motors ordered according to DNV GL for Essential Service Propulsion         |
| <b>X71</b> | Tests for the second and additional motors ordered according to KR for Essential Service Propulsion             |
| <b>X73</b> | Tests for the second and additional motors ordered according to LR for Essential Service Propulsion             |

#### Supplementary options

| Order code              | Option description   |
|-------------------------|--|
| <b>X99<sup>1)</sup></b> | Tests in the presence of representatives of the customer (together with the inspector of the classification society)             |
| <b>E80<sup>2)</sup></b> | Conditions deviating from the classification requirements  |
| <b>E81</b>              | Upgrading a marine motor for unprotected installation on deck, use in especially aggressive atmospheres or offshore applications |

<sup>1)</sup> Only for Essential Service and Essential Service Propulsion.

<sup>2)</sup> Additional plain text data explaining the deviation required.

## Service & Support



6/2


Industry Services

## Service & Support

### Industry Services

#### Overview

**Unleash potential – with services from Siemens**

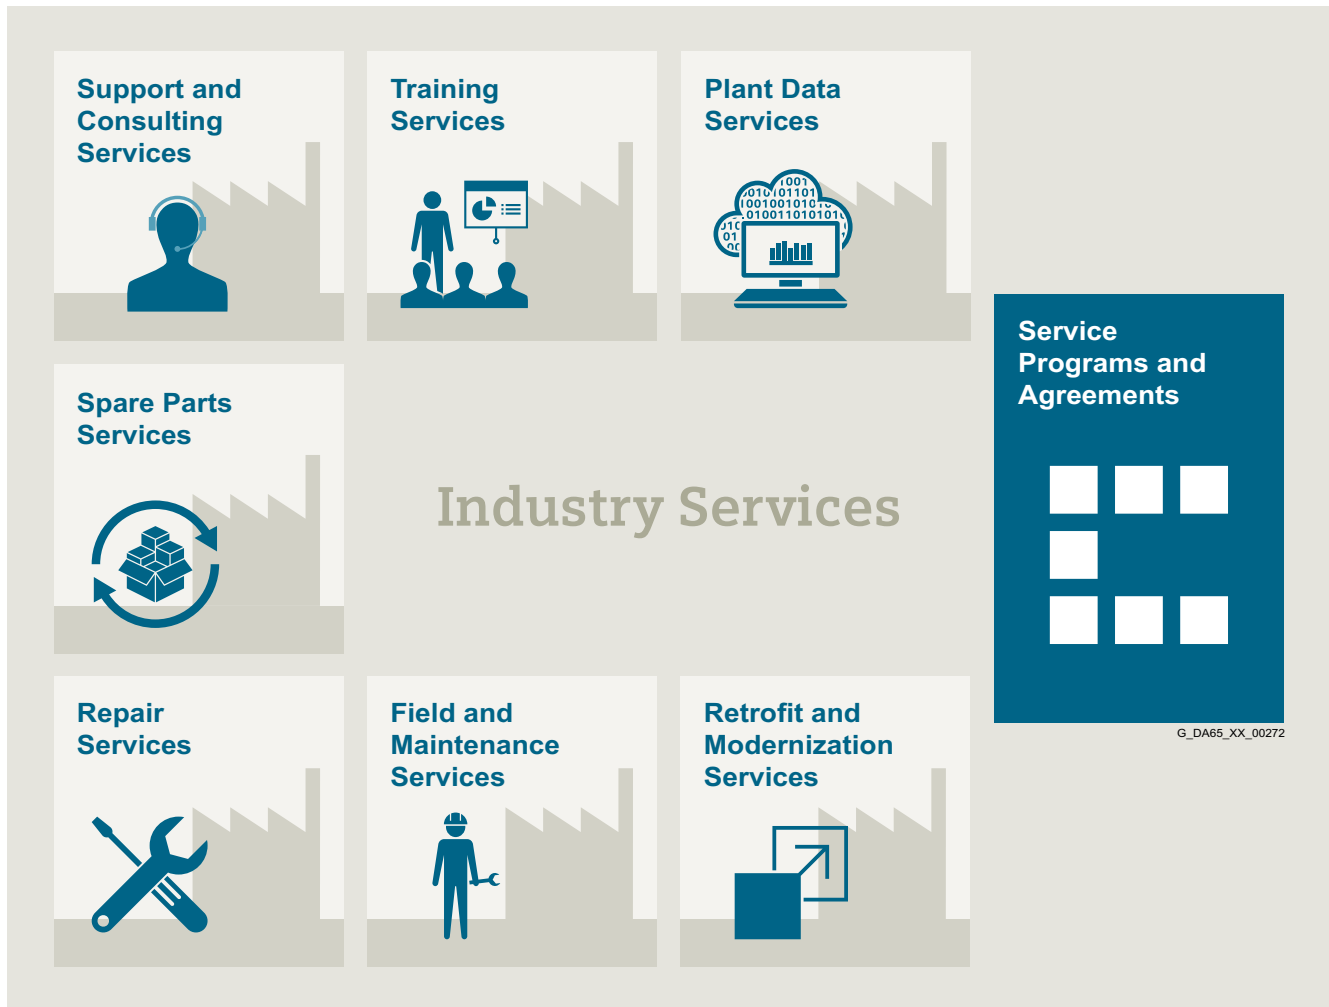

6

#### **Increase your performance – with Industry Services**

Optimizing the productivity of your equipment and operations can be a challenge, especially with constantly changing market conditions. Working with our service experts makes it easier. We understand your industry's unique processes and provide the services needed so that you can better achieve your business goals.

You can count on us to maximize your uptime and minimize your downtime, increasing your operations' productivity and reliability. When your operations have to be changed quickly to meet a new demand or business opportunity, our services give you the flexibility to adapt. Of course, we take care that your production is protected against cyber threats. We assist in keeping your operations as energy and resource efficient as possible and reducing your total cost of ownership. As a trendsetter, we ensure that you can capitalize on the opportunities of digitalization and by applying data analytics to enhance decision making: You can be sure that your plant reaches its full potential and retains this over the longer lifespan.

You can rely on our highly dedicated team of engineers, technicians and specialists to deliver the services you need – safely, professionally and in compliance with all regulations. We are there for you, where you need us, when you need us.



## Overview

## Plant Data Services



Make your industrial processes transparent to gain improvements in productivity, asset availability, and energy efficiency. Production data is generated, filtered and translated with intelligent analytics to enhance decision-making. This is done whilst taking data security into consideration and with continuous protection against cyber attack threats.

[www.industry.siemens.com/services/global/en/portfolio/plant-data-services/Pages/index.aspx](http://www.industry.siemens.com/services/global/en/portfolio/plant-data-services/Pages/index.aspx)

## Training Services



From the basics and advanced to specialist skills, SITRAIN courses provide expertise right from the manufacturer – and encompass the entire spectrum of Siemens products and systems for the industry.

Worldwide, SITRAIN courses are available wherever you need a training course in more than 170 locations in over 60 countries.

[www.industry.siemens.com/services/global/en/portfolio/training/Pages/index.aspx](http://www.industry.siemens.com/services/global/en/portfolio/training/Pages/index.aspx)

## Support and Consulting Services



**Industry Online Support** site for comprehensive information, application examples, FAQs and support requests.

**Technical and Engineering Support** for advice and answers for all inquiries about functionality, handling, and fault clearance.

**Information & Consulting Services**, e.g. SIMATIC System Audit; clarity about the state and service capability of your automation system or Lifecycle Information Services; transparency on the lifecycle of the products in your plants.

[www.industry.siemens.com/services/global/en/portfolio/support-consulting/Pages/index.aspx](http://www.industry.siemens.com/services/global/en/portfolio/support-consulting/Pages/index.aspx)

## Spare Parts Services



Are available worldwide for smooth and fast supply of spare parts – and thus optimal plant availability. Genuine spare parts are available for up to ten years. Logistic experts take care of procurement, transport, custom clearance, storage and order management. Reliable logistics processes ensure that components reach their destination as needed.

Asset optimization services help you design a strategy for parts supply where your investment and carrying costs are reduced and the risk of obsolescence is avoided.

[www.industry.siemens.com/services/global/en/portfolio/spare\\_parts/Pages/index.aspx](http://www.industry.siemens.com/services/global/en/portfolio/spare_parts/Pages/index.aspx)

## Service & Support

### Industry Services

#### Industry Services – Portfolio overview

##### Overview (continued)

#### Repair Services



Are offered on-site and in regional repair centers for fast restoration of faulty devices' functionality.

Also available are extended repair services, which include additional diagnostic and repair measures, as well as emergency services.

[www.industry.siemens.com/services/global/en/portfolio/repair\\_services/Pages/index.aspx](http://www.industry.siemens.com/services/global/en/portfolio/repair_services/Pages/index.aspx)

#### Retrofit and Modernization Services



Provide a cost-effective solution for the expansion of entire plants, optimization of systems or upgrading existing products to the latest technology and software, e.g. migration services for automation systems.

Service experts support projects from planning through commissioning and, if desired over the entire extended lifespan, e.g. Retrofit for Integrated Drive Systems for an extended lifetime of your machines and plants

[www.industry.siemens.com/services/global/en/portfolio/retrofit-modernization/Pages/index.aspx](http://www.industry.siemens.com/services/global/en/portfolio/retrofit-modernization/Pages/index.aspx)

#### Field and Maintenance Services



Siemens specialists are available globally to provide expert field and maintenance services, including commissioning, functional testing, preventive maintenance and fault clearance.

All services can be included in customized service agreements with defined reaction times or fixed maintenance intervals.

[www.industry.siemens.com/services/global/en/portfolio/field\\_service/Pages/index.aspx](http://www.industry.siemens.com/services/global/en/portfolio/field_service/Pages/index.aspx)

#### Service Programs and Agreements



A technical Service Program or Agreement enables you to easily bundle a wide range of services into a single annual or multi-year agreement.

You pick the services you need to match your unique requirements or fill gaps in your organization's maintenance capabilities.

Programs and agreements can be customized as KPI-based and/or performance-based contracts.


[www.industry.siemens.com/services/global/en/portfolio/service\\_programs/Pages/index.aspx](http://www.industry.siemens.com/services/global/en/portfolio/service_programs/Pages/index.aspx)

## Overview



Online Support is a comprehensive information system for all questions relating to products, systems, and solutions that Siemens has developed for industry over time. With more than 300,000 documents, examples and tools, it offers users of automation and drive technology a way to quickly find up-to-date information. The 24-hour service enables direct, central access to detailed product information as well as numerous solution examples for programming, configuration and application.

### Online Support App



Using the Online Support app, you can access over 300,000 documents covering all Siemens industrial products – anywhere, any time. Regardless of whether you need help implementing your project, fault-finding, expanding your system or are planning a new machine.

You have access to FAQs, manuals, certificates, characteristic curves, application examples, product notices (e.g. announcements of new products) and information on successor products in the event that a product is discontinued.

Just scan the product code printed on the product directly using the camera of your mobile device to immediately see all technical information available on this product at a glance. The graphical CAx information (3D model, circuit diagrams or EPLAN macros) is also displayed. You can forward this information to your workplace using the e-mail function.

The search function retrieves product information and articles and supports you with a personalized suggestion list. You can find your favorite pages – articles you need frequently – under “mySupport”. You also receive selected news on new functions, important articles or events in the News section.

The content, in six languages, is increasingly multimedia-based – and now also available as a mobile app. Online support’s “Technical Forum” offers users the opportunity to share information with each other. The “Support Request” option can be used to contact Siemens’ technical support experts. The latest content, software updates, and news via newsletters and Twitter ensure that industry users are always up to date.

[www.siemens.com/industry/onlinesupport](http://www.siemens.com/industry/onlinesupport)

Scan the QR code  
for information on  
our Online Support  
app.



The app is available free of charge from the Apple App Store (iOS) or from Google Play (Android).

<https://support.industry.siemens.com/cs/ww/en/sc/2067>




## Appendix



|            |   |
|------------|---|
| <b>7/2</b> | <b>Partner at Siemens</b>                                   |
| <b>7/3</b> | <b>Online Services</b>                                      |
| 7/3        | Information and Ordering Options on the Internet and on DVD |
| 7/4        | Information and Download Center Social Media, Mobile Media  |
| <b>7/5</b> | <b>Indexes</b>  |
| 7/5        | Subject index   |
| <b>7/6</b> | <b>Conditions of sale and delivery</b>                      |

# Appendix

## Partner at Siemens

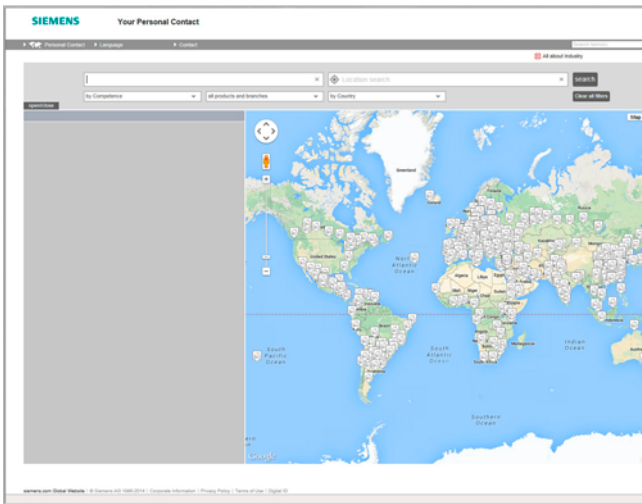



At Siemens we are resolutely pursuing the same goal: long-term improvement of your competitive ability. We are committed to this goal. Thanks to our commitment, we continue to set new standards in automation and drive technology. In all industries – worldwide.

At your service locally, around the globe for consulting, sales, training, service, support, spare parts ... on the entire Digital Factory and Process Industries and Drives.

Your personal contact can be found in our Contacts Database at: [www.siemens.com/automation/partner](http://www.siemens.com/automation/partner)

You start by selecting

- the required competence,
  - products and branches,
  - a country,
  - a city
- or by a
- location search or
  - person search.

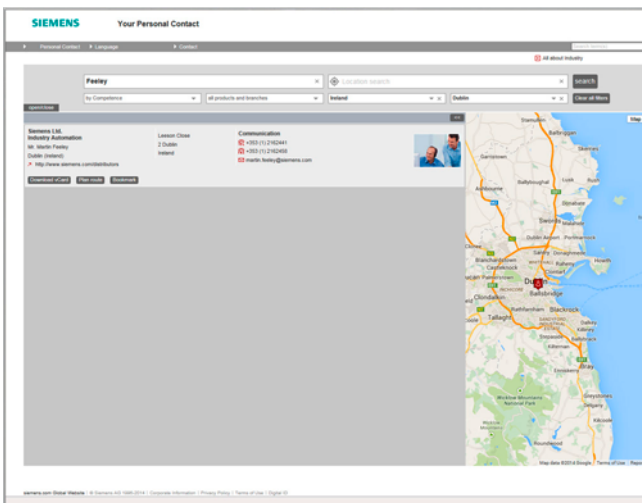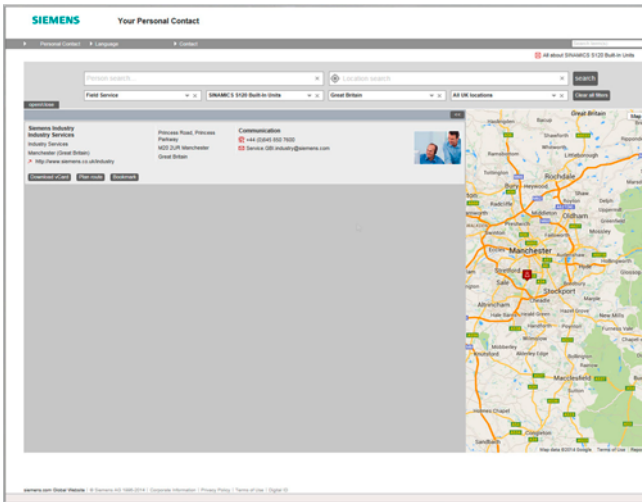

### Information and Ordering Options on the Internet and DVD

#### The Future of Manufacturing on the Internet




Detailed knowledge of the range of products and services available is essential when planning and engineering automation systems. It goes without saying that this information must always be as up-to-date as possible.

Industry is on the threshold of the fourth industrial revolution as digitization now follows after the automation of production. The goals are to increase productivity and efficiency, speed, and quality. In this way, companies can remain competitive on the path to the future of industry.

You will find everything you need to know about products, systems and services on the internet at:

[www.siemens.com/industry](http://www.siemens.com/industry)

#### Product Selection Using the Interactive CA 01 Automation and Drives Catalog

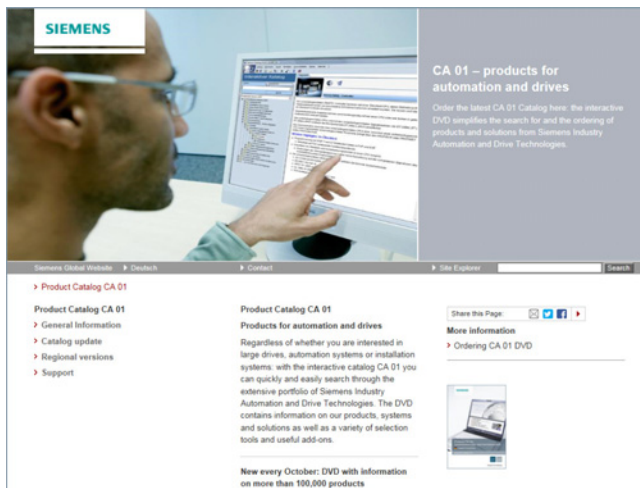

Detailed information together with user-friendly interactive functions:

The CA 01 interactive catalog covers more than 100,000 products, thus providing a comprehensive overview of the product range provided by Siemens.

You will find everything you need here for solving tasks in the fields of automation, switching, installation and drives. All information is provided over a user interface that is both user-friendly and intuitive.

You can order the CA 01 product catalog from your Siemens sales contact or in the Information and Download Center:


[www.siemens.com/industry/infocenter](http://www.siemens.com/industry/infocenter)

Information about the CA 01 interactive catalog can be found on the Internet at:

[www.siemens.com/automation/ca01](http://www.siemens.com/automation/ca01)

or on DVD.

#### Easy Shopping with the Industry Mall

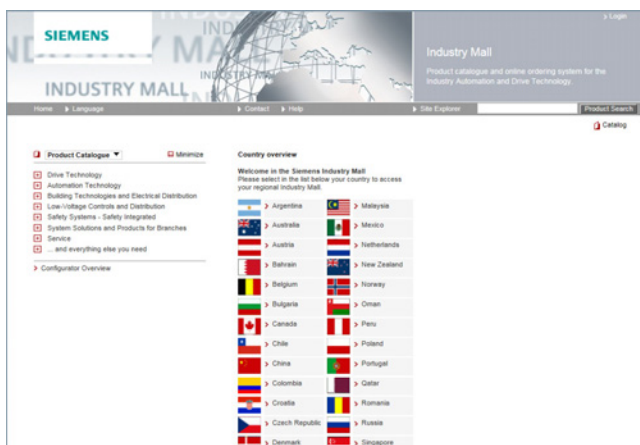

The Industry Mall is the electronic ordering platform of Siemens AG on the Internet. Here you have online access to a huge range of products presented in an informative and attractive way.

Data transfer via EDIFACT allows the whole procedure, from selection through ordering to tracking and tracing, to be carried out online. Availability checks, customer-specific discounts and bid creation are also possible.

Numerous additional functions are provided for your support. For example, powerful search functions make it easy to select the required products. Configurators enable you to configure complex product and system components quickly and easily. CAx data types are also provided here.

You can find the Industry Mall on the Internet at:


[www.siemens.com/industrymall](http://www.siemens.com/industrymall)

## Appendix

### Online Services

#### Information and Download Center, Social Media, Mobile Media

##### Downloading Catalogs

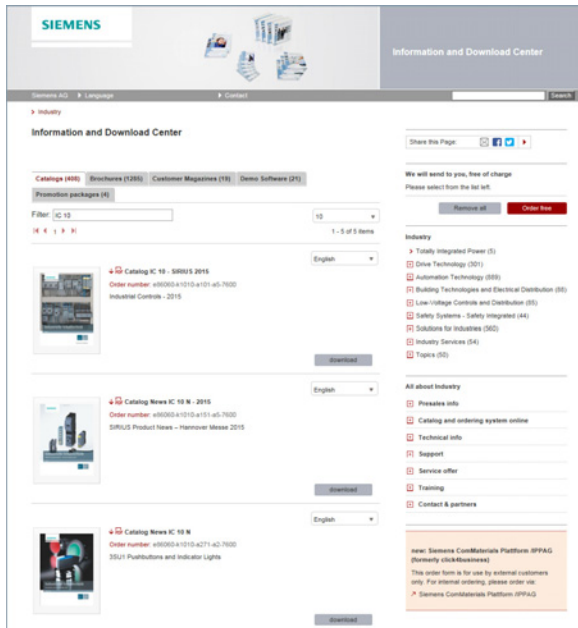


In addition to numerous other useful documents, you can also find the catalogs listed on the back inside cover of this catalog in the Information and Download Center. You can download these catalogs in PDF format without having to register.

The filter dialog above the first catalog displayed makes it possible to carry out targeted searches. If you enter "MD 3" for example, you will find both the MD 30.1 and MD 31.1 catalogs. If you enter "IC 10", both the IC 10 catalog and the associated news or add-ons are displayed.

Visit us at:

[www.siemens.com/industry/infocenter](http://www.siemens.com/industry/infocenter)

##### Social and Mobile Media

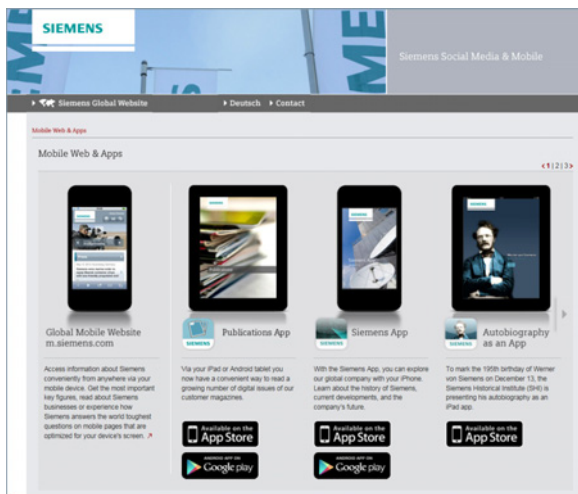

Connect with Siemens through social media: visit our social networking sites for a wealth of useful information, demos on products and services, the opportunity to provide feedback, to exchange information and ideas with customers and other Siemens employees, and much, much more. Stay in the know and follow us on the ever-expanding global network of social media.

To find out more about Siemens' current social media activities, visit us at:


[www.siemens.com/socialmedia](http://www.siemens.com/socialmedia)

Or via our product pages at:

[www.siemens.com/automation](http://www.siemens.com/automation) or [www.siemens.com/drives](http://www.siemens.com/drives)

Connect with Siemens Industry at our central access point to read all the news on the future of manufacturing, watch current videos and inform yourself about all the latest industry developments:

[www.siemens.com/future-of-manufacturing](http://www.siemens.com/future-of-manufacturing)

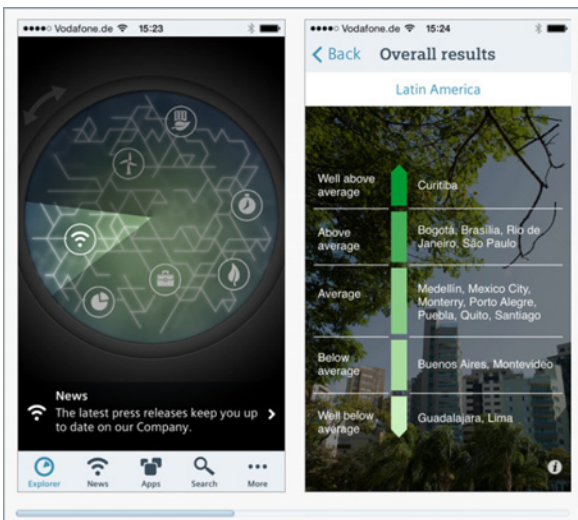

Discover the world of Siemens.

We are also constantly expanding our offering of cross-platform apps for smartphones and tablets. You will find the current Siemens apps at the App Store (iOS) or at Google Play (Android):

<https://itunes.apple.com/en/app/siemens/id452698392?mt=8>

<https://play.google.com/store/search?q=siemens>

The Siemens app, for example, tells you all about the history, latest developments and future plans of the company – with informative pictures, fascinating reports and the most recent press releases.



**Numerics**

1LA4 Standardline version ..... 1/4

**A**

## Air-cooled motors

- H-compact 1LA4 ..... 2/3, 3/3
- H-compact 1PQ4 ..... 3/31
- H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7 ..... 2/84, 3/49
- H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7 ..... 2/30, 3/81
- Article number code ..... 1/2
- SIMOTICS HV M (Modular) ..... 1/8
- SIMOTICS HV/TN Series H-compact ..... 1/3
- SIMOTICS HV/TN Series H-compact PLUS ..... 1/6

**B**

Balancing quality ..... 1/23

Bearing insulation ..... 1/23

**C**

Converter operation (VSD) ..... 1/23

**D**

Direction of rotation, fan ..... 1/23

**E**

## Explosion-protected motors

- Air-cooled motors · H-compact 1MA4 ..... 4/12
- Air-cooled motors · H-compact 1MG4 ..... 4/9
- Air-cooled motors · H-compact 1MS4 ..... 4/5
- Air-cooled motors · H-compact PLUS 1SB4/1SB6, SIMOTICS HV M 1SB7 ..... 4/10
- Air-cooled motors · H-compact PLUS 1SG4/1SG6, SIMOTICS HV M 1SG7 ..... 4/6
- Certification ..... 4/4
- Classification of zones ..... 4/2
- Explosion-protected motors for converter operation ..... 4/3
- Options and tests ..... 4/14
- Type of protection Ex eb ..... 4/12
- Type of protection Ex ec/Ex tc ..... 4/5
- Type of protection Ex pxb ..... 4/8
- Type of protection Ex tc acc. to IEC/EN 60079-31 ..... 4/3
- Type of protection, Ex ec acc. to IEC/EN 60079-7 ..... 4/3
- Type of protection, flameproof enclosure Ex db acc. to IEC/EN 60079-1 ..... 4/3
- Type of protection, increased safety Ex eb acc. to IEC/EN 60079-7 ..... 4/3
- Type of protection, pressurized enclosure Ex pxb acc. to IEC/EN 60079-2 ..... 4/3
- Types of protection ..... 4/3
- Water-cooled motors · H-compact PLUS 1SL4/1SL6, SIMOTICS HV M 1SL7 ..... 4/7
- Water-cooled motors · H-compact PLUS 1SQ4/1SQ6, SIMOTICS HV M 1SQ7 ..... 4/11

**G**

General technical versions ..... 1/14

Guideline for coupling selection ..... 1/24

**I**

Industry Services ..... 6/2

Integrated Drive Systems ..... 2

Introduction ..... 1/2

**L**

LOHER VARIO ..... 1/25

LOHER VARIO PLUS ..... 1/25

**M**

Mechanical design ..... 1/20

## Motor terminal boxes

- Overview ..... 1/15
- Connection options ..... 1/15
- Terminal box type 1XA8 711 (up to 6.6 kV, 3 terminals) ..... 1/16
- Terminal box type 1XB8 911 (up to 11 kV) ..... 1/16
- Terminal box type 1XB8 751 (up to 6.6 kV, 6 terminals) ..... 1/17
- Terminal box type 1XD1 543-3AA up to 11 kV IEC and 6.6 kV NEMA .. 1/17

- Terminal box type 1XD1 566-3AA (up to 11 kV, 10 terminals) ..... 1/18
- Terminal box type 1XB1 631 (up to 1 kV, 12 terminals) ..... 1/18
- Neutral point terminal box ..... 1/19

## Motors for converter operation

- Air-cooled motors ..... 3/3, 3/31, 3/49, 3/81
- H-compact 1LA4 ..... 3/3
- H-compact 1LH4 ..... 3/117
- H-compact 1PQ4 ..... 3/31
- H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7 ..... 3/49
- H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7 ..... 3/121
- H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7 ..... 3/81
- Options and tests ..... 3/155
- Sinusoidal and non-sinusoidal converter output ..... 3/2
- Water-cooled motors ..... 3/117, 3/121

## Motors for line operation

- Air-cooled motors ..... 2/3
- H-compact PLUS 1RA4, 1RA6, 1RP6 and SIMOTICS HV M 1RA7 ..... 2/84
- H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7 ..... 2/136
- H-compact PLUS 1RQ4, 1RQ6 and SIMOTICS HV M 1RQ7 ..... 2/30
- Options and tests ..... 2/189
- Water-cooled motors ..... 2/136

**O**

Online Services ..... 7/3

Online Support ..... 6/5

## Options for marine and offshore applications

- Classification authorities ..... 5/2
- Degree of protection ..... 5/6
- Enclosure version ..... 5/4
- Motor connection ..... 5/4
- Motors for Essential Services ..... 5/5
- Motors for Essential Services for Propulsion ..... 5/5
- Motors for Non-Essential Services ..... 5/5
- Options for marine motors ..... 5/9
- Order information ..... 5/6
- Ordering examples ..... 5/7
- Orientation ..... 5/2
- Paint finish ..... 5/6
- Recommended special versions ..... 5/6
- Scope of design options X00 to X26 ..... 5/6
- SIMOTICS HV/TN in a marine design ..... 5/5
- Temperature class and coolant temperature ..... 5/6
- Winding and motor protection ..... 5/6

**P**

Paint finish ..... 1/23

Partner at Siemens ..... 7/2

**S**

Service &amp; Support ..... 6/2

## SIMOTICS HV M (Modular)

- Article number code ..... 1/8
- Cooling concepts ..... 1/12
- Performance features ..... 1/10

## SIMOTICS HV/TN Series H-compact

- Article number code ..... 1/3
- Cooling concepts ..... 1/5
- Performance features ..... 1/4

## SIMOTICS HV/TN Series H-compact PLUS

- Article number code ..... 1/6
- Cooling concepts ..... 1/12
- Performance features ..... 1/10

Standards and regulations ..... 1/23

**V**

Vibration response ..... 1/23

**W**

## Water-cooled motors

- H-compact 1LH4 ..... 3/117
- H-compact PLUS 1RN4, 1RN6 and SIMOTICS HV M 1RN7 ..... 2/136, 3/121

## Appendix

### Conditions of sale and delivery

#### 1. General Provisions

By using this catalog you can acquire hardware and software products described therein from Siemens AG subject to the following Terms and Conditions of Sale and Delivery (hereinafter referred to as "T&C"). Please note that the scope, the quality and the conditions for supplies and services, including software products, by any Siemens entity having a registered office outside Germany, shall be subject exclusively to the General Terms and Conditions of the respective Siemens entity. The following T&C apply exclusively for orders placed with Siemens Aktiengesellschaft, Germany.

##### 1.1 For customers with a seat or registered office in Germany

For customers with a seat or registered office in Germany, the following applies subordinate to the T&C:

- the "General Terms of Payment"<sup>1)</sup> and,
- for software products, the "General License Conditions for Software Products for Automation and Drives for Customers with a Seat or Registered Office in Germany"<sup>1)</sup> and,
- for other supplies and services, the "General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry"<sup>1)</sup>.

##### 1.2 For customers with a seat or registered office outside Germany

For customers with a seat or registered office outside Germany, the following applies subordinate to the T&C:

- the "General Terms of Payment"<sup>1)</sup> and,
- for software products, the "General License Conditions for Software Products for Automation and Drives for Customers with a Seat or Registered Office outside of Germany"<sup>1)</sup> and
- for other supplies and/or services, the "General Conditions for Supplies of Siemens Industry for Customers with a Seat or Registered Office outside of Germany"<sup>1)</sup>.

#### 2. Prices

The prices are in € (Euro) ex point of delivery, exclusive of packaging.

The sales tax (value added tax) is not included in the prices. It shall be charged separately at the respective rate according to the applicable statutory legal regulations.

Prices are subject to change without prior notice. We will charge the prices valid at the time of delivery.

To compensate for variations in the price of raw materials (e.g. silver, copper, aluminum, lead, gold, dysprosium and neodym), surcharges are calculated on a daily basis using the so-called metal factor for products containing these raw materials. A surcharge for the respective raw material is calculated as a supplement to the price of a product if the basic official price of the raw material in question is exceeded.

The metal factor of a product indicates the basic official price (for those raw materials concerned) as of which the surcharges on the price of the product are applied, and with what method of calculation.

An exact explanation of the metal factor can be downloaded at:

[www.siemens.com/automation/salesmaterial-as/catalog/en/terms\\_of\\_trade\\_en.pdf](http://www.siemens.com/automation/salesmaterial-as/catalog/en/terms_of_trade_en.pdf)

To calculate the surcharge (except in the cases of dysprosium and neodym), the official price from the day prior to that on which the order was received or the release order was effected is used.

To calculate the surcharge applicable to dysprosium and neodym ("rare earths"), the corresponding three-month basic average price in the quarter prior to that in which the order was received or the release order was effected is used with a one-month buffer (details on the calculation can be found in the explanation of the metal factor).

#### 3. Additional Terms and Conditions

The dimensions are in mm. In Germany, according to the German law on units in measuring technology, data in inches apply only to devices for export.

Illustrations are not binding.

Insofar as there are no remarks on the individual pages of this catalog - especially with regard to data, dimensions and weights given - these are subject to change without prior notice.

#### 4. Export regulations

We shall not be obligated to fulfill any agreement if such fulfillment is prevented by any impediments arising out of national or international foreign trade or customs requirements or any embargoes and/or other sanctions.

Export of goods listed in this catalog may be subject to licensing requirements. We will indicate in the delivery details whether licenses are required under German, European and US export lists. Goods labeled with "AL" not equal to "N" are subject to European or German export authorization when being exported out of the EU. Goods labeled with "ECCN" not equal to "N" are subject to US re-export authorization.

The export indications can be viewed in advance in the description of the respective goods on the Industry Mall, our online catalog system. Only the export labels "AL" and "ECCN" indicated on order confirmations, delivery notes and invoices are authoritative.

Even without a label, or with label "AL:N" or "ECCN:N", authorization may be required i .a. due to the final disposition and intended use of goods.

If you transfer goods (hardware and/or software and/or technology as well as corresponding documentation, regardless of the mode of provision) delivered by us or works and services (including all kinds of technical support) performed by us to a third party worldwide, you must comply with all applicable national and international (re-)export control regulations.

If required for the purpose of conducting export control checks, you (upon request by us) shall promptly provide us with all information pertaining to the particular end customer, final disposition and intended use of goods delivered by us respectively works and services provided by us, as well as to any export control restrictions existing in this relation.

The products listed in this catalog may be subject to European/German and/or US export regulations. Any export requiring approval is therefore subject to authorization by the relevant authorities.

Errors excepted and subject to change without prior notice.

1) The text of the Terms and Conditions of Siemens AG can be downloaded at [www.siemens.com/automation/salesmaterial-as/catalog/en/terms\\_of\\_trade\\_en.pdf](http://www.siemens.com/automation/salesmaterial-as/catalog/en/terms_of_trade_en.pdf)

Further information can be obtained from our branch offices listed at [www.siemens.com/automation-contact](http://www.siemens.com/automation-contact)

|   |                |   |                 |
|---|----------------|---|-----------------|
| <b>Interactive Catalog on DVD</b>   | <i>Catalog</i> | <b>Low-Voltage Power Distribution and Electrical Installation Technology</b>  | <i>Catalog</i>  |
| Products for Automation and Drives  | <b>CA 01</b>   | SETRON · SIVACON · ALPHA  | LV 10           |
| <b>Building Control</b>   |                | Protection, Switching, Measuring and Monitoring Devices, Switchboards and Distribution Systems  |                 |
| GAMMA Building Control  | ET G1          | Standards-Compliant Components for Photovoltaic Plants  | LV 11           |
| <b>Drive Systems</b>  |                | Electrical Components for the Railway Industry  | LV 12           |
| SINAMICS G130 Drive Converter Chassis Units   | D 11           | TÜV-certified Power Monitoring System   | LV 14           |
| SINAMICS G150 Drive Converter Cabinet Units   |                | Components for Industrial Control Panels according to UL Standards  | LV 16           |
| SINAMICS GM150, SINAMICS SM150 Medium-Voltage Converters  | D 12           | 3WT Air Circuit Breakers up to 4000 A   | LV 35           |
| SINAMICS PERFECT HARMONY GH180 Medium-Voltage Air-Cooled Drives (Germany Edition)                     | D 15.1         | 3VT Molded Case Circuit Breakers up to 1600 A   | LV 36           |
| SINAMICS G180 Converters – Compact Units, Cabinet Systems, Cabinet Units Air-Cooled and Liquid-Cooled | D 18.1         | <i>Digital: SIVACON System Cubicles, System Lighting and System Air-Conditioning</i>  | LV 50           |
| SINAMICS S120 Chassis Format Units and Cabinet Modules  | D 21.3         | <i>Digital: ALPHA Distribution Systems</i>  | LV 51           |
| SINAMICS S150 Converter Cabinet Units   |                | ALPHA FIX Terminal Blocks   | LV 52           |
| SINAMICS S120 and SIMOTICS  | D 21.4         | SIVACON S4 Power Distribution Boards  | LV 56           |
| SINAMICS DCM DC Converter, Control Module   | D 23.1         | SIVACON 8PS Busbar Trunking Systems   | LV 70           |
| SINAMICS DCM Cabinet  | D 23.2         | <i>Digital: DELTA Switches and Socket Outlets</i>   | ET D1           |
| SINAMICS Inverters for Single-Axis Drives and SIMOTICS Motors   | D 31           | <b>Motion Control</b>   |                 |
| <i>Digital: SINAMICS G120P and SINAMICS G120P Cabinet pump, fan, compressor converters</i>            | D 35           | SINUMERIK 840   | NC 62           |
| LOHER VARIO High Voltage Motors   | D 83.2         | Equipment for Machine Tools   |                 |
| Flameproof, Type Series 1PS4, 1PS5, 1MV4 and 1MV5 Frame Size 355 to 1000, Power Range 80 to 7100 kW   |                | SINUMERIK 808   | NC 81.1         |
| Three-Phase Induction Motors  | D 84.1         | Equipment for Machine Tools   |                 |
| SIMOTICS HV, SIMOTICS TN  |                | SINUMERIK 828   | NC 82           |
| High Voltage Three-phase Induction Motors   | D 84.9         | Equipment for Machine Tools   |                 |
| SIMOTICS HV Series A-compact PLUS   |                | SIMOTION  | PM 21           |
| Three-Phase Induction Motors SIMOTICS HV, Series H-compact  | D 86.1         | Equipment for Production Machines   |                 |
| Synchronous Motors with Permanent-Magnet Technology, HT-direct  | D 86.2         | <i>Digital: Drive and Control Components for Cranes</i>   | CR 1            |
| DC Motors   | DA 12          | <b>Power Supply</b>   |                 |
| SIMOREG DC MASTER 6RA70 Digital Chassis Converters  | DA 21.1        | SITOP Power supply  | KT 10.1         |
| SIMOREG K 6RA22 Analog Chassis Converters   | DA 21.2        | <b>Safety Integrated</b>  |                 |
| <i>Digital: SIMOREG DC MASTER 6RM70 Digital Converter Cabinet Units</i>                               | DA 22          | Safety Technology for Factory Automation  | SI 10           |
| SIMOVERT PM Modular Converter Systems   | DA 45          | <b>SIMATIC HMI / PC-based Automation</b>  |                 |
| SIEMOSYN Motors   | DA 48          | Human Machine Interface Systems/ PC-based Automation  | ST 80/<br>ST PC |
| MICROMASTER 420/430/440 Inverters   | DA 51.2        | <b>SIMATIC Ident</b>  |                 |
| MICROMASTER 411/COMBIMASTER 411   | DA 51.3        | Industrial Identification Systems   | ID 10           |
| <b>Low-Voltage Three-Phase-Motors</b>   |                | <b>SIMATIC Industrial Automation Systems</b>  |                 |
| SIMOTOCS S-1FG1 Servo geared motors   | D 41           | Products for Totally Integrated Automation  | ST 70           |
| SIMOTICS Low-Voltage Motors   | D 81.1         | SIMATIC PCS 7 Process Control System  | ST PCS 7        |
| SIMOTICS FD Low-Voltage Motors  | D 81.8         | System components   |                 |
| LOHER Low-Voltage Motors  | D 83.1         | SIMATIC PCS 7 Process Control System Technology components  | ST PCS 7 T      |
| MOTOX Geared Motors   | D 87.1         | Add-ons for the SIMATIC PCS 7 Process Control System  | ST PCS 7 AO     |
| SIMOGEAR Geared Motors  | MD 50.1        | <b>SIMATIC NET</b>  |                 |
| SIMOGEAR Gearboxes with adapter   | MD 50.11       | Industrial Communication  | IK PI           |
| <b>Mechanical Driving Machines</b>  |                | <b>SIRIUS Industrial Controls</b>   |                 |
| FLENDER Standard Couplings  | MD 10.1        | SIRIUS Industrial Controls  | IC 10           |
| FLENDER High Performance Couplings  | MD 10.2        |   |                 |
| FLENDER Backlash-free Couplings   | MD 10.3        |   |                 |
| FLENDER SIP Standard industrial planetary gear units  | MD 31.1        |   |                 |
| <b>Process Instrumentation and Analytics</b>  |                | <i>Digital: These catalogs are only available as a PDF.</i>   |                 |
| <i>Digital: Field Instruments for Process Automation</i>  | FI 01          | <b>Information and Download Center</b>  |                 |
| <i>Digital: Display Recorders SIREC D</i>   | MP 20          | Digital versions of the catalogs are available on the Internet at: <a href="http://www.siemens.com/industry/infocenter">www.siemens.com/industry/infocenter</a> |                 |
| <i>Digital: SIPART Controllers and Software</i>   | MP 31          | There you'll find additional catalogs in other languages.   |                 |
| Products for Weighing Technology  | WT 10          | Please note the section "Downloading catalogs" on page "Online services" in the appendix of this catalog.   |                 |
| Process Analytical Instruments  | AP 01          |   |                 |
| <i>Digital: Process Analytics, Components for Continuous Emission Monitoring</i>                      | AP 11          |   |                 |

## Get more information

Siemens High Voltage Motors:  
[www.siemens.com/high-voltage-motors](http://www.siemens.com/high-voltage-motors)

SIMOTICS HV M:  
[www.siemens.com/simotics-hv-m](http://www.siemens.com/simotics-hv-m)

Local partners worldwide:  
[www.siemens.com/automation/partner](http://www.siemens.com/automation/partner)

Siemens AG  
Process Industries and Drives Division  
Large Drives  
Postfach 47 43  
90025 NÜRNBERG  
GERMANY

© Siemens AG 2017  
Subject to change without prior notice  
Only PDF  
(Article No. E86060-K5584-A111-A7-7600)  
V6.MKKATA.LDT.191  
KG 0717 424 En  
Produced in Germany

The information provided in this catalog contains merely general descriptions or characteristics of performance which in case of actual use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract. Availability and technical specifications are subject to change without notice.

All product designations may be trademarks or product names of Siemens AG or supplier companies whose use by third parties for their own purposes could violate the rights of the owners.

## Security information

Siemens provides products and solutions with industrial security functions that support the secure operation of plants, systems, machines and networks.

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial security concept. Siemens' products and solutions constitute one element of such a concept.

Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place.

For additional information on industrial security measures that may be implemented, please visit  
<http://www.siemens.com/industrialsecurity>.

Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats.

To stay informed about product updates, subscribe to the Siemens Industrial Security RSS Feed under  
<http://www.siemens.com/industrialsecurity>.